动臂塔式起重机

Luffing Tower Crane

QD5021-10T

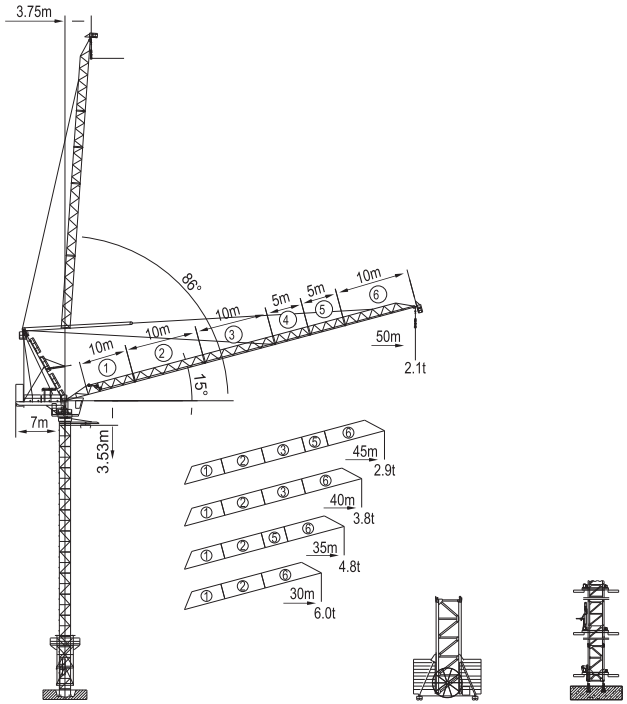

本技术参数不受法律约束，技术信息请详见相应技术说明书。

Specifications and data is not legally binding. For any technical information, please refer to the corresponding instructions.

塔身截面 | Masts L46A1 (1.6x1.6x3m)

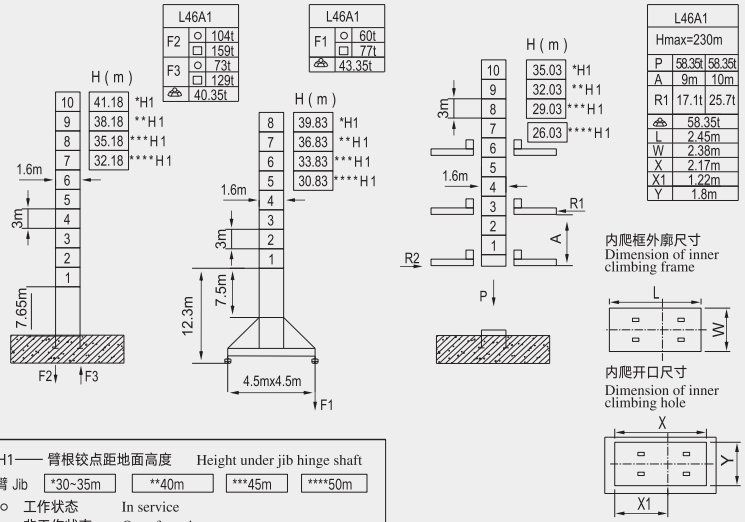

H1—— 臂根铰点距地面高度 Height under jib hinge shaft

臂 Jib	*30~35m	**40m	***45m	****50m

○ 工作状态 In service

□ 非工作状态 Out of service

空载、无配重 Without load and ballast

附着 | Anchorages

如果塔机高度高于本图所示最大高度，请向本公司咨询。

If the height of tower crane is higher than the maximum height shown in figure, please consult with our company.

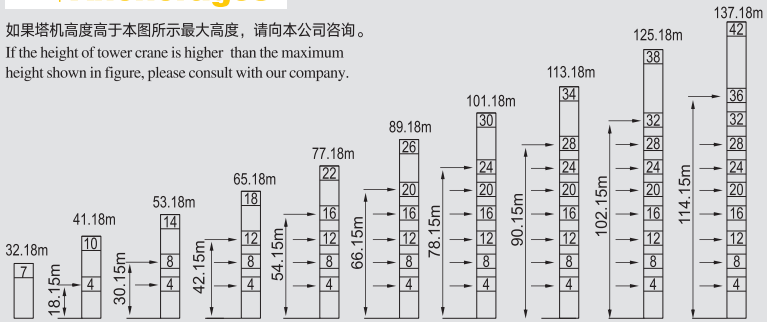

塔身截面 | Masts L48A1(1.6x1.6x3m)

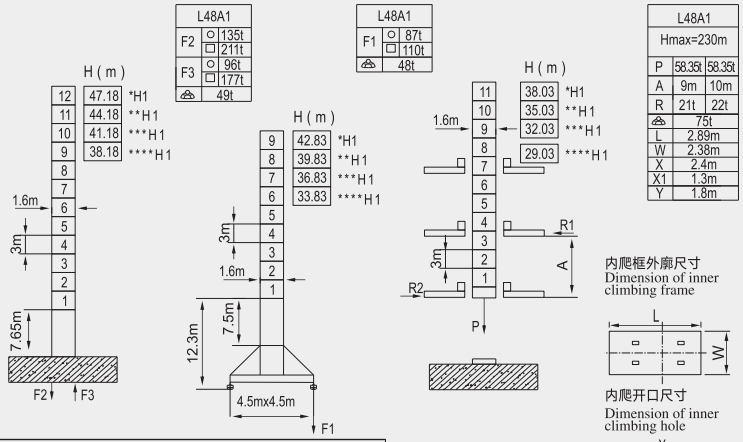

H1—— 臂根铰点距地面高度 Height under jib hinge shaft

臂 Jib *30~35m **40m ***45m ****50m

○ 工作状态 In service

□ 非工作状态 Out of service

空载、无配重 Without load and ballast

附着 Anchorages

如果塔机高度高于本图所示最大高度，请向本公司咨询。

If the height of tower crane is higher than the maximum height shown in figure, please consult with our company.

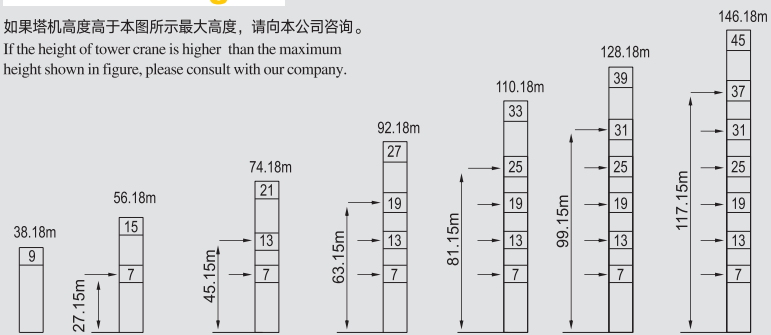

塔身截面 | Masts L68B1/B2 (2x2x3m)

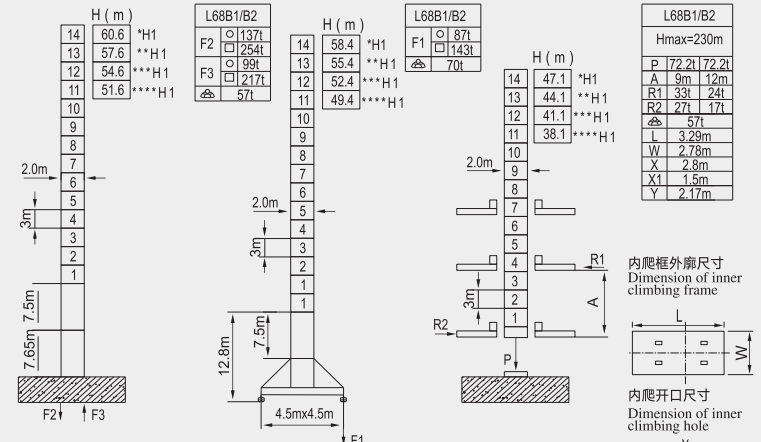

H1—— 臂根铰点距地面高度 Height under jib hinge shaft

臂 Jib *30~35m **40m ***45m ****50m

○ 工作状态 In service

□ 非工作状态 Out of service

空载、无配重 Without load and ballast

附着 | Anchorages

如果塔机高度高于本图所示最大高度，请向本公司咨询。

If the height of tower crane is higher than the maximum height shown in figure, please consult with our company.

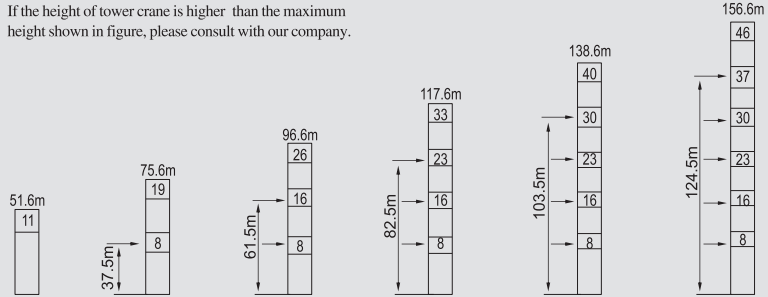

载荷表 | Load Diagrams

起重臂 Jib	倍率 Fall	起重幅度 Range(m)	3.75 -20.5	25.2	30	32.7	35	40	45	50
50(m)	IV	起重量 Load (t)	10.00	7.4	5.5	4.80	4.25	3.27	2.50	1.90
	III		7.50		5.6	4.90	4.35	3.37	2.60	2.00
	II		5.00				4.45	3.47	2.70	2.10

起重臂 Jib	倍率 Fall	起重幅度 Range(m)	3.4 -20.2	25.1	30	33.3	35	40	45
45(m)	IV	起重量 Load (t)	10.00	7.40	5.60	4.80	4.36	3.40	2.70
	III		7.50		5.70	4.90	4.46	3.50	2.80
	II		5.00				4.56	3.60	2.90

起重臂 Jib	倍率 Fall	起重幅度 Range(m)	3.1 -20.1	25	30	33.6	35	40
40(m)	IV	起重量 Load (t)	10.00	7.40	5.67	4.80	4.50	3.60
	III		7.50		5.77	4.90	4.60	3.70
	II		5.00				4.70	3.80

起重臂 Jib	倍率 Fall	起重幅度 Range(m)	2.7-20.4	25	30	34	35
35(m)	IV	起重量 Load (t)	10.00	7.40	5.80	4.80	4.60
	III		7.50		5.90	4.90	4.70
	II		5.00				4.80

起重臂 Jib	倍率 Fall	起重幅度 Range(m)	2.3 -20	25	30
30(m)	IV	起重量 Load (t)	10.00	7.40	5.9
	III		7.50		6
	II		5.00		

平衡重配置 | Counter-jib Ballast

吊臂长度 Jib Length(m)	后臂长度 Counter JibLength(m)	平衡重/Counter-weight			
		CA	CB	CC	合计/Tatal(kg)
		4000kg	3000kg	2000kg	
50	7	1	4	1	18000
45	7	1	3	2	17000
40	7	1	4		16000
35	7	1	3	1	15000
30	7	1	3	1	15000

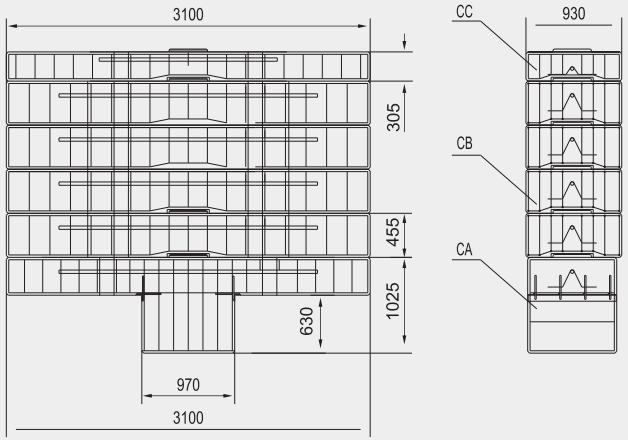

机构配置 | Specifications(Mechanisms)

机构名称 Item	机构代号 Mechanism	m/min	t	m/min	t	m/min	t	m	功率/Power Kw
起升 Hoisting	60LVF25	0-22.5	10	0-33.8	7.5	0-40	5.0	600	45Kw
		0-40	5	0-67.5	3.75	0-90	2.5		
拉臂 Luffing	33DVF30	≤3min		变频调速 Ferquency control					24Kw
回转 Slewing	RCV95	0-0.7r/min							2×4.5Kw
	RVF95	0-0.7r/min		变频调速 Ferquency control					2×4.5Kw
行走 Traveling	14TVF	0-25m/min		变频调速 Ferquency control					2X5.2Kw
电网 Mains supply		CE138 ICE38							380V(±5%)/50Hz 420V(±5%)/60Hz
电力容量 Necessary electric power									109KVA

部件尺寸及重量 | Dimension & weight

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
1	平衡臂 Counter-jib		7.372	3.325	4.618	9894	1
2	根部节 Jib-Section 1		10.53	1.4	1.451	1495	1
3	第二节 Jib-Section 2		10.5	1.4	1.375	887	1
4	第三节 Jib-Section 3		10.5	1.4	1.375	826	1
5	第四节 Jib-Section 4		5.34	1.4	1.375	450	1
6	第五节 Jib-Section 5		5.34	1.4	1.375	450	1
7	端部节 Jib-Section 6		10.67	1.4	1.532	1265	1
8	塔头 Towerhead		6.36	2.15	10.9	3255	1

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
9	缓冲装置 Buffer		3.5	1.6	0.36	680	1
10	回转支承 Slewing Table		6.25	4.51	3.34	7782	1
11	吊钩 Hook		1.04	0.3	1.8	348	1
12	套架 Telescoping Cage	 L46A1/1.6m L48A1/1.6m L68B1/2m L68B2/2m	3.63 3.98 4.38 4.38	3.63 3.89 4.09 4.09	6.8 7.28 7.28 7.28	3807 4744 5358 5358	1 1 1 1
13	基础节 Basic Mast	 L46A1/1.6m L48A1/1.6m L68B1/2m L68B2/2m	7.75 7.76 7.76 7.76	1.75 1.73 2.13 2.13	1.69 1.71 2.11 2.11	2688 3658 4355 4355	1 1 1 1

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
14	标准节 Mast	 L46A1/1.6m L48A1/1.6m L68B1/2m L68B2/2m	3.25 3.26 3.27 3.27	1.75 1.73 2.13 2.13	1.69 1.71 2.11 2.11	1207 1591 1792 1551	7 9 11 11
15	固定支脚 Fixing Angles	 L46A1/1.6m L48A1/1.6m L68B1/2m L68B2/2m	0.49 0.58 0.58 0.58	0.49 0.58 0.58 0.58	1.14 1.2 1.2 1.2	182 291 291 291	4 4 4 4
16	附着框 Anchorage Frame	 L46A1/1.6m L48A1/1.6m L68B1/2m L68B2/2m	2.4 2.4 2.75 2.75	0.41 0.41 0.44 0.44	2.51 2.51 3.0 3.0	1110 1110 1396 1396	n n n n