动臂塔式起重机

Luffing Tower Crane

QD5521-10T

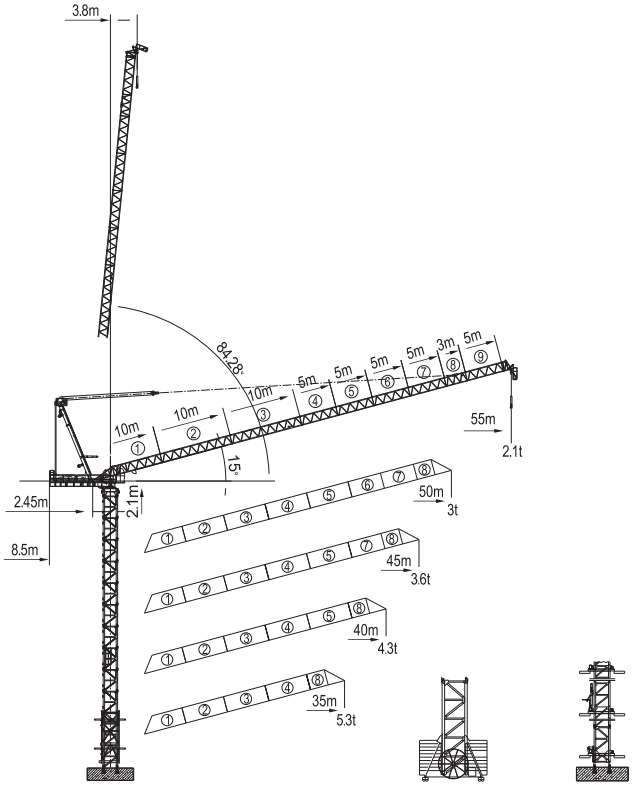

本技术参数不受法律约束，技术信息请详见相应技术说明书。

Specifications and data is not legally binding. For any technical information, please refer to the corresponding instructions.

塔身截面 | Masts L68B1/B2 (2x2x3m)

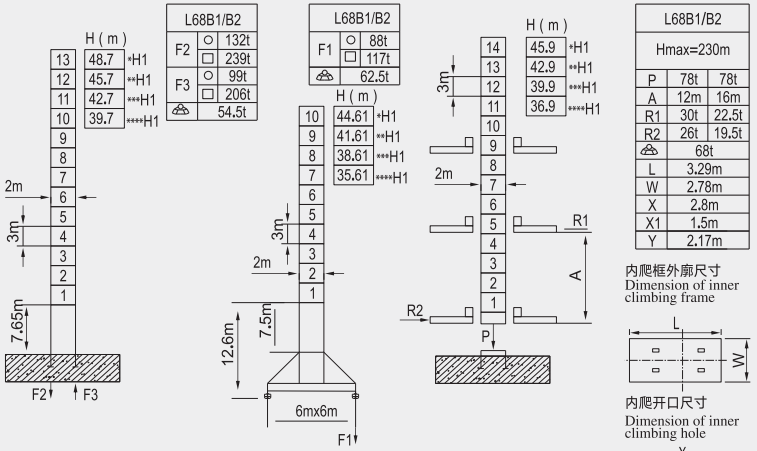

H1——臂根铰点距地面高度 Height under jib hinge shaft

臂Jib	*30~35m	**40~45m	***50m	****55m

○ 工作状态 In service

□ 非工作状态 Out of service

空载、无配重 Without load and ballast

附着 | Anchorages

如果塔机高度高于本图所示最大高度，请向本公司咨询。

If the height of tower crane is higher than the maximum height shown in figure, please consult with our company.

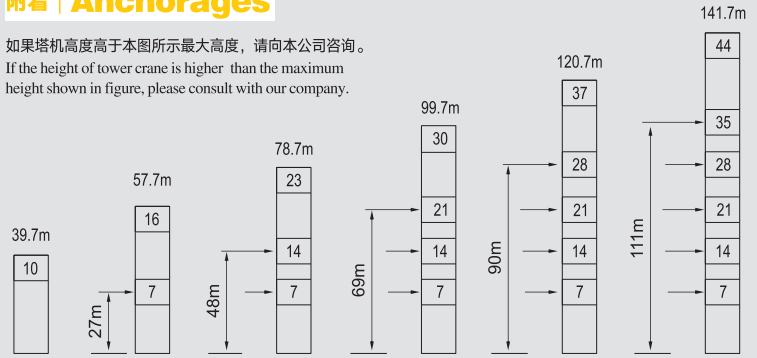

塔身截面 | Masts L48A1 (1.6x1.6x3m)

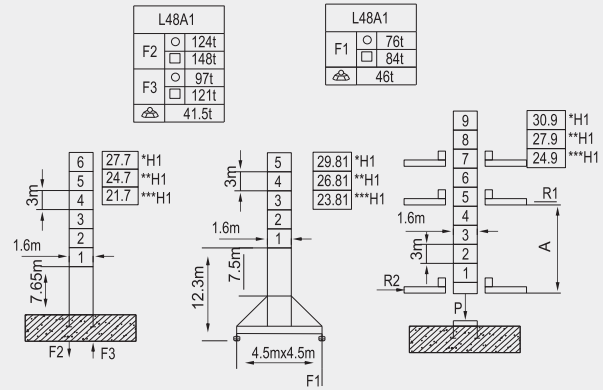

L48A1		
Hmax=230m		
P	58t	58t
A	7m	11m
R1	32t	21t
R2	28t	18.5t
	48t	
L	2.89m	
W	2.38m	
X	2.4m	
X1	1.3m	
Y	1.8m	

内爬框外廓尺寸
Dimension of inner climbing frame



内爬开口尺寸
Dimension of inner climbing hole



H1—— 臂根铰点距地面高度 Height under jib hinge shaft

臂Jib	*30~35m	**40~45m	***50m~55m

○ 工作状态 In service
□ 非工作状态 Out of service
空载、无配重 Without load and ballast

附着 | Anchorages

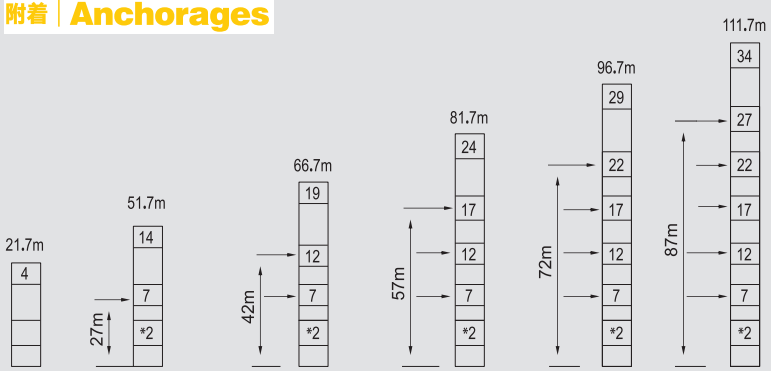

载荷表 | Load Diagrams

起重臂 Jib	倍率Fall	起重幅度 Range(m)	3.8~18	20	22	25	27	30	32	35	37	40
55m	IV	起重量 Load(t)	10	8.6	7.6	6.5	5.8	5	4.6	4.1	3.8	3.5
	II		5						4.6	4.1	3.8	3.5

起重臂 Jib	倍率Fall	起重幅度 Range(m)	42	45	47	50	52	55
55m	IV	起重量 Load(t)	3.2	2.9	2.7	2.5	2.3	2.1
	II		3.2	2.9	2.7	2.5	2.3	2.1

起重臂 Jib	倍率Fall	起重幅度 Range(m)	3.8~20	22	25	27	30	32	35	37	40	42
50m	IV	起重量 Load(t)	10	8.7	7.5	6.8	6	5.5	5	4.5	4.1	3.8
	II		5							4.5	4.1	3.8

起重臂 Jib	倍率Fall	起重幅度 Range(m)	45	47	50
50m	IV	起重量 Load(t)	3.5	3.2	3
	II		3.5	3.2	3

起重臂 Jib	倍率Fall	起重幅度 Range(m)	3.8~20	22	25	27	30	32	35	37	40	42	45
45m	IV	起重量 Load(t)	10	9	7.7	7	6.2	5.7	5.1	4.7	4.2	4	3.6
	II		5							4.7	4.2	4	3.6

起重臂 Jib	倍率Fall	起重幅度 Range(m)	3.8~20	22	25	27	30	32	35	37	40
40m	IV	起重量 Load(t)	10	9.1	7.8	7.1	6.2	5.7	5.1	4.8	4.3
	II		5							4.8	4.3

起重臂 Jib	倍率Fall	起重幅度 Range(m)	3.8~20	22	25	27	30	32	35
35m	IV	起重量 Load(t)	10	9.2	8	7.2	6.4	5.9	5.3
	II		5						

平衡重配置 | Counter-jib Ballast

吊臂长度 Jib Length(m)	后臂长度 Counter Jib Length(m)	平衡重/Counter-weight	
		CA	合计/Tatal(kg)
		2200kg	
55	8.5	7	15400
50	8.5	6	13200
45	8.5	5	11000
40	8.5	4	8800
35	8.5	3	6600

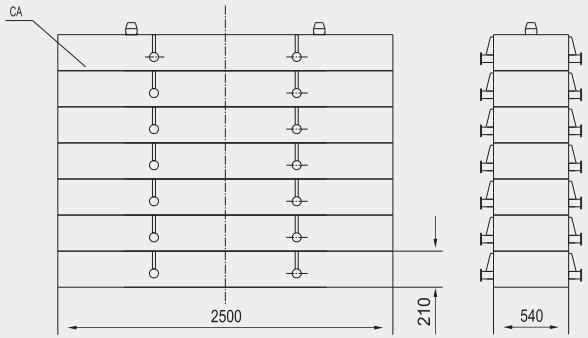

机构配置 | Specifications(Mechanisms)

机构名称 Item	机构代号 Mechanism						功率/Power	
		m/min	t	m/min	t	m	Hp	Kw
起升 Hoisting	60LVF25	0-22.5	10	0-45	5	600	60	45
		0-45	5	0-90	2.5			
拉臂 Luffing	50DVF40	≤3.5min		变频调速 Ferquency control			功率/Power 37Kw	
回转 Slewing	RCV185	0-0.7r/min					功率/Power 2X9Kw	
	RVF185	0-0.7r/min		变频调速 Ferquency control			功率/Power 2X9Kw	
行走 Traveling	18TVF	0-25m/min		变频调速 Ferquency control			4X3.4kw	
电网 Mains supply		CE138 ICE38					380V(±5%)/50Hz 440V(±5%)/60Hz	
电力容量 Necessary electric power							135KVA	

部件尺寸及重量 | Dimension & weight

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
1	平衡臂 Counter-jib		7.37	3.87	2.37	6120	1
2	根部节 Jib-Section 1		10.2	1.41	1.44	1538	1

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
3	第二节 Jib-Section 2		10.14	1.35	1.39	1134	1
4	第三节 Jib-Section 3		10.14	1.34	1.3	1019	1
5	第四节 Jib-Section 4		5.32	1.34	1.3	493	1
6	第五六节 Jib-Section 5、6		5.32	1.34	1.3	408	2
7	第七节 Jib-Section 7		5.32	1.34	1.3	431	1
8	第八节 Jib-Section 8		3.14	1.34	1.36	340	1
9	第九节 Jib-Section 9		5.3	1.32	1.3	437	1
10	端部节 Jib-Section 10		2	1.32	2.23	396	1

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
11	塔头 Towerhead		5.07	2.12	12.57	5500	1
12	回转支承 Slewing Table		4.8	4.58	4.1	7902	1
13	吊钩 Hook		1.14	0.24	1.72	380	1
14	套架 Telescoping Cage		L48A1/1.6m L68B1/2m L68B2/2m	3.98 4.38 4.38	3.89 4.09 4.09	7.28 7.28 7.28	4744 5358 5358	1 1 1
15	基础节 Basic Mast		L48A1/1.6m L68B1/2m L68B2/2m	7.76 7.76 7.76	1.73 2.13 2.13	1.71 2.11 2.11	3658 4355 4355	1 1 1
16	标准节 Mast		L48A1/1.6m L68B1/2m L68B2/2m	3.26 3.27 3.27	1.73 2.13 2.13	1.71 2.11 2.11	1591 1792 1551	4 10 10
17	固定支脚 Fixing Angles		L48A1/1.6m L68B1/2m L68B2/2m	0.58 0.58 0.58	0.58 0.58 0.58	1.2 1.2 1.2	291 291 291	4 4 4
18	附着框 Anchorage Frame		L48A1/1.6m L68B1/2m L68B2/2m	2.4 2.75 2.75	0.41 0.44 0.44	2.51 3.0 3.0	1110 1396 1396	n n n