动臂塔式起重机

Luffing Tower Crane

QD5523-10T

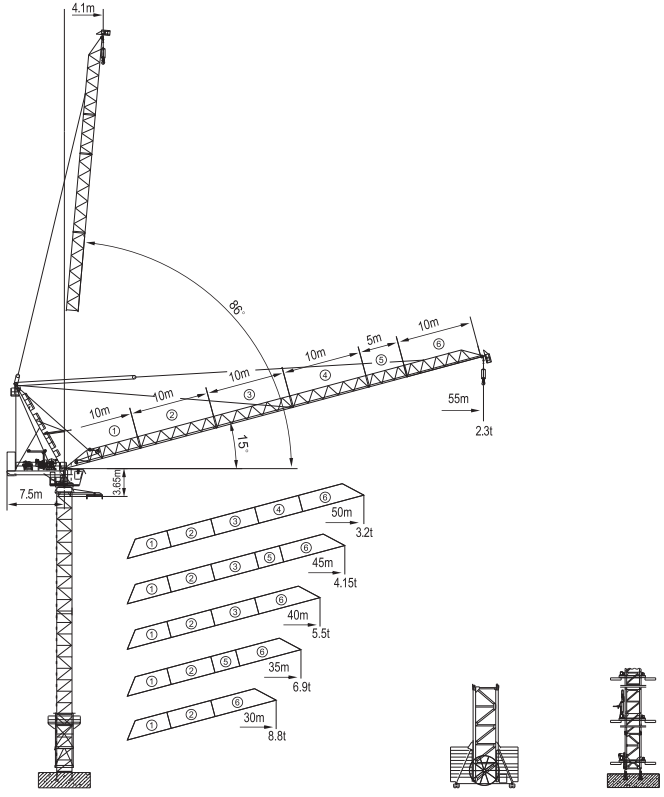

本技术参数不受法律约束，技术信息请详见相应技术说明书。
Specifications and data is not legally binding. For any technical information, please refer to the corresponding instructions.

塔身截面 | Masts L48A1 (1.6x1.6x3m)

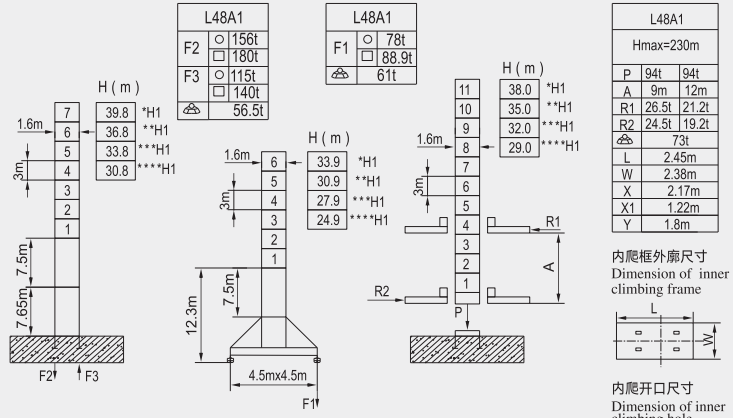

H1—— 臂根铰点距地面高度 Height under jib hinge shaft

臂 Jib	*30~35m	**40~45m	***50m	****55m

○ 工作状态 In service
□ 非工作状态 Out of service
空载、无配重 Without load and ballast

附着 | Anchorages

如果塔机高度高于本图所示最大高度，请向本公司咨询。
If the height of tower crane is higher than the maximum height shown in figure, please consult with our company.

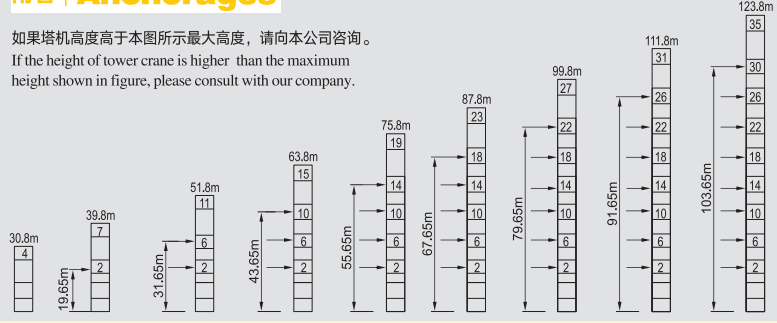

塔身截面 | Masts L68B1/B2 (2x2x3m)

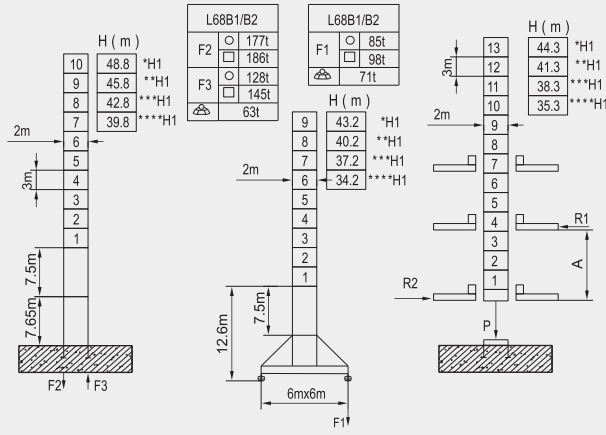

L68B1/B2		
Hmax=230m		
P	95.5t	95.5t
A	9m	12m
R1	28.7t	23.1t
R2	26.7t	21.1t
	74t	
L	3.29m	
W	2.78m	
X	2.8m	
X1	1.5m	
Y	2.17m	

内爬框外廓尺寸
Dimension of inner climbing frame



内爬开口尺寸
Dimension of inner climbing hole



H1—— 臂根铰点距地面高度 Height under jib hinge shaft

臂 Jib	*30~35m	**40~45m	***50m	****55m

○ 工作状态 In service
□ 非工作状态 Out of service
空载、无配重 Without load and ballast

附着 | Anchorages

如果塔机高度高于本图所示最大高度，请向本公司咨询。
If the height of tower crane is higher than the maximum height shown in figure, please consult with our company.

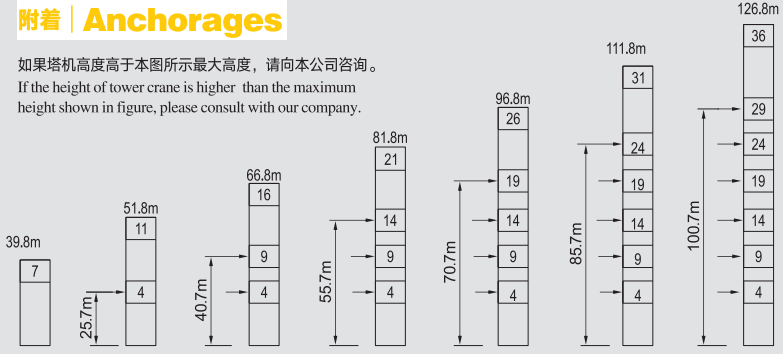

塔身截面 | Masts L69B2 (2x2x3m)

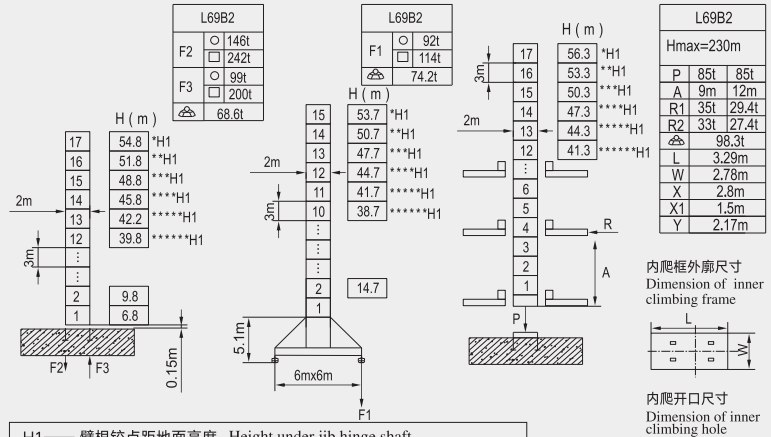

L69B2		
Hmax=230m		
P	85t	85t
A	9m	12m
R1	35t	29.4t
R2	33t	27.4t
	98.3t	
L	3.29m	
W	2.78m	
X	2.8m	
X1	1.5m	
Y	2.17m	

内爬框外廓尺寸
Dimension of inner climbing frame

内爬开口尺寸
Dimension of inner climbing hole



H1—— 臂根铰点距地面高度 Height under jib hinge shaft

臂 Jib	*30~35m	**40~45m	***50m	****55m

○ 工作状态 In service
□ 非工作状态 Out of service
空载、无配重 Without load and ballast

附着 | Anchorages

如果塔机高度高于本图所示最大高度，请向本公司咨询。
If the height of tower crane is higher than the maximum height shown in figure, please consult with our company.

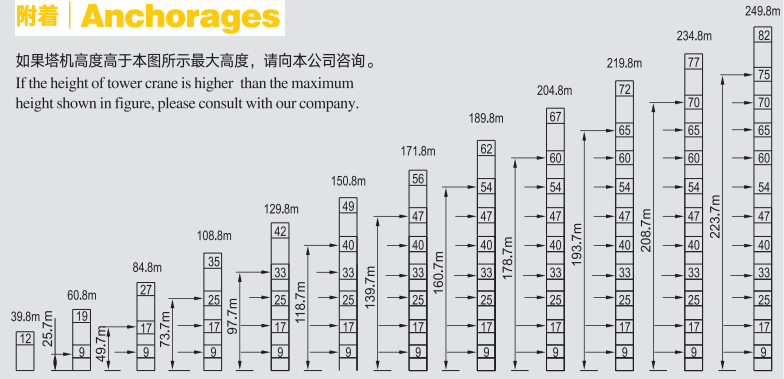

载荷表 | Load Diagrams

起重臂 Jib	倍率Fall	起重幅度 Range(m)	4.1~24.4	25	29.79	30	35	36.9	40	45	50	55
55m	IV	起重量 Load(t)	10	9.67	7.40	7.35	5.76	4.80	4.42	3.45	2.70	2.10
	III		7.5			7.45	5.86	4.90	4.52	3.55	2.80	2.20
	II		5						4.62	3.65	2.90	2.30

起重臂 Jib	倍率Fall	起重幅度 Range(m)	3.7 ~24.76	25	30	30.38	35	39.35	40	45	50
50m	IV	起重量 Load(t)	10	9.85	7.60	7.40	5.95	4.80	4.66	3.74	3.00
	III		7.5				6.05	4.90	4.76	3.84	3.10
	II		5						4.86	3.94	3.20

起重臂 Jib	倍率Fall	起重幅度 Range(m)	3.38 ~25.37	30	32.95	35	40	43.4	45
45m	IV	起重量 Load(t)	10	8.24	7.40	6.52	5.27	4.80	4.30
	III		7.5			6.62	5.37	4.90	4.40
	II		5						4.50

起重臂 Jib	倍率Fall	起重幅度 Range(m)	3.1 ~26.2	30	33.1	35	40
40m	IV	起重量 Load(t)	10	8.28	7.40	6.58	5.40
	III		7.5			6.68	5.50
	II		5				

起重臂 Jib	倍率Fall	起重幅度 Range(m)	2.7~26.5	30	33.36	35
35m	IV	起重量 Load(t)	10	8.40	7.40	6.80
	III		7.5			6.90
	II		5			

起重臂 Jib	倍率Fall	起重幅度 Range(m)	2.3~27.2	30
30m	IV	起重量 Load(t)	10	8.80
	III		7.5	
	II		5	

平衡重配置 | Counter-jib Ballast

吊臂长度 Jib Length(m)	后臂长度 Counter Jib Length(m)	平衡重/Counter-weight			
		CA	CB	CC	合计/Tatal(kg)
		4000kg	3000kg	2000kg	
55	7.5	1	5	2	23000
50	7.5	1	5	1	21000
45	7.5	1	5	1	21000
40	7.5	1	4	2	20000
35	7.5	1	4	2	20000
30	7.5	1	4	2	20000

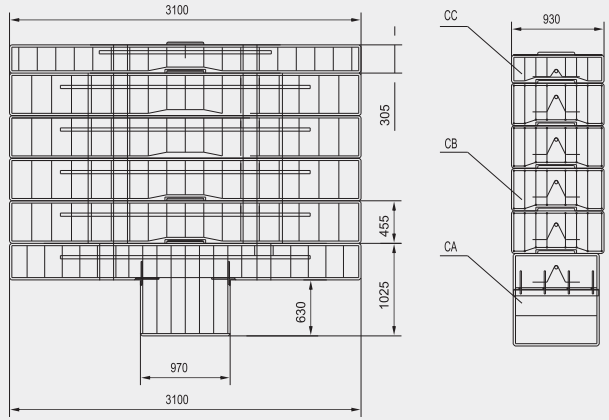

机构配置 | Specifications(Mechanisms)

机构名称 Item	机构代号 Mechanism	起升 Hoisting m/min	起升 Hoisting t	起升 Hoisting m/min	起升 Hoisting t	起升 Hoisting m/min	起升 Hoisting t	m	功率/Power Kw
起升 Hoisting	60LVF25	0-22.5	10	0-33.8	7.5	0-45	5	600	45kw
		0-45	5	0-67.5	3.75	0-90	2.5		
拉臂 Luffing	40DVF35	≤3min		变频调速 Ferquency control					30kw
回转 Slewing	RCV120A	0-0.7r/min							2x6kw
	RVF120	0-0.7r/min		变频调速 Ferquency control					2x6kw
行走 Traveling	18TVF	0-25m/min		变频调速 Ferquency control					4x3.4kw
电网 Mains supply		CE138 ICE38							380V(±5%)/50Hz 440V(±5%)/60Hz
电力容量 Necessary electric power									122KVA

部件尺寸及重量 | Dimension & weight

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
1	平衡臂 Counter-jib		7.92	3.63	5.34	10482	1
2	根部节 Jib-Section 1		10.53	1.77	1.75	1873	1
3	第二节 Jib-Section 2		10.5	1.7	1.68	1075	1
4	第三节 Jib-Section 3		10.5	1.7	1.68	931	1
5	第四节 Jib-Section 4		10.5	1.7	1.68	927	1
6	第五节 Jib-Section 5		5.34	1.7	1.68	551	1
7	端部节 Jib-Section 6		10.67	1.74	1.83	1506	1
8	塔头 Towerhead		6.89	2.46	11.86	3774	1

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
9	缓冲装置 Buffer		3.5	1.83	0.32	754	1
10	回转支承 Slewing Table		6.86	4.58	3.42	9081	1
11	吊钩 Hook		1.21	0.28	1.41	367	1
12	套架 Telescoping Cage	 L48A1/1.6m L68B1/2m L68B2/2m L69B2/2m	3.98 4.38 4.38 4.38	3.89 4.09 4.09 4.09	7.28 7.28 7.28 7.28	4744 5358 5358 5478	1 1 1 1
13	基础节 Basic Mast	 L48A1/1.6m L68B1/2m L68B2/2m L69B2/2m	7.76 7.76 7.76	1.73 2.13 2.13	1.71 2.11 2.11	3658 4355 4355	1 1 1
14	标准节 Mast	 L48A1/1.6m L68B1/2m L68B2/2m L69B2/2m	3.26 3.27 3.27 3.31	1.73 2.13 2.13 2.13	1.71 2.11 2.11 2.13	1591 1792 1551 1850	4 6 6 10
15	加强基础节 Reinforced Basic Mast	 L48A1/1.6m L68B1/2m L68B2/2m L69B2/2m	7.76 7.81 7.81	1.73 2.13 2.13	1.71 2.11 2.11	4399 4898 4898	1 1 1
16	固定支脚 Fixing Angles	 L48A1/1.6m L68B1/2m L68B2/2m L69B2/2m	0.58 0.58 0.58 0.8	0.58 0.58 0.58 0.8	1.2 1.2 1.2 1.31	291 291 291 420	4 4 4 4
17	附着框 Anchorage Frame	 L48A1/1.6m L68B1/2m L68B2/2m L69B2/2m	2.4 2.75 2.75 2.75	0.41 0.44 0.44 0.67	2.51 3.0 3.0 3.0	1110 1396 1396 1430	n n n n