动臂塔式起重机

Luffing Tower Crane

QD5525-12T

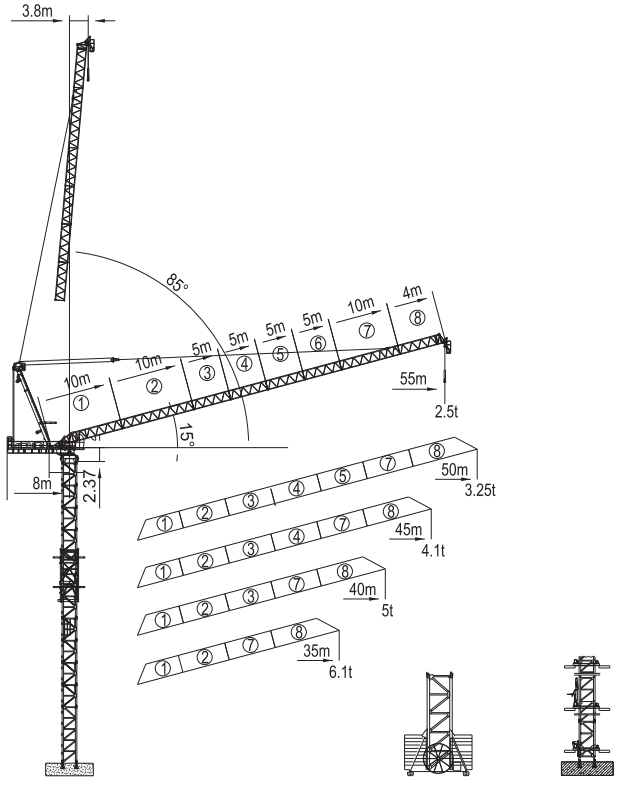

本技术参数不受法律约束，技术信息请详见相应技术说明书。

Specifications and data is not legally binding. For any technical information, please refer to the corresponding instructions.

塔身截面 | Masts L68B1/B2 (2x2x3m)

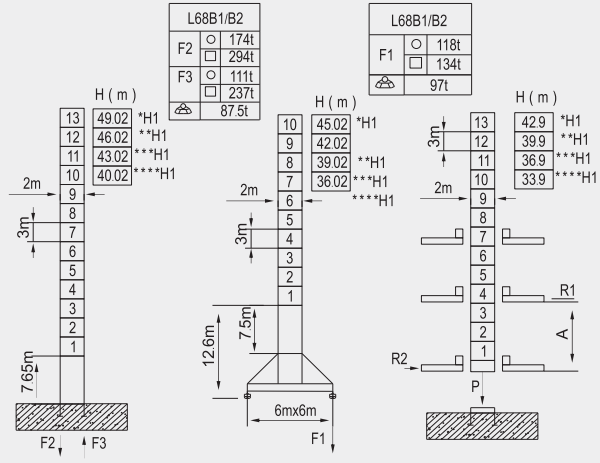

L68B1/B2		
F2	○	174t
	□	294t
F3	○	111t
	□	237t
	⚠	87.5t

L68B1/B2		
F1	○	118t
	□	134t
	⚠	97t

L68B1/B2		
P	101t	101t
A	12m	16m
R1	34t	25.5t
R2	29.6t	22.2t
⚠	81.5t	
L	3.29m	
W	2.78m	
X	2.8m	
X1	1.5m	
Y	2.17m	

内爬框外廓尺寸

Dimension of inner climbing frame



内爬开口尺寸

Dimension of inner climbing hole



H1—— 臂根铰点距地面高度 Height under jib hinge shaft

臂 Jib	*30~35m	**40~45m	***50m	****55m

○ 工作状态	In service
□ 非工作状态	Out of service
⚠ 空载、无配重	Without load and ballast

附着 | Anchorages

如果塔机高度高于本图所示最大高度，请向本公司咨询。

If the height of tower crane is higher than the maximum height shown in figure, please consult with our company.

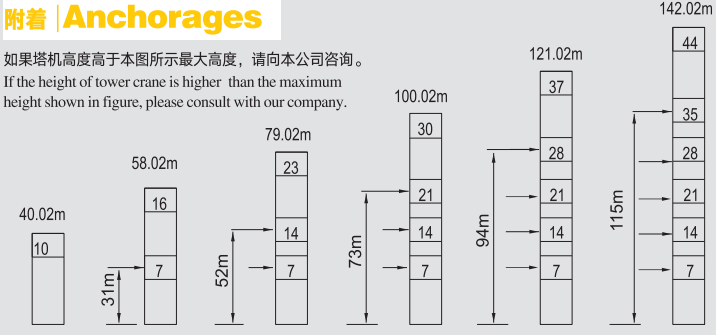

载荷表 | Load Diagrams

起重臂 Jib	倍率Fall	起重幅度 Range(m)	3.8~17.6	20	22	25	30	31.8	35	37	40	42	45
55m	IV	起重量 Load(t)	12	10.4	9.4	8	6.3	5.8	4.9	4.4	3.9	3.5	3.1
	II		6						5.1	4.6	4.1	3.7	3.3

起重臂 Jib	倍率Fall	起重幅度 Range(m)	47	50	52	55
55m	IV	起重量 Load(t)	2.9	2.6	2.4	2.3
	II		3.1	2.8	2.6	2.5

起重臂 Jib	倍率Fall	起重幅度 Range(m)	3.5~19.6	22	25	27	30	32	34.2	34.8	37	40	42
50m	IV	起重量 Load(t)	12	10	8.8	8	6.8	6.3	6	5.8	5.2	4.6	4.2
	II		6								5.4	4.8	4.4

起重臂 Jib	倍率Fall	起重幅度 Range(m)	45	47	50
50m	IV	起重量 Load(t)	3.7	3.4	3.05
	II		3.9	3.6	3.25

起重臂 Jib	倍率Fall	起重幅度 Range(m)	3.5~20	22	25	27	30	32	34.4	35	37	40	42	45
45m	IV	起重量 Load(t)	12	10.4	9	8.1	7	6.4	6	5.8	5.3	4.8	4.4	3.9
	II		6								5.5	5	4.6	4.1

起重臂 Jib	倍率Fall	起重幅度 Range(m)	3.5~20.2	22	25	27	30	32	34.8	35.4	37	40
40m	IV	起重量 Load(t)	12	10.5	9.2	8.2	7.1	6.5	6	5.8	5.3	4.8
	II		6								5.5	5

起重臂 Jib	倍率Fall	起重幅度 Range(m)	3.5~20.4	22	25	27	30	32	35
35m	IV	起重量 Load(t)	12	10.8	9.3	8.3	7.3	6.6	6.1
	II		6						

平衡重配置 | Counter-jib Ballast

吊臂长度 Jib Length(m)	后臂长度 Counter Jib Length(m)	平衡重/Counter-weight		
		CA	CB	合计/Tatal(kg)
		4200kg	2100kg	
55	8	5	1	23100
50	8	5		21000
45	8	5		21000
40	8	4	1	18900
35	8	4	1	18900

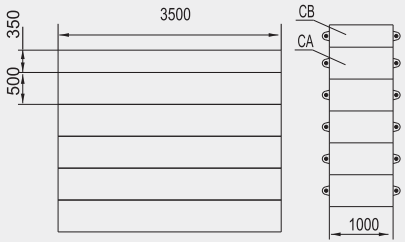

机构配置 | Specifications(Mechanisms)

机构名称 Item	机构代号 Mechanism	m/min	t	m/min	t	m	功率/Power
起升 Hoisting	75LVF30	0-22.5	12	0-45	6	500 >500* 变频调速 Ferquency control	55kw
		0-45	6	0-90	3		
拉臂 Luffing	60DVF45	≤3min		变频调速 Ferquency control			45kw
回转 Slewing	RCV185	0-0.7r/min					2x9kw
	RVF185	0-0.7r/min		变频调速 Ferquency control			2x9kw
行走 Traveling	18TVF	0-25m/min		变频调速 Ferquency control			4x3.4kw
电网 Mains supply		CE138 ICE38					380V(±5%)/50Hz 440V(±5%)/60Hz
电力容量 Necessary electric power							165KVA

部件尺寸及重量 | Dimension & weight

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
1	平衡臂 Counter-jib		7.16	4.16	1.75	6020	1
2	根部节 Jib Section 1		10.2	1.61	1.64	1711	1

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
3	第二节 Jib-Section 2		10.14	1.55	1.51	1090	1
4	第三节 Jib-Section 3		5.32	1.6	1.5	622	1
5	第四节 Jib-Section 4		5.32	1.54	1.5	533	1
6	第五节 Jib-Section 5		5.3	1.53	1.5	442	2
7	第六节 Jib-Section 6		10.02	1.53	1.56	1057	1
8	端部节 Jib-Section 6		4.02	1.55	2.45	709	1
9	塔头 Towerhead		6.2	2.32	12.76	3774	1
10	回转支承 Slewing Table		4.36	3.31	3.25	5746	1

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
11	吊钩 Hook		1.23	0.29	1.88	457	1
12	套架 Telescoping Cage	 L68B1/2m L68B2/2m	4.38 4.38	4.09 4.09	7.28 7.28	5358 5358	1 1
13	加强节 Reinforced Mast	 L68B1/2m L68B2/2m	3.27 3.27	2.13 2.13	2.08 2.08	1942 1701	3 3
14	标准节 Mast	 L68B1/2m L68B2/2m	3.27 3.27	2.13 2.13	2.11 2.11	1792 1551	7 7
15	加强基础节 Reinforced Basic Mast	 L68B1/2m L68B2/2m	7.81 7.81	2.13 2.13	2.11 2.11	4898 4898	1 1
16	固定支脚 Fixing Angles	 L68B1/2m L68B2/2m	0.58 0.58	0.58 0.58	1.2 1.2	291 291	4 4
17	附着框 Anchorage Frame	 L68B1/2m L68B2/2m	2.75 2.75	0.44 0.44	3.0 3.0	1396 1396	n n