动臂塔式起重机

Luffing Tower Crane

QD6038-20T

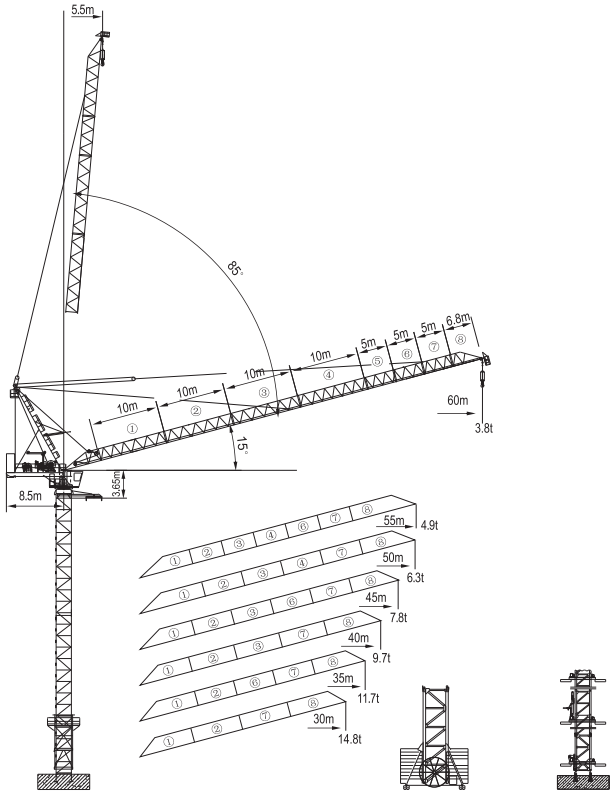

本技术参数不受法律约束，技术信息请详见相应技术说明书。

Specifications and data is not legally binding. For any technical information, please refer to the corresponding instructions.

塔身截面 | Masts L69B2 (2x2x3m)

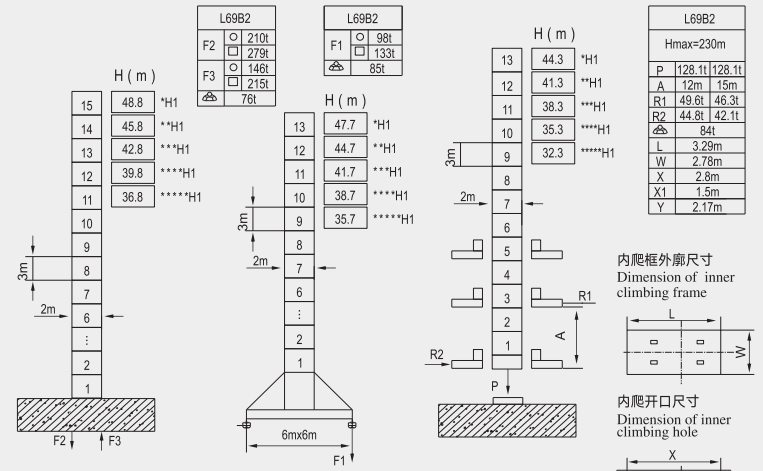

H1—— 臂根铰点距地面高度 Height under jib hinge shaft

臂 Jib	*40m	**45m	***50m	****55m	*****60m

○ 工作状态 In service

□ 非工作状态 Out of service

空载、无配重 Without load and ballast

附着 | Anchorages

如果塔机高度高于本图所示最大高度，请向本公司咨询。

If the height of tower crane is higher than the maximum height shown in figure, please consult with our company.

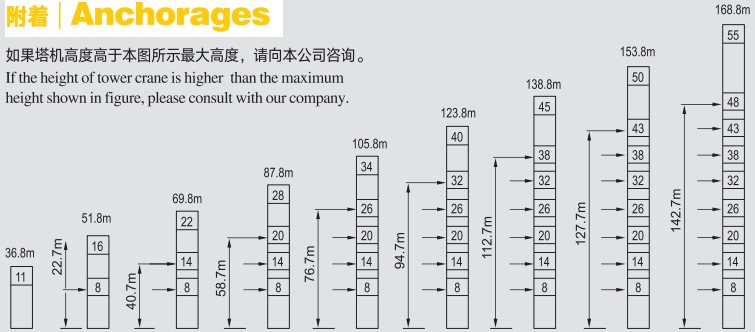

载荷表 | Load Diagrams

起重臂 Jib	倍率Fall	起重幅度 Range(m)	5.5~37.5	40	45	50	55	60
60m	II	起重量 Load(t)	10	8.71	7.09	5.78	4.7	3.8

起重臂 Jib	倍率Fall	起重幅度 Range(m)	5.1~27.2	30	35	36.4	40	45	50	55
55m	III	起重量 Load(t)	15	13.45	10.72	9.8	8.66	7.05	5.76	4.7
	II		10				8.86	7.25	5.96	4.9

起重臂 Jib	倍率Fall	起重幅度 Range(m)	4.7~22	24.3	25	27.75	30	35	37.42	40	45	50
50m	IV	起重量 Load(t)	20	18	17.39	14.8	13.58	10.88	9.6	8.8	7.19	5.9
	III		15				13.78	11.08	9.8	9	7.39	6.1
	II		10							9.2	7.59	6.3

起重臂 Jib	倍率Fall	起重幅度 Range(m)	4.3~22.4	24.54	25	28.25	30	35	38.2	40	45
45m	IV	起重量 Load(t)	20	18	17.59	14.8	13.78	11.06	9.6	9.0	7.4
	III		15				14.3	11.56	9.8	9.2	7.6
	II		10							9.4	7.8

起重臂 Jib	倍率Fall	起重幅度 Range(m)	3.8~22.6	24.86	25	28.8	30	35	39.2	40
40m	IV	起重量 Load(t)	20	18	17.92	14.8	14.1	11.36	9.6	9.3
	III		15				14.3	11.56	9.8	9.5
	II		10							9.7

起重臂 Jib	倍率Fall	起重幅度 Range(m)	3.3~22.8	25.1	28.95	32	35
35m	IV	起重量 Load(t)	20	18	14.8	12.92	11.5
	III		15			13.12	11.7
	II		10				

起重臂 Jib	倍率Fall	起重幅度 Range(m)	2.9~23.1	25.4	29.4	30
30m	IV	起重量 Load(t)	20	18	14.8	14.6
	III		15			14.8
	II		10			

平衡重配置 | Counter-jib Ballast

吊臂长度 Jib Length(m)	后臂长度 Counter Jib Length(m)	平衡重/Counter-weight		合计/Tatal kg
		CA	CB	
60	8.5	4800kg	2900kg	
		6	2	34600
55	8.5	6	2	34600
50	8.5	6	1	31700
45	8.5	6	1	31700
40	8.5	6		28800
35	8.5	6		28800
30	8.5	6		28800

机构配置 | Specifications(Mechanisms)

机构名称 Item	机构代号 Mechanism								功率/Power
		m/min	t	m/min	t	m/min	t	m	Kw
起升 Hoisting	120LVF50	0-22.5	20	0-33.75	15	0-45	10	650	90kw
		0-45	10	0-67.5	7.5	0-90	5		
拉臂 Luffing	85DVF50	≤3min		变频调速 Ferquency control					65kw
回转 Slewing	RCV185	0-0.7r/min							2x9kw
	RVF185	0-0.7r/min		变频调速 Ferquency control					2x9kw
行走 Traveling	18TVF	0-25m/min		变频调速 Ferquency control					4x3.4kw
电网 Mains supply		CE138 ICE38							380V(±5%)/50Hz 440V(±5%)/60Hz
电力容量 Necessary electric power									230KVA

部件尺寸及重量 | Dimension & weight

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
1	平衡臂 Counter-jib		8.66	5.03	5.94	7757	1
2	起升机构 Hoist Mechanism		1.95	2.14	1.04	1200	1
3	塔头 Towerhead		8.66	2.46	13.23	4929	1

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
4	司机室 Cabin		3.6	1.3	2.7	1032	1
5	回转支承 Slewing Table		3.79	4.69	3.84	11584	1
6	根部节 Jib-Section1		10.22	1.77	1.78	2220	1
7	起重臂第二节 Jib-Section2		10.17	1.72	1.7	1468	1
8	起重臂第三节 Jib-Section3		10.17	1.72	1.7	1468	1
9	起重臂第四节 Jib-Section4		10.17	1.72	1.7	1468	1
10	起重臂第五节 Jib-Section5		5.34	1.72	1.7	765	1
11	起重臂第六节 Jib-Section6		5.34	1.72	1.7	765	1

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(Kg)	数量 Qty
12	起重臂第七节 Jib-Section7		5.34	1.72	1.7	765	1
13	起重臂端部节 Jib-Section8		6.83	1.76	1.96	1319	1
14	缓冲装置 Buffer		3.52	2.66	1.47	748	1
15	吊钩 Hook		1.2	0.28	2.25	532	1
16	套架 Telescoping Cage		7.26	4.06	4.22	5478	1
17	标准节 Mast		3.31	2.13	2.11	1850	11
18	固定支脚 Fixing Angles		0.8	0.8	1.31	417	4
19	附着框 Anchorage Frame		2.75	0.67	3.0	1430	n