强力建机 | QLCM®

SICHUAN QIANGLI CONSTRUCTION MACHINERY CO.,LTD.

致力于提供安全、稳定、智能的
建筑机械整体解决方案

Dedicated to provide overall solution scheme for safe, stable and intelligent construction machinery.

地址：成都市新津县花源镇官林村
邮编：611432
Add: Guanlin Village, Garden Town, Xinjin County, Chengdu, China
Post code: 611432

国际销售 Overseas Sale
Tel: 0086-28-87769616 87765996 Fax: 0086-28-87769616
Email: sales@geql.com

国内销售 Domestic Sale
Tel:0086-28-84710808
Http://www.qlcmcrane.com

QLCM®

QP6515-8T

尖头塔式起重机 Topkit Tower Crane

平头塔式起重机 Topless Tower Crane

动臂塔式起重机 Luffing Tower Crane

屋面起重机 Derrick Crane

塔式起重机配件 Tower Crane Spare Parts

平头塔式起重机

Topless Tower Crane

QP6515-8T

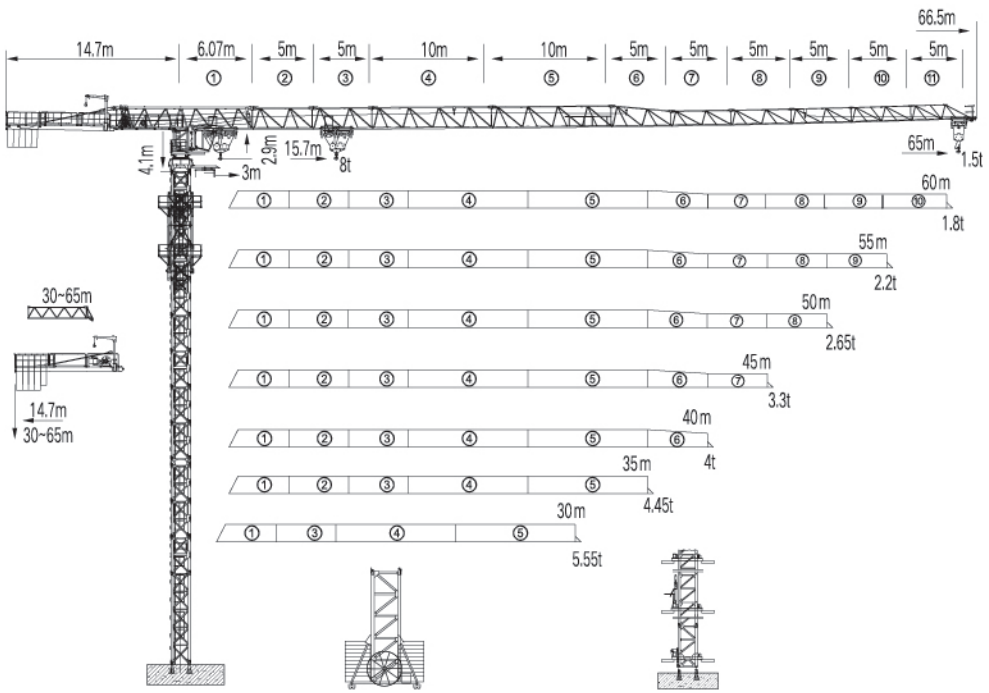

本技术参数不受法律约束，技术信息请详见相应技术说明书。

Specifications and data is not legally binding For any technical information, please refer to the corresponding instructions.

塔身截面 | Masts L46A1 (1.6x1.6x3m)

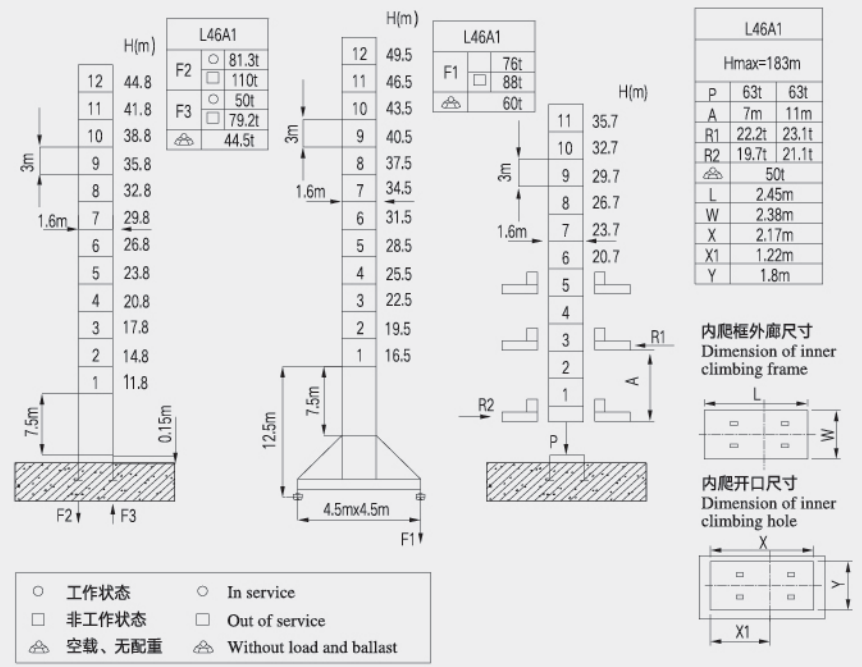

附着 | Anchorages

如果塔机高度高于本图所示最大高度，请向本公司咨询。

If the height of tower crane is higher than the maximum height shown in figure, please consult with our company.

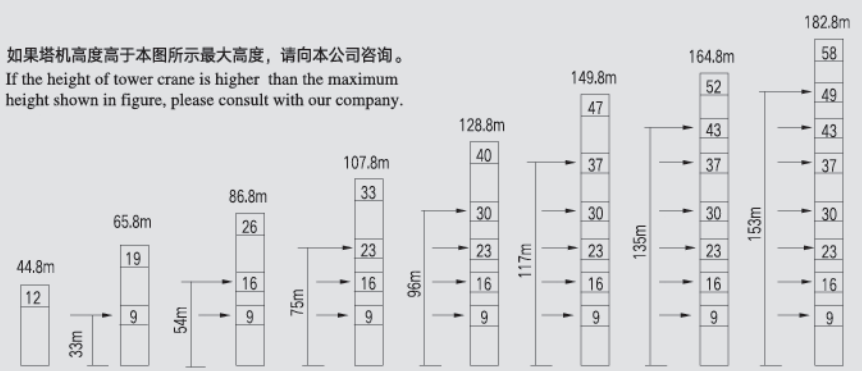

塔身截面 | Masts L68A1 (2x2x3m)

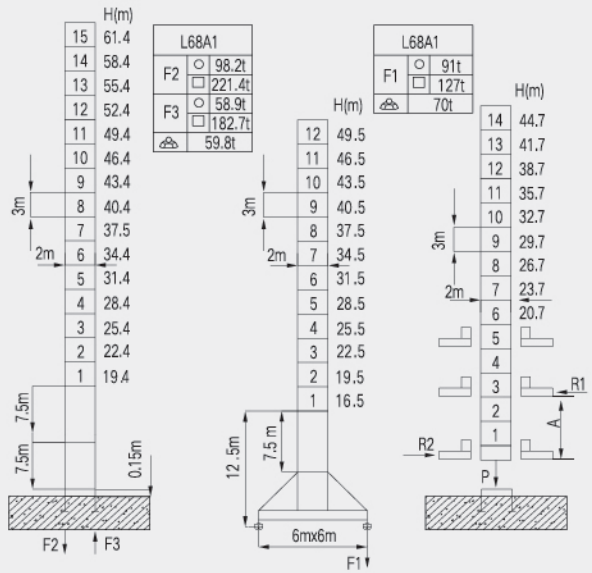

L68A1		
F2	○	98.2t
	□	221.4t
F3	○	58.9t
	□	182.7t
		59.8t

L68A1	
F1	○ 91t
	□ 127t
	70t

L68A1		
Hmax=230m		
P	72.2t	72.2t
A	12m	15m
R1	25.5t	18.7t
R2	23.1t	16.2t
	52.7t	
L	3.29m	
W	2.78m	
X	2.8m	
X1	1.5m	
Y	2.17m	

内爬框外廓尺寸
Dimension of inner climbing frame



内爬开口尺寸
Dimension of inner climbing hole



○ 工作状态	○ In service
□ 非工作状态	□ Out of service
空载、无配重	Without load and ballast

附着 | Anchorages

如果塔机高度高于本图所示最大高度，请向本公司咨询。
If the height of tower crane is higher than the maximum height shown in figure, please consult with our company.

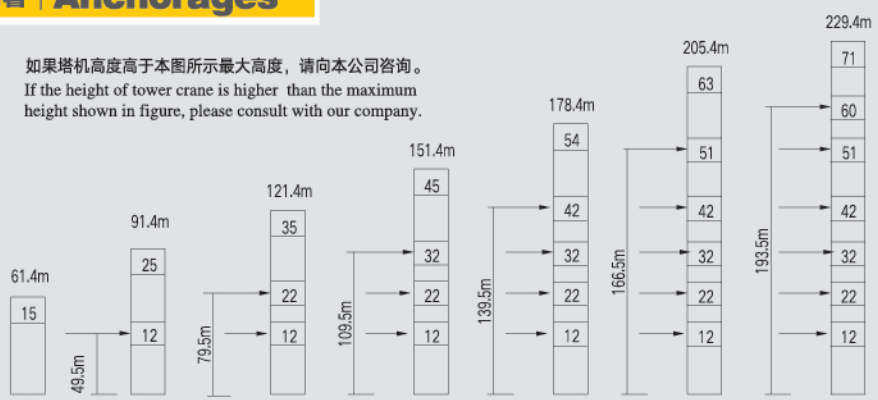

载荷表 | Load Diagrams

起重臂Jib	倍率Fall	起重幅度 Range(m)	3.0-15.7	20	22	25	27	30	30.1	35	37	40	42	45	47	50
65m	IV	起重量 Load(t)	8	6.01	5.35	4.57	4.15	3.63	3.62	2.96	2.74	2.46	2.29	2.07	1.94	1.76
	II		4							3.34	3.12	2.84	2.67	2.45	2.32	2.14

起重臂Jib	倍率Fall	起重幅度 Range(m)	52	55	56	57	60	62	65
65m	IV	起重量 Load(t)	1.65	1.51	1.46	1.42	1.30	1.22	1.12
	II		2.03	1.89	1.84	1.80	1.68	1.60	1.50

起重臂Jib	倍率Fall	起重幅度 Range(m)	3.0-16.5	20	22	25	27	30	31.6	35	37	40	42	45	47	50
60m	IV	起重量 Load(t)	8	6.38	5.69	4.87	4.43	3.88	3.62	3.17	2.94	2.64	2.47	2.23	2.09	1.91
	II		4							3.55	3.32	3.02	2.85	2.61	2.47	2.29

起重臂Jib	倍率Fall	起重幅度 Range(m)	52	55	56	57	60
60m	IV	起重量 Load(t)	1.79	1.64	1.59	1.55	1.42
	II		2.17	2.02	1.97	1.93	1.80

起重臂Jib	倍率Fall	起重幅度 Range(m)	30-17.5	20	22	25	27	30	33.6	35	37	40	42	45	47	50
55m	IV	起重量 Load(t)	8	6.88	6.15	5.27	4.80	4.21	3.62	3.45	3.21	2.89	2.70	2.45	2.30	2.10
	II		4							3.83	3.59	3.27	3.08	2.83	2.68	2.48

起重臂Jib	倍率Fall	起重幅度 Range(m)	52	55
55m	IV	起重量 Load(t)	1.98	1.82
	II		2.36	2.20

起重臂Jib	倍率Fall	起重幅度 Range(m)	3.0-18.5	20	22	25	27	30	35	35.5	37	40	42	45	47	50
50m	IV	起重量 Load(t)	8	7.30	6.53	5.61	5.11	4.49	3.69	3.62	3.43	3.10	2.90	2.64	2.48	2.27
	II		4								3.81	3.48	3.28	3.02	2.86	2.65

起重臂Jib	倍率Fall	起重幅度 Range(m)	3.0-19.27	20	22	25	27	30	32	35	37.93	40	42	45
45m	IV	起重量 Load(t)	8	7.44	6.44	5.33	4.94	4.4	4.15	3.84	3.62	3.39	3.19	2.29
	II		4									3.77	3.57	3.30

起重臂Jib	倍率Fall	起重幅度 Range(m)	3.0-20.31	22	25	27	30	32	35	36.8	40
40m	IV	起重量 Load(t)	8	7.31	6.31	5.77	5.11	4.73	4.25	4	3.62
	II		4								

起重臂Jib	倍率Fall	起重幅度 Range(m)	3.0-21.4	22	25	27	30	32	35
35m	IV	起重量 Load(t)	8	7.75	6.68	6.10	5.37	4.97	4.45
	II		4						

起重臂Jib	倍率Fall	起重幅度 Range(m)	3.0-21.97	22	25	27	30
30m	IV	起重量 Load(t)	8	7.99	6.89	6.29	5.55
	II		4				

平衡重配置 | Counter-jib Ballast

吊臂长度 Jib Length(m)	后臂长度 Counter Jib Length(m)	平衡重 / Counter-weight				合计 / Tatal(kg)
		CA	CB	CC	CD	
		4000kg	2000kg	1000kg	500kg	
65	14.7	3	2	1	1	17500
60	14.7	3	2	1		17000
55	14.7	3	1	1	1	15500
50	14.7	3	1	1		15000
45	14.7	3	1			14000
40	14.7	3		1		13000
35	14.7	2	1	1	1	11500
30	14.7	2		1	1	9500

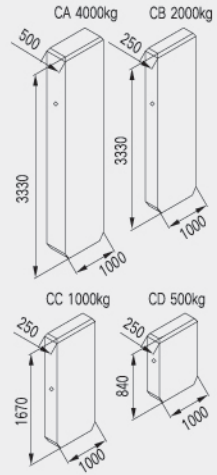

机构配置 | Specifications(Mechanisms)

机构名称 Item	机构代号 Mechanism	m/min	t	m/min	t	m	功率 / Power
起升 Hoisting	40L VF20	0-20	8	0-40	4	500	30kw
		0-40	4	0-80	2		
变幅 Trolleying	X96L	0-30-60m/min					4.5kw
	DVF95	0-60m/min		变频调速 Ferquency control			4.5kw
回转 Slewing	RCV95	0-0.7r/min					2x4.5kw
	RVF95			变频调速 Ferquency control			2x4.5kw
行走 Traveling	14TVF	0-25m/min		变频调速 Ferquency control			4x3.4kw
电网 Mains supply		CE138 ICE38					380V(±5%)/50Hz 440V(±5%)/60Hz
电力容量 Necessary electric power							60KVA

部件尺寸及重量 | Dimension & weight

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(KG)	数量 Qty
1	平衡臂根部节 Counter-jib 1		5.29	2.31	1.96	1760	1
2	平衡臂端部节 Counter-jib 2		9.25	2.31	2.59	3735	1
3	起升机构 Hoist Mechanism		1.95	2.14	1.04	1200	1
4	塔头 Towerhead		3.0	1.86	4.6	2100	1
5	司机室 Cabin		3.6	1.3	2.7	1032	1
6	回转支承 Slewing Table		2.08	2.14	2.5	3800	1
7	根部节 Jib Section1		5.73	1.23	2.0	1967	1

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(KG)	数量 Qty
8	起重臂第二节 Jib Section2		5.32	1.05	2.0	1425	1
9	起重臂第三节 Jib Section3		5.3	1.05	1.91	1236	1
10	起重臂第四节 Jib Section4		10.27	1.05	1.91	1862	1
11	起重臂第五节 Jib Section5		10.22	1.05	1.87	1345	1
12	起重臂第六节 Jib Section6		5.2	1.05	1.84	579	1
13	起重臂第七节 Jib Section7		5.2	1.05	1.34	521	1
14	起重臂第八节 Jib Section8		5.17	1.05	1.33	432	1
15	起重臂第九节 Jib Section9		5.14	1.05	1.31	376	1
16	起重臂第十节 Jib Section10		5.11	1.05	1.29	325	1
17	起重臂第十一节 Jib Section11		5.1	1.05	1.28	277	1
18	起重臂端部节 Jib Nose		0.92	1.17	1.4	116	1

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(KG)	数量 Qty
19	后小车 Rear Trolley		1.47	1.31	0.97	252	1
20	前小车 Front Trolley		1.41	1.31	0.97	247	1
21	吊钩 Hook		1.26	0.25	1.61	231	1
22	套架 Telescoping Cage	 L46A1/1.6m L68A1/2m	3.63 4.38	3.63 4.07	6.8 7.26	3807 4915	1 1
23	基础节 Basic Mast	 L46A1/1.6m L68A1/2m	7.75 7.76	1.75 2.1	1.69 2.1	2688 3785	1 1
24	标准节 Mast	 L46A1/1.6m L68A1/2m	3.25 3.27	1.75 2.1	1.69 2.08	1207 1691	12 15
25	固定支脚 Fixing Angles	 L46A1/1.6m L68A1/2m	0.49 0.58	0.49 0.58	1.14 1.2	182 291	4 4
26	附着框 Anchorage frame	 L46A1/1.6m L68A1/2m	2.4 2.75	0.41 0.44	2.51 3.0	1110 1396	n n