强力建机 QLCM®

SICHUAN QIANGLI CONSTRUCTION MACHINERY CO.,LTD.

致力于提供安全、稳定、智能的
建筑机械整体解决方案

Dedicated to provide overall solution scheme for safe, stable and intelligent construction machinery.

地址：成都市新津县花源镇官林村
邮编：611432
Add: Guanlin Village, Garden Town, Xinjin County, Chengdu, China
Post code: 611432

国际销售 Overseas Sale
Tel: 0086-28-87769616 87765996 Fax: 0086-28-87769616
Email: sales@geql.com

国内销售 Domestic Sale
Tel:0086-28-84710808
Http://www.qlcmcrane.com

QLCM®

QP7023-10T

尖头塔式起重机 Topkit Tower Crane
平头塔式起重机 Topless Tower Crane
动臂塔式起重机 Luffing Tower Crane
屋面起重机 Derrick Crane
塔式起重机配件 Tower Crane Spare Parts

致力于提供

安全、稳定、智能的

建筑机械整体解决方案

Dedicated to provide
overall solution scheme for
safe, stable
and intelligent
construction machinery

成为可持续发展的创造型企业 中国领先的塔机品牌

Become a creative enterprise with sustainable development
China's leading tower crane brand

平头塔式起重机

Topless Tower Crane

QP7023-10T

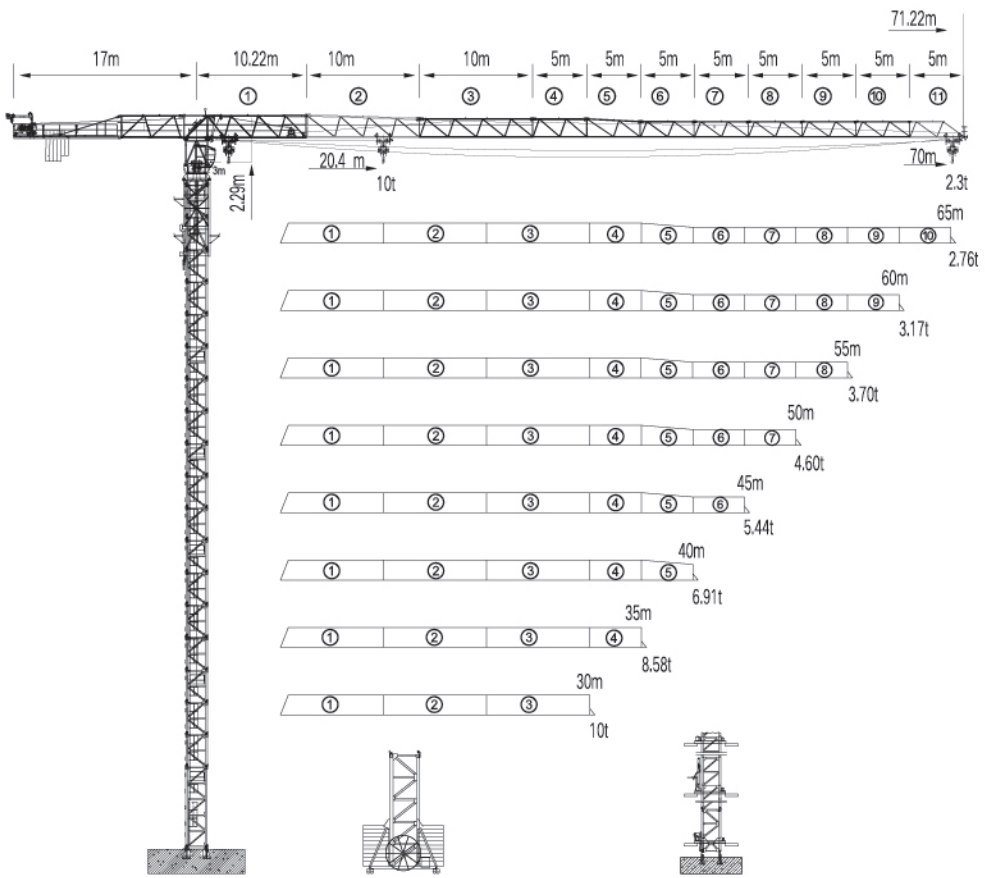

本技术参数不受法律约束，技术信息请详见相应技术说明书。
Specifications and data is not legally binding For any technical information, please refer to the corresponding instructions.

塔身截面 | Masts L68B1/B2 (2x2x3m)

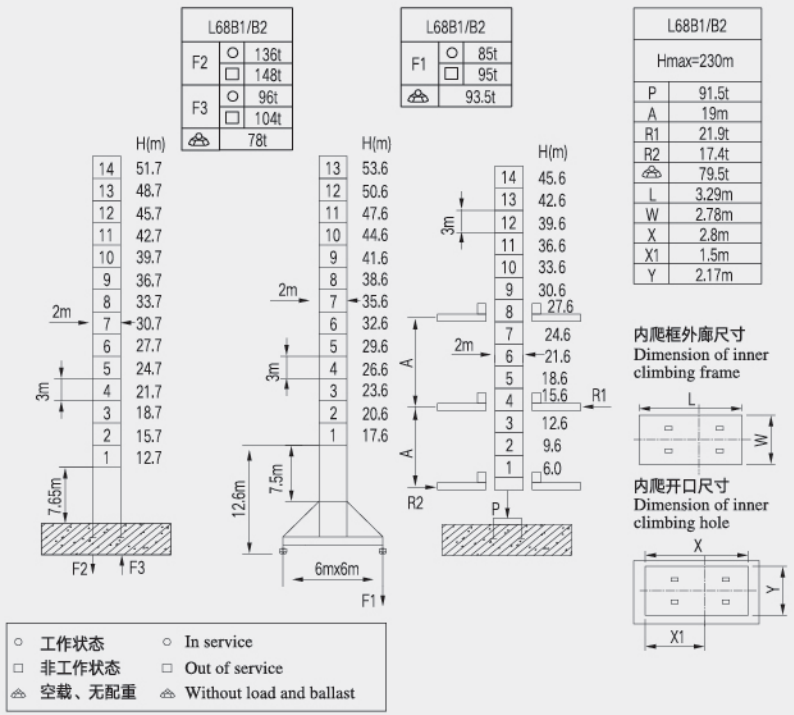

附着 | Anchorages

如果塔机高度高于本图所示最大高度，请向本公司咨询。
If the height of tower crane is higher than the maximum height shown in figure, please consult with our company.

塔身截面 | Masts L68B1/B2 (2x2x3m)



○ 工作状态	○ In service
□ 非工作状态	□ Out of service
空载、无配重	Without load and ballast

附着 | Anchorages

如果塔机高度高于本图所示最大高度，请向本公司咨询。
If the height of tower crane is higher than the maximum height shown in figure, please consult with our company.

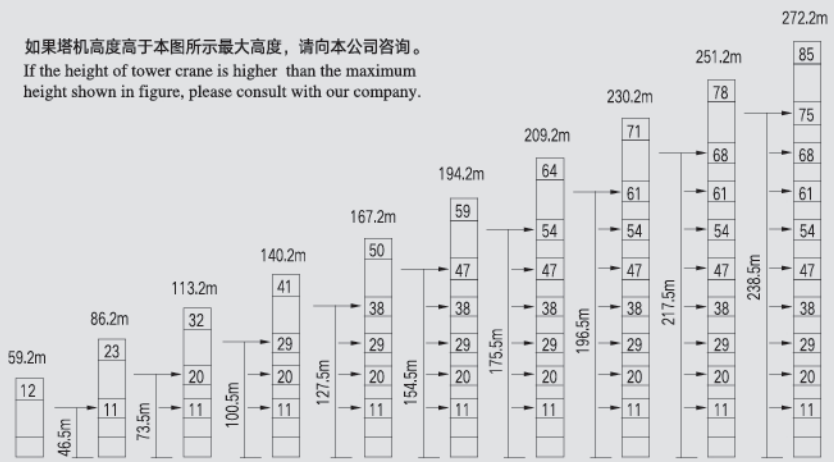

载荷表 | Load Diagrams

起重臂Jib	倍率Fall	起重幅度 Range(m)	3~20.4	22	25	27	30	32	35	37	38.3	40	42	45	47	50
70m	IV	起重量 Load(t)	10	9.22	7.98	7.3	6.45	5.98	5.36	5.01	4.8	4.55	4.28	3.91	3.7	3.41
	II		5									4.75	4.48	4.11	3.9	3.61

起重臂Jib	倍率Fall	起重幅度 Range(m)	52	55	57	60	62	65	67	70
70m	IV	起重量 Load(t)	3.23	2.99	2.84	2.64	2.52	2.35	2.25	2.10
	II		3.43	3.19	3.04	2.84	2.72	2.55	2.45	2.30

起重臂Jib	倍率Fall	起重幅度 Range(m)	3~21.6	22	25	27	30	32	35	37	40	40.58	42	45	47	50	52	55	57	60	62	65
65m	IV	起重量 Load(t)	10	9.83	8.51	7.8	6.9	6.4	5.75	5.37	4.88	4.8	4.6	4.21	3.98	3.67	3.49	3.23	3.08	2.87	2.74	2.56
	II		5										4.8	4.41	4.18	3.87	3.69	3.43	3.28	3.07	2.94	2.76

起重臂Jib	倍率Fall	起重幅度 Range(m)	3~22.2	25	27	30	32	35	37	40	41.6	42	45	47	50	52	55	57	60
60m	IV	起重量 Load(t)	10	8.76	8.03	7.11	6.59	5.93	5.54	5.04	4.8	4.74	4.35	4.12	3.8	3.61	3.35	3.19	2.97
	II		5									4.94	4.55	4.32	4.00	3.81	3.55	3.39	3.17

起重臂Jib	倍率Fall	起重幅度 Range(m)	3~23	25	27	30	32	35	37	40	42	43	45	47	50	52	55
55m	IV	起重量 Load(t)	10	9.11	8.35	7.4	6.86	6.17	5.78	5.26	4.95	4.8	4.54	4.3	3.97	3.77	3.5
	II		5										4.74	4.5	4.17	3.97	3.7

起重臂Jib	倍率Fall	起重幅度 Range(m)	3~24.9	25	27	30	32	35	37	39.95	42	45	46.7	47	50
50m	IV	起重量 Load(t)	10	9.97	9.14	8.11	7.53	6.79	6.36	5.8	5.46	5.02	4.8	4.76	4.40
	II		5											4.96	4.6

起重臂Jib	倍率Fall	起重幅度 Range(m)	3~26.6	27	30	32	35	37	40	42	45
45m	IV	起重量 Load(t)	12	9.85	8.75	8.13	7.33	6.87	6.27	5.91	5.44
	II		5								

起重臂Jib	倍率Fall	起重幅度 Range(m)	3~28.9	30	32	35	37	40
40m	IV	起重量 Load(t)	10	9.60	8.93	8.06	7.56	6.91
	II		5					

起重臂Jib	倍率Fall	起重幅度 Range(m)	3~30.5	32	35
35m	IV	起重量 Load(t)	10	9.49	8.58
	II		5		

起重臂Jib	倍率Fall	起重幅度 Range(m)	3~30
30m	IV	起重量 Load(t)	10
	II		5

平衡重配置 | Counter-jib Ballast

吊臂长度 Jib Length(m)	后臂长度 Counter Jib Length(m)	平衡重 / Counter-weight			合计 / Tatal(kg)
		CA	CB	CC	
		4800kg	2800kg	1400kg	
70	17	5	1	1	28200
65	17	5	1		26800
60	17	5		1	25400
55	17	5			24000
50	17	4	1	1	23400
45	17	4	1		22000
40	17	4		1	20600
35	17	4			19200
30	17	3	1		17200

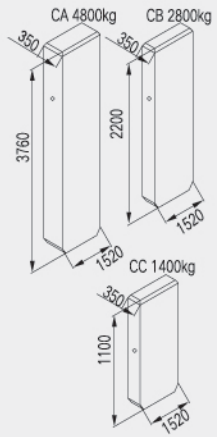

机构配置 | Specifications(Mechanisms)

机构名称 Item	机构代号 Mechanism	m/min	t	m/min	t	m	功率 / Power Kw
起升 Hoisting	70RCS25	0-22.5	10	0-45	5	550 >550*	51.5kw
		0-45	5	0-90	2.5		
	60LVF25	0-22.5	10	0-45	5	600 >600* 变频调速 Ferquency control	45kw
		0-45	5	0-90	2.5		
变幅 Trolleying	X120K	15-30-60m/min					6kw
	DVF120	0-60m/min		变频调速 Ferquency control			6kw
回转 Slewing	RCV145	0-0.7r/min					2x9kw
	RVF145	0-0.7r/min		变频调速 Ferquency control			2x9kw
行走 Traveling	18TVF	0-25m/min		变频调速 Ferquency control			4x3.4kw
电网 Mains supply		CE138 ICE38					380V(±5%)/50Hz 440V(±5%)/60Hz
电力容量 Necessary electric power							100KVA

部件尺寸及重量 | Dimension & weight

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(KG)	数量 Qty
1	平衡臂根部节 Counter-jib 1		6.09	1.49	2.2	1620	1
2	平衡臂端部节 Counter-jib 2		10.22	3.53	2.53	3135	1
3	起升机构 Hoist Mechanism		2.02	1.46	1.03	1150	1
4	塔头 Towerhead		2.36	2.51	3.25	1728	1
5	司机室 Cabin		3.6	1.3	2.7	1032	1
6	回转支承 Slewing Table		5.33	4.86	3.27	6678	1

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(KG)	数量 Qty
7	根部节 Jib Section1		12.77	1.61	2.4	6182	1
8	起重臂第二节 Jib Section2		10.83	1.45	2.23	2867	1
9	起重臂第三节 Jib Section3		10.29	1.45	1.89	2425	1
10	起重臂第四节 Jib Section4		5.27	1.45	1.84	882	1
11	起重臂第五节 Jib Section5		5.25	1.45	1.82	765	1
12	起重臂第六节 Jib Section6		5.22	1.45	1.57	657	1
13	起重臂第七节 Jib Section7		5.19	1.45	1.56	563	1
14	起重臂第八节 Jib Section8		5.17	1.45	1.55	448	1
15	起重臂第九节 Jib Section9		5.14	1.45	1.54	350	1
16	起重臂第十节 Jib Section10		5.14	1.45	1.54	350	1
17	起重臂第十一节 Jib Section11		5.11	1.45	1.54	313	1
18	起重臂端部节 Jib Nose		1.57	0.59	0.84	130	1

序号 No.	名称 Name	产品描述 Description	长 L(m)	宽 W(m)	高 H(m)	单件重量 Weight(KG)	数量 Qty
19	小车 Rear Trolley		1.72	2.08	1.11	402	1
20	吊钩 Hook		1.28	0.39	2.13	532	1
21	套架 Telescoping Cage		4.38	4.09	7.28	5358	1
22	基础 Basic Mast		7.76	2.13	2.11	4355	1
23	标准节 Mast		3.27 3.27	2.13 2.13	2.11 2.11	1792 1551	14
24	固定支脚 Fixing Angles		0.58	0.58	1.2	291	4
25	附着框 Anchorage Frame		2.75	0.44	3.0	1396	n