

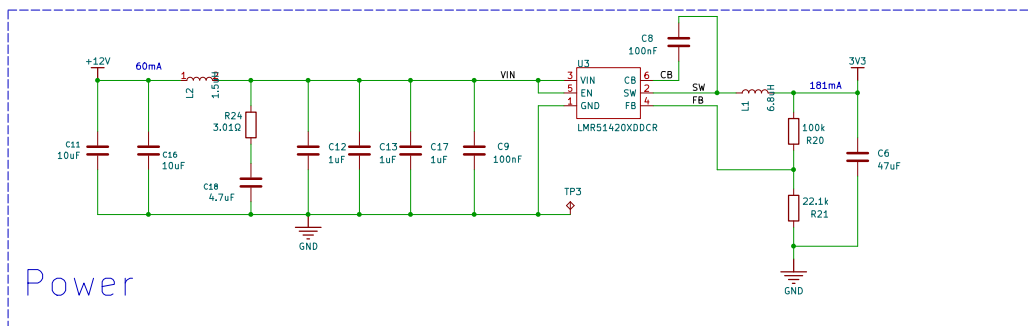
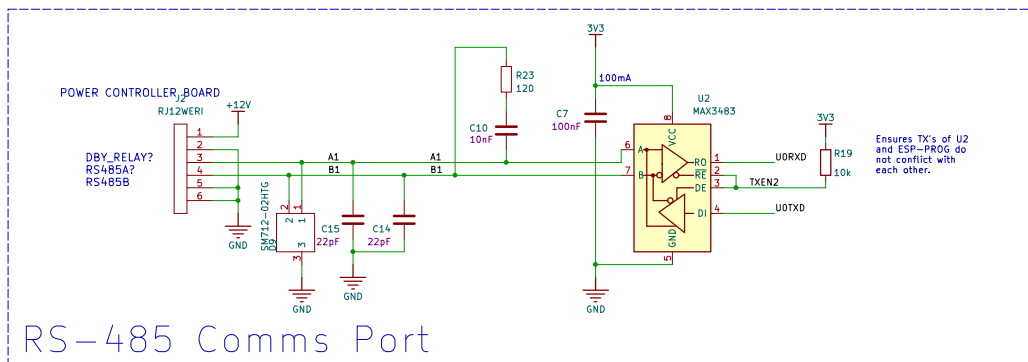


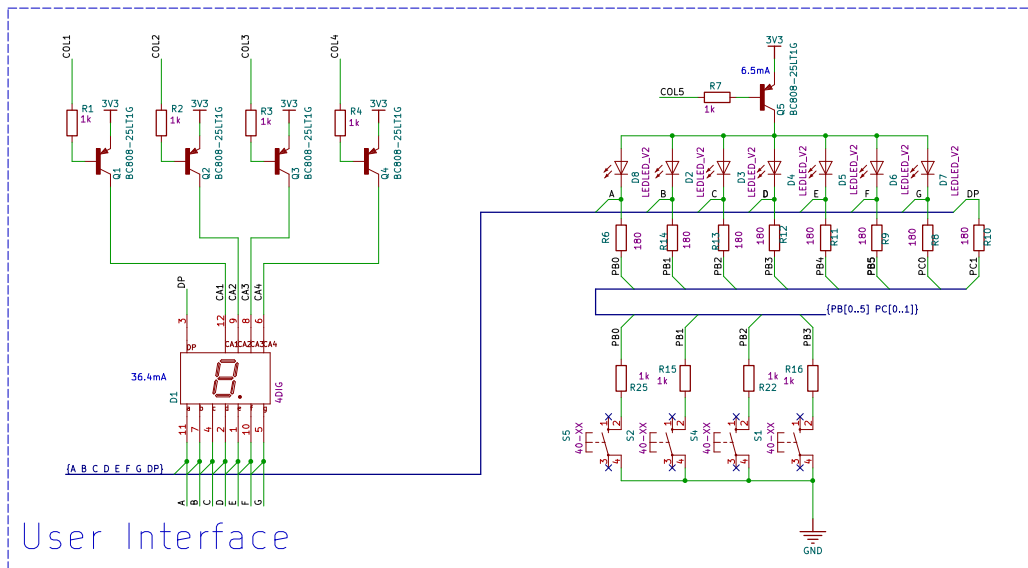

Changes from P0

1. removed auto-programming circuit
2. put back GPIO push button
3. Dev version has blue LED. Unmount in Prod version –DONE
4. Corrected ESP32–C5 symbol
5. Removed C15 and C17 in P0 schematic that messes with RS–485 comms
6. In LMR54120 feedback, changed 162k to 100k to get 3.3V so that 5V supply is no longer needed
7. Changed MAX483 to its 3.3V version, MAX3483
8. Used 0603 package where hand-soldering may be required.
9. Followed the 15mm clearance rule around ESP32–C5 PCB antenna
10. Included DCDC input and output filtering.

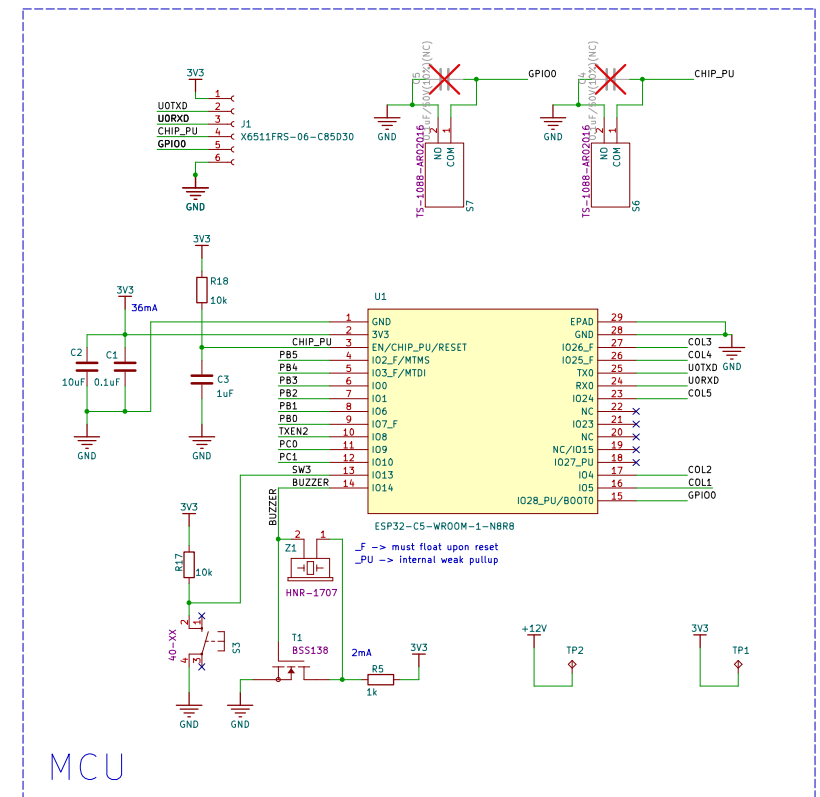

Drawn by: Edgar Polcarpio
Reviewed by:
Approved by:

Sheet: /
File: UI-V3A.kicad_sch

Title: UI V3A

Size: A3 Date: 2026-03-23

KiCad E.D.A. 9.0.7

Rev: P1
Id: 1/1