

深圳市昱申科技有限公司 CHINA YOUNG SUN LED TECHNOLOGY CO., LTD.

TEL: (86) 755-28079401 28079402 28079403 28079404 28079405

Model No.: YSL-R531K3D-D2

Applications:

Decorations

■Bill Insperctor

☐Inceticidal Lights

Absolute Maximum Ratings: $(Ta=25^{\circ}C)$.

ITEMS	Symbol	Absolute Maximum Rating	Unit	
Forward Current	IF	20	mA	
Peak Forward Current	I _{FP}	30	mA	
Suggestion Using Current	${f I}_{\sf su}$	16-18	mA	
Reverse Voltage (V _R =5V)	${ m I}_{\sf R}$	10	uA	
Power Dissipation	P□	105	mW	
Operation Temperature	Topr	-40 ~ 85	${\mathbb C}$	
Storage Temperature	Тѕтс	-40 ~ 100	$^{\circ}$	
Lead Soldering Temperature	Tsol	Max. 260℃ for 3 Sec. Max. (3mm from the base of the expoxy bulb)		

Absolute Maximum Ratings: (Ta=25℃)

ITEMS	Symbol	Test condition	Min.	Тур.	Max.	Unit
Forward Voltage	VF	I _F =20mA	1.8		2.2	V
Wavelenength (nm) or TC(k)	Δλ	I _F =20mA	570		575	nm
*Luminous intensity	Ιν	I⊧=20mA	150		200	mcd
50% Viewing Angle	2 θ 1/2	I _F =20mA	40		60	deg



深圳市昱申科技有限公司

CHINA YOUNG SUN LED TECHNOLOGY CO., LTD.


TEL: (86) 755-28079401 28079402 28079403 28079404 28079405

Light Degradation in mcd: (I_F=20mA)

Hours	Light Degradation in mcd after Different Hours							
Colors	216 Hrs	360 Hrs	792 Hrs	1104 Hrs	1992 Hrs	2328 Hrs		
Red	1.52%	-1.22%	-3.10%	-4.68%	-5.72%	-8.27%		
Yellow	-1.71%	-2.97%	-5.93%	-8.13%	-8.90%	-11.10%		
Blue	3.13%	-0.33%	-3.84%	-8.23%	-21.32%	-24.92%		
Green	-8.02%	-9.78%	-14.25%	-17.37%	-20.79%	-22.30%		
Hours	48 Hrs	168 Hrs	336 Hrs	360Hrs	720 Hrs	1008 Hrs		
Cool White	10.56%	6.72%	-2.29%	-7.68%	-17.32%	-22.48%		
Pure White	13.66%	8.22%	-1.45%	-8.50%	-19.52%	-25.26%		
Warm White	3.02%	-4.38%	-15.18%	-21.15%	-27.19%	-29.97%		

Mechanical Dimensions:

- \blacksquare All dimension are in mm, tolerance is ± 0.2 mm unless otherwise noted
- ■An epoxy meniscus may extend about 1.5mm down the leads.
- Burr around bottom of epoxy may be 0.5mm Maximum

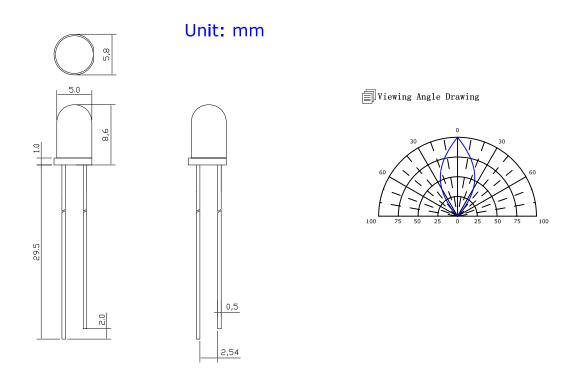

Address: 5/F, Building B, Anzhilong Indl., Qinghua East Road., Longhua Town, Shenzhen CHINA. 518109