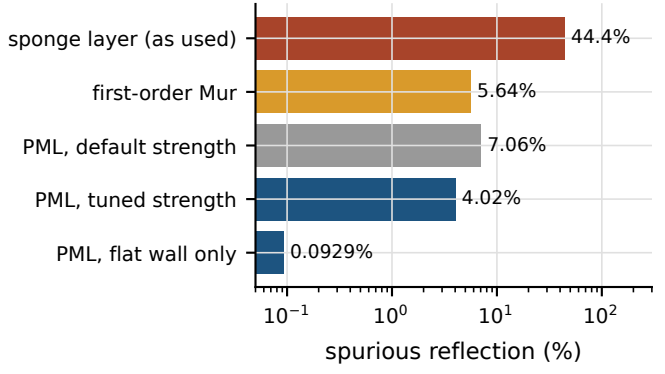
(a) reflection against a 4× larger domain
sponge layer (as used)
first-order Mur
PML, default strength
PML, tuned strength
PML, flat wall only
44.4%
5.64%
7.06%
4.02%
0.0929%
10^{-1}
10^{0}
10^{1}
10^{2}
spurious reflection (%)

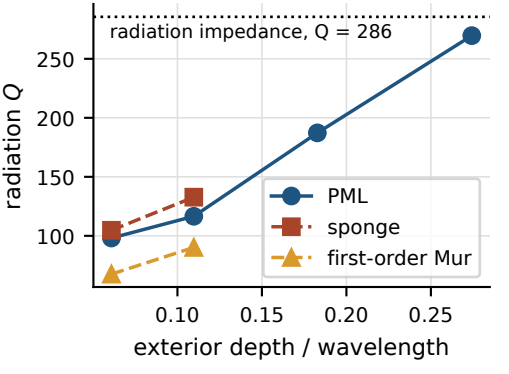
(b) Q as the exterior grows
radiation impedance, Q = 286
radiation Q
250
200
150
100
PML
sponge
first-order Mur
0.10
0.15
0.20
0.25
exterior depth / wavelength