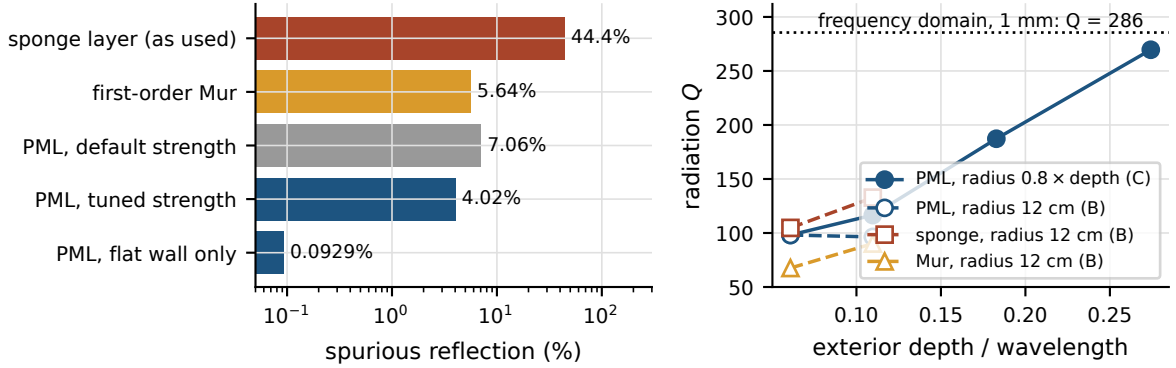
(a) reflection against a 4× larger domain
sponge layer (as used)
first-order Mur
PML, default strength
PML, tuned strength
PML, flat wall only
44.4%
5.64%
7.06%
4.02%
0.0929%
10^{-1}
10^{0}
10^{1}
10^{2}
spurious reflection (%)
(b) Q as the exterior grows
frequency domain, 1 mm: Q = 286
radiation Q
300
250
200
150
100
50
PML, radius 0.8 × depth (C)
PML, radius 12 cm (B)
sponge, radius 12 cm (B)
Mur, radius 12 cm (B)
0.10
0.15
0.20
0.25
exterior depth / wavelength