



New Arrival 5th E-FIR-E Series LED Ceiling Light



Material

Iron plate+PP cover and socket

Optional Function



Switch 3-step
dimmable



CCT adjustable




Remote control

- Quick and easy to wiring and install
- Socket patented design and private mold
- No need to remove the cover when installing, no risk of electric shock
- Fully sealed, dust-proof, shock-proof and anti-mosquito
- Ultra Slim

Installation Instruction

STEP1

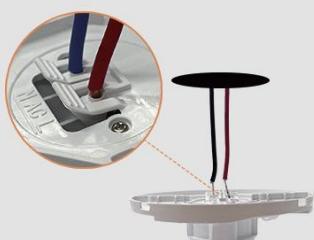

Insert the wire
into the socket.

STEP2



① Align the lamp body
with the center of
② Press and rotate it
until stop.

STEP3



Turn on the light

REMOVE



Rotate the lamp 45° in
the opposite direction,
then pull down.

Model	Wattage	Lumen	Voltage	CRI	PF	Dimension
KSCL-E-FIR-E28	28W	2240lm	100-240Vac	>80Ra	0.5	D260*H55mm
KSCL-E-FIR-E40	40W	3200lm	100-240Vac	>80Ra	0.5	D370*H55mm
KSCL-E-FIR-E60	60W	4800lm	100-240Vac	>80Ra	0.5	D460*H65mm



RGB Backlight Multi-function LED Ceiling Light

Material

Iron plate+PP cover and socket



All in one




RGB backlight



Emergency



Microwave motion sensor



3CCT selectable



Remote control




Memory function

- Quick and easy to wiring and install
- Socket patented design and private mold
- No need to remove the cover when installing, no risk of electric shock
- Fully sealed, dust-proof, shock-proof and anti-mosquito
- Ultra Slim

Installation Instruction

STEP1



Insert the wire into the socket.

STEP2



- ① Align the lamp body with the center of
- ② Press and rotate it until stop.

STEP3



Turn on the light

REMOVE



Rotate the lamp 45° in the opposite direction, then pull down.

Model	Wattage	Lumen	Voltage	CRI	PF	Dimension
-------	---------	-------	---------	-----	----	-----------

KSCL-E-FIR-E24RGB 24W 1950lm 100-240Vac >80Ra 0.5 D370*H55mm




- Quick and easy to wiring and install
- Patented design and private mold
- Fully plastic material more secure
- Fully sealed, dust-proof, shock-proof and anti-mosquito
- Cover optional or customized
- Function modularized to meet your needs



Installation Instruction

STEP1



Insert the wire into the socket.

STEP2



Align the lamp body with the center of the socket, push it to the bottom until you hear "pop pop".

STEP3



Turn on the light.

REMOVE



Press two buckles to the end at the same time, then pull down.




New Arrival 5th B-FIR-E Series LED Ceiling Light

Material

PP plate and socket+Acrylic or PS or PVC cover



Optional Function



Switch 3-step
dimmable



Voice control



Microwave
motion sensor



CCT adjustable



Remote control



APP control

Model	Wattage	Lumen	Voltage	CRI	PF	Dimension
KSCL-B-FIR-E18	18W	1620lm	100-240Vac	>80Ra	0.5	D250*H87mm
KSCL-B-FIR-E24	24W	2160lm	100-240Vac	>80Ra	0.5	D315*H87mm
KSCL-B-FIR-E36	36W	3240lm	100-240Vac	>80Ra	0.5	D400*H100mm
KSCL-B-FIR-E50	50W	4500lm	100-240Vac	>80Ra	0.5	D500*H100mm

Solar Power Multi-function LED Ceiling Light



Material


PP plate and socket+PS cover



- Solar powered microwave motion sensor
- Sensing distance 3-5m
- Polycrystalline silicon solar panel
- Quick and easy to wiring and install
- Patented design and private mold
- Fully plastic material more secure
- Fully sealed, dust-proof, shock-proof and anti-mosquito

Installation Instruction

STEP1



Insert the wire into the socket.

STEP2



Align the lamp body with the center of the socket, push it to the bottom until you hear "pop pop".

STEP3



Turn on the light.

REMOVE



Press two buckles to the end at the same time, then pull down.

Model	Wattage	Lumen	Solar Panel	Li-ion Battery	Emergency Time	Dimension
KSCL-SP-1.5E	1.5W	165lm	6V/5W	3.7V/2000mAH	4-5H	D228*H67mm
KSCL-SP-3E	3W	360lm	6V/6W	3.7V/2000mAH	3-4H	D288*H67mm

Material

PP plate and socket+Plastic or metal accessories



Optional Function



Switch 3-step dimmable



Voice Control



CCT adjustable




Remote control

- Round or square optional
- Accessories optional or customized
- Quick and easy to wiring and install
- Patented design and private mold
- Fully sealed, dust-proof, shock-proof and anti-mosquito
- Function modularized to meet your needs

Installation Instruction

STEP1



Insert the wire into the socket.

STEP2



Align the lamp body with the center of the socket, push it to the bottom until you hear "pop pop".

STEP3



Turn on the light.

REMOVE



Press two buckles to the end at the same time, then pull down.

Model	Wattage	Lumen	Voltage	CRI	PF	Dimension
KSCL-B-FIR-E50BRR	50W	3500-5000lm	100-240Vac	>80Ra	0.5	D480*H50mm
KSCL-B-FIR-E50BRS	50W	3500-5000lm	100-240Vac	>80Ra	0.5	W465*D465*H50mm

NEW 4TH E-FIR LED CEILING LAMP SERIES



Sealed design , dust-proof , anti-mosquito , no need cleaning every year .

Easy and safe to replacement when the lamp over lifespan , also 2 steps , rotate and pull down the lamp and then install the new lamp .

Complete plastic(flame retardant material) shell , without paint , environmental protection and against electric shock .

High lumen efficiency 100lm/w , 25,000hs long lifespan .



Installation Instruction



MODEL	WATTAGE	VOLTAGE	LUMEN	CRI	PF	DIMENSION	MATERIAL	EXTRA FUNCTION
KSCL-E-FIR-15W	15W	100-240V	1500lm	> 80Ra	0.5	250*92mm	Acrylic Cover PP plate & socket	
KSCL-E-FIR-18W	18W	100-240V	1800lm	> 80Ra	0.5	250*92mm	Acrylic Cover PP plate & socket	
KSCL-E-FIR-28W	28W	100-240V	2800lm	> 80Ra	0.5	315*92mm	Acrylic Cover PP plate & socket	
KSCL-E-FIR-42W	42W	100-240V	3780lm	> 80Ra	0.9	450*102mm	Acrylic Cover PP plate & socket	switch 3-step dimming
KSCL-E-FIR-48W	48W	100-240V	4320lm	> 80Ra	0.9	450*102mm	Acrylic Cover PP plate & socket	switch 3-step dimming & remote control
KSCL-E-FIR-60W	60W	100-240V	5400lm	> 80Ra	0.9	570*102mm	Acrylic Cover PP plate & socket	switch 3-step dimming & remote control
KSCL-E-FIR-75W	75W	100-240V	6750lm	> 80Ra	0.9	570*102mm	Acrylic Cover PP plate & socket	switch 3-step dimming & remote control
KSCL-E-FIR-85W	85W	100-240V	7220lm	> 80Ra	0.9	660*150mm	Acrylic Cover PP plate & socket	switch 3-step dimming & remote control
KSCL-E-FIR-100W	100W	100-240V	8500lm	> 80Ra	0.9	680*150mm	Acrylic Cover PP plate & socket	switch 3-step dimming & remote control



Features

It's able to be quickly installed/disassembled like a bulb lamp

High lumen efficiency 100lm/w

Light and safe (the whole lamp shell made of plastic)

Dust-proof and mosquito-proof (the whole lamp with sealed design)

Can be installed independently, no need to call an electrician.



Installation Instruction



Fix the socket on the ceiling and screw to tight



Push up the lamp into the socket and press gently until you hear two "pops"



Rotate the lamp left and right, and pull it down gently to ensure that the lamp does not fall off. Installation complete



Turn on the light

MODEL	WATTAGE	VOLTAGE	LUMEN	CRI	PF	DIMENSION	MATERIAL	EXTRA FUNCTION
KSCL-B-FIR-16W	16W	100-240V	1600lm	>80Ra	0.5	250*92mm	Acrylic Cover PP plate & socket	
KSCL-B-FIR-20W	20W	100-240V	2000lm	>80Ra	0.5	250*92mm	Acrylic Cover PP plate & socket	
KSCL-B-FIR-30W	30W	100-240V	3000lm	>80Ra	0.5	315*92mm	Acrylic Cover PP plate & socket	
KSCL-B-FIR-45W	45W	100-240V	4500lm	>80Ra	0.5	450*107mm	Acrylic Cover PP plate & socket	switch 3-step dimming



Mushroom Milk Cover



Aurora Starry Cover



Mushroom Starry Cover




Diamond Starry Cover

**Installation Instruction**

Fix the socket on the ceiling and screw to tight



Push up the lamp into the socket



Rotate in the clockwise direction until is locked



Turn on the light

-90%
energy
saving

100%
instant light

on off
≥15.000
switch

-20
+45
°C

MODEL	WATTAGE	VOLTAGE	LUMEN	CRI	CCT	BEAM ANGLE	PF	DIMENSION
KS-QFIR-L(15W)	15W	120V/220V	1250lm	>80Ra	2700-6500K	120°	0.5/0.9	D280*103mm
KS-QFIR-H(15W)	15W	120V/220V	1700lm	>80Ra	2700-6500K	120°	0.5/0.9	D280*103mm
KS-QFIR-L(20W)	20W	120V/220V	1600lm	>80Ra	2700-6500K	120°	0.5/0.9	D280*103mm
KS-QFIR-H(20W)	20W	120V/220V	2300lm	>80Ra	2700-6500K	120°	0.5/0.9	D280*103mm
KS-QFIR-L(23W)	23W	120V/220V	1800lm	>80Ra	2700-6500K	120°	0.5/0.9	D350*120mm
KS-QFIR-H(23W)	23W	120V/220V	2600lm	>80Ra	2700-6500K	120°	0.5/0.9	D350*120mm
KS-QFIR-L(27W)	27W	120V/220V	2200lm	>80Ra	2700-6500K	120°	0.5/0.9	D350*125mm
KS-QFIR-H(27W)	27W	120V/220V	3100lm	>80Ra	2700-6500K	120°	0.5/0.9	D350*125mm
KS-QFIR-L(34W)	34W	120V/220V	2700lm	>80Ra	2700-6500K	120°	0.5/0.9	D400*125mm
KS-QFIR-H(34W)	34W	120V/220V	3800lm	>80Ra	2700-6500K	120°	0.5/0.9	D400*125mm


**AI LAMP
VOICE CONTROL**


- Hi baby kangkang
- Turn on please
- switch off please
- half lighting please
- white light please
- neutral light please
- yellow light please
- Maximum lighting please
- Minimum lighting please
- Galaxy Night Light please
- Sleep aid night light please

 -90%
energy
saving

 100%
instant light

 on off
≥15.000
switch

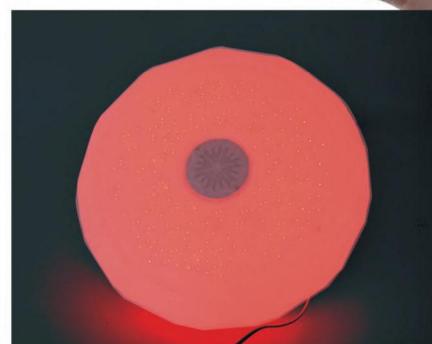 -20
+45
°C


MODEL	WATTAGE	VOLTAGE	LUMEN	CRI	CCT	PF	DIMENSION
KS-AI-CLS-24W	24W	140V-260V	1700lm	>80Ra	2700-6500K	0.5/0.9	400*110mm
KS-AI-CLS-30W	30W	140V-260V	2000lm	>80Ra	2700-6500K	0.5/0.9	400*110mm
KS-AI-CLS-36W	36W	140V-260V	2500lm	>80Ra	2700-6500K	0.5/0.9	500*110mm
KS-AI-CLS-50W	50W	140V-260V	3500lm	>80Ra	2700-6500K	0.5/0.9	500*110mm




Installation Instruction



Fix the socket on the ceiling and screw to tight



Push up the lamp into the socket and press gently until you hear two "pops"



Rotate the lamp left and right and pull it down gently to ensure that the lamp does not fall off. Installation complete



Turn on the light

MODEL	WATTAGE	VOLTAGE	LUMEN	CRI	PF	DIMENSION	MATERIAL	EXTRA FUNCTION
KSCL-B-FIR-AI45W	45W	100-240V	4500lm	>80Ra	0.9	450*110mm	Acrylic Cover PP plate & socket	4-step CCT switchable voice control & APP
KSCL-B-FIR-AI55W	55W	100-240V	5500lm	>80Ra	0.9	450*110mm	Acrylic Cover PP plate & socket	4-step CCT switchable voice control & APP
KSCL-B-FIR-AI75W	75W	100-240V	7000lm	>80Ra	0.9	550*110mm	Acrylic Cover PP plate & socket	4-step CCT switchable voice control & APP

LED Work Light Station





LED Work Light CS Series



- With on/off switch
- PC lens
- Cord type/length:SJT 18AWG 2C/5ft
- NEMA 1-15P UL plug
- 3 years warranty

Model	Wattage	Lumens	Voltage	CRI	PF	IP Rating	Lamp Size
KSWL1-1000H5	11W	1000LM	120Vac/230Vac	>80Ra	>0.9	IP44	18.8*4*17cm
KSWL1-1500H5	13W	1500LM	120Vac/230Vac	>80Ra	>0.9	IP44	18.8*4*17cm
KSWL1-2000H5	15W	2000LM	120Vac/230Vac	>80Ra	>0.9	IP44	18.8*4*17cm



LED Work Light CS Series With Tripod



- With on/off switch
- PC lens
- Cord type/length:SJT 18AWG 2C/5ft
- NEMA 1-15P UL plug
- 3 years warranty
- Iron spray paint 1.22m/48" height tripod



Model	Wattage	Lumens	Voltage	CRI	PF	IP Rating	Size
KSWL1-T1000	11W	1000LM	120Vac/230Vac	>80Ra	>0.9	IP44	18.8*4*17cm
KSWL1-T1500	13W	1500LM	120Vac/230Vac	>80Ra	>0.9	IP44	18.8*4*17cm
KSWL1-T2000	15W	2000LM	120Vac/230Vac	>80Ra	>0.9	IP44	18.8*4*17cm
KSWL1-DT2000	11W*2	2000LM	120Vac/230Vac	>80Ra	>0.9	IP44	18.8*4*17cm
KSWL1-DT3000	13W*2	3000LM	120Vac/230Vac	>80Ra	>0.9	IP44	18.8*4*17cm
KSWL1-DT4000	15W*2	4000LM	120Vac/230Vac	>80Ra	>0.9	IP44	18.8*4*17cm



LED Work Light CB Series



With H stand



With Hook&Clamp

- With on/off switch
- PC lens
- Cord type/length: SJT 18AWG 2C/5ft
- NEMA 1-15P UL plug
- 3 years warranty
- Shell color customizable
- IP65 waterproof

Model	Wattage	Lumens	Voltage	CRI	PF	IP Rating	Lamp Size
KSWL-K1-H1000lm	12W	1000LM	120Vac/230Vac	>80Ra	>0.9	IP65	18*4.8*13.5cm
KSWL-K1-1500lm	15W	1500LM	120Vac/230Vac	>80Ra	>0.9	IP65	18*4.8*13.5cm
KSWL-K1-1800lm	15W	1800LM	120Vac/230Vac	>80Ra	>0.9	IP65	18*4.8*13.5cm
KSWL-K1-2000lm	17W	1800LM	120Vac/230Vac	>80Ra	>0.9	IP65	18*4.8*13.5cm



LED Work Light CB Series



With tripod



- With on/off switch
- PC lens
- Cord type/length: SJT 18AWG 3C/6ft
- NEMA 5-15P UL plug
- 3 years warranty
- With USB port 5V 2A
- With outlet 120V 6A

Model	Wattage	Lumens	Voltage	CRI	PF	IP Rating	Lamp Size
KSWL-K2-3000lm	30W	3000LM	120Vac/230Vac	>80Ra	>0.9	IP65	22*15.4*22cm
KSWL-K2-3500lm	30W	3500LM	120Vac/230Vac	>80Ra	>0.9	IP65	22*15.4*22cm
KSWL-K2-4000lm	30W	4000LM	120Vac/230Vac	>80Ra	>0.9	IP65	22*15.4*22cm
KSWL-K3-5000lm	40W	5000LM	120Vac/230Vac	>80Ra	>0.9	IP65	29.5*22.5*29cm
KSWL-K3-5500lm	40W	5500LM	120Vac/230Vac	>80Ra	>0.9	IP65	29.5*22.5*29cm
KSWL-K3-6000lm	40W	6000LM	120Vac/230Vac	>80Ra	>0.9	IP65	29.5*22.5*29cm



LED Work Light CB Series With Tripod



- With on/off switch
- PC lens
- Cord type/length:SJT 18AWG 2C/5ft
- NEMA 1-15P UL plug
- 3 years warranty
- Iron spray paint 1.22m/48" height tripod
- IP65 waterproof



Model	Wattage	Lumens	Voltage	CRI	PF	IP Rating	Size
KSWL-K1-TH1000lm	12W	1000LM	120Vac/230Vac	>80Ra	>0.9	IP65	18*4.8*122cm
KSWL-K1-T1500lm	15W	1500LM	120Vac/230Vac	>80Ra	>0.9	IP65	18*4.8*122cm
KSWL-K1-T2000lm	17W	1800LM	120Vac/230Vac	>80Ra	>0.9	IP65	18*4.8*122cm
KSWL-K1-DTH2000lm	12W*2	2000LM	120Vac/230Vac	>80Ra	>0.9	IP65	32*4.8*122cm
KSWL-K1-DT3000lm	15W*2	3000LM	120Vac/230Vac	>80Ra	>0.9	IP65	32*4.8*122cm
KSWL-K1-DT4000lm	17W*2	4000LM	120Vac/230Vac	>80Ra	>0.9	IP65	32*4.8*122cm



New Arrival LED Work Light K4 Series



With plastic stand



With H stand



With metal stand



- With on/off switch
- PC lens
- Cord type/length: SJT 18AWG 2C/5ft
- NEMA 1-15P UL plug
- 3 years warranty
- Shell color customizable

- With on/off switch
- With USB port (5V 2A)
- PC lens
- Cord type/length: SJT 18AWG 3C/6ft
- NEMA 5-15P UL plug
- 3 years warranty
- Shell color customizable


Model	Wattage	Lumens	Voltage	CRI	PF	IP Rating	Size
KSWL-K4-3200lm	24W	3200LM	120Vac/230Vac	>80Ra	>0.9	IP44	23.5*6*24.3cm
KSWL-K4-4500lm	30W	4500LM	120Vac/230Vac	>80Ra	>0.9	IP44	23.5*6*24.3cm
KSWL-K4-7000lm	50W	7000LM	120Vac/230Vac	>80Ra	>0.9	IP44	32*6.5*25.3cm
KSWL-K4-8500lm	60W	8500LM	120Vac/230Vac	>80Ra	>0.9	IP44	32*6.5*25.3cm
KSWL-K4-10000lm	70W	10000LM	120Vac/230Vac	>80Ra	>0.9	IP44	32*6.5*25.3cm



New Arrival LED Work Light K4 Series With Tripod




- With on/off switch
- PC lens
- Cord type/length: SJT 18AWG 2C/5ft
- NEMA 1-15P UL plug
- 3 years warranty
- Iron spray paint tripod
- Shell color customizable

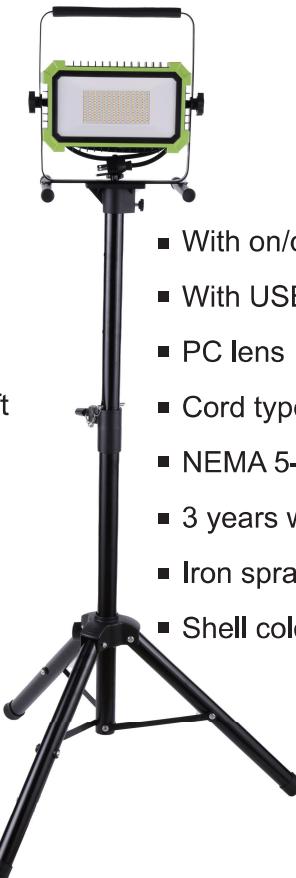

- With on/off switch
- With USB port (5V 2A)
- PC lens
- Cord type/length: SJT 18AWG 3C/6ft
- NEMA 5-15P UL plug
- 3 years warranty
- Iron spray paint tripod
- Shell color customizable

Model	Wattage	Lumens	Voltage	CRI	PF	IP Rating	Size
KSWL-K4-T3200lm	24W	3200LM	120Vac/230Vac	>80Ra	>0.9	IP44	23.5*6*160cm
KSWL-K4-T4500lm	30W	4500LM	120Vac/230Vac	>80Ra	>0.9	IP44	23.5*6*160cm
KSWL-K4-T7000lm	50W	7000LM	120Vac/230Vac	>80Ra	>0.9	IP44	32*6.5*160cm
KSWL-K4-T8500lm	60W	8500LM	120Vac/230Vac	>80Ra	>0.9	IP44	32*6.5*160cm
KSWL-K4-T10000lm	70W	10000LM	120Vac/230Vac	>80Ra	>0.9	IP44	32*6.5*160cm
KSWL-K4-DT6400lm	24W*2	6400LM	120Vac/230Vac	>80Ra	>0.9	IP44	58*20*165cm
KSWL-K4-DT9000lm	30W*2	9000LM	120Vac/230Vac	>80Ra	>0.9	IP44	58*20*165cm
KSWL-K4-DT14000lm	50W*2	14000LM	120Vac/230Vac	>80Ra	>0.9	IP44	58*20*165cm
KSWL-K4-DT17000lm	60W*2	1700LM	120Vac/230Vac	>80Ra	>0.9	IP44	58*20*165cm
KSWL-K4-DT20000lm	70W*2	20000LM	120Vac/230Vac	>80Ra	>0.9	IP44	58*6.5*165cm

New Design 10000lm Metal Shell LED Work Light

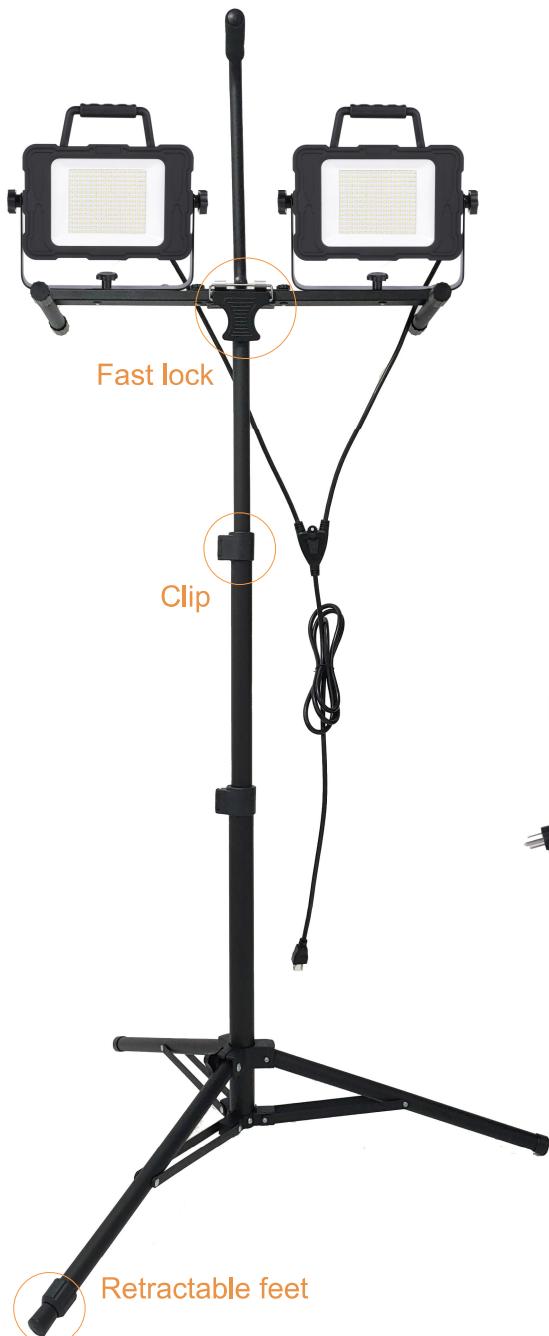


- With on/off switch
- Aluminum body
- Tempered glass lens
- Cord type/length:SJT 18AWG 3C/6ft
- NEMA 5-15P UL plug
- 3 years warranty
- Iron spray paint tripod



Model	Wattage	Lumens	Voltage	CRI	PF	IP Rating	Size
KSWL-MS-100H	85W	10000LM	120Vac/230Vac	>80Ra	>0,9	IP54	25*18.5*28cm
KSWL-MS-DT200H	85W*2	20000LM	120Vac/230Vac	>80Ra	>0,9	IP54	58*20*165cm



New Design Round Type LED Work Light



- With on/off switch
- PC lens
- Cord type/length:SJT 18AWG 2C/5ft
- NEMA 1-15P UL plug
- 3 years warranty
- Shell color customizable

Model	Wattage	Lumens	Voltage	CRI	PF	IP Rating	Size
KS-BKKWL-1000lm	10W	1000LM	120Vac/230Vac	>80Ra	>0.9	IP65	16.5*4*15.8cm
KS-BKKWL-1500lm	15W	1500LM	120Vac/230Vac	>80Ra	>0.9	IP65	16.5*4*15.8cm

New Arrival Solar Power DC LED Work Light

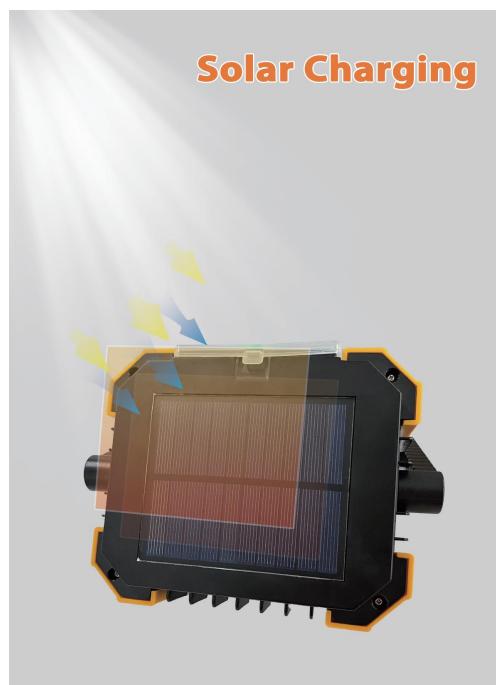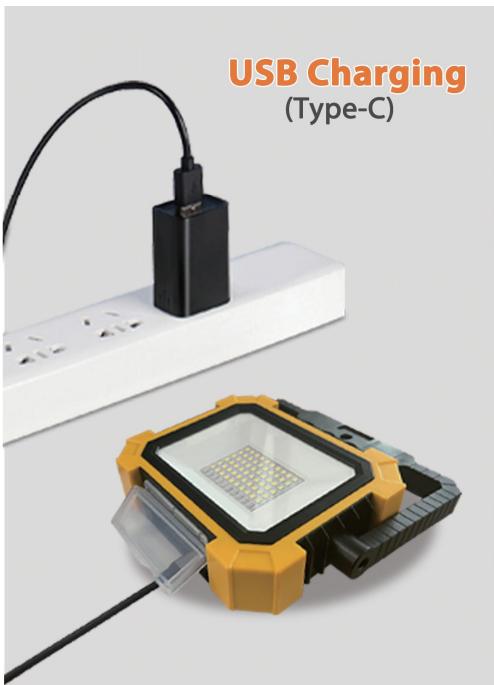

- With on/off switch
- PC lens
- 5ft USB charging cable
- 1W solar panel
- With magnet
- With USB port
- With warning light
- 4hours charging time
- 4hours running time@100% brightness
- Dimmable (100%-50%-15%)
- 2000mAh 18650 battery
- Shell color customizable

Model	Wattage	Lumens	Voltage	CRI	PF	IP Rating	Size
KSWL-DC-SP01	7W	1000LM	DC	>80Ra	>0.9	IP54	18.5*4.6*18.5cm
KSWL-DC-SP02	15W	2000LM	DC	>80Ra	>0.9	IP54	18.5*4.6*18.5cm

Battery Powered LED Camping Lights



CONQUER
THE DARK




- Material: ABS+PC Light
- Mode: Switch high/low dimming (extended press for stepless dimming) /battery indicator/USB output
- Battery type : Li-ion rechargeable
- Charging Type: TP-C USB cable
- This camping light can be used while charging

Model	CCT	Lumens	CRI	Battery Capacity	Running time	Size	IP Rating
KS-Q150-500W	7000K	900lm	>80Ra	4000mAh	6-8Hrs	Φ 150*70mm	IP65
KS-Q125-300W	7000K	700lm	>80Ra	4000mAh	6-8Hrs	Φ 125*77mm	IP65
KS-Q102-200W	7000K	380lm	>80Ra	1500mAh	4-6Hrs	Φ 100*70mm	IP65

New Design Round Type LED Work Light



KSSL-5H-U75W

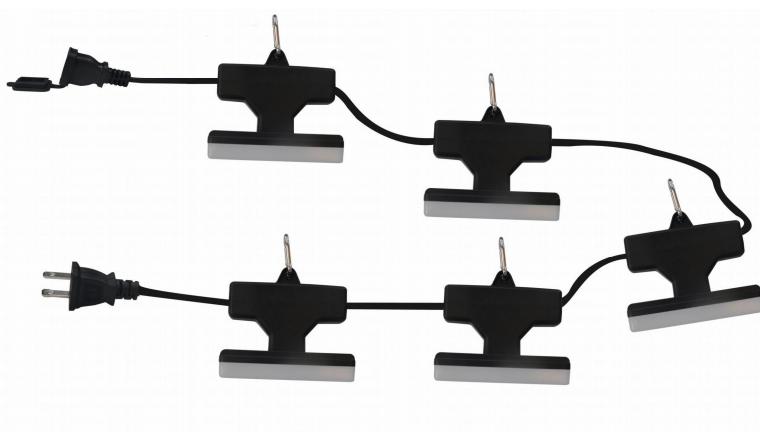

KSSL-5H-P75W

MODEL	WATTAGE	VOLTAGE	LUMEN	CRI	CCT	LED LIFE	IP RATING	CORD TYPE	CORD LENGTH	LINKABLE
KSSL-3H-P45W	45W	120Vac	4500LM	80Ra	3000-6500K	50000Hrs	IP65	SJTW 2C, 18AWG	30FT	Up to 10sets
KSSL-5H-P75W	75W	120Vac	7500LM	80Ra	3000-6500K	50000Hrs	IP65	SJTW 2C, 18AWG	50FT	Up to 8 sets
KSSL-3H-U45W	45W	120Vac	4500LM	80Ra	3000-6500K	50000Hrs	IP65	SJTW 2C, 18AWG	30FT	Up to 10sets
KSSL-5H-U75W	75W	120Vac	7500LM	80Ra	3000-6500K	50000Hrs	IP65	SJTW 2C, 18AWG	50FT	Up to 8 sets

New Arrival UFO LED Highbay Light



- New design
- Aluminum body
- PC lens
- Metal reflector (option)
- Dimmable (option)
- Motion sensor (option , Max.15m height)
- 30000hours lifespan
- 120° beam angle

Model	Wattage	Lumens	Voltage	CRI	PF	Size	Material
KSHL-U-100	100W	10000lm	220-240Vac	>80Ra	>0.9	255*40mm	Aluminum+PC
KSHL-U-150	150W	15000lm	220-240Vac	>80Ra	>0.9	295*40mm	Aluminum+PC
KSHL-U-200	200W	20000lm	220-240Vac	>80Ra	>0.9	335*40mm	Aluminum+PC
KSHL-U-240	240W	28000lm	120Vac	>80Ra	>0.9	380*55mm	Aluminum+PC



- ▶ IP65 waterproof
- ▶ Beam angle: 120°
- ▶ Aluminum body+PC cover ,
- ▶ Patent design
- ▶ Small size, loading more , save transportation cost



120° irradiation Angle

Details of the features



MODEL	WATTAGE	VOLTAGE	LUMEN	CRI	CCT	BASE	PF	DIMENSION
KS-HBL-35SP	40W	120V/220V	3000lm	> 80Ra	2700K-6500K	E26/E27	0.9	230X81mm
KS-HBL-50SP	60W	120V/220V	5000lm	> 80Ra	2700K-6500K	E26/E27	0.9	250X91mm
KS-HBL-100SP	130W	120V/220V	10000lm	> 80Ra	2700K-6500K	E26/E27	0.9	250X139mm



KS-HBL-100B



KS-HBL-50B

- GARAGES
- BASEMENTS
- STORAGE AREAS
- WORKSHOPS

E27 Lamp base ,
High quality aluminum radiator ,
High light transmittance PC cover .

Details of the features



MODEL	WATTAGE	VOLTAGE	LUMEN	CRI	CCT	BASE	PF	DIMENSION
KS-HBL-25B	35W	120V/220V	2500lm	> 80Ra	2700K-6500K	E26/E27	0.9	200X114.5mm
KS-HBL-35B	45W	120V/220V	3500lm	> 80Ra	2700K-6500K	E26/E27	0.9	245X114.5mm
KS-HBL-44B	58W	120V/220V	4400lm	> 80Ra	2700K-6500K	E26/E27	0.9	260X132.5mm
KS-HBL-50B	68W	120V/220V	5000lm	> 80Ra	2700K-6500K	E26/E27	0.9	350X132.5mm
KS-HBL-75B	98W	120V/220V	7500lm	> 80Ra	2700K-6500K	E26/E27	0.9	350X157.5mm
KS-HBL-100B	130W	120V/220V	10000lm	> 80Ra	2700K-6500K	E26/E27	0.9	350X177.5mm



GARAGES



BASEMENTS



STORAGE AREAS



WORKSHOPS



E27 Lamp base ,
Aluminum body+PC cover
High light transmittance PC cover .



MODEL	WATTAGE	VOLTAGE	LUMEN	CRI	CCT	BASE	PF	DIMENSION
KS-HBL-25A	35W	120V/220V	2500lm	>80Ra	2700K-6500K	E26/E27	0.9	200X86mm
KS-HBL-44A	58W	120V/220V	4400lm	>80Ra	2700K-6500K	E26/E27	0.9	260X90mm
KS-HBL-55A	80W	120V/220V	5500lm	>80Ra	2700K-6500K	E26/E27	0.9	350X91mm



Xiamen Konshine Lighting Electron Co., Ltd

Add: Building 12th, 2881 Dongfu Avenue, Haicang Area, Xiamen, Fujian, China 361027

Tel: 0086-0592-5553079

Fax: 0086-0592-6262835

Web: www.konshinelighting.com/en/index.php