

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS AND MINING					FORM 8										
WELL COMPLETION OR RECOMPLETION REPORT AND LOG										1. WELL NAME RP TRIBAL 21N-31W-H4LP					
2. TYPE OF WELL Oil Well				3. TYPE OF WORK DRILL NEW ☒ REENTER P&A ☐ DEEPEN ☐ RECOMP ☐						4. API NUMBER 4301354646					
5. NAME OF OPERATOR Uinta Wax Operating, LLC						6. OPERATOR PHONE 817-402-0861				7. FIELD NAME BLUEBELL					
8. ADDRESS OF OPERATOR 6000 Western Plaza, Suite 1000, Fort Worth, TX, 76107						9. OPERATOR E-MAIL zachary.archer@uintawax.com				10. UNIT NAME					
11. MINERAL LEASE NUMBER MULTIPLE LEASES				12. MINERAL OWNERSHIP INDIAN,FEE				13. SURFACE OWNERSHIP FEE			14. COUNTY DUCHESNE				
15. DATE SPUDED (SPUD RIG) 01/16/2024			16. DATE SPUDED (ROTARY RIG) 01/29/2024			17. DATE TOTAL DEPTH REACHED 04/16/2024			18. DATE COMPLETED/ABANDONED 07/14/2024			19. DATE OF FIRST PROD. / INJ. PROD:07/16/2024 INJ:			
20. DEPTH REFERENCE GROUND LEVEL ☒ KELLY BUSHING ☐ DERRICK FLOOR ☐						21. DEPTH REFERENCE ELEVATION 5084 (US Feet)				22. GRADED GROUND LEVEL ELEVATION 5084 (US Feet)					
23. WELLBORE DEVIATION PROFILE VERTICAL ☐ DIRECTIONAL ☐ HORIZONTAL ☒						24. TOTAL DEPTH MD 17788 TVD 8178				25. PLUGGED BACK TOTAL DEPTH MD 17640 TVD 8175					
26. CURRENT WELL STATUS Producing															

27. LOCATION OF WELL									
WELL POSITION	FOOTAGES		QTR-QTR	SECTION	TOWNSHIP	RANGE	MERIDIAN	UTM EASTING	UTM NORTHING
Surface	290 FSL	1846 FEL	LOT6	21	3.0 S	1.0 W	U	585247	4450606
Producing Interval Top	1020 FSL	1710 FEL	LOT6	21	3.0 S	1.0 W	U		
Producing Interval Bottom	100 FNL	1732 FEL	NWNE	16	3.0 S	1.0 W	U		
Total Depth	50 FNL	1732 FEL	NWNE	16	3.0 S	1.0 W	U		

28. HOLE, CASING AND CEMENT INFORMATION																
STRING	HOLE SIZE	CASING O.D.	WEIGHT	GRADE	THREAD	TOP (MD)	BOTTOM (MD)	DV TOOL DEPTH	LEAD TAIL	CEMENT TYPE	SACKS	YIELD	WEIGHT	CEMENT TOP	BASIS FOR TOP	
SURF	13.5	10.75	45.5	J-55	BTC	0	2157		L	Class G Cement	360	2.84	11.5	0	Circulate	
									T	Class G Cement	300	1.17	15.8			
INT	9.875	7.625	29.7	P-110	BTC	0	7739		L	Class G Cement	840	2.91	11.5	0	Circulate	
									T	Class G Cement	210	1.15	15.8			
PROD	6.75	5.5	23.0	P-110	BTB	0	7375		L	Class G Cement	200	2.85	11.5	0	Circulate	
P2	6.75	5.0	18.0	P-110	BTB	7375	17749		T	Class G Cement	1140	1.2	14.5			

29. TUBING RECORD			
TUBING SIZE	TOP (MD)	BOT (MD)	PACKER DEPTH
2.875	0	7307	7307

30. RETRIEVABLE / TEMPORARY PLUGS		
PLUG	DEPTH (MD)	TYPE

31. PERMANENT / ABANDONMENT PLUGS		
PLUG	TOP (MD)	BOTTOM (MD)
1	17640	17641

32. FORMATION DETAILS and STRATIGRAPHIC MARKERS				
FR	FORMATION NAME	TOP (MD)	TOP (TVD)	DESCRIPTION, CONTENTS, ETC.
1	BIRDS NEST	4089	4084	
	OIL SHOW? ☐ GAS SHOW? ☐ WATER FLOW? ☐ DRILL STEM TESTED? ☐ CORED? ☐ COMPLETED OR TESTED? ☐ COMMINGLED? ☐			
2	MAHOGANY BENCH	5051	5046	
	OIL SHOW? ☐ GAS SHOW? ☐ WATER FLOW? ☐ DRILL STEM TESTED? ☐ CORED? ☐ COMPLETED OR TESTED? ☐ COMMINGLED? ☐			
3	GARDEN GULCH	6150	6144	
	OIL SHOW? ☐ GAS SHOW? ☐ WATER FLOW? ☐ DRILL STEM TESTED? ☐ CORED? ☐ COMPLETED OR TESTED? ☐ COMMINGLED? ☐			
4	DOUGLAS CREEK	7027	7021	
	OIL SHOW? ☐ GAS SHOW? ☐ WATER FLOW? ☐ DRILL STEM TESTED? ☐ CORED? ☐ COMPLETED OR TESTED? ☐ COMMINGLED? ☐			

5	BLACK SHALE	7769	7693				
	OIL SHOW? ☐	GAS SHOW? ☐	WATER FLOW? ☐	DRILL STEM TESTED? ☐	CORED? ☐	COMPLETED OR TESTED? ☐	COMMINGLED? ☐
6	CASTLE PEAK	8104	7824				
	OIL SHOW? ☒	GAS SHOW? ☒	WATER FLOW? ☐	DRILL STEM TESTED? ☐	CORED? ☐	COMPLETED OR TESTED? ☒	COMMINGLED? ☐

33. COMPLETED and TESTED INTERVALS (Formation Reference (FR) 1, 2, 3, ..., etc. as in Section 32.)						
FR	TOP (MD)	BOTTOM (MD)	TOP (TVD)	BOTTOM (TVD)	STIMULATION TREATMENT	INTERVAL STATUS
6	8262	17628	7840	8175	Fracture Stimulated	PRODUCING

34A. PRODUCTION INFORMATION (Formation Reference (FR) 1, 2, 3, ..., etc. as in Section 32.)									
FR	TOP (MD)	BOTTOM (MD)	DATE FIRST PROD.	TEST DATE	HRS. TESTED	TBG. PRESSURE	CSG. PRESSURE	PROD. METHOD	
6	8262	17628	07/16/2024	07/23/2024	24			Pumping	
	TEST PRODUCTION VOLUMES			24-HOUR PRODUCTION RATES			GAS-OIL RATIO	OIL API	GAS BTU
	OIL (BBL)	GAS (MSCF)	WATER (BBL)	OIL (BBL)	GAS (MSCF)	WATER (BBL)	646	0.0	
	178	115	1526	178	115	1526			

35. WELL TREATMENTS (Formation Reference (FR) 1, 2, 3, ..., etc. as in Section 32.)						
FR	TREATMENT TYPE	TOP (MD)	BOTTOM (MD)	START DATE	END DATE	AMOUNT AND TYPE OF MATERIAL
6	Fracture Stimulation	8262	17628	05/29/2024	06/29/2024	23,585,500 #100 mesh sand, 378,574 bbls water


36. LOGS, SURVEYS, AND REPORTS (PDF file of each and LAS file of logs if available are to be submitted.)													
REPORTS AND OTHER INFORMATION.													
Dx Survey ☒		DST Report ☐		Core Analysis ☐		DOGM Form 7 ☐		Geologic Report ☐		Wellbore Diagram ☐		Other ☒	
SUBMITTED PDF LOGS						SUBMITTED LAS LOGS							
CEMENT BOND													

OGM Official Use Only

37. I hereby certify that the foregoing and attached information is complete as determined from all available records.		
NAME Preston Morrow	TITLE Regulatory Director	DATE 11/19/2024
SIGNATURE N/A	PHONE 817-924-8695	EMAIL preston.morrow@uintawax.com



Project: DUCHESNE COUNTY, UT (NAD 83) GRID
Site: S21-T3S-R1W (Bastian/Griswold)
Well: RP TRIBAL 21N-31W-H4LP
Wellbore: OH (240134)
Design: SURVEYS



Azimuths to Grid North
True North: -0.96°
Magnetic North: 9.20°

Magnetic Field
Strength: 51112.2nT
Dip Angle: 65.65°
Date: 2/28/2024
Model: HDGM2024



SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSect	Target	Annotation
1	2106.00	1.20	240.80	2105.61	-8.24	-6.49	0.00	0.00	-8.13		
2	2306.00	1.20	240.80	2305.57	-10.28	-10.15	0.00	0.00	-10.12		
3	2515.16	3.44	120.00	2514.61	-14.49	-6.63	2.00	-135.05	-14.38		
4	2815.16	3.44	120.00	2814.07	-23.49	8.96	0.00	0.00	-23.63		
5	2984.06	3.69	63.52	2982.69	-23.60	18.22	2.00	-114.49	-23.89		
6	4760.78	3.69	63.52	4755.73	27.35	120.51	0.00	0.00	25.44		
7	4945.18	0.00	0.00	4940.00	30.00	125.82	2.00	180.00	28.00		
8	7133.22	0.00	0.00	7128.04	30.00	125.82	0.00	0.00	28.00		
9	8229.59	87.71	359.09	7843.67	717.49	114.88	8.00	359.09	715.58		
10	12517.44	87.71	359.09	8015.00	5001.37	46.73	0.00	0.00	5000.00	RP TRIBAL 21N-31W-H4LP - 5000' VS	
11	12523.30	87.59	359.09	8015.24	5007.23	46.63	2.00	178.58	5005.85		
12	17755.51	87.59	359.09	8235.00	10234.16	-36.26	0.00	0.00	10233.44	BHL - RPT 21N H4LP (50 FNL, 1732 FEL)	

23' KB @ 5107.00usft
Ground: 5084.00

WELLBORE TARGET DETAILS (LAT/LONG)

Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
SHL - RPT 21N H4LP (290 FSL, 1846 FEL)	0.00	0.01	0.00	7245652.86	2059824.59	40.2015279	-109.9983711
LP - RPT 21N H4LP (50 FSL, 1719 FEL)	7800.39	-238.30	129.82	7245414.55	2059954.42	40.2008678	-109.9979207
FTP - RPT 21N H4LP (100 FSL, 1719 FEL)	7802.20	-188.29	129.01	7245464.56	2059953.60	40.2010051	-109.9979206
RP TRIBAL 21N-31W-H4LP - 5000' VS	8015.00	5001.37	46.73	7250654.22	2059871.32	40.2152536	-109.9979031
LTP - RPT 21N H4LP (100 FNL, 1732 FEL)	8173.54	10184.22	-35.48	7255837.08	2059789.11	40.2294834	-109.9978858
BHL - RPT 21N H4LP (50 FNL, 1732 FEL)	8235.00	10234.16	-36.26	7255887.01	2059788.33	40.2296205	-109.9978856

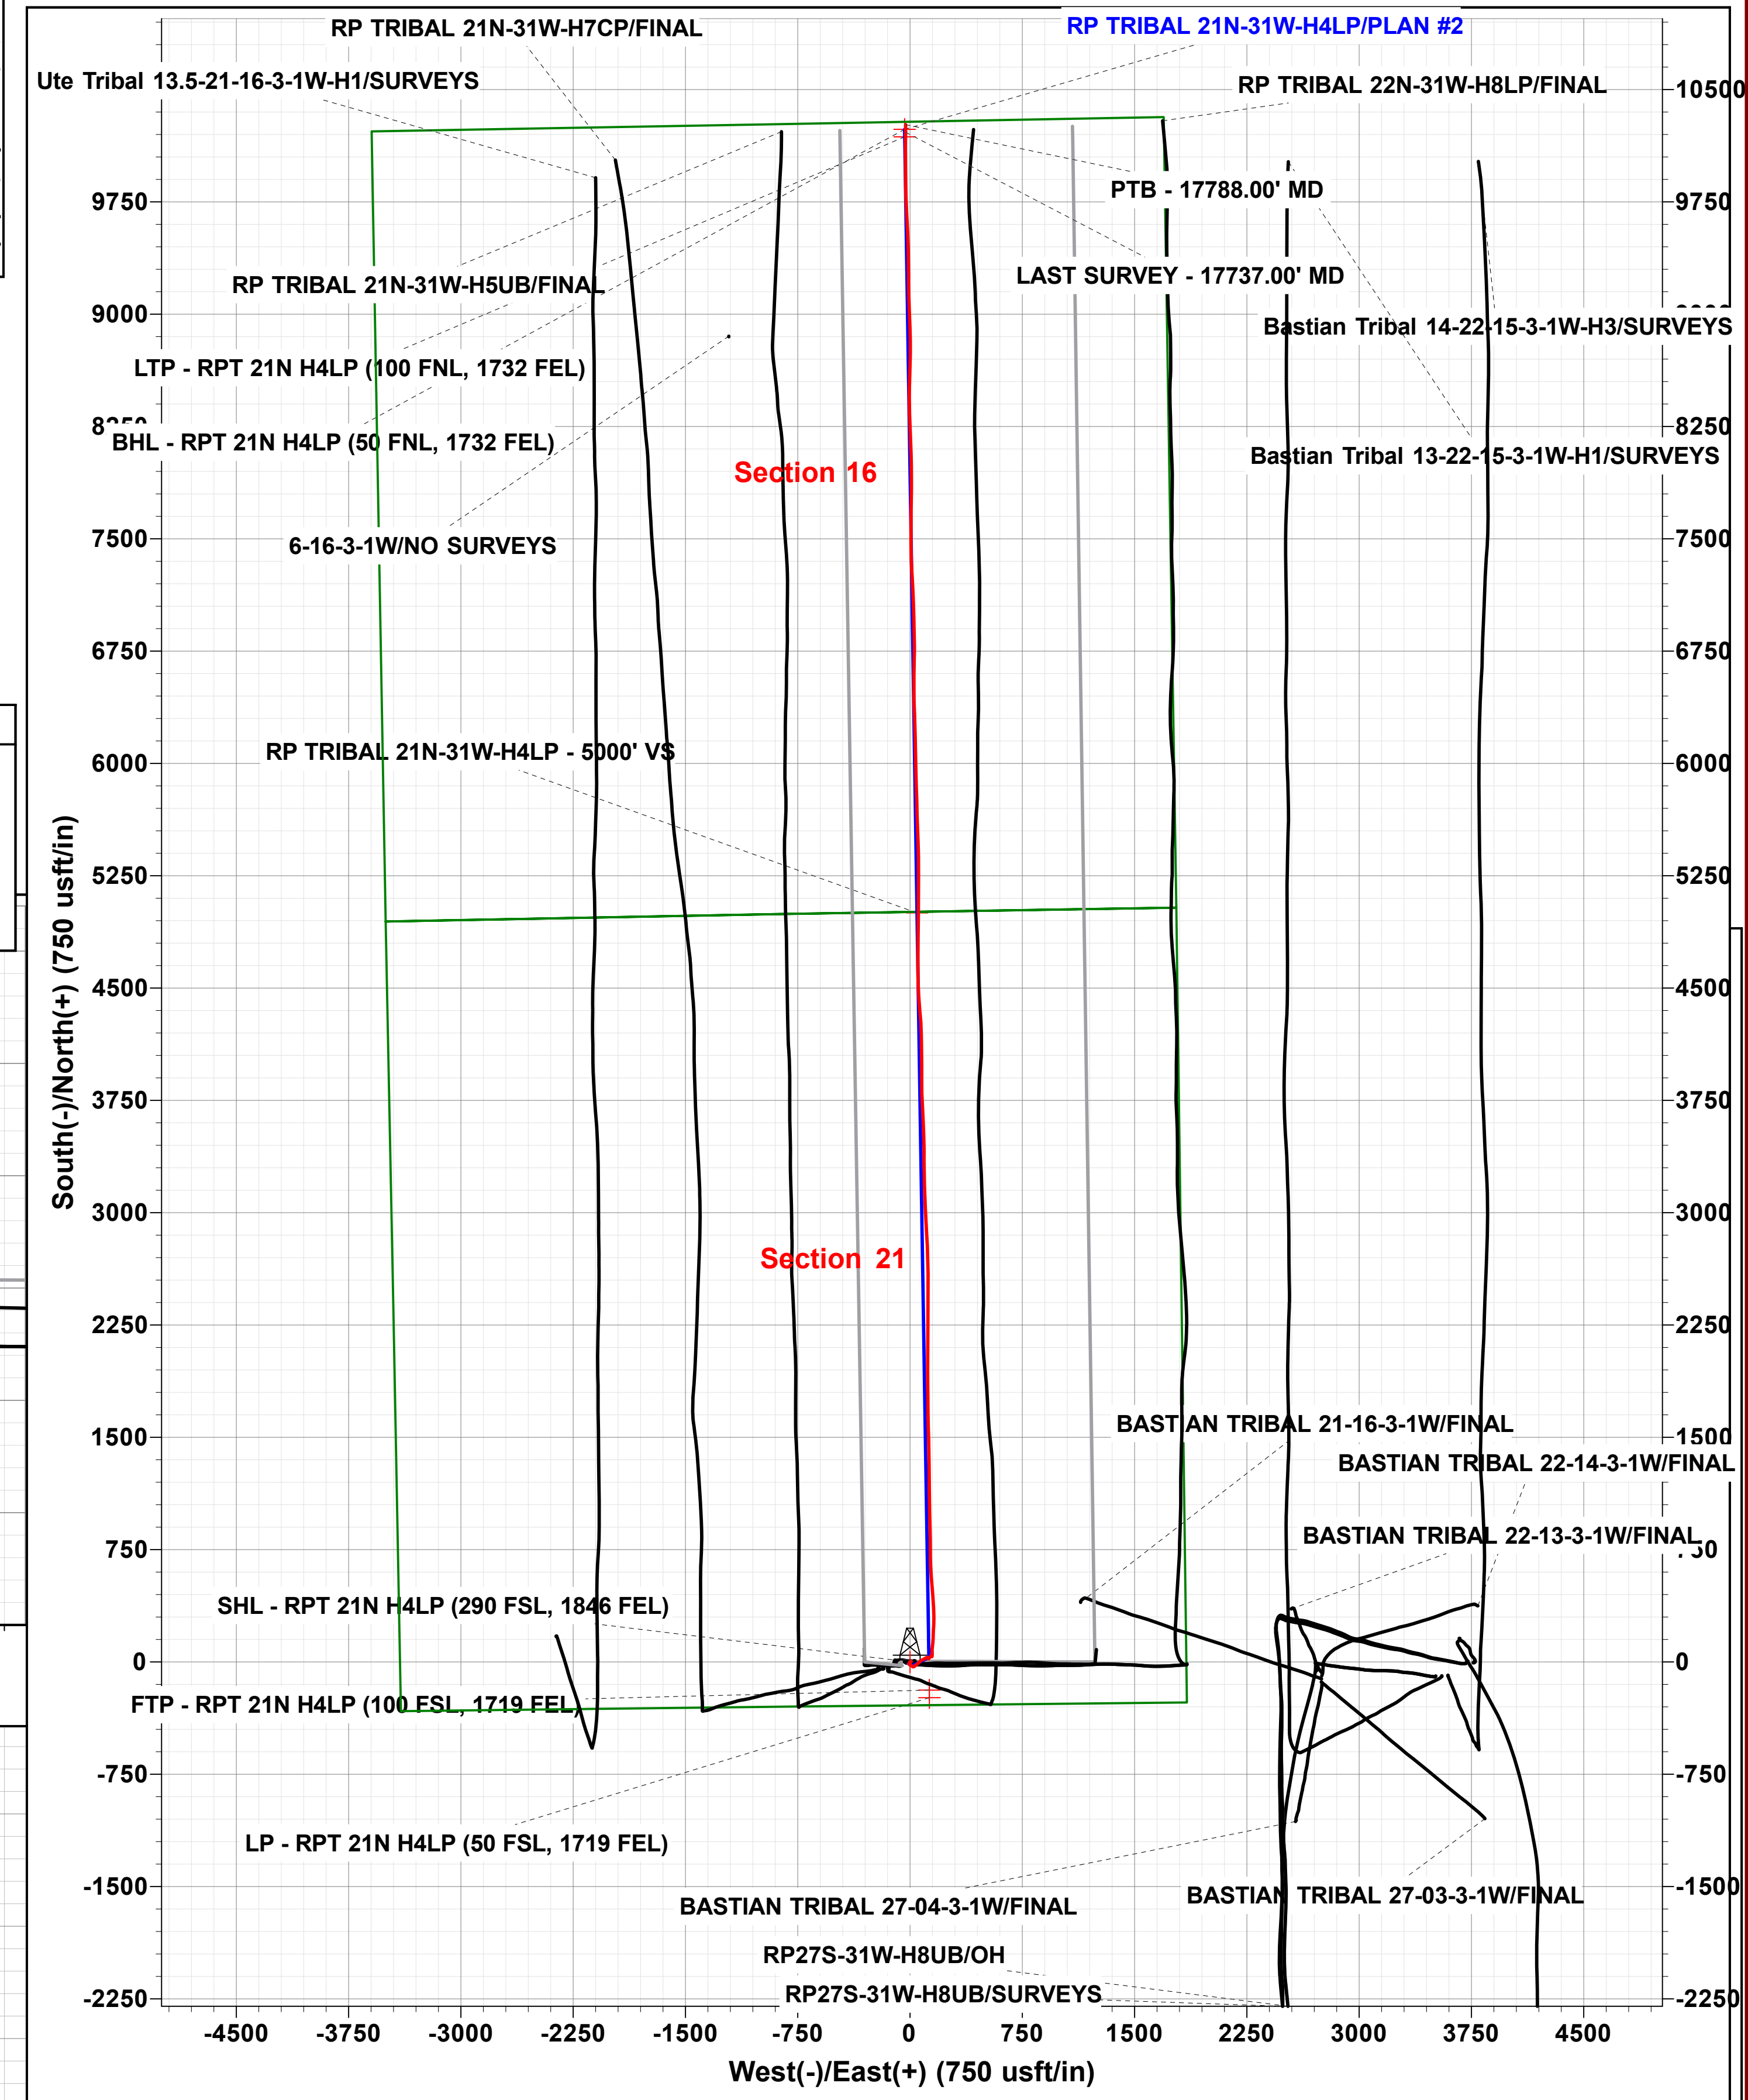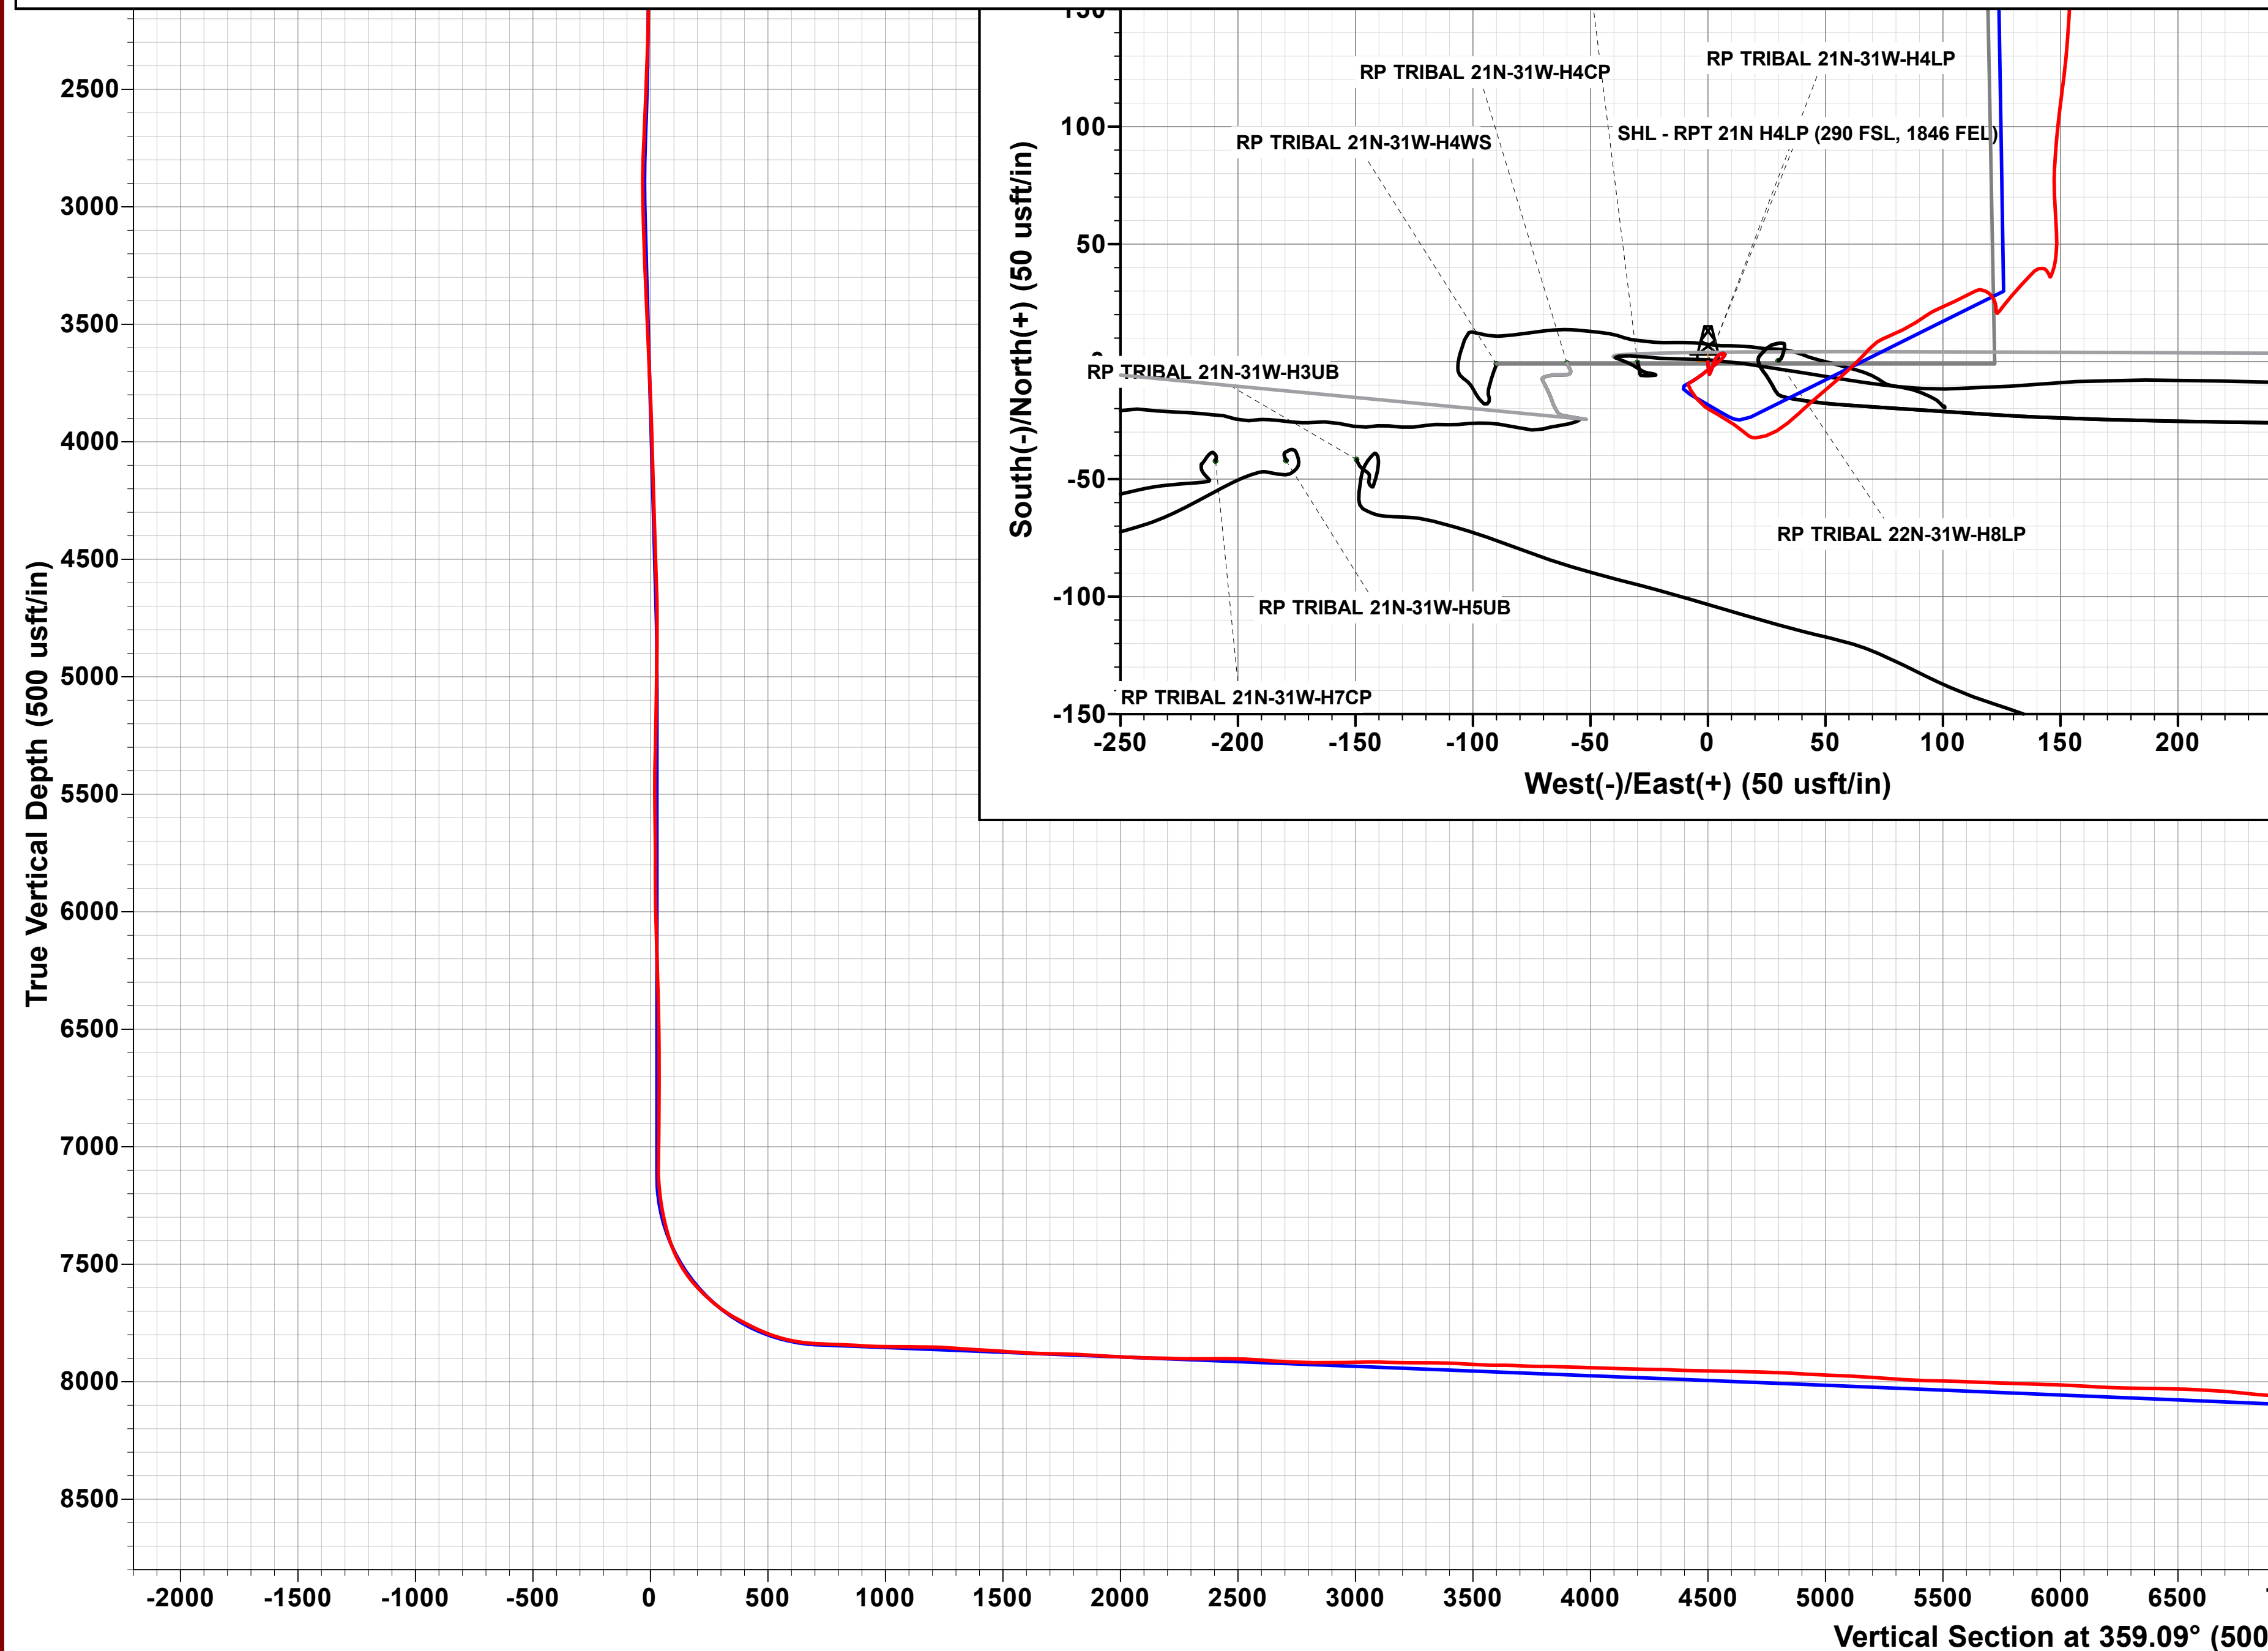

Uinta Wax

DUCHESNE COUNTY, UT (NAD 83) GRID
S21-T3S-R1W (Bastian/Griswold)
RP TRIBAL 21N-31W-H4LP

OH (240134)

SURVEYS



Standard Survey Report

16 April, 2024

Total Report Version 1.70

COMPASS 5000.16 Build 97



Survey Report

Company:	Uinta Wax	Local Co-ordinate Reference:	Well RP TRIBAL 21N-31W-H4LP
Project:	DUCHESNE COUNTY, UT (NAD 83) GRID	TVD Reference:	23' KB @ 5107.00usft
Site:	S21-T3S-R1W (Bastian/Griswold)	MD Reference:	23' KB @ 5107.00usft
Well:	RP TRIBAL 21N-31W-H4LP	North Reference:	Grid
Wellbore:	OH (240134)	Survey Calculation Method:	Minimum Curvature
Design:	SURVEYS	Database:	.Total Directional Production DB

Project	DUCHESNE COUNTY, UT (NAD 83) GRID		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	Utah Central Zone		

Site	S21-T3S-R1W (Bastian/Griswold)		
Site Position:		Northing:	7,245,539.25 usft
From:	Lat/Long	Easting:	2,062,573.43 usft
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "
		Latitude:	40.2010890
		Longitude:	-109.9885380

Well	RP TRIBAL 21N-31W-H4LP		
Well Position	+N/-S	0.00 usft	Northing: 7,245,652.85 usft
	+E/-W	0.00 usft	Easting: 2,059,824.59 usft
Position Uncertainty	0.00 usft	Wellhead Elevation:	usft
Grid Convergence:	0.96 °	Ground Level:	5,084.00 usft

Wellbore	OH (240134)		
Magnetics	Model Name	Sample Date	Declination
	HDGM2024	2/28/2024	(°) 10.17
			Dip Angle
			(°) 65.65
			Field Strength
			(nT) 51,112.20000000

Design	SURVEYS		
Audit Notes:			
Version:	1.0	Phase:	ACTUAL
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W
	(usft)	(usft)	(usft)
	0.00	0.00	0.00
			Direction
			(°) 359.09

Survey Program	Date	4/16/2024		
From	To	Survey (Wellbore)	Tool Name	Description
(usft)	(usft)			
150.00	17,788.00	Survey #1 (OH (240134))	OWSG (Rev2) MWD	OWSG MWD - Standard

Survey													
Measured	Vertical	Local Coordinates		Map Coordinates		Geo Coordinates		Vertical	Dogleg	Build	Turn		
Depth	INC	AZI	Depth	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude	Section	Rate	Rate	Rate
(usft)	(°)	(°)	(usft)	(usft)	(usft)	(usft)	(usft)	(°)	(°)	(usft)	(°/100usft)	(°/100usft)	(°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	7,245,652.85	2,059,824.59	40.2015279	-109.9983711	0.00	0.00	0.00	0.00
SHL - RPT 21N H4LP (290 FSL, 1846 FEL)													
150.00	0.70	176.70	150.00	-0.91	0.05	7,245,651.94	2,059,824.65	40.2015254	-109.9983710	-0.92	0.47	0.47	0.00
241.00	0.60	177.00	240.99	-1.95	0.11	7,245,650.91	2,059,824.70	40.2015226	-109.9983708	-1.95	0.11	-0.11	0.33
331.00	0.90	166.60	330.98	-3.10	0.30	7,245,649.75	2,059,824.89	40.2015194	-109.9983702	-3.11	0.36	0.33	-11.56
422.00	1.10	179.40	421.97	-4.67	0.47	7,245,648.18	2,059,825.07	40.2015150	-109.9983697	-4.68	0.33	0.22	14.07



Survey Report

Company:	Uinta Wax	Local Co-ordinate Reference:	Well RP TRIBAL 21N-31W-H4LP
Project:	DUCHESNE COUNTY, UT (NAD 83) GRID	TVD Reference:	23' KB @ 5107.00usft
Site:	S21-T3S-R1W (Bastian/Griswold)	MD Reference:	23' KB @ 5107.00usft
Well:	RP TRIBAL 21N-31W-H4LP	North Reference:	Grid
Wellbore:	OH (240134)	Survey Calculation Method:	Minimum Curvature
Design:	SURVEYS	Database:	.Total Directional Production DB

Survey													
Measured Depth (usft)	INC (°)	AZI (°)	Vertical Depth (usft)	Local Coordinates +N/-S (usft)	Local Coordinates +E/-W (usft)	Map Coordinates Northing (usft)	Map Coordinates Easting (usft)	Geo Coordinates Latitude (°)	Geo Coordinates Longitude (°)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
512.00	0.30	45.80	511.96	-5.37	0.65	7,245,647.48	2,059,825.24	40.2015131	-109.9983691	-5.38	1.47	-0.89	-148.44
602.00	1.20	22.80	601.96	-4.34	1.19	7,245,648.51	2,059,825.78	40.2015159	-109.9983671	-4.36	1.03	1.00	-25.56
691.00	1.60	18.00	690.93	-2.30	1.93	7,245,650.55	2,059,826.52	40.2015215	-109.9983643	-2.33	0.47	0.45	-5.39
782.00	1.30	16.20	781.90	-0.10	2.61	7,245,652.75	2,059,827.20	40.2015275	-109.9983618	-0.14	0.33	-0.33	-1.98
873.00	0.80	39.60	872.88	1.38	3.30	7,245,654.24	2,059,827.90	40.2015315	-109.9983592	1.33	0.71	-0.55	25.71
991.00	0.40	37.70	990.88	2.34	4.08	7,245,655.20	2,059,828.67	40.2015341	-109.9983564	2.28	0.34	-0.34	-1.61
1,077.00	0.40	60.10	1,076.88	2.73	4.52	7,245,655.58	2,059,829.12	40.2015352	-109.9983548	2.66	0.18	0.00	26.05
1,164.00	0.90	60.70	1,163.87	3.22	5.38	7,245,656.07	2,059,829.98	40.2015365	-109.9983516	3.13	0.57	0.57	0.69
1,249.00	0.60	84.40	1,248.86	3.59	6.41	7,245,656.44	2,059,831.00	40.2015374	-109.9983480	3.48	0.50	-0.35	27.88
1,335.00	0.40	151.20	1,334.86	3.37	7.00	7,245,656.22	2,059,831.59	40.2015368	-109.9983458	3.26	0.67	-0.23	77.67
1,422.00	0.60	187.10	1,421.86	2.65	7.09	7,245,655.50	2,059,831.68	40.2015348	-109.9983456	2.54	0.42	0.23	41.26
1,508.00	1.60	230.20	1,507.84	1.43	6.11	7,245,654.29	2,059,830.71	40.2015315	-109.9983491	1.34	1.43	1.16	50.12
1,594.00	2.20	225.60	1,593.79	-0.49	4.01	7,245,652.36	2,059,828.60	40.2015264	-109.9983568	-0.55	0.72	0.70	-5.35
1,679.00	2.20	237.70	1,678.73	-2.50	1.47	7,245,650.35	2,059,826.06	40.2015210	-109.9983660	-2.53	0.55	0.00	14.24
1,764.00	1.60	228.90	1,763.68	-4.16	-0.81	7,245,648.70	2,059,823.79	40.2015165	-109.9983743	-4.14	0.78	-0.71	-10.35
1,850.00	1.00	236.90	1,849.66	-5.35	-2.34	7,245,647.50	2,059,822.25	40.2015133	-109.9983798	-5.32	0.73	-0.70	9.30
2,021.00	1.20	232.50	2,020.63	-7.26	-5.01	7,245,645.59	2,059,819.58	40.2015082	-109.9983895	-7.18	0.13	0.12	-2.57
2,106.00	1.20	240.80	2,105.61	-8.24	-6.49	7,245,644.62	2,059,818.10	40.2015056	-109.9983949	-8.13	0.20	0.00	9.76
2,188.00	1.10	236.10	2,187.60	-9.09	-7.90	7,245,643.76	2,059,816.70	40.2015033	-109.9983999	-8.97	0.17	-0.12	-5.73
2,236.00	0.90	192.90	2,235.59	-9.72	-8.36	7,245,643.14	2,059,816.23	40.2015016	-109.9984016	-9.58	1.58	-0.42	-90.00
2,329.00	2.60	144.30	2,328.55	-12.14	-7.30	7,245,640.71	2,059,817.30	40.2014949	-109.9983980	-12.03	2.27	1.83	-52.26
2,423.00	2.60	146.10	2,422.45	-15.64	-4.86	7,245,637.21	2,059,819.73	40.2014852	-109.9983895	-15.56	0.09	0.00	1.91
2,517.00	3.60	125.00	2,516.31	-19.11	-1.25	7,245,633.75	2,059,823.34	40.2014755	-109.9983768	-19.08	1.60	1.06	-22.45
2,608.00	4.70	118.50	2,607.07	-22.52	4.36	7,245,630.33	2,059,828.96	40.2014659	-109.9983569	-22.59	1.31	1.21	-7.14
2,702.00	4.80	125.00	2,700.75	-26.62	10.97	7,245,626.24	2,059,835.56	40.2014543	-109.9983335	-26.79	0.58	0.11	6.91
2,795.00	3.50	131.70	2,793.51	-30.74	16.28	7,245,622.11	2,059,840.87	40.2014428	-109.9983147	-30.99	1.49	-1.40	7.20
2,889.00	2.60	82.50	2,887.39	-32.37	20.53	7,245,620.48	2,059,845.13	40.2014381	-109.9982996	-32.69	2.84	-0.96	-52.34
2,982.00	2.70	75.60	2,980.29	-31.55	24.75	7,245,621.30	2,059,849.34	40.2014402	-109.9982844	-31.94	0.36	0.11	-7.42
3,075.00	3.50	57.50	3,073.15	-29.48	29.26	7,245,623.37	2,059,853.85	40.2014456	-109.9982681	-29.94	1.35	0.86	-19.46
3,168.00	3.80	51.00	3,165.96	-26.01	34.05	7,245,626.84	2,059,858.64	40.2014549	-109.9982508	-26.55	0.55	0.32	-6.99
3,262.00	3.70	48.30	3,259.76	-22.04	38.74	7,245,630.82	2,059,863.33	40.2014656	-109.9982338	-22.65	0.22	-0.11	-2.87
3,355.00	3.20	46.60	3,352.59	-18.26	42.86	7,245,634.60	2,059,867.46	40.2014758	-109.9982188	-18.93	0.55	-0.54	-1.83
3,448.00	4.00	50.40	3,445.41	-14.41	47.25	7,245,638.45	2,059,871.84	40.2014862	-109.9982029	-15.15	0.90	0.86	4.09
3,541.00	3.90	48.90	3,538.19	-10.26	52.13	7,245,642.59	2,059,876.72	40.2014973	-109.9981851	-11.09	0.15	-0.11	-1.61
3,634.00	3.80	48.70	3,630.98	-6.15	56.83	7,245,646.71	2,059,881.42	40.2015084	-109.9981681	-7.05	0.11	-0.11	-0.22
3,727.00	3.60	46.80	3,723.79	-2.11	61.27	7,245,650.74	2,059,885.87	40.2015193	-109.9981519	-3.09	0.25	-0.22	-2.04
3,819.00	3.30	45.20	3,815.62	1.73	65.26	7,245,654.58	2,059,889.85	40.2015296	-109.9981374	0.69	0.34	-0.33	-1.74
3,912.00	2.80	40.00	3,908.49	5.36	68.62	7,245,658.21	2,059,893.21	40.2015394	-109.9981252	4.27	0.61	-0.54	-5.59



Survey Report

Company:	Uinta Wax	Local Co-ordinate Reference:	Well RP TRIBAL 21N-31W-H4LP
Project:	DUCHESNE COUNTY, UT (NAD 83) GRID	TVD Reference:	23' KB @ 5107.00usft
Site:	S21-T3S-R1W (Bastian/Griswold)	MD Reference:	23' KB @ 5107.00usft
Well:	RP TRIBAL 21N-31W-H4LP	North Reference:	Grid
Wellbore:	OH (240134)	Survey Calculation Method:	Minimum Curvature
Design:	SURVEYS	Database:	.Total Directional Production DB

Survey

Measured Depth (usft)	INC (°)	AZI (°)	Vertical Depth (usft)	Local Coordinates +N/-S (usft)	+E/-W (usft)	Map Coordinates Northing (usft)	Easting (usft)	Geo Coordinates Latitude (°)	Longitude (°)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,005.00	2.80	56.80	4,001.38	8.34	71.98	7,245,661.19	2,059,896.57	40.2015475	-109.9981130	7.20	0.88	0.00	18.06
4,098.00	4.00	68.30	4,094.21	10.78	76.89	7,245,663.64	2,059,901.48	40.2015540	-109.9980952	9.56	1.48	1.29	12.37
4,191.00	4.20	63.00	4,186.98	13.53	82.94	7,245,666.38	2,059,907.53	40.2015612	-109.9980734	12.21	0.46	0.22	-5.70
4,284.00	3.80	57.80	4,279.75	16.72	88.58	7,245,669.57	2,059,913.18	40.2015697	-109.9980530	15.31	0.58	-0.43	-5.59
4,377.00	3.00	54.00	4,372.58	19.79	93.16	7,245,672.64	2,059,917.75	40.2015779	-109.9980364	18.31	0.89	-0.86	-4.09
4,470.00	4.40	66.40	4,465.39	22.65	98.40	7,245,675.50	2,059,922.99	40.2015855	-109.9980175	21.08	1.73	1.51	13.33
4,563.00	4.70	64.40	4,558.10	25.72	105.10	7,245,678.58	2,059,929.70	40.2015937	-109.9979933	24.05	0.36	0.32	-2.15
4,656.00	4.50	62.60	4,650.80	29.05	111.78	7,245,681.90	2,059,936.37	40.2016025	-109.9979692	27.27	0.27	-0.22	-1.94
4,749.00	1.20	95.90	4,743.67	30.63	115.99	7,245,683.48	2,059,940.58	40.2016066	-109.9979541	28.78	3.83	-3.55	35.81
4,843.00	1.10	112.60	4,837.66	30.18	117.80	7,245,683.03	2,059,942.39	40.2016053	-109.9979476	28.31	0.37	-0.11	17.77
4,936.00	1.00	125.40	4,930.64	29.37	119.28	7,245,682.22	2,059,943.88	40.2016030	-109.9979424	27.47	0.27	-0.11	13.76
5,030.00	0.90	140.40	5,024.63	28.32	120.42	7,245,681.18	2,059,945.02	40.2016001	-109.9979383	26.41	0.28	-0.11	15.96
5,122.00	1.10	147.90	5,116.61	27.02	121.35	7,245,679.87	2,059,945.95	40.2015965	-109.9979351	25.09	0.26	0.22	8.15
5,215.00	1.10	161.20	5,209.60	25.42	122.12	7,245,678.27	2,059,946.71	40.2015920	-109.9979325	23.47	0.27	0.00	14.30
5,308.00	1.20	172.20	5,302.58	23.61	122.53	7,245,676.46	2,059,947.13	40.2015870	-109.9979311	21.66	0.26	0.11	11.83
5,401.00	1.50	180.80	5,395.55	21.43	122.65	7,245,674.28	2,059,947.24	40.2015811	-109.9979308	19.47	0.39	0.32	9.25
5,495.00	0.70	52.00	5,489.54	20.55	123.09	7,245,673.40	2,059,947.68	40.2015786	-109.9979293	18.59	2.14	-0.85	-137.02
5,588.00	1.20	40.50	5,582.53	21.64	124.17	7,245,674.49	2,059,948.76	40.2015816	-109.9979253	19.66	0.57	0.54	-12.37
5,681.00	0.70	36.50	5,675.52	22.84	125.14	7,245,675.69	2,059,949.73	40.2015848	-109.9979218	20.85	0.54	-0.54	-4.30
5,774.00	0.40	28.20	5,768.51	23.58	125.63	7,245,676.43	2,059,950.22	40.2015868	-109.9979200	21.58	0.33	-0.32	-8.92
5,867.00	0.10	34.30	5,861.51	23.93	125.83	7,245,676.78	2,059,950.42	40.2015878	-109.9979193	21.93	0.32	-0.32	6.56
5,961.00	0.50	47.60	5,955.51	24.28	126.18	7,245,677.13	2,059,950.77	40.2015887	-109.9979180	22.27	0.43	0.43	14.15
6,054.00	2.20	37.60	6,048.48	25.96	127.56	7,245,678.82	2,059,952.16	40.2015933	-109.9979129	23.93	1.84	1.83	-10.75
6,146.00	2.60	43.00	6,140.40	28.89	130.06	7,245,681.74	2,059,954.66	40.2016012	-109.9979038	26.82	0.50	0.43	5.87
6,239.00	2.30	40.70	6,233.31	31.85	132.72	7,245,684.70	2,059,957.31	40.2016092	-109.9978941	29.73	0.34	-0.32	-2.47
6,331.00	2.00	41.80	6,325.25	34.44	134.99	7,245,687.30	2,059,959.59	40.2016162	-109.9978858	32.29	0.33	-0.33	1.20
6,425.00	1.80	44.20	6,419.20	36.72	137.12	7,245,689.58	2,059,961.71	40.2016224	-109.9978781	34.54	0.23	-0.21	2.55
6,518.00	1.40	47.50	6,512.16	38.54	138.97	7,245,691.39	2,059,963.57	40.2016273	-109.9978713	36.33	0.44	-0.43	3.55
6,612.00	1.00	74.90	6,606.14	39.53	140.61	7,245,692.38	2,059,965.20	40.2016299	-109.9978654	37.29	0.73	-0.43	29.15
6,703.00	0.80	91.60	6,697.13	39.72	142.01	7,245,692.57	2,059,966.61	40.2016304	-109.9978604	37.46	0.36	-0.22	18.35
6,797.00	0.50	103.90	6,791.12	39.60	143.07	7,245,692.45	2,059,967.66	40.2016300	-109.9978566	37.32	0.35	-0.32	13.09
6,890.00	0.90	136.50	6,884.12	38.97	143.96	7,245,691.83	2,059,968.56	40.2016282	-109.9978534	36.68	0.59	0.43	35.05
6,983.00	1.20	152.10	6,977.10	37.58	144.92	7,245,690.44	2,059,969.52	40.2016244	-109.9978501	35.28	0.44	0.32	16.77
7,076.00	0.80	163.40	7,070.09	36.10	145.56	7,245,688.95	2,059,970.16	40.2016203	-109.9978479	33.78	0.48	-0.43	12.15
7,170.00	4.70	18.80	7,163.99	39.12	146.99	7,245,691.97	2,059,971.59	40.2016285	-109.9978426	36.78	5.71	4.15	-153.83
7,262.00	9.80	1.80	7,255.24	50.52	148.45	7,245,703.37	2,059,973.05	40.2016597	-109.9978367	48.16	5.96	5.54	-18.48
7,309.00	12.10	355.20	7,301.38	59.43	148.17	7,245,712.28	2,059,972.76	40.2016842	-109.9978371	57.07	5.57	4.89	-14.04



Survey Report

Company:	Uinta Wax	Local Co-ordinate Reference:	Well RP TRIBAL 21N-31W-H4LP
Project:	DUCHESNE COUNTY, UT (NAD 83) GRID	TVD Reference:	23' KB @ 5107.00usft
Site:	S21-T3S-R1W (Bastian/Griswold)	MD Reference:	23' KB @ 5107.00usft
Well:	RP TRIBAL 21N-31W-H4LP	North Reference:	Grid
Wellbore:	OH (240134)	Survey Calculation Method:	Minimum Curvature
Design:	SURVEYS	Database:	.Total Directional Production DB

Survey

Measured Depth (usft)	INC (°)	AZI (°)	Vertical Depth (usft)	Local Coordinates +N/-S (usft)	+E/-W (usft)	Map Coordinates Northing (usft)	Easting (usft)	Geo Coordinates Latitude (°)	Longitude (°)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
7,357.00	14.00	357.50	7,348.14	70.24	147.49	7,245,723.10	2,059,972.09	40.2017139	-109.9978389	67.89	4.10	3.96	4.79
7,449.00	22.00	5.90	7,435.58	98.55	148.78	7,245,751.41	2,059,973.38	40.2017916	-109.9978326	96.18	9.12	8.70	9.13
7,496.00	27.00	7.50	7,478.33	117.90	151.08	7,245,770.75	2,059,975.67	40.2018445	-109.9978232	115.49	10.73	10.64	3.40
7,542.00	31.90	3.90	7,518.38	140.39	153.27	7,245,793.25	2,059,977.87	40.2019062	-109.9978140	137.94	11.32	10.65	-7.83
7,559.56	33.84	3.09	7,533.13	149.91	153.85	7,245,802.76	2,059,978.44	40.2019323	-109.9978114	147.45	11.32	11.04	-4.61
LP - RPT 21N H4LP (50 FSL, 1719 FEL)													
7,582.03	36.33	2.17	7,551.51	162.80	154.44	7,245,815.66	2,059,979.03	40.2019676	-109.9978085	160.33	11.32	11.07	-4.12
FTP - RPT 21N H4LP (100 FSL, 1719 FEL)													
7,589.00	37.10	1.90	7,557.10	166.97	154.59	7,245,819.82	2,059,979.18	40.2019791	-109.9978077	164.49	11.32	11.09	-3.80
7,636.00	42.50	2.30	7,593.20	197.02	155.70	7,245,849.88	2,059,980.29	40.2020615	-109.9978019	194.53	11.50	11.49	0.85
7,700.00	46.60	3.00	7,638.80	241.86	157.78	7,245,894.72	2,059,982.37	40.2021845	-109.9977918	239.33	6.45	6.41	1.09
7,773.00	53.30	1.50	7,685.74	297.67	159.94	7,245,950.52	2,059,984.53	40.2023376	-109.9977807	295.09	9.31	9.18	-2.05
7,866.00	62.00	355.10	7,735.50	376.05	157.40	7,246,028.91	2,059,981.99	40.2025528	-109.9977851	373.51	11.01	9.35	-6.88
7,960.00	64.80	355.00	7,777.58	459.78	150.15	7,246,112.63	2,059,974.74	40.2027830	-109.9978060	457.34	2.98	2.98	-0.11
8,053.00	73.00	356.00	7,811.03	546.20	143.37	7,246,199.06	2,059,967.96	40.2030205	-109.9978251	543.86	8.87	8.82	1.08
8,147.00	82.00	357.70	7,831.36	637.74	138.35	7,246,290.59	2,059,962.95	40.2032720	-109.9978375	635.46	9.74	9.57	1.81
8,240.00	88.20	358.90	7,839.30	730.31	135.61	7,246,383.17	2,059,960.20	40.2035262	-109.9978418	728.07	6.79	6.67	1.29
8,333.00	86.70	359.90	7,843.44	823.21	134.64	7,246,476.07	2,059,959.23	40.2037813	-109.9978397	820.97	1.94	-1.61	1.08
8,427.00	87.40	358.60	7,848.28	917.08	133.41	7,246,569.93	2,059,958.00	40.2040390	-109.9978384	914.84	1.57	0.74	-1.38
8,520.00	89.20	359.20	7,851.03	1,010.02	131.62	7,246,662.87	2,059,956.22	40.2042942	-109.9978392	1,007.80	2.04	1.94	0.65
8,613.00	89.90	358.30	7,851.77	1,102.99	129.59	7,246,755.84	2,059,954.19	40.2045494	-109.9978409	1,100.79	1.23	0.75	-0.97
8,706.00	88.90	359.30	7,852.74	1,195.96	127.65	7,246,848.81	2,059,952.24	40.2048047	-109.9978423	1,193.78	1.52	-1.08	1.08
8,800.00	85.50	0.00	7,857.33	1,289.83	127.07	7,246,942.69	2,059,951.67	40.2050624	-109.9978387	1,287.65	3.69	-3.62	0.74
8,893.00	86.50	359.00	7,863.82	1,382.60	126.26	7,247,035.45	2,059,950.86	40.2053171	-109.9978360	1,380.42	1.52	1.08	-1.08
8,987.00	86.90	358.80	7,869.23	1,476.43	124.46	7,247,129.28	2,059,949.05	40.2055747	-109.9978368	1,474.26	0.48	0.43	-0.21
9,080.00	85.50	358.30	7,875.39	1,569.19	122.11	7,247,222.04	2,059,946.71	40.2058294	-109.9978396	1,567.05	1.60	-1.51	-0.54
9,174.00	88.40	358.80	7,880.39	1,663.02	119.74	7,247,315.87	2,059,944.33	40.2060871	-109.9978425	1,660.91	3.13	3.09	0.53
9,267.00	89.10	0.00	7,882.42	1,755.99	118.77	7,247,408.84	2,059,943.36	40.2063423	-109.9978404	1,753.88	1.49	0.75	1.29
9,360.00	87.00	359.10	7,885.59	1,848.92	118.04	7,247,501.78	2,059,942.63	40.2065974	-109.9978374	1,846.82	2.46	-2.26	-0.97
9,453.00	85.80	0.00	7,891.43	1,941.74	117.31	7,247,594.59	2,059,941.90	40.2068522	-109.9978344	1,939.63	1.61	-1.29	0.97
9,546.00	88.10	0.10	7,896.37	2,034.60	117.39	7,247,687.45	2,059,941.98	40.2071071	-109.9978286	2,032.48	2.48	2.47	0.11
9,639.00	89.00	0.90	7,898.73	2,127.56	118.20	7,247,780.42	2,059,942.79	40.2073622	-109.9978201	2,125.42	1.29	0.97	0.86
9,732.00	88.00	0.70	7,901.16	2,220.52	119.50	7,247,873.37	2,059,944.09	40.2076173	-109.9978098	2,218.34	1.10	-1.08	-0.22
9,824.00	90.00	0.20	7,902.77	2,312.50	120.22	7,247,965.35	2,059,944.81	40.2078698	-109.9978017	2,310.30	2.24	2.17	-0.54
9,918.00	90.40	359.70	7,902.44	2,406.50	120.14	7,248,059.35	2,059,944.73	40.2081278	-109.9977964	2,404.29	0.68	0.43	-0.53
10,011.00	88.70	0.40	7,903.17	2,499.49	120.22	7,248,152.34	2,059,944.81	40.2083830	-109.9977905	2,497.27	1.98	-1.83	0.75
10,104.00	85.60	359.70	7,907.79	2,592.36	120.30	7,248,245.22	2,059,944.89	40.2086379	-109.9977846	2,590.13	3.42	-3.33	-0.75
10,198.00	87.20	358.00	7,913.70	2,686.15	118.42	7,248,339.01	2,059,943.01	40.2088955	-109.9977857	2,683.93	2.48	1.70	-1.81



Survey Report

Company:	Uinta Wax	Local Co-ordinate Reference:	Well RP TRIBAL 21N-31W-H4LP
Project:	DUCHESNE COUNTY, UT (NAD 83) GRID	TVD Reference:	23' KB @ 5107.00usft
Site:	S21-T3S-R1W (Bastian/Griswold)	MD Reference:	23' KB @ 5107.00usft
Well:	RP TRIBAL 21N-31W-H4LP	North Reference:	Grid
Wellbore:	OH (240134)	Survey Calculation Method:	Minimum Curvature
Design:	SURVEYS	Database:	.Total Directional Production DB

Survey

Measured Depth (usft)	INC (°)	AZI (°)	Vertical Depth (usft)	Local Coordinates +N/-S (usft)	+E/-W (usft)	Map Coordinates Northing (usft)	Easting (usft)	Geo Coordinates Latitude (°)	Longitude (°)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
10,291.00	87.80	358.40	7,917.75	2,779.02	115.50	7,248,431.87	2,059,940.09	40.2091505	-109.9977906	2,776.83	0.78	0.65	0.43
10,382.00	90.00	356.20	7,919.50	2,869.89	111.21	7,248,522.74	2,059,935.80	40.2094001	-109.9978005	2,867.76	3.42	2.42	-2.42
10,475.00	91.50	356.50	7,918.28	2,962.69	105.29	7,248,615.54	2,059,929.89	40.2096551	-109.9978161	2,960.64	1.64	1.61	0.32
10,568.00	90.40	357.20	7,916.74	3,055.53	100.18	7,248,708.39	2,059,924.78	40.2099102	-109.9978288	3,053.56	1.40	-1.18	0.75
10,661.00	88.00	359.10	7,918.04	3,148.47	97.18	7,248,801.32	2,059,921.77	40.2101654	-109.9978339	3,146.52	3.29	-2.58	2.04
10,755.00	90.00	358.70	7,919.68	3,242.43	95.38	7,248,895.28	2,059,919.97	40.2104234	-109.9978347	3,240.50	2.17	2.13	-0.43
10,848.00	89.80	359.50	7,919.84	3,335.42	93.92	7,248,988.27	2,059,918.51	40.2106787	-109.9978344	3,333.50	0.89	-0.22	0.86
10,941.00	87.10	0.00	7,922.36	3,428.37	93.51	7,249,081.23	2,059,918.10	40.2109339	-109.9978303	3,426.45	2.95	-2.90	0.54
11,034.00	86.60	357.40	7,927.47	3,521.20	91.40	7,249,174.05	2,059,916.00	40.2111888	-109.9978322	3,519.30	2.84	-0.54	-2.80
11,128.00	90.00	358.10	7,930.26	3,615.07	87.72	7,249,267.92	2,059,912.31	40.2114466	-109.9978398	3,613.22	3.69	3.62	0.74
11,221.00	87.00	355.90	7,932.69	3,707.90	82.85	7,249,360.75	2,059,907.45	40.2117016	-109.9978516	3,706.11	4.00	-3.23	-2.37
11,314.00	89.70	358.80	7,935.37	3,800.74	78.56	7,249,453.59	2,059,903.15	40.2119567	-109.9978614	3,799.01	4.26	2.90	3.12
11,407.00	88.20	0.20	7,937.07	3,893.72	77.74	7,249,546.57	2,059,902.34	40.2122119	-109.9978587	3,891.99	2.21	-1.61	1.51
11,500.00	88.40	0.00	7,939.83	3,986.67	77.91	7,249,639.53	2,059,902.50	40.2124670	-109.9978525	3,984.93	0.30	0.22	-0.22
11,593.00	87.60	359.40	7,943.08	4,079.62	77.42	7,249,732.47	2,059,902.01	40.2127222	-109.9978487	4,077.87	1.08	-0.86	-0.65
11,686.00	89.20	358.80	7,945.67	4,172.56	75.96	7,249,825.42	2,059,900.55	40.2129774	-109.9978483	4,170.83	1.84	1.72	-0.65
11,780.00	88.70	356.70	7,947.40	4,266.47	72.27	7,249,919.32	2,059,896.86	40.2132353	-109.9978559	4,264.78	2.30	-0.53	-2.23
11,873.00	87.40	354.00	7,950.56	4,359.10	64.74	7,250,011.95	2,059,889.33	40.2134899	-109.9978773	4,357.52	3.22	-1.40	-2.90
11,966.00	88.90	357.00	7,953.57	4,451.75	57.45	7,250,104.60	2,059,882.04	40.2137445	-109.9978978	4,450.28	3.60	1.61	3.23
12,060.00	88.90	358.80	7,955.37	4,545.67	54.00	7,250,198.52	2,059,878.60	40.2140025	-109.9979045	4,544.24	1.91	0.00	1.91
12,153.00	89.30	359.50	7,956.83	4,638.64	52.62	7,250,291.50	2,059,877.22	40.2142578	-109.9979039	4,637.22	0.87	0.43	0.75
12,246.00	87.90	0.90	7,959.10	4,731.61	52.95	7,250,384.46	2,059,877.54	40.2145129	-109.9978971	4,730.17	2.13	-1.51	1.51
12,339.00	87.10	0.70	7,963.16	4,824.51	54.24	7,250,477.37	2,059,878.84	40.2147679	-109.9978869	4,823.04	0.89	-0.86	-0.22
12,432.00	87.20	0.40	7,967.78	4,917.39	55.14	7,250,570.25	2,059,879.73	40.2150228	-109.9978781	4,915.90	0.34	0.11	-0.32
12,518.11	87.29	0.13	7,971.92	5,003.40	55.53	7,250,656.25	2,059,880.12	40.2152588	-109.9978715	5,001.89	0.34	0.11	-0.32
RP TRIBAL 21N-31W-H4LP - 5000' VS													
12,526.00	87.30	0.10	7,972.29	5,011.28	55.55	7,250,664.14	2,059,880.14	40.2152805	-109.9978710	5,009.77	0.34	0.11	-0.32
12,619.00	87.90	0.10	7,976.19	5,104.20	55.71	7,250,757.06	2,059,880.30	40.2155355	-109.9978648	5,102.67	0.65	0.65	0.00
12,712.00	85.10	0.90	7,981.86	5,197.02	56.52	7,250,849.87	2,059,881.11	40.2157902	-109.9978563	5,195.46	3.13	-3.01	0.86
12,806.00	86.40	359.80	7,988.83	5,290.75	57.09	7,250,943.60	2,059,881.68	40.2160475	-109.9978487	5,289.18	1.81	1.38	-1.17
12,899.00	87.70	359.00	7,993.62	5,383.62	56.12	7,251,036.47	2,059,880.71	40.2163024	-109.9978466	5,382.05	1.64	1.40	-0.86
12,992.00	88.70	358.60	7,996.54	5,476.55	54.17	7,251,129.41	2,059,878.76	40.2165576	-109.9978479	5,475.00	1.16	1.08	-0.43
13,085.00	87.80	356.80	7,999.38	5,569.43	50.44	7,251,222.28	2,059,875.03	40.2168127	-109.9978557	5,567.93	2.16	-0.97	-1.94
13,178.00	88.20	359.10	8,002.62	5,662.31	47.12	7,251,315.16	2,059,871.71	40.2170678	-109.9978620	5,660.85	2.51	0.43	2.47
13,271.00	87.60	358.50	8,006.03	5,755.22	45.17	7,251,408.08	2,059,869.76	40.2173229	-109.9978634	5,753.78	0.91	-0.65	-0.65
13,364.00	88.20	357.10	8,009.44	5,848.09	41.60	7,251,500.94	2,059,866.19	40.2175780	-109.9978706	5,846.69	1.64	0.65	-1.51
13,457.00	88.60	359.30	8,012.04	5,941.00	38.68	7,251,593.86	2,059,863.27	40.2178331	-109.9978755	5,939.64	2.40	0.43	2.37
13,550.00	87.00	358.70	8,015.61	6,033.92	37.06	7,251,686.77	2,059,861.65	40.2180882	-109.9978757	6,032.57	1.84	-1.72	-0.65



Survey Report

Company:	Uinta Wax	Local Co-ordinate Reference:	Well RP TRIBAL 21N-31W-H4LP
Project:	DUCHESNE COUNTY, UT (NAD 83) GRID	TVD Reference:	23' KB @ 5107.00usft
Site:	S21-T3S-R1W (Bastian/Griswold)	MD Reference:	23' KB @ 5107.00usft
Well:	RP TRIBAL 21N-31W-H4LP	North Reference:	Grid
Wellbore:	OH (240134)	Survey Calculation Method:	Minimum Curvature
Design:	SURVEYS	Database:	.Total Directional Production DB

Survey													
Measured Depth (usft)	INC (°)	AZI (°)	Vertical Depth (usft)	Local Coordinates +N/-S (usft)	+E/-W (usft)	Map Coordinates Northing (usft)	Easting (usft)	Geo Coordinates Latitude (°)	Longituge (°)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
13,643.00	87.20	359.50	8,020.31	6,126.78	35.60	7,251,779.64	2,059,860.19	40.2183432	-109.9978753	6,125.45	0.89	0.22	0.86
13,736.00	87.60	358.30	8,024.53	6,219.67	33.82	7,251,872.52	2,059,858.41	40.2185983	-109.9978761	6,218.35	1.36	0.43	-1.29
13,829.00	88.50	357.30	8,027.70	6,312.55	30.25	7,251,965.40	2,059,854.84	40.2188533	-109.9978833	6,311.27	1.45	0.97	-1.08
13,922.00	89.20	358.90	8,029.56	6,405.47	27.17	7,252,058.32	2,059,851.76	40.2191086	-109.9978888	6,404.23	1.88	0.75	1.72
14,015.00	88.90	359.90	8,031.11	6,498.45	26.19	7,252,151.31	2,059,850.79	40.2193638	-109.9978866	6,497.22	1.12	-0.32	1.08
14,108.00	86.90	0.20	8,034.51	6,591.39	26.27	7,252,244.24	2,059,850.87	40.2196189	-109.9978808	6,590.14	2.17	-2.15	0.32
14,202.00	86.10	1.70	8,040.25	6,685.19	27.83	7,252,338.05	2,059,852.42	40.2198763	-109.9978696	6,683.91	1.81	-0.85	1.60
14,295.00	83.40	359.90	8,048.76	6,777.78	29.12	7,252,430.64	2,059,853.72	40.2201304	-109.9978594	6,776.46	3.48	-2.90	-1.94
14,389.00	86.40	358.50	8,057.12	6,871.39	27.82	7,252,524.24	2,059,852.41	40.2203874	-109.9978584	6,870.08	3.52	3.19	-1.49
14,482.00	88.10	358.50	8,061.58	6,964.25	25.38	7,252,617.10	2,059,849.98	40.2206424	-109.9978615	6,962.96	1.83	1.83	0.00
14,575.00	87.10	358.30	8,065.47	7,057.13	22.79	7,252,709.98	2,059,847.38	40.2208974	-109.9978652	7,055.87	1.10	-1.08	-0.22
14,669.00	89.10	357.30	8,068.59	7,151.00	19.18	7,252,803.85	2,059,843.78	40.2211553	-109.9978725	7,149.79	2.38	2.13	-1.06
14,762.00	89.50	356.70	8,069.73	7,243.86	14.32	7,252,896.72	2,059,838.91	40.2214104	-109.9978843	7,242.72	0.78	0.43	-0.65
14,854.00	92.10	357.20	8,068.44	7,335.72	9.42	7,252,988.57	2,059,834.01	40.2216627	-109.9978963	7,334.64	2.88	2.83	0.54
14,947.00	89.50	359.30	8,067.14	7,428.65	6.58	7,253,081.50	2,059,831.18	40.2219179	-109.9979009	7,427.61	3.59	-2.80	2.26
15,041.00	85.90	0.10	8,070.91	7,522.56	6.09	7,253,175.41	2,059,830.68	40.2221757	-109.9978970	7,521.51	3.92	-3.83	0.85
15,134.00	86.70	0.30	8,076.92	7,615.36	6.41	7,253,268.22	2,059,831.01	40.2224304	-109.9978903	7,614.30	0.89	0.86	0.22
15,228.00	86.20	0.80	8,082.74	7,709.18	7.31	7,253,362.03	2,059,831.91	40.2226879	-109.9978814	7,708.09	0.75	-0.53	0.53
15,321.00	88.70	1.20	8,086.87	7,802.06	8.94	7,253,454.92	2,059,833.53	40.2229428	-109.9978700	7,800.94	2.72	2.69	0.43
15,414.00	87.10	359.60	8,090.28	7,894.99	9.59	7,253,547.85	2,059,834.18	40.2231978	-109.9978621	7,893.85	2.43	-1.72	-1.72
15,507.00	88.00	359.80	8,094.26	7,987.91	9.10	7,253,640.76	2,059,833.69	40.2234529	-109.9978583	7,986.75	0.99	0.97	0.22
15,601.00	87.60	357.60	8,097.87	8,081.81	6.97	7,253,734.66	2,059,831.56	40.2237107	-109.9978603	8,080.68	2.38	-0.43	-2.34
15,693.00	88.60	357.40	8,100.92	8,173.67	2.96	7,253,826.52	2,059,827.55	40.2239630	-109.9978691	8,172.59	1.11	1.09	-0.22
15,786.00	88.60	357.50	8,103.19	8,266.55	-1.18	7,253,919.40	2,059,823.41	40.2242182	-109.9978783	8,265.52	0.11	0.00	0.11
15,880.00	89.10	359.30	8,105.08	8,360.49	-3.80	7,254,013.34	2,059,820.79	40.2244761	-109.9978821	8,359.49	1.99	0.53	1.91
15,973.00	88.00	0.70	8,107.43	8,453.45	-3.80	7,254,106.31	2,059,820.79	40.2247313	-109.9978765	8,452.45	1.91	-1.18	1.51
16,065.00	86.20	0.40	8,112.08	8,545.33	-2.92	7,254,198.18	2,059,821.67	40.2249835	-109.9978678	8,544.30	1.98	-1.96	-0.33
16,158.00	88.60	2.30	8,116.30	8,638.20	-0.73	7,254,291.05	2,059,823.86	40.2252383	-109.9978544	8,637.12	3.29	2.58	2.04
16,251.00	87.90	1.10	8,119.14	8,731.11	2.03	7,254,383.96	2,059,826.62	40.2254932	-109.9978389	8,729.98	1.49	-0.75	-1.29
16,344.00	88.60	359.20	8,121.98	8,824.06	2.27	7,254,476.91	2,059,826.86	40.2257483	-109.9978324	8,822.91	2.18	0.75	-2.04
16,436.00	88.10	357.30	8,124.63	8,915.98	-0.54	7,254,568.83	2,059,824.06	40.2260007	-109.9978370	8,914.86	2.13	-0.54	-2.07
16,530.00	88.20	358.00	8,127.67	9,009.85	-4.39	7,254,662.70	2,059,820.20	40.2262585	-109.9978451	9,008.78	0.75	0.11	0.74
16,624.00	88.90	357.90	8,130.04	9,103.76	-7.75	7,254,756.61	2,059,816.84	40.2265165	-109.9978515	9,102.73	0.75	0.74	-0.11
16,717.00	87.60	0.20	8,132.89	9,196.69	-9.29	7,254,849.54	2,059,815.30	40.2267716	-109.9978514	9,195.68	2.84	-1.40	2.47
16,811.00	85.60	359.20	8,138.46	9,290.52	-9.78	7,254,943.37	2,059,814.81	40.2270292	-109.9978476	9,289.50	2.38	-2.13	-1.06
16,904.00	86.60	358.80	8,144.79	9,383.29	-11.40	7,255,036.14	2,059,813.19	40.2272839	-109.9978478	9,382.29	1.16	1.08	-0.43
16,997.00	89.90	358.50	8,147.63	9,476.21	-13.59	7,255,129.06	2,059,811.00	40.2275390	-109.9978500	9,475.23	3.56	3.55	-0.32



Survey Report

Company:	Uinta Wax	Local Co-ordinate Reference:	Well RP TRIBAL 21N-31W-H4LP
Project:	DUCHESNE COUNTY, UT (NAD 83) GRID	TVD Reference:	23' KB @ 5107.00usft
Site:	S21-T3S-R1W (Bastian/Griswold)	MD Reference:	23' KB @ 5107.00usft
Well:	RP TRIBAL 21N-31W-H4LP	North Reference:	Grid
Wellbore:	OH (240134)	Survey Calculation Method:	Minimum Curvature
Design:	SURVEYS	Database:	.Total Directional Production DB

Survey

Measured Depth (usft)	INC (°)	AZI (°)	Vertical Depth (usft)	Local Coordinates		Map Coordinates		Geo Coordinates		Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
				+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude (°)	Longituge (°)				
17,090.00	86.70	357.60	8,150.38	9,569.10	-16.76	7,255,221.95	2,059,807.84	40.2277942	-109.9978558	9,568.16	3.57	-3.44	-0.97
17,183.00	88.00	356.60	8,154.68	9,661.88	-21.46	7,255,314.73	2,059,803.14	40.2280490	-109.9978670	9,661.00	1.76	1.40	-1.08
17,277.00	88.10	357.70	8,157.88	9,755.70	-26.13	7,255,408.56	2,059,798.47	40.2283068	-109.9978781	9,754.89	1.17	0.11	1.17
17,369.00	88.40	359.50	8,160.69	9,847.63	-28.37	7,255,500.48	2,059,796.22	40.2285592	-109.9978806	9,846.84	1.98	0.33	1.96
17,463.00	86.70	359.50	8,164.71	9,941.54	-29.19	7,255,594.39	2,059,795.40	40.2288170	-109.9978779	9,940.75	1.81	-1.81	0.00
17,556.00	85.20	359.00	8,171.28	10,034.29	-30.41	7,255,687.15	2,059,794.19	40.2290717	-109.9978767	10,033.51	1.70	-1.61	-0.54
17,648.00	89.90	0.80	8,175.21	10,126.18	-30.56	7,255,779.03	2,059,794.03	40.2293239	-109.9978717	10,125.39	5.47	5.11	1.96
17,705.95	88.73	0.54	8,175.90	10,184.12	-29.89	7,255,836.98	2,059,794.71	40.2294829	-109.9978658	10,183.31	2.07	-2.02	-0.45
LTP - RPT 21N H4LP (100 FNL, 1732 FEL)													
17,737.00	88.10	0.40	8,176.76	10,215.16	-29.63	7,255,868.01	2,059,794.96	40.2295681	-109.9978630	10,214.34	2.07	-2.02	-0.45
LAST SURVEY - 17737.00' MD - BHL - RPT 21N H4LP (50 FNL, 1732 FEL)													
17,788.00	88.10	0.40	8,178.45	10,266.13	-29.28	7,255,918.98	2,059,795.32	40.2297079	-109.9978587	10,265.30	0.00	0.00	0.00
PTB - 17788.00' MD													

Design Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
17,737.00	8,176.76	10,215.16	-29.63	LAST SURVEY - 17737.00' MD
17,788.00	8,178.45	10,266.13	-29.28	PTB - 17788.00' MD

Checked By: _____ Approved By: _____ Date: _____