

Detection to Attribution: Linking Two Decades of Antarctic Stream-Channel Change to Climate Drivers Utilizing Terrain Data

Summary: Previous work [1] has identified places where Antarctic Dry Valley streams are reshaping the land, but the analysis stops at identifying locations and doesn't examine the causes of stream migration. This project attempts to elucidate the drivers of channel migration. Using remote sensing and machine learning, it links the measured changes to the driving processes (heat, melt, thawing ground), extends the measurement from the channel centerline into the near-channel corridor, and attaches an estimated uncertainty value to every pixel.

The Setup and the Gap

The McMurdo Dry Valleys (MDVs) are the largest ice-free region of Antarctica. They were long treated as one of Earth's most stable landscapes. That view is now an open question. The valleys are energy-limited: ice is everywhere, and there is barely enough summer heat to melt much of it [2]. A small warming produces a measurable response — ephemeral streams (channels that flow only during a brief melt season) carry more water, move sediment, and reshape the terrain. Their pace of change is an early, direct measure of the ice-free Antarctic crossing a climate threshold [3].

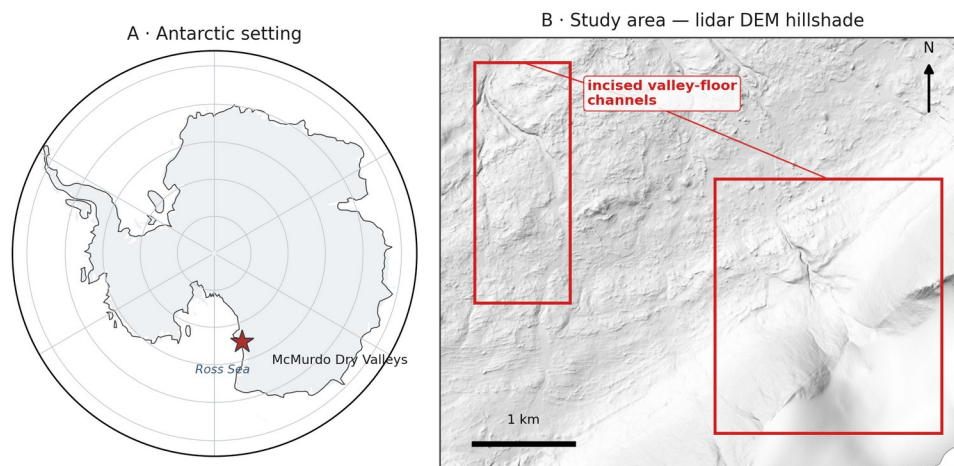


Figure 1. Study area. (A) The McMurdo Dry Valleys within Antarctica (coastline: Natural Earth). (B) Hillshade of the study-area airborne lidar DEM (1 m), showing example incised valley-floor channels this project identifies and mensurates.

Present Data

Recent contributions to knowledge [1, 2] laid the foundation for this study by providing the following initial data products:

1. A U-Net ML methodology [4], [5] that automatically identifies stream channels using high-resolution terrain (elevation, slope, aspect).
2. Initial verification that repeat-acquisition airborne lidar and valley-wide REMA (Reference Elevation Model of Antarctica) satellite DEMs [6] are precise and high-

resolution enough to detect stream-corridor changes once aligned to a common geodetic datum and independent external ground control.

3. Partial maps of elevation change (erosion and deposition) across four Antarctic valleys and three survey periods (2001, 2014, 2021-23).

The Open Question

Detecting where ephemeral channels are changing is now feasible; explaining the cause(s) of these changes is not. The open question is which climate or landscape drivers set the rate of channel change, and whether melt energy, water volume or another possible variable dominates. This project attributes measured stream-channel change to those drivers and attaches calibrated per-pixel uncertainty to every measurement of change. Knowing the driver turns monitoring into forecasting, projecting channel response from climate scenarios here and in any polar region with repeat elevation data.

NASA Relevance

The project directly relates to NASA's Earth Science Division. It spans three of the Division's research spheres. The Cryosphere covers the glaciers and their meltwater, the Hydrosphere the stream network, and the Geosphere the changing surface topography. The 2001 baseline is NASA data — airborne lidar swath mapping never fully exploited for surface change [7]. The project turns the airborne lidar, REMA satellite DEMs (corrected and controlled by airborne lidar and ICESat-2 observations) and reanalysis into a temporal, uncertainty-calibrated record of climate-driven surface change in the Dry Valleys. The methodology is applicable beyond the McMurdo Dry Valleys to any elevation-differencing problem, including the surface-change records NASA missions such as ICESat-2 and NISAR produce. NISAR's left-looking, 12-day L-band coverage includes the Dry Valleys [8]. It cannot supply DEMs but can flag melt-season bank disturbance as an independent check. The Dry Valleys are also the canonical terrestrial analog for cold-desert planetary surfaces such as Mars. The proposed research also develops the skills NASA's open-science strategy calls for: open geospatial data, machine learning on remote sensing, and rigorous uncertainty.

Objectives

The project considers three objectives:

1. Attribution (Objective 1). Determination of the climate and landscape drivers that control each stream's rate of geomorphic change. Candidate controls fall into two groups. Climate forcing includes air temperature, incoming sunlight, meltwater discharge, glacial mass balance, and summer thaw. These records come from the McMurdo Dry Valleys Long Term Ecological Research (LTER) network [9]. Coverage gaps are filled with the European Centre for Medium-Range Weather Forecasts ERA5 reanalysis [10] and the Antarctic Mesoscale Prediction System (AMPS). Substrate susceptibility includes microclimate zone, mapped permafrost and ground-ice class, and bed material, drawn from published MDV mapping [3], [11]. We hypothesize that melt energy will predict channel change better than water volume alone after controlling for substrate (H1). Forcing should matter most where ground ice is present. The hypothesis fails if discharge alone predicts channel migration as well as melt energy does, or if substrate class alone absorbs the explanatory power.

2. Process attribution along the stream corridor (Objective 2). Beyond the channel centerline, classify change in the near-channel corridor — channel shift and avulsion, bank thaw and subsidence, and fan growth — by process type. Bedrock and stable soils outside the corridor provide the fixed reference used to georeference the REMA satellite DEM to the airborne lidar and ICESat-2, so change is measured against genuinely stable ground rather than an assumption that the whole surface is moving. We expect each process type to carry its own driver fingerprint. Bank thaw should track summer thaw and ground-ice class, channel shift should track peak discharge, and fan growth should follow both (H2). If every process type responds to the drivers the same way, the fingerprint idea fails and the classification carries no explanatory weight.
3. Calibrated uncertainty (Objective 3). Provide a per-pixel detection threshold for slope, aspect, and sensor, in place of a single valley-wide noise value. Success test: on ground that did not change, a 95% confidence threshold should be exceeded by 5% of pixels.

REMA, the only elevation observations past 2014, is built from optical stereo imagery. Its offset from lidar shifts with slope, aspect, and seasonal snow. The terrain-aware uncertainty model absorbs those offsets as part of the method.

Approach

By objective:

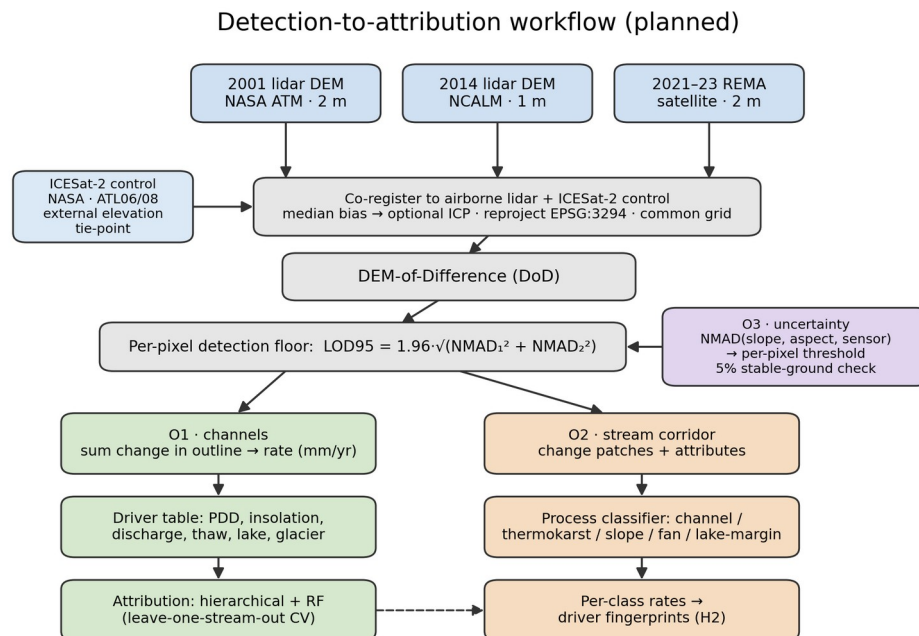


Figure 2. Planned detection-to-attribution workflow: three DEM epochs, co-registration to airborne-lidar and ICESat-2 control, DEM-of-Difference, per-pixel detection floor, then the Objective 1 (channel), Objective 2 (stream-corridor), and Objective 3 (uncertainty) analyses. Method schematic; no results shown.

Objective 1:

1. Objective 1 tests whether melt energy predicts channel change better than water volume alone. To test it, each gauged stream's change rate is measured: co-register the two

elevation epochs (removing the median vertical offset over stable ground, with an optional iterative closest point (ICP) refinement), resample to a shared grid, difference them, keep only pixels whose change clears the detection floor (the per-pixel level of detection at 95% confidence, LOD95, from Objective 3), and integrate that change inside the channel outline, normalized by channel area and years elapsed to a rate in cm/yr.

2. Build a driver history for every stream, gauged or not. ERA5 and AMPS supply temperature and radiation for every basin, per-basin insolation comes from the project DEMs with terrain shading, and substrate covariates come from published maps. The 21 LTER gauge records calibrate a regression between measured discharge and summer insolation on each gauged stream's source glacier, which then covers the ungauged streams and the sparse record after 2015. LTER data calibrate and validate the driver set, but they do not limit its coverage.
3. Fit two models, a hierarchical regression (grouped by stream, with substrate covariates) and a random forest, ranking variable importance across the full forcing-plus-substrate set. Validate by leave-one-stream-out cross-validation, so every score comes from a stream held out of the fit, and check that the two model families agree.
4. Test the melt energy hypothesis against the water volume alternative, controlling for substrate class.

Objective 2:

1. Apply the Objective 3 per-pixel thresholds along the stream corridor and pull out each change patch as a connected group of super-threshold pixels, dropping patches below a minimum mapping unit to suppress isolated-pixel noise. Bedrock and stable soils flanking the corridor supply the fixed reference used to co-register the sensors (using ICESat-2 and 2014 NCALM lidar), so change is measured against genuinely stable ground. Stable ground is defined as any area the channel detector marks as non-stream in every epoch, and that computed surface is the reference.
2. Describe each patch by area, mean elevation change, local slope and aspect, and distance to the nearest channel and lake, then classify it by process type from that signature. The classification will start with rules and fall back to a learned classifier only if they underperform.
3. Run each process type's rates through the Objective 1 driver models and compare.
4. As mentioned before, the REMA-minus-lidar difference over stable ground can be modeled against slope and aspect, and used to remove any bias before differencing the two sensors.

Objective 3:

1. Model the noise as a function of slope, aspect, and sensor pair instead of a single valley-wide value, as previously used, to adaptively estimate the level of change significance. Bin the stable-ground differences on those variables, take the normalized median absolute deviation (NMAD) in each bin, and fit a smooth surface through the bins so every pixel carries its own LOD95 ($= 1.96 \times \text{NMAD}$) threshold.
2. Publish the per-pixel threshold map and verify the 5%-on-stable-ground property. There is also a check that assumes nothing about stable ground. Difference a 2014 REMA DEM against the 2014 lidar DEM. Both map the same year, so the true change should be zero. Whatever is left over is sensor error, and that is what can be used to calibrate the noise model.

Note that all methods use robust statistics [12], since elevation errors here are heavy-tailed and an ordinary standard deviation would be thrown off by a few blunders. The noise scale throughout is the NMAD (1.4826 times the median absolute deviation from the median). For a single surface the detection floor is $LOD_{95} = 1.96 \times NMAD$; since a difference subtracts two noisy surfaces, their NMADs add in quadrature, so the differencing floor is

$$LOD_{95,diff} = 1.96 \sqrt{NMAD_1^2 + NMAD_2^2}$$

The change that noise alone clears only 5% of the time. Everything (DEMs, channel outlines, driver fields) is reprojected into one common Antarctic polar-stereographic grid (EPSG:3294) first, and the two lidar epochs (2 m and 1 m native) are resampled to a shared cell size before differencing.

Project Needs:

All data is freely available or has been given with permission from the author of the initial studies.

Need	Source	Availability
2001 airborne lidar DEM (2 m)	NASA ATM via USGS ScienceBase	public, free
2014 airborne lidar DEM (1 m) + point cloud	NCALM via OpenTopography	public, free
REMA satellite DEM (2 m, 2021–23)	Polar Geospatial Center / AWS	public, free
Stream discharge, 21 gauges (daily)	MCM-LTER via EDI	public, free
Meteorology, glacier mass balance, soil temperature	MCM-LTER via EDI	public, free
ERA5 reanalysis; AMPS Antarctic weather model	Copernicus CDS; NCAR GDEX	public, free
Stream channel outlines (labels)	MCM-LTER via EDI	public, free
The prior dissertation's hand-digitized training tiles [1]	dissertation author	acquired directly from the author
ICESat-2 elevation (external control)	NASA NSIDC DAAC	public, free
Permafrost / ground-ice and microclimate-zone maps	published MDV mapping [3], [11]	public, free

Labels. The gold-standard training set, the dissertation author's hand-digitized tiles, has been acquired directly.

Computing

A single workstation GPU trains the segmentation models, and the elevation processing is CPU-bound and modest. The host institution's computing cluster is available for heavier batches, though the project does not depend on it. Raster stacks reach tens of gigabytes and need only local storage.

Skills and Mentoring

The researcher has built terrain-segmentation and change-detection pipelines on non-Antarctic data but is new to Antarctic hydrology and hierarchical statistical modeling. Coursework and mentorship are detailed elsewhere.

Dissemination

Results will reach the cryosphere community through AGU and polar-science presentations, open-access publications, and archived data products with DOIs.

Assessment

The project is designed to keep risk low. The remaining threats that could affect the completeness of the results are described below with their proposed mitigations.

Attribution Signal

The signal may be weak. With 21 gauged streams and only 3 epochs, the sample is small. If no driver clearly outperforms another, the deliverable becomes a rigorous null result with calibrated uncertainty — useful, if less exciting. The risk is to impact, not feasibility.

Gauge Records

Gauge records are patchy after 2015. Stream gauging in the MDVs declined, and some streams have only a few dozen recorded days in the satellite epoch. The sunlight-to-discharge regression in Objective 1 mitigates this risk, though the discharge side of the hypothesis stays weakest in the most recent period.

Satellite Coverage

Coverage is uneven. REMA quality varies by location and date. Taylor Valley has the best three-epoch coverage and will anchor the acceleration claims; other valleys may support only two epochs — this requires a more thorough analysis of the individual available REMA DEMs.

Change Scale

Outside the channels, much of the slowly changing valley floor may sit below our detection threshold. If so, Objective 2 stays tight to the channel and its immediate margins, and results are reported at that scope.

Even so, the proposal is worth doing. The MDV streams are the most direct, measurable climate response in one of Earth's most stable landscapes, and the data — two lidar epochs, a satellite record, and LTER station records — already exist and are free.

Timeline

Period	Work	Deliverable
Stage 1	Rebuild the change-detection chain from public data; harmonize driver records per stream; secure or rebuild training labels; first attribution model (Objective 1, Taylor Valley)	Attribution manuscript drafted; labeled training set archived
Stage 2	Stream-corridor process attribution (Objective 2), gated by the Objective 3 thresholds; driver tests per change type; sensor-disagreement correction	Process-classification paper; AGU presentation
Stage 3	Per-pixel uncertainty product; three-epoch acceleration analysis; extension beyond Taylor Valley	Synthesis paper; public data products with DOIs

Data Management and Open Science

All inputs are public and cited to source, and all derived products and code will be released open-access with DOIs (Zenodo / EDI), as detailed in the accompanying OSDMP.

References

- [1] Barlow, M. C. (2026). A Comprehensive Spatial Analysis of Stream Boundary and Geomorphological Change Detection: McMurdo Dry Valleys, Antarctica. PhD Dissertation.
- [2] Fountain, A. G., et al. (1999). Physical controls on the Taylor Valley ecosystem, Antarctica. *BioScience* 49(12):961–971.
- [3] Fountain, A. G., Levy, J. S., Gooseff, M. N., & Van Horn, D. (2014). The McMurdo Dry Valleys: A landscape on the threshold of change. *Geomorphology* 225:25–35.
- [4] Ronneberger, O., Fischer, P., & Brox, T. (2015). U-Net: Convolutional Networks for Biomedical Image Segmentation. *MICCAI* 234–241.
- [5] Barlow, M. C., Zhu, X., & Glennie, C. L. (2022). Stream Boundary Detection of a Hyper-Arid, Polar Region Using a U-Net Architecture: Taylor Valley, Antarctica. *Remote Sensing* 14(1):234.
- [6] Howat, I. M., et al. (2019). The Reference Elevation Model of Antarctica (REMA). *The Cryosphere* 13:665–674.
- [7] Schenk, T., Csatho, B., Ahn, Y., Yoon, T., Shin, S. W., & Huh, K. I. (2004). DEM generation from the Antarctic LiDAR data: Site report. US Geological Survey.
- [8] *NASA-ISRO SAR (NISAR) Mission Science Users' Handbook*, 2nd ed. (2025). NASA Jet Propulsion Laboratory.
- [9] McMurdo Dry Valleys LTER. Stream, meteorology, glacier, and soil datasets. Environmental Data Initiative (EDI), knb-lter-mcm.*.
- [10] Hersbach, H., et al. (2020). The ERA5 global reanalysis. *Q. J. R. Meteorol. Soc.* 146:1999–2049.
- [11] Bockheim, J. G., Campbell, I. B., & McLeod, M. (2007). Permafrost distribution and active-layer depths in the McMurdo Dry Valleys, Antarctica. *Permafrost and Periglacial Processes* 18(3):217–227.
- [12] Höhle, J., & Höhle, M. (2009). Accuracy assessment of digital elevation models by means of robust statistical methods. *ISPRS J. Photogramm. Remote Sens.* 64(4):398–406.

Open Science and Data Management Plan

1. Data and software the project will use

All input data are free, public, and archived by their originating programs; nothing is purchased or restricted.

Input	Archive / host	Access
2001 airborne lidar DEM (NASA ATM, 2 m)	USGS ScienceBase	public
2014–15 airborne lidar DEM + point cloud (NCALM, 1 m)	OpenTopography	public
REMA satellite DEM v2 (2 m mosaic, 2021–23)	Polar Geospatial Center / AWS Open Data	public
ICESat-2 laser altimetry (ATLAS; ATL06/ATL08), external geodetic control	NASA NSIDC DAAC	public
Permafrost / ground-ice and microclimate-zone maps (substrate covariates)	Published MDV mapping (Bockheim et al. 2007; Fountain et al. 2014)	public
Stream discharge (21 gauges), meteorology, glacier mass balance, soil climate	MCM-LTER via the Environmental Data Initiative (EDI)	public
Stream-channel outlines (labels)	EDI (knb-lter-mcm scope)	public
ERA5 reanalysis	Copernicus Climate Data Store	public
AMPS Antarctic mesoscale model output	NCAR GDEX	public

One dataset in this domain is *not* public: the prior dissertation's hand-digitized training tiles, held by their author. If shared, they will be used under the author's terms and will not be redistributed, and all credit will remain with the author.

All processing software is open source: Python (numpy/scipy, rasterio, geopandas, PyTorch), PDAL, GDAL/OGR, and WhiteboxTools. No proprietary software is required to reproduce any result.

2. Data and software the project will produce

Product	Format / standard	Where released
Elevation-change (DoD) rasters, all epoch pairs	Cloud-Optimized GeoTIFF, explicit CRS (EPSG:3294), nodata and units in metadata	Zenodo
Per-stream erosion/deposition rate tables	CSV with data dictionary	Zenodo
Per-pixel calibrated detection-threshold layers (Objective 3)	Cloud-Optimized GeoTIFF	Zenodo
Stream-channel outlines + process-classified geomorphic-change maps (Objective 2)	GeoPackage (OGC) / Cloud-Optimized GeoTIFF	Zenodo
Training labels (if self-digitized)	GeoPackage + tile rasters	Zenodo
Trained model weights	PyTorch checkpoint + ONNX export, with training configuration	Zenodo
Processing code (full pipeline: fetch → derivatives → detection → change → attribution)	Python, version-controlled public repository, OSI-approved license (Apache-2.0)	Public repository, archived to Zenodo

Driver-attribution model outputs (Objective 1)	CSV + fitted-model objects with documentation	Zenodo
--	---	--------

Documentation standard. Every released raster/vector product carries: coordinate reference system (EPSG code), acquisition epochs and processing date, method summary, uncertainty estimate (NMAD/LOD95 or the Objective 3 per-pixel layer), and a pointer to the exact code version (commit/DOI) that produced it.

3. When and where products are shared

- Code: developed in the open in a public repository from award start; released versions archived with DOIs.
- Data products: released no later than the publication of the paper they support, and at yearly milestones regardless of publication status.
- Publications: submitted to open-access venues or archived as accepted manuscripts in a public repository, consistent with SMD open-access policy.

4. Licenses

Data products: CC0 or CC-BY. Software: Apache-2.0. Third-party inputs remain under their original terms and are cited, not re-hosted, except where their license permits convenience copies.

5. Protections and exceptions

The project uses no human-subjects data, no export-controlled data, and no commercially restricted data. The single access-limited item (the author-held label tiles) is handled as described in §1, namely use with permission, no redistribution, and a published replacement set if the project digitizes its own.

6. Roles and oversight

The FI is responsible for day-to-day data management, repository hygiene, and product releases; the PI reviews each public release. Working data are stored on institutionally backed storage with an off-machine mirror; the public archives provide long-term preservation beyond the award period.

7. Reproducibility commitment

Every number and figure in project publications will regenerate from public inputs via the released code: a single documented command sequence per product. Heavy intermediate rasters are treated as regenerable and are not archived; the scripts and small tables/figures that define them are.

Mentoring Plan

1. Purpose and roles

The FI is the intellectual lead of the proposed research: the FI designed the project, authored this proposal, and will execute the analyses, write the papers as first author, and release the data products. The PI serves as research mentor and PI of record: scientific guidance, domain expertise, institutional accountability, and career development. This plan states how that relationship operates for the award's duration — a designed structure, not an assumption.

2. Mentoring structure and cadence

- Biweekly one-on-one meetings between FI and PI: progress against the timeline, technical roadblocks, and interpretation of results. The FI sets the agenda; the PI probes assumptions and connects results to the wider literature.
- Monthly research-group meetings: the FI presents work-in-progress to the group, building the habit of defending methods and results before an informed audience.
- Semester milestone reviews: at the start of each semester, FI and PI revisit the project timeline (§6 of the proposal) against actual progress, adjust scope where needed, and record the decisions. The Assessment section of the proposal (fallback plans per risk) is the standing agenda for these reviews.
- Committee alignment: the FI's dissertation committee reviews project progress at the institution's required milestones (qualifying exam, annual review, and proposal defense)], keeping the FINESST work and the degree requirements on track.

3. What the mentoring specifically develops

The proposal identifies two gaps in the FI's preparation; the mentoring plan is how these gaps are closed.

Domain knowledge — Antarctic geomorphology and hydrology. The FI's methods background is strong but was built on temperate-landscape problems. The PI will direct a structured reading program in cold-desert process geomorphology (energy-limited melt, permafrost/active-layer dynamics, closed-basin lake behavior),. By the end of Year 1, the FI can defend the physical interpretation of every Objective 1 driver to a polar audience, not just the statistics.

Statistical methodology and hierarchical modeling. The FI will complete graduate coursework in Bayesian/hierarchical statistical modeling before the Year-1 attribution analysis that depends on it. The PI will review model specifications at the design stage, before fitting — at that point the review will prevent mistakes instead of discovering them.

4. Professional development

- Conferences: the FI presents at AGU (cryosphere section) in Year 2 and at a SCAR/ISAES Antarctic venue in Year 3. Initially posters, then a hopefully an oral talk as results mature.

The PI introduces the FI to the McMurdo Dry Valleys research community — including the LTER network whose data this project uses — at these venues.

- Publication: three first-author papers are planned (proposal §6 timeline). The PI's role is manuscript review and journal strategy; the FI drafts, submits, and handles review responses, with the PI advising. Authorship follows institutional norms, stated in advance: the FI is first author on all project papers.
- Proposal craft: this proposal is itself a training artifact. During the award, the FI will draft at least one follow-on funding proposal with PI review — building the skills the fellowship strives to foster: becoming a fundable independent investigator.
- Open science practice: the FI maintains the public code repository, documentation, and data releases described in the OSDMP; the PI reviews each public release. This is treated as a professional skill under active mentorship, not an afterthought.
- Teaching/outreach: The FI will TA at least one semester of CIVE 3323 (Statistics for Engineers) and will also present his research in a long format (1 hour) research seminar class every fall semester.

5. Career development

- The FI and PI complete an Individual Development Plan (IDP) in the first semester of the award and revisit it annually: target career path, the skills and network that path needs, and identification of development goals for each project year.
- The PI commits to timely, candid letters and introductions as the FI approaches graduation, and to structuring Year 3 so that dissertation completion and the project's synthesis deliverables are aligned.

6. Communication, feedback, and safeguards

- Feedback: the PI provides written feedback on manuscripts and the annual NASA progress report within two weeks of receiving drafts. The FI flags potential issues early rather than at milestone reviews; the biweekly meeting exists so that no problem is more than a week old before the PI knows about it.
- Disagreement: scientific disagreements are resolved by evidence and recorded in the project's decision log. If the mentoring relationship itself needs mediation, the FI's dissertation committee and the department's chair are the named escalation path, per institutional policy.
- Availability: if the PI is on leave or travel for an extended period, Dr. Juan Carlos Fernandez-Diaz, NCALM PI, provides interim technical guidance so the FI is never unsupervised for more than two weeks.

7. Assessment of the mentoring itself

Once per year, FI and PI explicitly review this plan — what mentoring worked, what was missing, what the coming year's emphasis should be — and revise it. The plan is a working document, and will be treated as one.