

CALIFORNIA STATE UNIVERSITY, NORTHRIDGE

PROTEIN FOLDING: PLANAR CONFIGURATION SPACES OF DISC
ARRANGEMENTS AND HINGED POLYGONS

A thesis submitted in partial fulfillment of the requirements for the degree of
Master of Science in Applied Mathematics

by

Clinton Bowen

August 2014

The thesis of Clinton Bowen is approved:

Dr. Silvia Fernandez

Date

Dr. John Dye

Date

Dr. Csaba Tóth, Chair

Date

California State University, Northridge

Table of Contents

Signature page	ii
Abstract	iv
 Chapter 1	
Realizability of Polygonal Linkages with Fixed Orientation	1
1.1 Auxiliary Construction	2
1.1.1 Functionality of the Auxiliary Construction and Gadgets	6

ABSTRACT

PROTEIN FOLDING: PLANAR CONFIGURATION SPACES OF DISC ARRANGEMENTS AND

HINGED POLYGONS

By

Clinton Bowen

Master of Science in Applied Mathematics

Chapter 1

Realizability of Polygonal Linkages with Fixed Orientation

We begin the chapter with describing several gadgets that translates the associated graph $A(\Phi)$ of a P3SAT boolean formula. These gadgets will be used together to form a special hexagonal tiling that behaves in a similar nature to the logic engine of Chapter ?? but simulate a Planar 3-SAT and its associated graph. Together the gadgets will form what is called the auxiliary construction. The hexagonal tiling would then be used to prove the following theorem:

Theorem 1. *It is strongly NP-hard to decide whether a polygonal linkage whose hinge graph is a **tree** can be realized with counter-clockwise orientation.*

Our proof is a reduction from P3SAT. Given an instance Φ of P3SAT with n variables and m clauses and its associated graph $A(\Phi)$, we construct a simply connected polygonal linkage (\mathcal{P}, H) , of polynomial size in n and m , such that Φ is satisfiable if and only if (\mathcal{P}, H) admits a realization with fixed orientation.

We construct a polygonal linkage in two main steps: first, we construct an auxiliary structure where some of the polygons have fixed position in the plane (called *obstacles*), while other polygons are flexible, and each flexible polygon is hinged to an obstacle. Second, we modify the auxiliary construction into a polygonal linkage by allowing the obstacles to move freely, and by adding new polygons and hinges as well as an exterior *frame* that holds the obstacle polygons in place. All polygons in our constructions are regular hexagons or long and skinny rhombi because these are the polygons that we can “simulate” with disk arrangements in Section ??.

Modifying the Associated Graph of a P3SAT. Given an instance of P3SAT boolean formula Φ of n variables and m clauses with associated graph $A(\Phi)$, we construct a finite *honeycomb* grid $H_{A(\Phi)}$ of regular hexagons over the plane centered at origin. We modify the associated graph drawing $A(\Phi)$ by overlaying it onto a honeycomb in the following way:

1. **Variable:** A vertex representing a variable shall encompass a consecutive set of hexagons along a horizontal line in the honeycomb. Let $D = \max_{v \in V} \deg(v)$ where V is the set of vertices of $A(\Phi)$. Every variable vertex v must encompass at least $2 \cdot \deg(v)$ consecutive hexagons but can encompass upto $2 \cdot D$ consecutive hexagons.
2. **Clause:** A vertex representing a clause shall be a vertex of a hexagon in the honeycomb.
3. **Edge:** Edges of the associated graph $A(\Phi)$ are paths between the variable x_i and clause C_j . An edge $\{x_i, C_j\}$ of the associated graph is pairwise edge disjoint. The edges of the drawing shall traverse the edges of hexagons in a vertically or horizontally zigzagging manner (see Figure 1.1) in the honeycomb from the literal to the corresponding clause. Edges traverse a hexagon in two edges vertically, three edges horizontally. The vertical zigzagging edge segments traverse the left or right sides of a hexagon(s). The horizontal zigzagging edge segments traverse the top or bottom halves of a hexagon(s). When the edge transitions from a vertical to horizontal traversal, the edge traverses in over 4 edges about the hexagon. The length of the edges are bounded above by $6 \cdot (\ell_1(x_i, C_j) + D)$ where ℓ_1 is the L_1 norm.

Figure 1.1 illustrates an associated graph of a P3SAT overlayed on a honeycomb. This type of construction emulates an *orthogonal drawing* over a hexagonal grid; an orthogonal drawing where edges are drawn with alternating vertical and horizontal line segments. Let the region in which the construction lies in be a regular hexagon region with polynomial side length $s(n, m)$. It was shown that if $G = (V, E)$ is planar, it can be

embedded in an $|V| \times |V|$ grid with $2.4|V| + 4$ bends [1, 2]. From this result, we can define the side length polynomial $s(n, m)$ to be something larger than $2.4(n + m) + 4$.

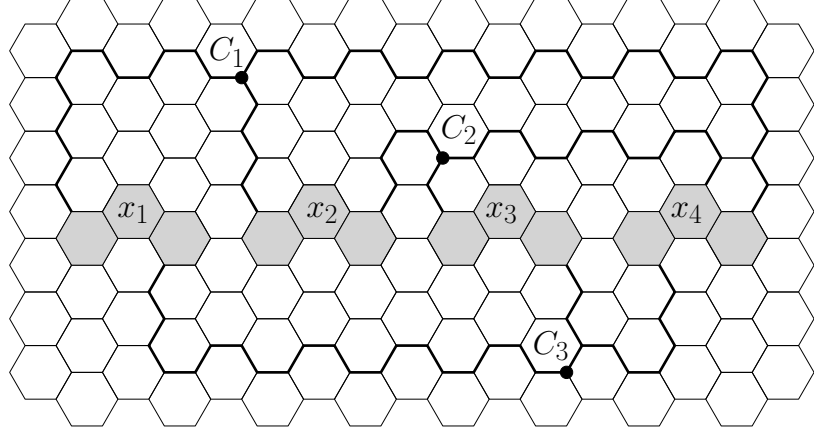


Figure 1.1: This is an instance of an associated graph for a P3SAT overlaid onto a honeycomb grid. This honeycomb graph could correspond to Boolean formula $(\neg x_1 \vee \neg x_2 \vee x_4) \wedge (x_2 \vee \neg x_3 \vee x_4) \wedge (x_1 \vee \neg x_3 \vee \neg x_4)$.

The honeycomb construction will act as preliminary concept that will be refined further in the Auxiliary Construction. We denote the associated graph overlaid on the honeycomb as $\tilde{A}(\Phi)$.

1.1 Auxiliary Construction

Let Φ be a Boolean formula of P3SAT with variables x_1, \dots, x_n and clauses C_1, \dots, C_m , where $A(\Phi)$ is the associated planar graph and $\tilde{A}(\Phi)$ be corresponding honeycomb graph. We continue to modify $\tilde{A}(\Phi)$ to form the auxiliary construction. Consider a large (polynomial-size) regular hexagon J with side length $s(n, m)$ that contains all gadgets in our construction. For each hexagon in $\tilde{A}(\Phi)$, we scale the hexagons in the following way: first we fix the center of the hexagon and then scale (shrink) the hexagon; the hexagons in the honeycomb no longer touch each other and form corridors and junctions between the hexagons. Formally, let a *corridor* be a channel between two adjacent hexagons and a *junction* be a region where three corridors meet. We then finally re-scale this form of the honeycomb such that the side length of the hexagons are determined by polynomial of variable n and m , $N(n, m)$ (as described below), while preserving the corridors formed from the first scaling.

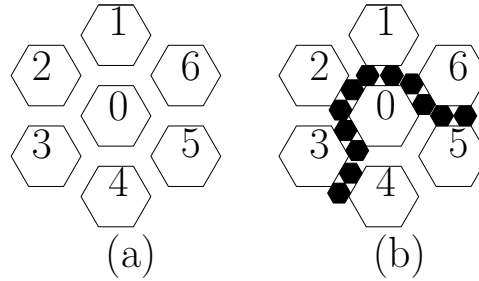


Figure 1.2: (a) A region of the honeycomb shown with scaling. The corridors and junctions formed from the first scaling is preserved after scaling the honeycomb grid to where the side lengths of the hexagon are $N(n, m)$. (b) The same region in (a) containing flags.

Let the hexagons of Figure 1.2(a) be obstacle hexagons that are fixed. In Figure 1.2(b), we have smaller hexagons within some corridors and junctions. These hexagons are flags. For each edge in $\tilde{A}(\Phi)$, we insert flags into the corridor corresponding to that edge. Flexible hexagons are hinged at the vertex closest to origin and the side of the corridor (See Figure 1.3). Let $t = 2N^3 - 1$ be the number of flags in a corridor (see

Figure 1.3). Scale the honeycomb such that the obstacle hexagons become regular hexagons of side length $(5t - 1)/2 + \sqrt{3}$, and then scale each obstacle hexagon independently from its center to a hexagon of side length $(5t - 1)/2$ (see Figure ??).

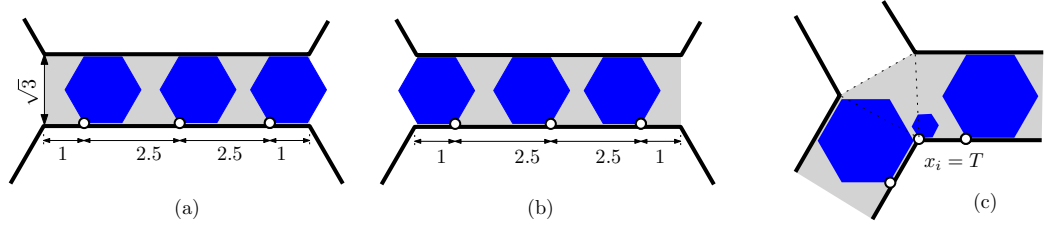


Figure 1.3: (a) A corridor when all unit hexagons are in state R. (b) A corridor where all unit hexagons are in state L. (c) A junction where a small hexagon between two corridors ensures that at most one unit hexagon enters the junction from those corridors.

Between two adjacent obstacle hexagons, there is a $\frac{5t-1}{2} \times \sqrt{3}$ rectangular corridor. Three adjacent corridors meet at a regular triangle, which we call a junction. For each corridor, there are two junctions adjacent to it; of these two junctions, we denote the junction from which a flag in the corridor enters into as the *active junction* (see Figure 1.4).

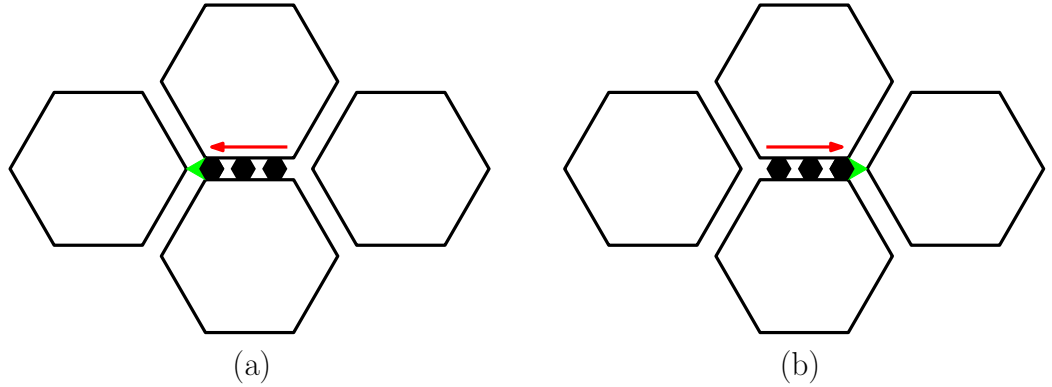


Figure 1.4: The active junction in (a) is the junction on the left and in (b) the active junction is on the right. The active junction is the junction in which a flag enters from a corridor.

We next describe variable, clause, and transmitter gadgets. The basic building block of both variable and transmitter gadgets consists of t regular hexagons of side length 1 (*unit hexagons*, for short) attached to a wall of a corridor such that the hinges divide the wall into $t + 1$ intervals of length $(1, 2.5, \dots, 2.5, 1)$ as shown in Fig. 1.3(a-b) for $t = 3$.

In some of the junctions, we attach a small hexagon of side length $\frac{1}{3}$ to one or two corners of the junction (see Fig. 1.3(c) and Fig. 1.8).

Variable Gadget. The **variable gadget** for variable x_i is constructed as follows. Recall that variable x_i corresponds to a cycle in the associated graph $\tilde{A}(\Phi)$, which has been embedded as a cycle in the hexagonal tiling, with corridors and junctions. In each junction along this cycle, attach a small hexagon in the common boundary of the two corridors in the cycle. Figure 1.5 depicts a *variable gadget* in the hexagonal grid.

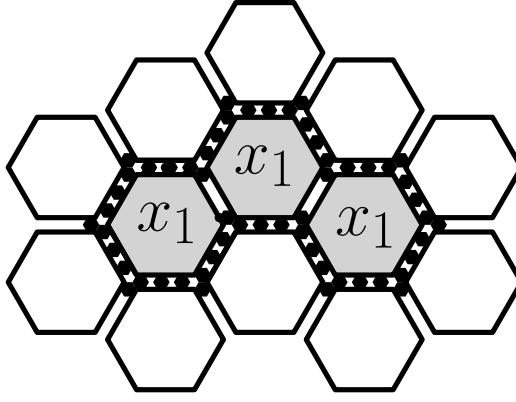


Figure 1.5: This depicts a variable gadget with $x_1 = T$. Carefully note that the flags around x_1 are in the state R . Corridors adjacent to two obstacles of a variable in the honeycomb do not have t flags; these corridors simply have the flexible hexagons at the junctions.

Clause Gadget. Recall that a clause from a Boolean formula Φ in 3-CNF has three literals. If Φ is a 'yes' instance, then at least one literal in every clause of Φ is true. We construct the clause gadget to model this fact about Boolean formulas in 3-CNF.

The **clause gadget** lies at a junction adjacent to three transmitter gadgets (see Fig. 1.6 and Section 1.1). At such a junction, we attach a unit line segment to an arbitrary vertex of the junction, and a small hexagon of side length $\frac{1}{3}$ to the other end of the segment. If unit hexagons enter the junction from all three corridors (i.e., all three literals are false), then there is no space left for the small hexagon.

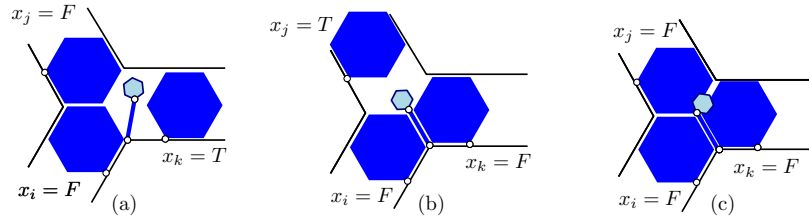


Figure 1.6: (a-b) A clause gadget $(x_i \vee x_j \vee x_k)$ is realizable when at least one of the literals is TRUE. (c) The clause gadget cannot be realized when all three literals are FALSE.

But if at most two unit hexagons enter the junction (i.e., one of the literals is true), then the unit segment and the small hexagon are realizable.

Transmitter Gadget. In the planar 3-SAT graph $A(\Phi)$, every variable vertex has an associated cyclic order of edges. Suppose we have a variable vertex x_i with counter-clockwise cyclic order of edges $(\{x_i, C_1\}, \{x_i, C_2\}, \dots, \{x_i, C_k\})$. Assign distinct junctions of the variable cycle of x_i to the edges $\{x_i, C_j\}$ in the same cyclic order (refer to Figure ?? for an example).

A **transmitter gadget** is constructed for each edge $\{x_i, C_j\}$ of the graph $A(\Phi)$; it consists of a sequence of junctions and corridors from a variable gadget's junction to a clause junction.

For each junction in the transmitter gadget, we attach a small hexagon in the junction as shown in Figure 1.8 except at the clause junction. Choosing the location of the small hexagon depends on whether the non-negated or negated literal is found in the clause.

- (a) For an edge (x_i, C_j) of the graph $A(\Phi)$, if the non-negated literal of x_i exists in C_j , attach the small

hexagon to the left side of the junction (see Figure 1.7(a)).

- (b) For an edge (x_i, C_j) of the graph $A(\Phi)$, if the negated literal of x_i exists in C_j , attach the small hexagon to the right side of the junction (see Figure 1.7(b)).

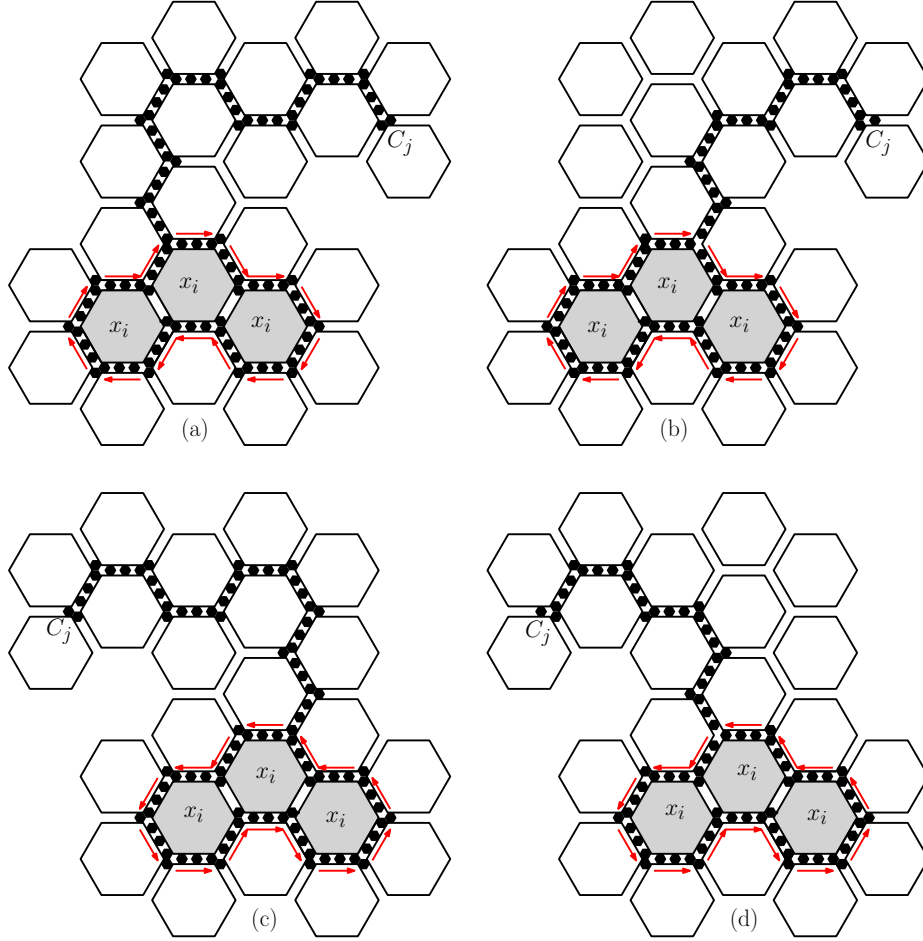


Figure 1.7: These four figures depict an example of placing a transmitter gadget corresponding to edge $\{x_i, C_j\}$.

Figure 1.7 shows an example of each rule on choosing a junction to attach a transmitter gadget. The first column transmits a “true” value between the variable gadget and clause junction. The second column transmits a “false” value between the variable gadget and clause junction. The variable gadgets in the first row are in state R , i.e. variable $x_i = T$. The variable gadgets in the second row are in state L , i.e. variable $x_i = F$.

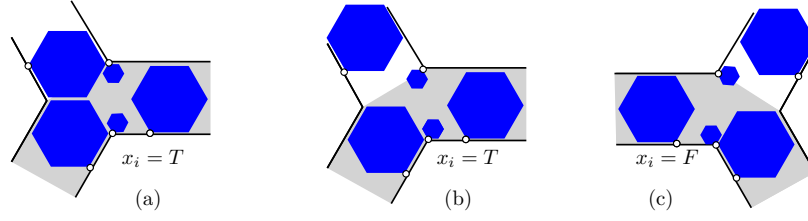


Figure 1.8: The common junction of a variable gadget and a transmitter gadget. (a) When $x_i = T$, a hexagon of the transmitter may enter the junction of the variable gadget. (b) When $x_i = T$, the transmitter gadget has several possible realizations. (c) When $x_i = F$, no hexagon from the transmitter enters a junction of the variable gadget.

1.1.1 Functionality of the Auxiliary Construction and Gadgets

If the literal x_i (resp., \bar{x}_i) appears in C_j , then we attach a small hexagon to the corner of this junction such that if $x_i = F$ (resp., $\bar{x}_i = F$), then the unit hexagon of the transmitter gadget cannot enter this junction.

A variable gadget for vertex v in the associated graph of a P3SAT Boolean formula encompasses at least $2 \cdot \deg(v)$ consecutive obstacle hexagons. The arrangement of the consecutive obstacle hexagons are in staggered fashion about a horizontal line where there are at least $\deg(v)$ obstacle hexagons in the upper portion of the staggering arrangement and at least $\deg(v)$ obstacle hexagons in the lower portion of the staggering arrangement.

Section 1.1 is a formal description of the auxiliary construction and its gadgets. This subsection covers the underlying assumptions and proofs about the functionality of the auxiliary construction. The first observations about the functionality of the auxiliary construction are about the flags.

Observation 1. (1) If the leftmost hexagon is in state R, then all t hexagons are in state R, and the rightmost hexagon enters the junction on the right of the corridor.

(2) Similarly, if the rightmost hexagon is in state L, then all t hexagons are in state L, and the leftmost hexagon enters the junction on the left of the corridor.

Observation 1 and the small hexagons ensure that the state of any unit hexagon along the cycle determines the state of all other unit hexagons in the cycle. This property defines the binary variable x_i : If $x_i = T$, then all unit hexagons in the top horizontal corridors are in state R; and if $x_i = F$, they are all in state L.

When a binary variable $x_i = T$, we will say that the variable is in state *R* and that the cycle of small hexagons around the variable gadget are in a “clockwise direction”. When a binary variable $x_i = F$, we will say that the variable is in state *L* and that the cycle of small hexagons around the variable gadget are in a “counter-clockwise direction”.

The proof of the Observation 1 is similar to the proof of Lemma ?? regarding a row in a logic engine having a collision-free configuration.

Proof. Suppose the leftmost hexagon, h_1 , is in state *R* in a corridor. Denote the t flags in a corridor as h_1, h_2, \dots, h_t from leftmost to rightmost respectively. h_2 must be in state *R* otherwise we result in a collision between h_1 and h_2 . Without loss of generality, h_i and h_{i+1} must be in a state *R* in order to prevent an adjacent flag collision. This implies that rightmost flag h_t must also be in state *R*; this implies that h_t enters the junction that is on the right of the corridor.

Similarly, suppose the rightmost hexagon, h_t , is in state *L* in a corridor. Denote the t flags in a corridor as h_1, h_2, \dots, h_t from leftmost to rightmost respectively. h_{t-1} must be in state *L* otherwise we result in a collision between h_t and h_{t-1} . Without loss of generality, h_i and h_{i+1} must be in a state *L* in order to prevent an adjacent flag collision. This implies that rightmost flag h_1 must also be in state *L*; this implies that h_1 enters the junction that is on the left of the corridor. \square

The flags of the auxiliary construction help communicate the boolean value of a variable gadget to the rest of the auxiliary construction. This communication property of the flags in a corridor is analogous to the flags in a row of a logic engine.

Each junction is a regular triangle, adjacent to three corridors. In some of the junctions, we attach a small hexagon of side length $\frac{1}{3}$ to one or two corners of the junction (see Fig. 1.3(c) and Fig. 1.8). Importantly, we have the following observation:

Observation 2. If a small hexagon is attached to a vertex at a junction between two adjacent corridors, then a flag can enter the junction from at most one of those corridors.

Proof. Suppose there is a small hexagon attached to a vertex at a junction between two adjacent corridors. Suppose it is not that case that a flag can enter the junction from at most one of these adjacent corridors. Then there are two flags entering the junction, one from each adjacent corridor. The angular sum of the vertex about the adjacent corridors consists of the obstacle hexagon, both flags, and the small unit hexagon. Each angle of each hexagon is $\frac{2\pi}{3}$ radians, totalling to an angular sum of $\frac{8\pi}{3} > 2\pi$. This is a contradiction with the total angular sum of a vertex on the plane to be 2π . \square

Observation 1 and the small hexagons ensure that the state of any unit hexagon along the cycle determines the state of all other unit hexagons in the cycle. This property defines the binary variable x_i : If $x_i = T$, then all unit hexagons in the top horizontal corridors are in state R; and if $x_i = F$, they are all in state L.

Suppose there is an edge $\{x_i, C_j\}$ in the graph $A(\Phi)$.

Lemma 1. *If $x_i = T$ and its negated literal is in C_j , then a flag enters into the clause gadget of C_j , otherwise it need not enter; if $x_i = F$ and its non-negated literal is in C_j , then a flexible hexagon enters into the clause gadget of C_j , otherwise it need not enter.*

Proof. The transmitter gadget for each literal is placed on an active junction of the variable gadget. This junction is “activated” by the variable gadget. By Observation 2, the flag nearest of the transmitter gadget to the variable gadget does not enter the transmitter-variable junction. By Observation 1 and the state of the flag nearest of the transmitter gadget to the variable gadget implies that the flags in that transmitter corridor activate the junction opposite the transmitter-variable junction. The subsequent flags in the transmitter gadget corridors have the same state of the flag in the transmitter gadget nearest of the transmitter-variable junction by Observations 1 and 2. This activation process continues up to the clause junction and the flag in the transmitter gadget nearest the clause junction enters the clause junction. \square

Lemma 2. *Hexagons in a clause junction have a non-overlapping placement if and only if at least one of the three literals is true.*

Proof. Suppose we have a hexagons in a clause junction that have a non-overlapping placement. To show that there is at least one of the three literals is true, we do a proof by contradiction. Suppose all literals of the clause are false. If all literals of the clause are false, then all flags in each transmitter gadget nearest their clause junction enters the clause junction, as shown in Figure 1.6(c) which show the small hexagon overlapping flags in the clause junction, a contradiction with hexagons in the clause junction have a non-overlapping placement.

If at least one of the three literals is true, then by Lemma 1, this literal’s flag need not enter the transmitter-variable junction. There allows for the small hexagon in the clause junction to move into the area where this literal’s flag could enter the junction and thus allow non-overlapping placement of hexagons in the junction. \square

For a variable gadget x_i , place horizontal axis h at mid-height of the gadget. Then we have the following lemma:

Lemma 3. *If variable $x_i = T$, then all flags above h are in state R and all flags below h are in state L ; if variable $x_i = L$, then all flexible hexagons above h are in state L and all flexible hexagons below h are in state R .*

Proof. Suppose we have two adjacent corridors k_i and k_{i+1} sharing junction J_i and without loss of generality, k_i is the left most corridor. Observation 2 implies that there can only be one hexagon entering J_i from either k_i or k_{i+1} . If the hexagon that enters J_i is from corridor k_i , then this hexagon has state R and all flags in corridor k_i are in state R by Observation 1. Since the nearest flag of corridor k_{i+1} cannot enter the junction J_i , it must also have state R . All flags in corridor k_{i+1} are in state R by Observation 1.

The argument is similar if the hexagon entering J_i is from corridor k_{i+1} and all flags in both corridors k_i and k_{i+1} have state L .

Because variable gadgets form a simple cycle of corridors and junctions $(k_1, J_1, k_2, J_2, \dots, k_n, J_n)$ and the argument above, all flags about a variable gadget have the same state. \square

Lemma 4. *For every instance Φ of P3SAT, the above polygonal linkage with flexible and obstacle polygons has the following properties: (1) it has polynomial size; (2) its hinge graph is a forest; (3) it admits a realization such that the obstacle polygons remain fixed if and only if Φ is satisfiable.*

Proof. (1) We can bound the number of obstacle hexagons to represent a variable gadget by $2D$, where $D = (\max_{v \in V} \deg(v))$. The number of clause junctions is n . To give an upper bound on the number of flags in the auxiliary construction, we have to account for the flags in the transmitter gadgets, the extra hexagons found in junctions, and the flexible hexagons around the variable gadgets.

Recall that the number of flags in a corridor are $t = 2N(m, n)^3 + 1$ where $N(m, n)$ is a polynomial. Recall that the drawing of $A(\Phi)$ have edges drawn in vertically and horizontally and can join at some “elbow”. The distance can be measured in the ℓ_1 norm. Similarly in the honeycomb construction, the flexible hexagons zig-zig vertically and horizontally through out honeycomb. The number of corridors about an obstacle hexagon is 6. To give a generous upper bound on the number of flags in a transmitter gadget, is $6 \cdot t \cdot \ell_1(v_i, C_j)$, assuming each obstacle hexagon is of unit height.

The number of junctions in the auxiliary construction is the number of junctions to form all variable gadgets, transmitter gadgets, and clause gadgets. We know there are at most $2 \cdot D$ obstacle hexagons to form each variable gadget and 6 junctions for each obstacle hexagon. Therefore an upper bound for the number of flags around variable gadgets is $m \cdot 6 \cdot t \cdot 2 \cdot D$. The upper bound for the number of junctions in a transmitter gadget is $6\ell_1(v_i, C_j)$. Thus, the upper bound of all junctions in all transmitter gadgets is

$$6 \cdot \sum_{\{v_i, C_j\} \in E} \ell_1(v_i, C_j).$$

The upper bound on the total number of flags is

$$m \cdot 6 \cdot t \cdot 2 \cdot D + 6 \cdot \sum_{\{v_i, C_j\} \in E} \ell_1(v_i, C_j).$$

(2) Recall that a forest is a disjoint union of trees. By construction, each flag is hinged to exactly one obstacle hexagon. There are no hinges between obstacle hexagons. Consequently, each component of the hinge graph is a star, where the center corresponds to an obstacle hexagon and the leafs corresponds to the flexible hexagons attached to it.

(3) The final statement is to show an if and only if statement: it admits a realization such that the obstacle polygons remain fixed if and only if Φ is satisfiable.

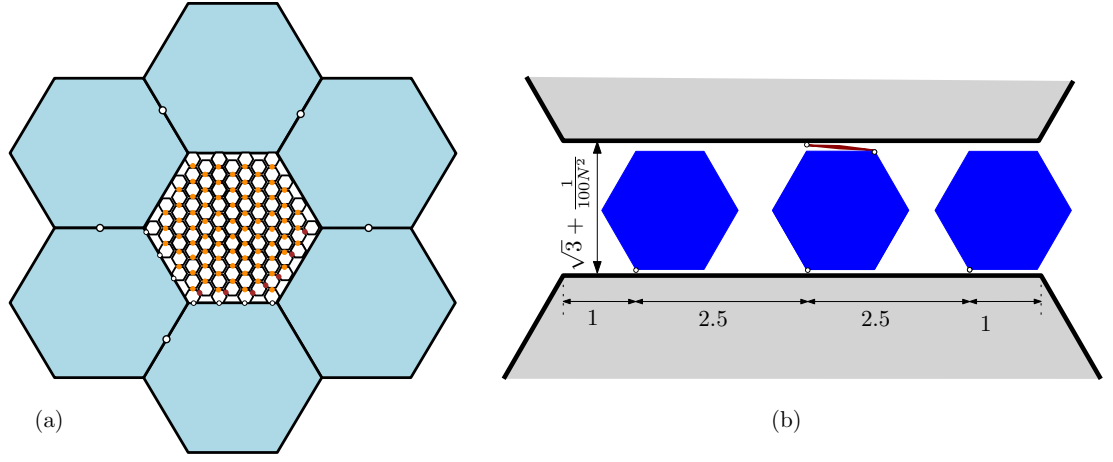


Figure 1.10: (a) A frame (built of 6 hinged regular hexagons) encloses a hexagonal tiling, and vertical paths connect all obstacle hexagons to the frame. (b) A corridor is widened to $\sqrt{3} + \frac{1}{N^2}$. A connection between two adjacent obstacle hexagons is established via a skinny rhombus.

We obtain a simply connected polygonal linkage. We now allow the obstacle hexagons to move freely, and call their original fixed position *canonical*. (3) We may assume without loss of generality that the frame is at its original position. It is enough to show that the obstacle hexagons are still confined to an $1/N$ -neighborhood of their canonical position, then it follows that the polygonal linkage is realizable if and only if Φ is satisfiable.

The position of each hexagon can be defined by the isometry from its canonical position; an isometry is given by the triple (α, β, δ) where α is a counter clockwise rotation about the center of the hexagon and (β, δ) is a translation vector. Canonical position would have each obstacle hexagon's position as $(0, 0, 0)$.




Figure 1.11: This figure depicts a column of obstacle hexagons rotated such that the obstacle hexagons veer off the vertical line ℓ .

Lemma 5. *Let P be a polygonal linkage obtained from the modified auxiliary construction. In every realization of P , the obstacle polygons are close to canonical position such that*

Lemma 5 serves as assurance that once a boolean formula of P3SAT is encoded into an arbitrary realization of the modified auxiliary construction, the information of the boolean formula is preserved regardless of the positioning of the gadgets and components in the construction. This quality shows that the information is stable and preserved in an arbitrary realization of the modified auxiliary construction. In Figure 1.11, we have a column of obstacle hexagons veering off ℓ . This is an example of extreme angular rotation that should not occur over a vertical stack of hexagons.

Proof. We need to show that the modified auxiliary construction could not deform in such a way that any information the construction encodes is lost or modified and the functionality of the gadgets within the construction behave as stated in the description.

To help identify components of the construction for this proof, let's identify components in the canonical position:

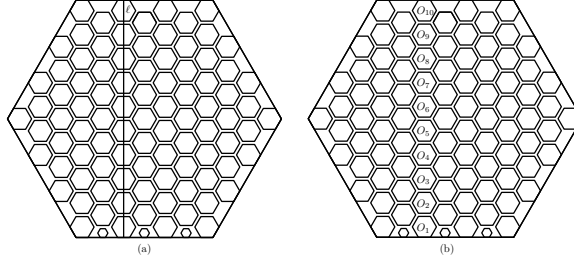


Figure 1.12: (a) depicts a column of obstacle hexagons O_1, \dots, O_{10} along the vertical line ℓ ; (b) identifies obstacle hexagons O_1, \dots, O_{10} in (a).

Without loss of generality, we can identify a column of obstacle hexagons O_i along a vertical line ℓ (See Figure 1.12). In this proof, unless otherwise specified, we assume that the argument refers to a column that starts and ends with an obstacle hexagon. In total there will be $u + 1$ number of obstacle hexagons and u corridors in a column.

The length of $H(n, m)$ (and ℓ in Figure 1.13(a)) can be expressed as a sum of the heights of the corridors and obstacle polygons. The width of a skinny rhombus in canonical position is $\frac{1}{100N}$. The obstacle hexagon has height of $\frac{5t-1}{2} \cdot \sqrt{3}$, and the flag is of height $\sqrt{3}$.

$$H(n, m) = (u + 1) \frac{5t-1}{2} \sqrt{3} + u \left(\frac{1}{100N} + \sqrt{3} \right) \quad (1.1)$$

The cross section of the corridor must have a minimum height of $\sqrt{3}$ everywhere. The height of an obstacle polygon in noncanonical position is $(t + 1) \cdot \sec \alpha_i \cdot \sqrt{3}$.

Angular Rotation α . First we show that the angular rotation of the obstacle hexagons with respect to canonical position is small. We first look at the relative angular difference between two adjacent obstacle polygons

$$|\alpha_i - \alpha_{i+1}|.$$

Given an arbitrary instance of a modified auxiliary construction, consider O_i , O_{i+1} , and the corridor between O_i and O_{i+1} . The skinny rhombus has length $\sqrt{1 + (100N)^{-2}}$.

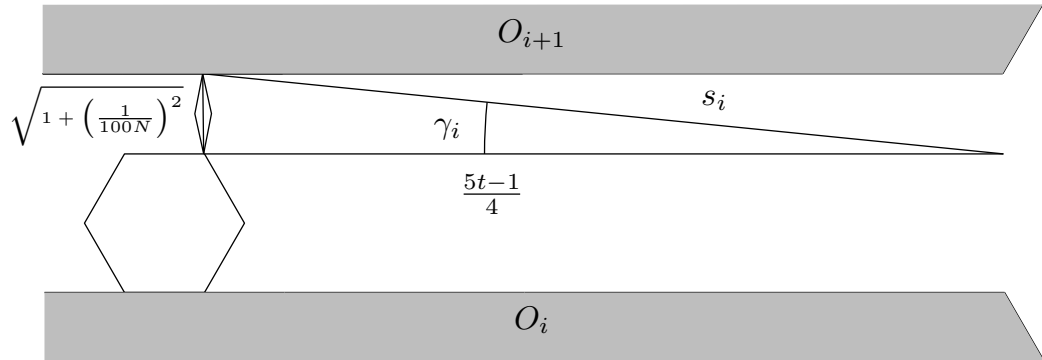


Figure 1.13: The obstacle hexagon here is in noncanonical position, and showing the side lengths adjacent to α_i . In figure 1.12(a) we see ℓ in the center of the column of obstacle hexagons. Our goal is show that the column

of hexagons cannot tilt in the manner Figure 1.11 does where the column veers greatly into the space occupied by corridors and obstacle hexagons. The cross section of an arbitrary corridor must have a height of at least $\sqrt{3}$ everywhere. Otherwise, a flag would overlap with an obstacle hexagon; it would no longer remain a realization since the height of a flag is $\sqrt{3}$. In Figure 1.13, we illustrate an obstacle hexagon, its upper corridor with the flag that has the hinge to the skinny rhombus. The rhombus is hinged at the midpoint of the upper side of the corridor. The length from a corridor's midpoint to one end of the corridor is $\frac{5t-1}{4}$. γ_j is the angle between s_j and the horizontal axis at the height of the flag ($j = 1, 2, \dots, u$). The bound of γ_j is:

$$\begin{aligned} \gamma_j &\leq \tan^{-1} \left(\frac{\sqrt{1 + \left(\frac{1}{100N}\right)^2}}{\frac{5t-1}{4}} \right) \\ &= \tan^{-1} \left(\frac{4\sqrt{1 + \frac{1}{(100N)^2}}}{5t-1} \right) \end{aligned} \quad (1.2)$$

Inequality 1.2 uses the first two terms Maclaurin series of \tan^{-1} . Thus the relative rotational difference between adjacent obstacle hexagons is

$$|\alpha_i - \alpha_{i+1}| \leq$$

From this inequality, it is clear that as $N \rightarrow \infty$, $\gamma_j \rightarrow 0$; and so the relative difference between α_i and α_{i+1} goes to zero as well.

Vertical Displacement δ

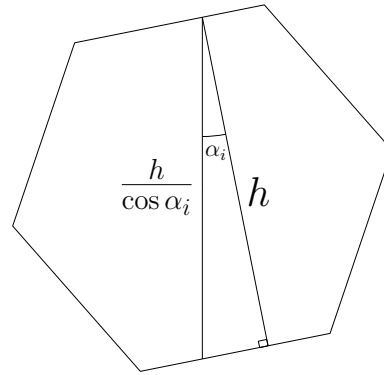


Figure 1.14: This figure shows a right triangle with angle α_i and sides of length h and $\frac{h}{\cos \alpha_i}$.

Figure 1.14, the height of the obstacle hexagon h is $(t+1) \cdot \sqrt{3}$. When rotated by α_i , h becomes $h \sec \alpha_i$. Using Equation 1.1 of $H(n, m)$, the length from the canonical position can also be represented as a sum of

widths of corridors and cross sectional heights obstacle hexagons in arbitrary position:

$$\begin{aligned}
H(n, m) &= (u+1) \frac{5t-1}{2} \sqrt{3} + u \left(\frac{1}{100N} + \sqrt{3} \right) = \sum_{i=1}^u \sqrt{3} + \sum_{i=1}^{u+1} \frac{5t-1}{2} \sqrt{3} \sec \alpha_i \\
&\leq u \sqrt{3} + \frac{5t-1}{2} \sqrt{3} \sum_{i=1}^{u+1} \sec \alpha_i \\
u \left(\frac{1}{100N} + \sqrt{3} - \sqrt{3} \right) &\leq (t+1) \sqrt{3} \sum_{i=1}^{u+1} (\sec \alpha_i - 1) \\
\frac{u}{100N(t+1)\sqrt{3}} &\leq \sum_{i=1}^{u+1} \left(1 + \frac{\alpha_i^2}{2} - 1 \right) \\
\frac{2u}{100N(t+1)\sqrt{3}} &\leq \sum_{i=1}^{u+1} \alpha_i^2 \\
\sqrt{\frac{2u}{100N(t+1)\sqrt{3}}} &\leq \sum_{i=1}^{u+1} \alpha_i \\
\sqrt{\frac{2u}{100N(t+1)\sqrt{3}}} &\leq \sum_{i=1}^{u+1} \alpha_i + \alpha_i - \alpha_i \\
\sum_{i=1}^{u+1} \alpha_i + \alpha_i - \alpha_i &\leq \sum_{i=1}^{u+1} \alpha_i + \frac{3N^2 - 4 - \frac{4}{(100N)^2}}{N^3}
\end{aligned}$$

Which implies:

$$\sqrt{\frac{2u}{100N(t+1)\sqrt{3}}} \leq \sum_{i=1}^{u+1} \alpha_i \leq (u+1) \left(\frac{3N^2 - 4 - \frac{4}{(100N)^2}}{N^3} \right)$$

As $N \rightarrow \infty$, $(u+1) \left(\frac{3N^2 - 4 - \frac{4}{(100N)^2}}{N^3} \right) \rightarrow 0$ which implies $\sum_{i=1}^{u+1} \alpha_i^2$ is bounded. The number of obstacle

hexagons is determined by a polynomial $N(m, n)$ where a is the number of variables in a corresponding Boolean formula and b is the number of clauses in the Boolean formula. Since α_i is bounded above, then there is a maximal rotation of each obstacle hexagon from canonical position.

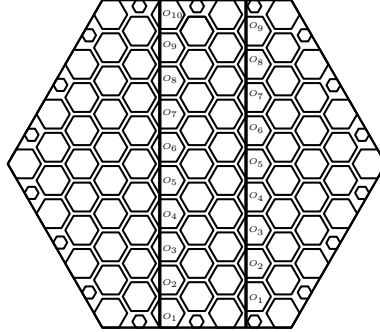


Figure 1.15

To show that the vertical displacement from canonical position is small, we first consider a column of obstacle hexagons in canonical position (see Figure 1.16). For canonical position, the j^{th} obstacle has $\delta_j = 0$.

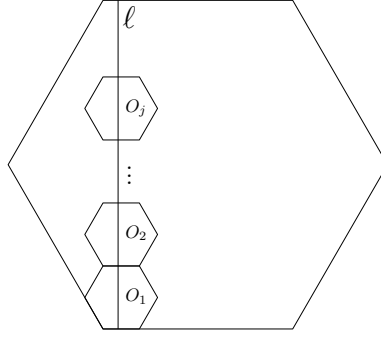


Figure 1.16: This illustration is of a column of obstacle hexagons in canonical position along a vertical line segment ℓ .

Now suppose that we're given an arbitrary realization where $|\delta_j| > 0$ where $j = 0, \dots, u+1$ (or u where we argue for columns with no obstacle hexagons attached to the frame). From Equation 1.1, we know the exact height of the ℓ in terms of the heights of the corridors and obstacle hexagons in canonical position. If $|\delta_j| > 0$, we have two cases: if $\delta_j > 0$ then the position of O_j is higher than canonical, thus giving less room for the remaining corridors and obstacle hexagons:

$$\sum_{i=j+1}^u (t+1)\sqrt{3} \sec \alpha_i + \delta_i + (u-j)\sqrt{3} \leq (u-j-1)(t+1)\sqrt{3} + (u-j-1) \left(\frac{1}{100N} + \sqrt{3} \right) \quad (1.3)$$

The argument is similar when $\delta_j < 0$, the position of O_j is lower than vertical canonical position and reduces the total amount of room for the previous corridors and hexagons:

$$\sum_{i=1}^j (t+1)\sqrt{3} \sec \alpha_i + \delta_i + (u-j-1)\sqrt{3} \leq (u-j)(t+1)\sqrt{3} + (u-j) \left(\frac{1}{100N} + \sqrt{3} \right) \quad (1.4)$$

From Inequality 1.3:

$$\begin{aligned} \sum_{i=j+1}^u (t+1)\sqrt{3} \sec \alpha_i + \delta_i + (u-j-1)\sqrt{3} &\leq (u-j-1)(t+1)\sqrt{3} + (u-j-1) \left(\frac{1}{100N} + \sqrt{3} \right) \\ (u-j-1) \left(\sqrt{3} \left(1 + \sum_{i=j+1}^u \sec \alpha_i + \delta_i \right) \right) &\leq (u-j-1) \left((t+1)\sqrt{3} + \left(\frac{1}{100N} + \sqrt{3} \right) \right) \\ \left(\sqrt{3} \left(1 + \sum_{j+1}^u 1 + \frac{\alpha_i}{2} + \delta_i \right) \right) &\leq \left((t+1)\sqrt{3} + \left(\frac{1}{100N} + \sqrt{3} \right) \right) \\ \sqrt{3} \sum_{i=j+1}^u \delta_i &\leq t\sqrt{3} + \sqrt{3} + \sqrt{3} - \left(\sqrt{3} \sum_{i=j+1}^u 1 + \frac{\alpha_i^2}{2} \right) \\ \sum_{i=j+1}^u \delta_i &\leq \frac{\sqrt{3} \left(t+2 - (u-j-1) - \sum_{i=j+1}^u \frac{\alpha_i^2}{2} \right)}{\sqrt{3}} \\ \sum_{i=j+1}^u \delta_i &\leq t+j-u+3 - \sum_{i=j+1}^u \frac{\alpha_i^2}{2} \end{aligned}$$

Horizontal Displacement α

□

Bibliography

- [1] James A Storer. On minimal-node-cost planar embeddings. *Networks*, 14(2):181–212, 1984.
- [2] R Tamassia and IG Tollis. Efficient embedding of planar graphs in linear time. In *Proc. IEEE Int. Symp. on Circuits and Systems*, pages 495–498, 1987.