
(a) unbounded cross-section calibration, 150×50 background cells



(b) rigid-plate channel calibration, 150×38 background cells

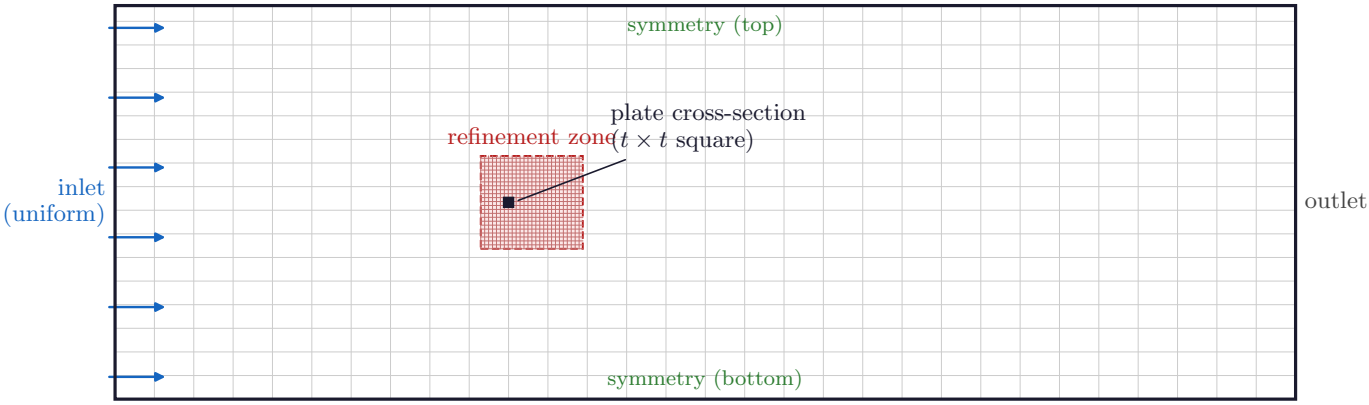