Why frequency-aware sensor fusion?

Sensor fusion must account for frequency-specific information.


01 Research problem

02 Frequency-specific sensor information


Lee et al., EAAI 179 (2026), 115273 · DOI 10.1016/j.engappai.2026.115273

FBG-SEANet: frequency-band graph construction and diagnosis

01 Frequency-band graph

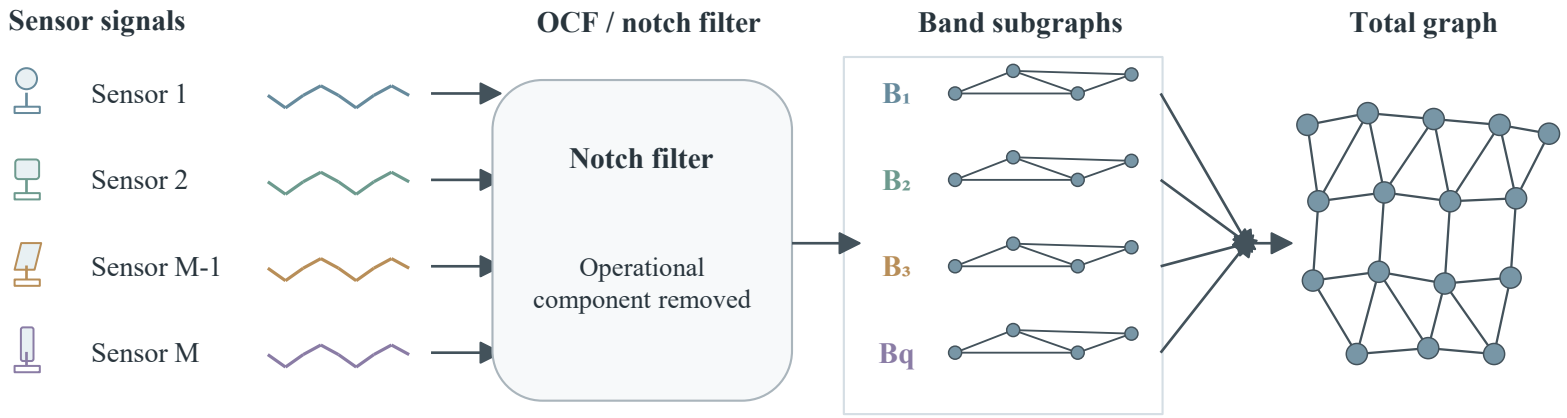

02 Graph-level diagnosis

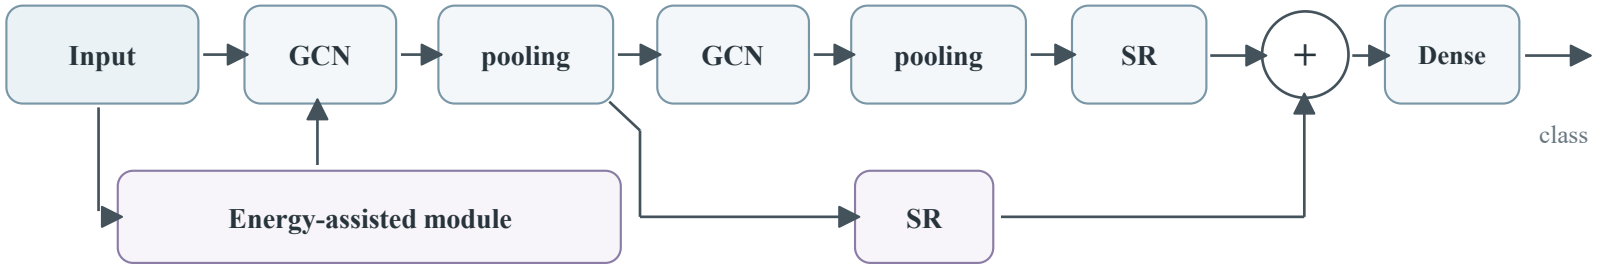

Source-visible structural redraw · not a numerical adjacency matrix

Reading guide

1 Filter

Remove operational components from sensor signals.

2 Construct

Build frequency-specific subgraphs and connect them.

3 Diagnose

EA feeds first GCN; pooled features branch to two SR paths.

Evidence boundary

Sensor glyphs and graph adjacency are schematic vector redraws.

Lee et al., EAAI 179 (2026), 115273
DOI: 10.1016/j.engappai.2026.115273

What the redraw establishes

The redraw preserves method topology while leaving numerical adjacency unasserted.

01 Source-visible structure

02 Schematic graph adjacency