

SEMITEC AT-4 – Lead Wire Thermistor

The Semitec AT-4 thermistor comes with flexible, insulated lead wires, providing the same technical advantages as the widely-used AT-2 NTC thermistor, while also improving versatility and helping streamline manufacture, especially in the battery assembly process.

The AT series thermistors are known for their high accuracy, featuring tight resistance and B-value tolerances of $\pm 1\%$. They require no adjustment between the control circuit and the sensor when used as temperature gauges. Their long-term reliability makes them an ideal choice for various applications with an estimated response time of 10 to 75 seconds in air.

Operating temperature range:

- 30°C to 90°C

Features:

- Automotive e-vehicles batteries
- Rechargeable battery packs
- Temperature controllers
- Mobile devices
- Home automation (Domotica)

Applications:

- High Accuracy $\pm 1\%$ tolerance
- R25 values from 1k ohms to 100k ohms
- Insulated leads negate secondary processing
- Long term reliability
- Cost effective solution

Technical:

For the following 10k Ω versions readily in stock there are two main wire gauges available (30AWG and 26AWG);


Part Number	Lead Length
103AT-4-70374	50mm 30AWG PVC Leads
103AT-4-80025	75mm 30AWG PVC Leads
103AT-4-70261	100mm 30AWG PVC Leads
103AT-4-10228	150mm 30AWG PVC Leads
103AT-4-61046	175mm 26AWG PVC Leads
103AT-4-51018	500mm 26AWG PVC Leads

Please get in touch with us for bespoke versions.




Drawings:

Shape1

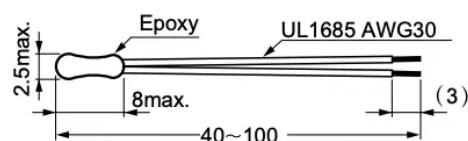

Shape2

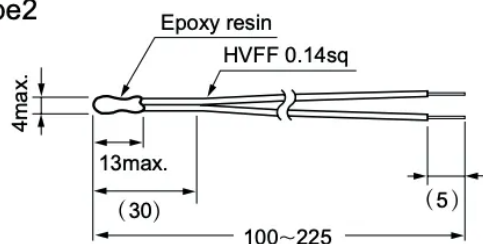

Unit (mm)

For further information please contact us at sales@atcsemitec.co.uk