

# SVI-TRX301S

## IEEE.802.15.4 2.4GHz Zigbee Radio

### MAIN FEATURES

- Process: SMIC-RF 180nm (1P6M)
- Compatible with IEEE.802.15.4
- Frequency range: 2.400–2.4835 GHz
- O-QPSK modulation
- Sensitivity = -98 dBm @ 250kbps
- Output power range: -25 – +3 dBm
- Ultra low power consumption
  - Peak RX: 15 mA @ 1.7V
  - Peak TX: 14 mA @ 1.7V (0 dBm)
- Chip Rate: 2.0 MChip/s
- -40 – +85 °C temperature range
- Ultra low power OFF/Standby modes
- Automatic Frequency Correction (AFC)
- Single ended & Differential PA options
- Offset Cancellation Loop
- Frequency hopping capability
- Programmable Channel Filter Bandwidth
- Integrated PLL loop filter
- Efficient SPI interface (read/write) access
- Automatic VCO & RX filter tuning
- Single ended & Differential PA options
- Can fit in 20L-QFN package in case of standalone IC
- Silicon Verified


### IP DESCRIPTION

Silicon Vision, *SVI-TRX301S* is a fully integrated radio transceiver IP targeting IEEE 802.15.4 standard. The *SVI-TRX301S* performance is tailored for low power operation to be used in ZigBee systems and battery-powered modules.

Transmitter output power ranges from -25 to +3dBm, while receiver sensitivity is -98dBm at 250kbps. The frequency range allows operation in 2.4GHz Industrial, Scientific, Medical (ISM) band. The Radio IP contains the RF-PHY, MODEM and IEEE.802.15.4 Baseband.

### APPLICATIONS

- ☑ Health
- ☑ Energy
- ☑ Home Automation
- ☑ IoT Applications

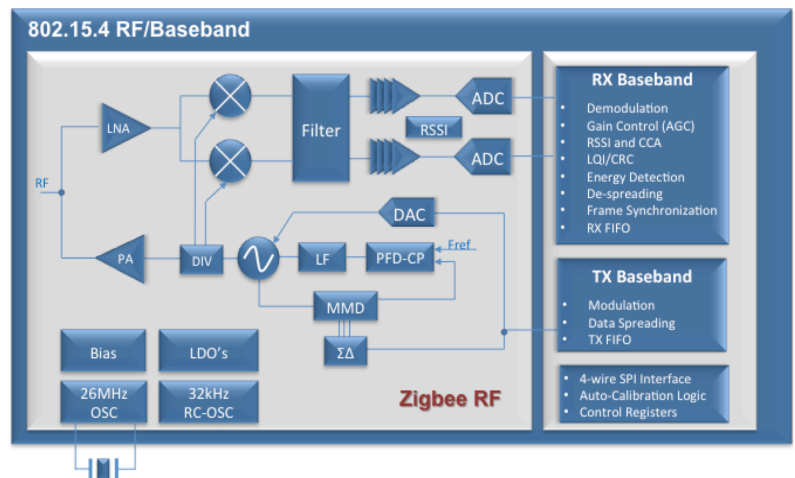

Block Diagram for SVI-TRX301S



Silicon Vision Tech. Ltd.

14 Manchester Square, London  
W1U 3PP, United Kingdom  
[info@siliconvision.com](mailto:info@siliconvision.com)