

# SiVi-FPLL2P4G180

TSMC 180nm (1P6M)



## MAIN FEATURES

- Designed on TSMC 180nm
- Supply Voltage 1.7V
- Input Frequency 13MHz, 26MHz, 52MHz
- Output Frequency 2.4GHz  $\rightarrow$  2.5GHz
- Frequency resolution 400Hz
- Settling time with calibration <80us
- RMS Phase error < 1.8°
- Phase noise @1MHz < -110dBc/Hz
- Phase noise @2MHz < -117dBc/Hz
- Phase noise @3MHz < -118dBc/Hz
- Current Consumption < 5mA
- Fully integrated solution
- Self-calibration mechanism using fully integrated calibrators and state machines
- Operational temperature range from -40°C to 125°C


## IP DESCRIPTION

Silicon Vision's SiVi-FPLL2P4G180 is 2.4GHz frequency synthesizer that operates and covers the 2.4GHz ISM Band. It low power consumption, low noise performance and fully integrated solution makes SiVi-FPLL2P4G180 perfect for 2.4GHz RF transceivers like in low energy Bluetooth and Zigbee.

SiVi-FPLL2P4G180 is silicon proven in 180nm TSMC

## APPLICATIONS

- Bluetooth and Low Energy Bluetooth Transceivers
- Zigbee Transceiver

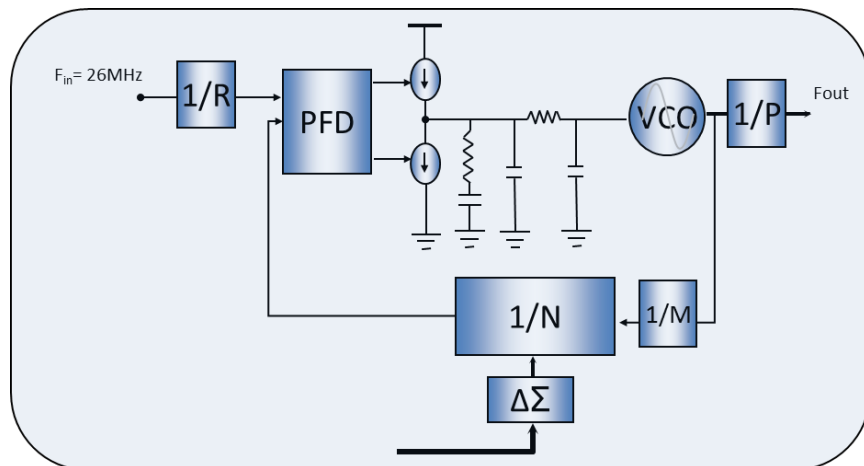

*Block Diagram for SiVi-FPLL2P4G180*



**Silicon Vision**  
79 Almultaqa Alaraby,  
Cairo, Egypt, P.O. Box 11361  
Tel: +202-22669160  
[info@si-vision.com](mailto:info@si-vision.com)