

VALVE DATA MANUAL



AVO LTD

AVOCET HOUSE

92-96 VAUXHALL BRIDGE ROAD
LONDON, S.W.1 ENGLAND



THE AVO VALVE CHARACTERISTIC METER Mk. III

FOREWORD

This data manual is primarily intended for use with the “AVO” Valve Characteristic Meter and “AVO” Valve Tester, but once the Selector Switch code is known, the manual also forms a quick and convenient guide for general use.

The Instruction Book which accompanies the Valve Characteristic Meter should be thoroughly studied before the data contained in this manual is used in conjunction with the instrument, but as a convenient guide to the user who is already familiar with the full instruction book, abbreviated working instructions for the instrument are given in this publication. Abbreviated working instructions are also given for the “AVO” Valve Tester.

It is our intention to issue revised copies of this manual from time to time and dates of publication will be given in our advertisements in the Trade Press.

The return of the enclosed postcard will enable us to inform you when new issues become available.

WATCH OUR ADVERTISEMENTS FOR FURTHER ANNOUNCEMENTS.

Contents

Foreword	3
Abbreviated Working Instructions for the “ AVO ” Valve Characteristic Meter, Mks. I & II	5
Abbreviated Working Instructions for the “ AVO ” Valve Characteristic Meter, Mk. III	7
Abbreviated Working Instructions for the “ AVO ” Valve Tester	9
Diagram of Standard Pin Connections	12
Civilian Equivalents of Service Types	13
B.V.A. Utility Equivalents	27
Manufacturers of Civilian Types with Service Equivalents	28
Test Data for Receiving and Small Transmitting Valves	51
Data for Tuning Indicators (Magic Eyes)	173
Test Data for High Voltage Rectifiers	175

Whilst every care has been taken in the preparation of this manual to ensure that the data given is correct, the Company cannot accept any responsibility for damage caused to a valve under test, or the instrument, due to the inclusion of incorrect information.

ABBREVIATED WORKING INSTRUCTIONS FOR THE "AVO" VALVE

CHARACTERISTIC METER MkS. I & II.

The brief notes which follow are intended to act as a guide to the operator who has already studied, and is familiar with, the contents of the Instruction Manual issued with the instrument.

1. Check mains adjustment tap and connect mains lead to the supply, red and black leads are line and neutral, green or yellow, the Earth connection.
2. Set "CIRCUIT SELECTOR" to "CHECK (C)".
3. Set "METER SELECTOR" to 100 on outer scale.
4. Turn "SET ZERO" Control fully clockwise.
5. Set "FILAMENT VOLTAGE" switches to value indicated in Valve Data.
6. Set "ANODE VOLTS", "SCREEN VOLTS", and "GRID VOLTS" to values indicated in Valve Data.
7. Set "ROLLER SELECTOR" switch as indicated in Valve Data.
8. Switch "ON", press "RESET" button, release, and with "ELECTRODE LEAKAGE" switch at "∞" adjust movement pointer to position "∞" by means of "SET ∞" switch.

ALL VALVES.

1. Insert Valve.
2. Fully rotate "ELECTRODE LEAKAGE" switch, check heater continuity at "H" and insulation on all other positions.
3. Set "CIRCUIT SELECTOR" at "CHECK (H)" to measure leakage from Heater/Cathode to all other electrodes strapped, with valve hot.
4. Turn "CIRCUIT SELECTOR" to "C/H ins." to measure leakage between heater and cathode with valve hot (if valve is indirectly heated).

TRIODES, DOUBLE TRIODES, DIODE TRIODES, PENTODES, DOUBLE PENTODES, DIODE PENTODES AND TETRODES IN SIMILAR COMBINATION.

ANODE CURRENT. Turn "ANODE SELECTOR" to "A₁". "CIRCUIT SELECTOR" to "TEST". Meter should then indicate "ANODE CURRENT". Reduce "METER SELECTOR" switch setting if required. If the meter lamps go out do not press "RESET" button until you have checked for faulty settings on "ROLLER SELECTOR" switch. If these are in order, the valve is probably "soft" and the test should proceed no further.

MUTUAL CONDUCTANCE. Reduce Meter reading to "ZERO" by means of the "SET ZERO" control. Press "mA/V" Button. Meter reading in milli-amps represents "MUTUAL CONDUCTANCE" in "mA/V". To test on "GOOD/BAD" scale, reduce meter readings to "ZERO" as before, turn "METER SELECTOR" switch to "mA/V" position. Adjust "SET mA/V" control to figure given in the Valve Data. Press "mA/V" Button. A good valve should read within the green band on the meter.

For double valves, check data for difference in electrode voltages and repeat above operation at A₂.

GAS TEST. To measure Grid current, proceed as for mutual conductance, using "GOOD/BAD" scale. Reduce meter reading to "ZERO" by means of the "SET ZERO" control, press "mA/V" button, adjust meter reading to full scale by means of "SET mA/V" control. Release "mA/V" button, press "GAS" button. Full scale deflection will now represent $10\mu\text{A}$ Grid Current. For currents over $10\mu\text{A}$ use method given in full instruction book.

DIODES. To measure "DIODES" set the "METER SELECTOR" switch to 1 on inner ring of figures and "ANODE SELECTOR" switch to " A_1 ", turn "CIRCUIT SELECTOR" switch to "DIODE". Check double diodes at " A_1 " and " A_2 ".

RECTIFIERS. Proceed as above to test for electrode leakage, heater/cathode leakage, etc. Using inner ring of figures, set "METER SELECTOR" switch to load shown in Valve Data, turn "CIRCUIT SELECTOR" switch to "REC" Good valves will read in green band on meter scale. Load reading is per anode.

NOTE. When using a recently produced instrument to check valves having a cathode top cap connection, the flying lead cathode socket will be found in the base of the "P" Type Valveholder (8SC, see page 12).

This socket is not fitted to earlier instruments and the following procedure should therefore be observed. Locate an unconnected pin (not internally connected to an element within the valve) upon the valve to be tested, set the appropriate roller to $\frac{1}{c}$, connect flying lead to valve top cap and insert plug in any valve holder pin corresponding to the roller set to $\frac{1}{c}$.

TUNING INDICATORS (MAGIC EYES). For testing data see page 135.

Abbreviations used in this Manual.

For detailed information, refer to the working instructions for the Valve Characteristic Meter.

D, DD, DDD, - Diodes.

DT, DDT, DP, DDP, - Valve with another electrode assembly in addition to the diode.

H, - Heptode or Hexode.

N, - Nonode.

O, - Octode.

P, - Pentode. **PP,** - Double pentode.

T, - Triode. **TT,** - Double triode. **TH,** - Triode Heptode, or Triode Hexode.

TP, - Triode pentode.

R, - Rectifier. **RR,** - Full wave rectifier.

***** - Denotes internally connected pin. For Valve Characteristic Meter Mk. I see procedure at top of page 11. For Valve Characteristic Meter Mk. II read "0" in place of "*" in selector switch number.

‡, - Third diode in triple diode.

ABBREVIATED WORKING INSTRUCTIONS FOR THE "AVO" VALVE

CHARACTERISTIC METER MARK III.

Before switching "ON" the full Instruction Book should be read and always used for reference when testing unusual types of valves.

1. Check mains adjustment tap and connect mains lead to the supply, red and black leads are line and neutral, green or yellow being the earth connection.
2. Set "CIRCUIT SELECTOR" to "CHECK C" and "ELECTRODE SELECTOR" to "A₁".
3. Set "METER SWITCH" to 100 on the Ia scale.
4. Turn "BACKING OFF" controls fully anti-clockwise.
5. Set "HEATER VOLTS" switches to value indicated in Valve Data.
6. Set "ANODE VOLTS", "SCREEN VOLTS" and "GRID VOLTS" to values indicated in Valve Data.
7. Rotate the "SET Ma/V" control to figure given in Valve Data using (where possible) the inner scale and appropriate setting of associated switch.
8. Set "ROLLER SELECTOR" switch as indicated in Valve Data and ensure that A₁ and A₂ links are tight. (For "*" in data read "0").
9. With leakage switch at "∼", switch on, and allow instrument to warm up. Adjust pointer to position "∼" by means of "SET∼" switch.

ALL VALVES.

1. Insert valve, and make any top cap connections if required.
2. Fully rotate "LEAKAGE" switch, check heater continuity at "H" and insulation on all other positions.
3. Set "CIRCUIT SELECTOR" to "CHECK H" to measure leakage from Heater/Cathode to all other electrodes strapped together with valve hot.
4. Turn "CIRCUIT SELECTOR" to "C/H" to measure leakage between heater and cathode with valve hot (if valve is indirectly heated).

TRIODES, DOUBLE TRIODES, DIODE TRIODES PENTODES, DOUBLE PENTODES, DIODE PENTODES AND TETRODES IN SIMILAR COMBINATION.

ANODE CURRENT. With "ELECTRODE SELECTOR" at "A₁" set "CIRCUIT SELECTOR" to "TEST". Meter should then indicate anode current. Reduce METER SWITCH setting if required. *If protective relay operates, switch off and check for incorrect setting of "ROLLER SELECTOR" switch or panel controls. If all controls are correct and relay continues to operate when instrument is switched on again, the valve is probably soft and the test should be discontinued.*

MUTUAL CONDUCTANCE. Reduce meter reading to zero by means of “**BACKING OFF**” controls. Set “**METER SWITCH**” to “2.5” position and readjust zero if necessary. Turn “**METER SWITCH**” to “mA/V” position, when a good valve will give an indication in the green band on the meter scale. To obtain actual mA/V reading, adjust “**SET mA/V**” control until needle reads on calibration point marked 1mA/V, in centre of green band. The “**SET mA/V**” control will now indicate the mutual conductance of the valve under test. To obtain a reading for valves with mutual conductance below 3mA/V, use outer scale setting on “**SET mA/V**” control and follow the procedure outlined above. See the Instruction Manual for more detailed information on the use of the “**SET mA/V**” control, the testing of valves with “slope” less than 1 mA/V.

For double valves, check data for difference in electrode voltages and repeat above operations with the “**ELECTRODE SELECTOR**” set to “A₂”.

GAS TEST. To measure grid current set “**CIRCUIT SELECTOR**” to position “**GAS**” and the “**METER SWITCH**” to its 100mA position. Meter will now indicate gas current, full-scale indication being 100μA.

DIODES. To check diodes turn “**ELECTRODE SELECTOR**” to “D₁” and “**METER SWITCH**” to “1mA” on D/R scale (unless otherwise indicated in Valve Data). Turn “**CIRCUIT SELECTOR**” to “**TEST**”. The condition of the valve will now be given on the “**REPLACE/GOOD**” scale. Check double diodes at D₁ and D₂ position of the “**ELECTRODE SELECTOR**”.

RECTIFIERS. To check rectifiers, set “**ELECTRODE SELECTOR**” to “D₁” and set anode loading given in Valve Data, on D/R scale of “**METER SWITCH**”. Turn “**CIRCUIT SELECTOR**” to “**TEST**”. The condition of the valve will now be indicated on “**REPLACE/GOOD**” scale. Load reading is per anode. Check full-wave rectifiers at positions “D₁” and “D₂” of “**ELECTRODE SELECTOR**” switch.

On completion of tests return controls to their fully anti-clockwise position.

TESTING WIRE ENDED (FLYING LEAD) VALVES. Wire-ended (flying lead) valves may be tested by inserting individual wires into appropriate electrode connections of a suitable valve holder in correct sequence.

When using the AVO V.C.M. Mk 111, the setting of the selector switch may be ignored, the leads being inserted into appropriate sockets of the top cap connector panel.

NOTE ‡ Alternative test figures are given for use when valve shows signs of back emission from anode to G3. This phenomenon can be recognised by the anode current apparently decreasing as the valve heats up.

When using AVO Characteristic Meter Mark II, to check valves requiring a bias of less than 1 volt, erroneous readings may be obtained due to the valve drawing grid current, which has the effect of reducing the grid bias voltage thus producing low mutual conductance readings. Users of this instrument are therefore advised to use the alternative data which has been supplied wherever possible. Valves with alternative data are marked thus §

ABBREVIATED WORKING INSTRUCTIONS FOR THE “ AVO ” VALVE TESTER.

Although the “ Avo ” Valve Tester has been out of production for some years, the following operational notes will be of assistance to the user not entirely familiar with the instrument, and its employment in conjunction with this new data manual.

The data in the following pages for the “ AVO ” VALVE CHARACTERISTIC METER also gives sufficient information for the checking of the valves with the “ AVO ” VALVE TESTER, referred to as the “ A.V.T.”

The data is presented in the following form :—

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		

By taking no account of the data shown in the columns specifically marked Valve Characteristic Meter, the data applicable to the “ A.V.T.”, is obvious.

1. The voltage selector panel associated with the internal transformer in the meter unit should be set to match the voltage of the A.C. mains supply.
2. Before switching on, locate in this manual the line of data applicable to the valve to be tested and set the ANODE, SCREEN and HEATER switches to the voltages indicated. The SELECT ANODE switch should be set to “NORMAL”, “A2”, “D₁” or “D₂” according to the test to be undertaken, the SET ZERO control turned fully clockwise, the SET mA/V control set at 100, and the ROLLER SELECTOR SWITCH set up in accordance with the code number appearing in the data.
3. Switch on, noting that the neon indicator lights up indicating that the mains switch is on, and insert test lead plugs into the sockets in Meter Unit Panel. The neon lamp will now have been extinguished. If the Crocodile Clips at the remote ends of the leads are now connected to the valve pins in turn, shorts between the valve electrodes will be indicated by the neon lamp glowing. The test should not proceed further if shorts between electrodes (other than heater pins) are indicated.
4. Insert valve in correct socket upon valve panel and observe test procedure outlined below.

P. & T. (Pentodes and Triodes).

As the valve warms up the initial anode current will be registered upon the meter and should be backed off to zero by means of the SET ZERO control. The SET mA/V control should now be set to “mA/V” and any adjustment required to return the needle to zero, made upon the SET ZERO control.

The toggle key is now depressed in the direction marked mA/V thus indicating the slope of the valve upon the “mA/V” scale. This reading should compare favourably with the figure given in the data.

The toggle key is now depressed in the direction marked C. INS. (for indirectly heated valves only) thus indicating cathode/heater insulation which should, for a good valve, be of the order of 5—10MΩ (in the case of pentodes, for this test the SCREEN switch should be at set 60 or damage to the instrument and valve may result),

DT, DDT, DP, DDP (Valves with another electrode assembly in addition to diode).

The mutual conductance of the triode or pentode section is checked with anode selector at "Normal". Emission figures for each diode are then obtained as below.

"†" See information given under the heading "Diodes" below.

TT and PP (Double Electrode Assemblies)

The mutual conductance of each half of such a valve is obtained with the anode selector at "Normal" and A_2 .

Where no mutual conductance figure is given, each half of valve should be checked for matching of mutual conductance.

R (Rectifiers).

To test rectifying valves for emission, set mA/V control at 100 and anode volts switch at "Rec". Emission of each anode (in case of full wave) will be obtained by setting anode selector at " D_1 " and " D_2 " respectively. The two emissions should match within small limits and can be compared with the figures given in the mA/V column which indicates the order of emission to be expected.

D, DD and DDD (Diodes).

These are tested for emission for each diode with anode volts switch at "D" and anode selector at " D_1 " and " D_2 ". Set "mA/V" control at "mA/V" when reading should be greater than 0.5 for a good diode. Readings will generally be between 2 and 5. Where the symbol "†" occurs amongst the selector switch set up figures, set to A_2^7 and test for emission of third diode with Anode Selector at A_2 .

Where D_1 or D_2 appears under the heading "Top Cap" these should be connected to top cap "A" and tested with the anode selector at "Normal".

		<i>Selector</i>			<i>Anode</i>		
		<i>Switch</i>	<i>T.C.</i>	<i>Vf</i>	<i>Volts</i>	<i>Base</i>	<i>Type</i>
E.g.	EA50	123 000 000	D_1	6	D	B3G	D

Connect to Anode Top Cap (A) and check for emission of Diode with Anode Selector at "Normal".

TH, TP, O (Frequency Changers).

To test frequency changers two sets of figures are given, first check the triode (Oscillator) section with the anode selector at "Normal" and then the pentode (mixer) section with the selector at A_2 .

SPECIAL NOTES.

Due to the vast improvements in valve technique, the A.V.T. has limitations to its use. Notably the tendency to parasitic oscillations has greatly increased, and this should be borne in mind when high slope, short grid base valves of the all-glass base construction are under test.

INTERNAL CONNECTION (*).

When the symbol * appears among the Selector Switch set up figures, it indicates that an unknown electrode may be connected to this pin internally. To obtain the complete Selector Switch coding, test with an ohmmeter between pin marked * and all others. (The ohmmeter should be on a sufficiently low range to discriminate between a dead short and filament resistance.) Dependent upon the electrode to which this pin is internally connected the correct code can be set up and normal test procedure followed.

Where the pin marked * is O.C. to all others Set Roller to 0.

”	”	”	”	”	”	connected to Cathode	Set Roller to	..	1.
”	”	”	”	”	”	”	Heater —	”	.. 2.
”	”	”	”	”	”	”	Heater +	”	.. 3.
”	”	”	”	”	”	”	Grid	”	.. 4.
”	”	”	”	”	”	”	Screen	”	.. 5.
”	”	”	”	”	”	”	Anode	”	.. 6.
”	”	”	”	”	”	”	Anode 2	”	.. 7.
”	”	”	”	”	”	”	Diode Anode 1	Set Roller to	8.
”	”	”	”	”	”	”	Diode Anode 2	”	.. 9.

1.4 Volt Dry Dattery Valves.

To obtain the filament supply for the 1.4V series, set the filament voltage switch to 10 volts and the toggle switch on the valve holder panel to ÷ 7 position. The toggle switch must always be returned to “Normal” after such tests. Where the Filament Voltage Extension Unit is used, 1.4 volts can be obtained direct by setting to 1.4V, but in these circumstances the ÷ 7 toggle switch must be left at “Normal”.

Accessories for A.V.T.

If the valve base required does not appear on the Valve Holder Panel it is necessary to use an adaptor which plugs into an existing valve holder. These are supplied as follows:

No. 1. B7G and B8A.	No. 5. Blank.
No. 2. B9G.	No. 6. Sm7 (6A7 Base).
No. 3. B8B.	No. 7. B9A.
No. 4. B3G. Hivac D.A.4 and 5 pin.	No. 8. Continental 8 pin (F8).
	No. 9. B7A.

Special Note re Use of Valve Base Adaptor No. 2.


When using this data in conjunction with the B9G base, Pin 1 must be connected to H_{3+} , and Pin 8 connected to H_2 . In these circumstances most types will give heater/cathode short which can be ignored. Apart from the filament connections referred to all other set up figures will remain as printed, but pin 9 should be connected to ϕ Eg. EF50. Using Valve Base Adaptor No. 2, Selector Switch Number will read 356 101 420.

Old Type Panels.


Note that the foregoing information does not apply to the now obsolete English and American panels without roller switch.

DIAGRAM OF STANDARD PIN CONNECTIONS


(viewed from underside of base)




BRITISH NINE PIN (B9)




BRITISH SEVEN PIN (B7)




B9G




'P' TYPE BASE (B5C)




INTERNATIONAL OCTAL (AO8)




AMERICAN SIX PIN (UX6)




BRITISH 4/5 PIN (B5&B4)




AMERICAN FIVE PIN (UX5)




MAZDA OCTAL (MO8)




B7A




AMERICAN SMALL SEVEN PIN (SM7)



AMERICAN FOUR PIN (UX4)




AMERICAN OCTAL (B8B or B8G)




SUB MINIATURE 8 PIN (B8D)




HIVAC FOUR PIN (SM4)




HIVAC FIVE PIN (SM5)




AMERICAN SEVEN PIN (UX7)



B7G




B9A




B3G



B5B


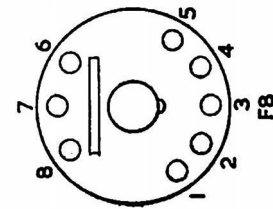


F8



B5A

COLOURED SPOT

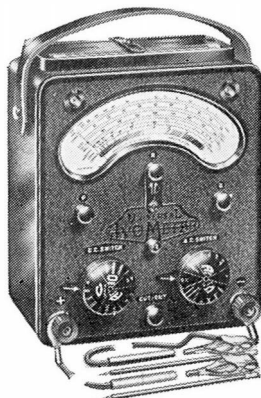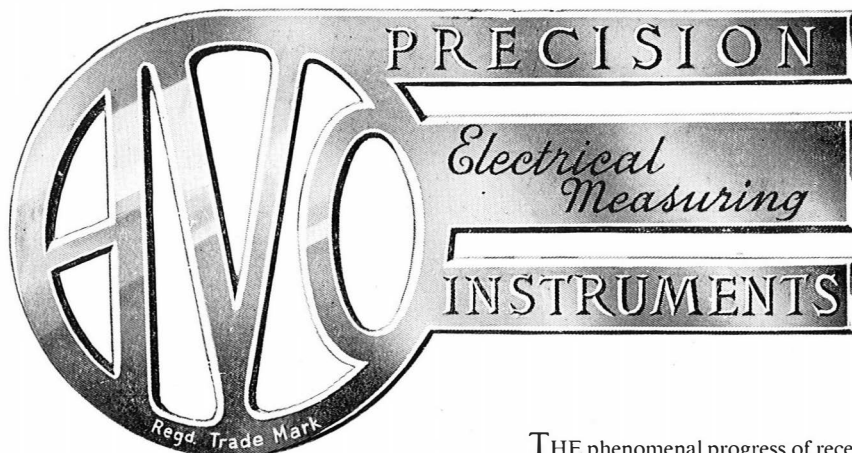

Model 7 Universal **AVOMETER** MK. II

A multi-range A.C./D.C. instrument providing 50 ranges of readings on a 5-in. hand calibrated scale. Range selection is by means of two rotary switches, for A.C. and D.C. respectively. A press button provides an additional range for each value of current and voltage shown on the switch knobs. Current consumption at full scale deflection is 1mA. or 2mA. according to whether press button is used or not. Total resistance is 500,000 ohms. By means of an external accessory (the Universal AvoMeter Power Factor and Wattage Unit) power factor and power can be measured in A.C. circuits. An automatic cut-out provides protection against damage through overload.

Current : A.C. and D.C. 0 to 10A.
Voltage : A.C. and D.C. 0 to 1,000V.
Resistance : Up to 40 megohms.
Capacity : .01 to 20 mFds.
Audio-Frequency Power Output : 0-2W.
Decibels : -25db to +16db.
Size : $8 \times 7\frac{1}{4} \times 4\frac{1}{2}$ ins. **Weight :** $6\frac{3}{4}$ lb.

Model 40 Universal **AVOMETER** MK. II

A similar instrument to the Model 7 AvoMeter described above, but providing 40 ranges of current, voltage and resistance. Total resistance is 200,000 ohms.

Current : A.C. and D.C. 0 to 12 amps.
Voltage : A.C. and D.C. 0 to 1,200 volts.
Resistance : Up to 1 megohm.
Size : $8 \times 7\frac{1}{4} \times 4\frac{1}{2}$ ins. **Weight :** $6\frac{1}{2}$ lb.

THE phenomenal progress of recent years in electrical engineering owes much to the contemporary advances in the design of electrical measuring instruments.

The equipment of a laboratory for making electrical measurements and tests can involve an expenditure of hundreds of pounds. Likewise the test gear essential to the work of the radio service engineer can also be a source of considerable expense.

This difficulty is largely surmounted, and other advantages are conferred, by the use of modern multi-range testing instruments, which afford maximum usefulness with a reasonable initial outlay.

"AVO" Instruments are scientifically designed on sound principles, being the outcome of many years of successful experience by the pioneers and leading manufacturers of multi-range instruments. Before leaving our factory, every "Avo" Instrument is tested and adjusted to give a high degree of accuracy and constancy of performance.

All AvoMeters and AvoMinors conform with the limits of accuracy laid down in Section 6 of the British Standard Specification 89/1954, for Industrial Portable Instruments.


Model 8 Universal **AVOMETER**

A recent version of the Universal AvoMeter having a sensitivity of 20,000 ohms per volt on all D.C. ranges, and 1,000 ohms per volt on A.C. ranges from 100V. upwards. In addition to the many well-known AvoMeter features, such as the automatic overload protection device, dual knob range selection, etc., it has a push button for reversing the polarity of the movement to obviate the inconvenience of changing over the leads when encountering opposite potentials in respect to a common reference point.

ACCURACY

A.C. Ranges and D.C. Current ranges to Section 6 BS 89/1954.
 D.C. Volts 2% of indication full to half scale; 1% full scale value below half scale.

Voltage : A.C. and D.C. 0 to 2,500 volts.
Current : A.C. and D.C. 0 to 10 amps.
Resistance : 0-20 megohms with internal batteries.
 0-200 megohms with external D.C. supply.
Decibels : -15db to +15db.
Size : $8\frac{1}{2} \times 7\frac{1}{4} \times 4\frac{1}{2}$ ins. **Weight :** $6\frac{1}{2}$ lb.

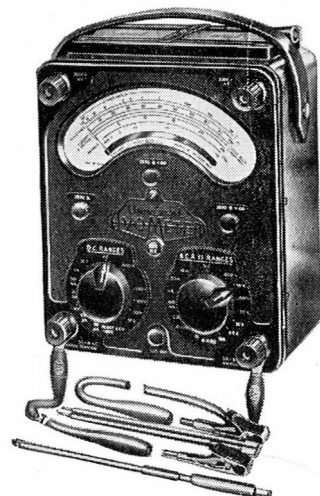



Electrical TESTING INSTRUMENTS



'Avo' ELECTRONIC TESTMETER

A highly stable thermionic D.C. Millivoltmeter with subsidiary circuit switching giving 56 ranges of readings as follows:—

D.C. Volts : 5·0mV. to 10,000V. Max. Input Resistance 110 megohms.

D.C. Current : 0·5 μ A. to 1A. (250mV. drop on all ranges).

A.C. Volts : 0·1V. to 2,500V. R.M.S. up to 2 Mc/s. With diode probe external 0·1V. to 250V. R.M.S. usable to 200 Mc/s.

A.C. Output Power : 5mW. to 5 watts in 6 different load resistances from 5 to 5,000 ohms.

Decibels : —10db to +20db Zero level 50mW.

Capacity : ·0001 μ F to 50 μ F.

Resistance : 0·2 ohm to 10 megohms.

Insulation : 0·1 megohm to 1,000 megohms.

Power Supply : 100–130V. and 200–260V., 50–60 c/s. A.C.

Size : 12½ × 9 × 5½ ins. Weight : 12½ lb.

PANCLIMATIC AVOMETERS

The standard Avometers can be relied upon to give excellent service in any climate. However, where extremes of climatic conditions are experienced, special protection is desirable for certain components.


In affording this protection, advantage has been taken of the latest developments in panclimatic techniques—for example, the use of new moulding powders in the manufacture of the cases and the “potting” of certain components to render them completely impervious to extremes of humidity and resistant to fungus growth.

These special instruments are now available at a small additional charge and are known as:—

The Model 7X Avometer

The Model 8X Avometer

The Model 8(S)X Avometer

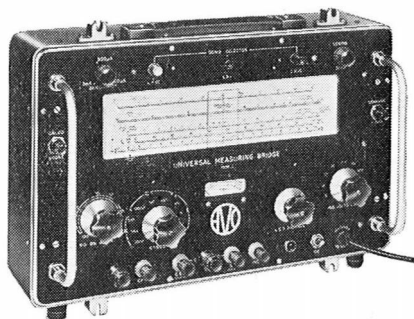

'Avo' UNIVERSAL MEASURING BRIDGE

Type 1

A self-contained mains driven instrument, covering 24 calibrated ranges for the measurement of resistance capacity and inductance.


Resistance Ranges : 6 calibrated ranges covering 0·1 Ω –1,000M Ω . (Accuracy $\pm$ 1% at mid-scale).

Capacity : 6 calibrated ranges covering a nominal 1 μ F–1,000 μ F. (Accuracy $\pm$ 1% at mid-scale).

Inductance : 6 calibrated ranges covering 1mH–1,000H. (Accuracy $\pm$ 2% at mid-scale).

The instrument is fitted with a $\pm$ 10% production comparator scale.

Size : 15½ × 10½ × 10 ins. Weight : 16 lbs. approx.

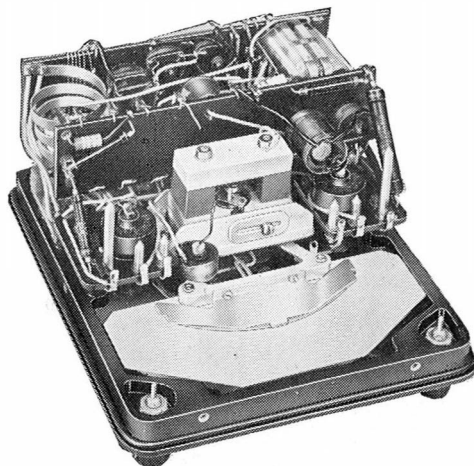

This shows the internal construction of a typical Panclimatic Avometer



Electrical TESTING INSTRUMENTS



'AVO' Wide Band A.M./F.M. SIGNAL GENERATOR
(Type T.F.M.)

Operating on Fundamentals and designed primarily for the television and F.M. Engineer, this instrument incorporates a number of additional refinements to enable it to deal satisfactorily with the very stringent requirements of the new bands.

A.M. Coverage : 5-220 Mc/s in 8 ranges, CW or 400 c/s sine/square wave modulation. Accuracy $\pm 1\%$. Provision for R.F. spot frequency calibration.

F.M. Coverage : 65-120 Mc/s. Accuracy $\pm 1\%$. Maximum deviation ± 150 kc/s.

Output : Minimum (about $2\mu\text{V}$.) to 100 mV. continuously variable with decade multiplier. Force output 250mV.

Output Impedance : 80 Ω , 200 Ω , balanced 80 Ω and 300 Ω .

L.F. signal is available for test purposes, and the instrument can be modulated from an external source (A.M. only). A double-ratio slow-motion mechanism, together with interpolation dial, enables the instrument to be set with a high degree of accuracy. On the F.M. range an internal phasing control enables the modulation signal to be applied to the X-plates of an oscillograph to produce a picture of a discriminator response curve.

Size : $15\frac{1}{4} \times 10\frac{1}{2} \times 10$ ins., approx. Weight : 16 lb. approx.



'AVO' SIGNAL GENERATOR
Type III

An inexpensive A.M. Signal Generator of entirely new design for the Service Engineer. Operates on Fundamentals and provides six frequency bands covering 150 kc/s - 220 Mc/s. Accuracy $\pm 1\%$.

150 kc/s—500 kc/s	} Continuous wave or modulated at 1,000c/s. L.F. signal available for test purposes.
500 kc/s—1.6 Mc/s	
1.6 Mc/s—5.5 Mc/s	
5.5 Mc/s—18 Mc/s	
18 Mc/s—70 Mc/s	
70 Mc/s—220 Mc/s	

A new type of attenuator ensures close adherence of the output to the attenuator calibration. The instrument provides a force output of 250 mV., whilst the following outputs are available via the attenuator:—

Minimum to $100\mu\text{V}$., x 1, x 10, x 100, x 1000.
Output impedances—80 Ω , 200 Ω and 400 Ω .

Size : $12 \times 8\frac{1}{2} \times 5\frac{1}{2}$ ins. approx.
Weight : $7\frac{1}{2}$ lb. approx.

Both Signal Generators operate on 100-120, 200-260V., 50-60 c/s. A.C. Mains. They are light and compact, and employ double screening to ensure minimum radiation.

HEAVY DUTY AVOMETER

An A.C./D.C. moving coil meter specially designed for use under conditions where an exceptionally robust and portable instrument is required; 18 ranges of direct readings on a $3\frac{1}{2}$ -in. scale.

Current : A.C. and D.C. 10mA., 100mA., 1A., 10A.

Voltage : A.C. and D.C. 10, 25, 250, 1,000V.

Resistance : 0-500 ohms. (Midscale 12.5 ohms).

0-50,000 ohms. (Midscale 1,250 ohms.)

Sensitivity : D.C. voltage ranges, 1,000 ohms per volt.


A.C. voltage ranges except 10-volt range, 500 ohms per volt.

10-volt A.C. range, 200 ohms per volt.

Size : $7\frac{3}{8} \times 5\frac{3}{8} \times 4$ ins. Weight : $5\frac{1}{2}$ lb.



Electrical TESTING INSTRUMENTS

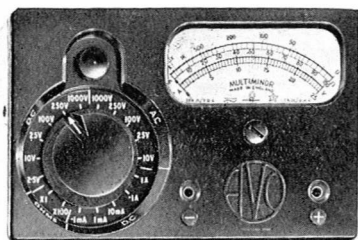

MULTIMINOR MODEL 1

A compact and highly sensitive moving coil/rectifier instrument for the measurement of A.C. and D.C. voltage, current and resistance.

Ranges: A.C. and D.C. Voltage 0-1000V. D.C. Current 0-1A

Resistance: 0-20,000Ω, 0-2 Megohms (using 1½V cell).

Accuracy: 3% D.C. 4% A.C.

Sensitivity: 10,000Ω/V.D.C. 1,000Ω/V.A.C.

Weight: 16 oz. (0.45kg.)

Size: 5½ × 3¾ × 1⅜ ins. (14.3 cm. × 9.2 cm. × 3.5 cm.)

Supplied complete with leads, interchangeable crocodile clips and an instruction booklet.

MULTIMINOR MODEL 2 (Panclimatic Model). Identical in specification to the Model 1, but suitable for use under unfavourable climatic conditions.

Power, Power Factor and kVAR can now be measured on the AvoMeter by means of the AVO Power Factor and Wattage Unit. Send for free illustrated leaflet.

*The following **ACCESSORIES** are available
for 'Avo' Testing Instruments.*

AvoMeter Voltage Multipliers.

AvoMeter Transformers for A.C.
Current Measurements.

AvoMeter Resistance Range
Extension Units.

25kV. D.C. Voltage multipliers can be supplied for the 'AVO' Electronic Testmeter, the 'AVO' Electronic Multiplier and the Model 8, 8X and 8(S)X AvoMeters.

AvoMeter Shunts for D.C. Current.


AvoMinor Voltage Multipliers.

AvoMinor Resistance Range
Extension Units.

AvoMinor Shunts.

Leather Cases are available for most Instruments.

● A Comprehensive Guide to the complete range of 'Avo' Instruments is available.

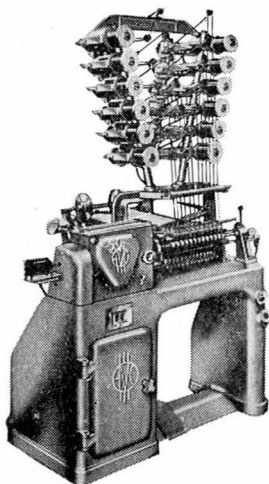

DOUGLAS and MACADIE COIL WINDERS

The Machine illustrated is the "Douglas" Fully Automatic Multi-Winder, for the high-speed production of large quantities of coils with or without paper interleaving. It will produce round, square or rectangular coils up to 6 in. each in length, and up to 4½ in. diameter. As many as 12 smaller coils can be wound simultaneously within the total available winding length of 15 inches, at headstock speeds of between 600 and 2,000 r.p.m.

Our complete catalogue illustrates twenty-seven different machines, ranging from a simple Hand-Winder to the Double-Bank Multi-Winder capable of producing 24 coils simultaneously, also Taping Machines and a Cotton Inserter Attachment.

Sole Proprietors and Manufacturers :

AVO LTD.

LONDON, S.W.1., ENGLAND.

Telephone: Victoria 3404 (9 lines).

Telegrams : Avocet, Sowest, London.

CIVILIAN EQUIVALENTS OF SERVICE TYPES

The equivalents given below are purely for convenience, and it does not necessarily follow that the data for any given valve type will appear in the data pages or even that the valve given can be tested on an 'AVO' Valve Characteristic Meter, or an 'AVO' Valve Tester.

Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.
ADI	DLS10	ARP36	SP61	CV22	BT45	CV90	E1368
AR4	PM1HF	ARP37	QP25	CV24	HL41	CV92	E1332
AR5	P220	ARP38	KTZ73	CV25	4242A	CV93	V625
AR6	LP2	ARS7	VS24	CV26	813	CV94	DS103
AR7	4DI	ARS8	PM12V	CV27	4357A	CV95	R3/10
AR8	HL23DD	ARTH2	ECH35	CV28	ACT9	CV96	R3/16
AR9	PMILF	ARTP1	TP22	CV29	E1235	CV97	R2/10
AR10	TDD2A	ARTP2	TP25	CV30	4270A	CV98	R2/38
AR11	4019B	AT20	MZ05/20	CV31	U20	CV99	E1373
AR12	4020A	AT35	DET25	CV32	RG3-250M	CV100	V2D33B
AR13	B406	AT37	ACT36	CV33	4077A	CV105	E1271
AR14	220RC	ATS25	807	CV34	MR10	CV108	BM313
AR15	220LF	ATP4	V248A	CV38	E1198	CV109	9KP5
AR16	220B	ATP5	V245	CV39	S22AF	CV110	VS68
AR17	MH4	ATP7	V266	CV40	E1255	CV114	E1265
AR20	4021B	ATP10	4061A	CV41	E1267	CV115	E1415
AR21	EBC33	ATP35	PVI-35	CV42	E1256	CV116	KR6/I
ARD2	DI	ATP75	PT6	CV44	E1155	CV117	E1417
ARD4	D42	ATP100	4069A	CV45	S130P	CV118	SP61
ARDD1	I0D1	ATS25A	807	CV46	8011	CV119	XJ
ARDD3	6H6	ATS70	4282B	CV49	3B/501A	CV120	MF
ARDD5	EB34	AU1	U18	CV51	E1320	CV121	V1920
ARH1	6L7	AU2	RG250	CV52	E1231	CV122	E1336
ARPI	PT2	AU3	U12/14	CV53	3A/146J	CV123	E1330
ARP2	SP2	AU3A	I561	CV54	V960	CV124	807
ARP3	9D2	AU4	U17	CV55	E1190	CV125	2043
ARP4	SP210	AU5	V1907	CV56	E1325	CV126	E1362
ARP5	VP2	AU6	GU50	CV57	E1271	CV127	S30A
ARP6	SP4	AU8	U22	CV58	E1273	CV128	SU750
ARP7	42MPT	AU12	U15	CV62	E1046	CV129	KRN2A
ARP8	AC4Pen	AU13	5Z4	CV63	E1323	CV130	KRN3
ARP9	Pen1340	AW2	7475	CV64	E1342	CV131	9D6
ARP9A	7D8	AW3	S130	CV65	Pen25	CV132	V885
ARPI0	PenA4	AW4	STV280/40	CV66	RL37	CV133	6C4
ARPI1	TSP4	AW5	ME41	CV69	E1326	CV135	EY91
ARPI2	VP23	AW6	EM31	CV71	OSGLIM	CV136	7D9
ARPI3	VP210	CV1	D051	CV72	V1120	CV137	EAC91
ARPI4	220IPT	CV2	E1228	CV73	I1E3	CV138	EF91
ARPI5	KTW63	CV3	AFN202	CV74	ESU74	CV139	6L34
ARPI6	6J7	CV4	E1229	CV75	4313C	CV140	6AL5
ARPI7	6F6	CV5	CV152	CV76	E1359	CV141	U4B
ARPI8	KT24	CV6	E1148	CV77	K TUBE	CV142	U2
ARPI9	SP41	CV8	E1356	CV78	E1137	CV143	U3
ARP20	SP42	CV9	AL60	CV79	E1379	CV144	U4
ARP21	Z62	CV12	E1191	CV80	VF01	CV145	U5
ARP22	I16/Pen	CV13	BT9B	CV81	VF08	CV147	U7
ARP23	MS/Pen	CV14	XN	CV82	3A/147J	CV148	U8
ARP24	220VPT	CV15	E1226	CV84	4033A	CV149	U7
ARP25	KT41	CV16	S25A	CV85	V2023	CV150	PK150
ARP26	KT44	CV18	DET19	CV86	V1507	CV152	GU21
ARP33	MSP4	CV19	EHT1	CV87	KRN2	CV153	E1411
ARP34	EF39	CV20	V1906	CV88	DV32	CV154	E1419
ARP35	EF50	CV21	VP41	CV89	E1380	CV155	E1190

Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.
CV158	KR3	CV233	B55	CV307	VCR530	CV403	FVD7
CV159	ALI	CV234	DV56	CV309	QV04-7	CV404	HR7
CV160	E1342	CV235	U23	CV310	NHPI	CV405	927
CV161	E1342	CV236	E1465	CV311	54/444	CV406	E1423
CV162	5Z094 or 52094	CV237	KR6/2	CV312	ESU74	CV407	VCRX221
CV163	5744WA	CV238	RK6/3	CV315	TY1-51	CV408	A1714
CV164	CG3E	CV240	ACT24	CV319	E1453	CV409	A1820
CV165	CS36A	CV242	GS18	CV321	KT66	CV410	K3A
CV166	GEX54/3	CV243	4045A	CV324	CV1628	CV411	GM5
CV167	TY4/500B	CV244	AF2	CV326	I5B	CV412	A800
CV168	XD60	CV245	4328D	CV327	EF52	CV413	GI50/20
CV169	XD61	CV248	GS16	CV328	L9	CV415	TT15
CV170	I25F7GT	CV249	4019A	CV329	6F33	CV416	6F17
CV171	W21 (4 PIN)	CV250	CMG25RS	CV335	VCR522B	CV417	EC91
CV172	E1468	CV251	MX57	CV336	VCR522C	CV418	MX2
CV173	EF55	CV252	ACR22	CV337	27M1	CV419	EC91
CV174	E1459	CV253	CS3A	CV338	E1524	CV420	VCRX277
CV175	XSG1-5	CV254	9L01A	CV339	24B2	CV421	CAT20C
CV176	XPI-5	CV256	NS2	CV343	V894	CV422	QS105/45
CV177	813	CV257	ACT22	CV344	E1323	CV423	255N7
CV178	E1458	CV258	E1273	CV345	I2E1	CV424	QQV06-40
CV180	KR4	CV259	E1495	CV346	EZ22	CV425	CGI-C
CV181	ECC32	CV260	SP61	CV347	EBC21	CV426	EY51
CV182	E1488	CV261	R10	CV349	V2030E	CV427	5D21
CV185	PM202	CV262	9MP6	CV352	EBC33	CV428	5B/251M
CV186	E1342	CV263	VX3026	CV353	M500	CV429	I2AEP6
CV187	UI9	CV264	API188	CV354	ME1005	CV430	29C1
CV188	7475	CV265	I9E2	CV357	DL65747	CV431	85A1
CV189	BS4	CV266	E1336	CV358	EF37A	CV432	ME1400
CV190	DLS10	CV267	E1336	CV359	NE17	CV433	BIC1E
CV191	E1494	CV268	E1330	CV360	NE18	CV434	QS75/60
CV192	E1481	CV269	VCR97	CV367	IN21B	CV435	GT11
CV199	NT99	CV271	V986	CV368	9-3	CV436	ACT25
CV200	MZ2-200	CV272	KR6/4	CV369	1B35	CV437	KT67
CV201	V630	CV273	5861	CV370	2J42	CV438	G120/1B
CV202	YF	CV275	V1042	CV371	19G6	CV439	22/11BXA
CV207	AC/P4	CV276	I1E2	CV372	3C45	CV440	I601ABC
CV208	I487	CV277	19G3	CV374	S3A	CV441	V1052
CV209	MX57	CV278	E1606	CV375	EA50	CV442	GEX35
CV211	V2030B	CV279	NG16	CV377	V1135C	CV443	CK505AX
CV212	LS594	CV281	X61	CV378	53KU	CV444	MZ1-75
CV214	E1531	CV283	6AL5	CV379	ACT19	CV445	51/260E
CV215	E1497	CV284	STV30/20	CV380	EF54	CV446	3Q/260E
CV216	VR150/30	CV285	VA35	CV382	T24/40JA	CV447	4078GA
CV217	KRN3	CV286	QS95/10	CV383	T24/40JB	CV448	GEX54
CV218	KRN3	CV287	ACT23	CV384	DET5	CV449	85A2
CV219	E1046	CV288	ACT23	CV385	DL71	CV450	EL38
CV220	631/PI	CV290	E1527	CV386	DF70	CV452	6AT6
CV221	E1516	CV292	E1481	CV387	DL72	CV453	6BE6
CV222	E1489	CV295	BS54	CV389	VCRX210	CV454	6BA6
CV223	KRN2A	CV296	DDR2	CV391	5B/255M	CV455	I2AT7
CV224	KRN2A	CV298	FA15	CV394	EM34	CV456	E1633
CV225	ACT17	CV299	V230A/IK	CV395	QS150/45	CV460	BS48
CV228	DV40B	CV302	ECH22	CV397	DET24	CV461	BS92
CV229	I336	CV303	EF22	CV398	715B	CV462	BS84
CV230	DV55	CV304	EL22	CV399	MH4	CV463	BS82
CV232	MF	CV305	EF51	CV400	3DE7	CV464	9L01A
		CV306	MX52	CV402	BS68	CV465	EF72

Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.
CV466	EF73	CV535	I2J5	CV593	GZ32	CV651	991
CV467	EF70	CV536	4I20/AA	CV594	6SH7	CV652	1603
CV468	EC70	CV537	I2SA7	CV595	6SH7	CV653	1611
CV469	EA76	CV538	I2SA7	CV596	2C45	CV654	1612
CV471	EL70	CV539	IB23	CV597	2X2A	CV655	1613
CV473	EY70	CV540	I2SC7	CV598	715C	CV656	1616
CV474	5643	CV541	IB3	CV599	I85I	CV657	1620
CV475	EF71	CV542	5J23	CV600	5CPI	CV658	1622
CV476	T92I	CV543	I2SK7	CV601	5BPI	CV659	1625
CV477	5899	CV544	I2SK7	CV602	3API	CV660	6AC7
CV486	V2046a	CV545	ACSP3	CV603	10	CV661	6AB7
CV487	CRT/5I	CV546	I2SQ7	CV604	30	CV662	8012
CV488	BS90	CV547	I2SQ7	CV605	32	CV663	8025
CV489	BT75	CV548	LP2	CV606	37	CV664	9002
CV490	I9H5	CV549	25A6	CV607	38	CV665	9003
CV491	I2AU7	CV550	25A6	CV608	41	CV666	9004
CV492	I2AX7	CV551	25L6	CV609	42	CV667	9005
CV493	6X4	CV552	25L6	CV610	45	CV668	35T
CV494	B12	CV553	25L6	CV611	56	CV669	279A
CV495	5802	CV554	D63	CV612	57	CV670	645
CV496	CG14	CV555	25Z5	CV613	58	CV676	726A
CV498	NEI7	CV556	QP25	CV614	75	CV677	701A
CV499	5B/256M	CV557	D42	CV615	76	CV678	702A
CV500	6T7	CV558	25Z6	CV616	77	CV679	703A
CV501	EBF32	CV559	25Z6	CV617	80	CV683	316A
CV502	LD210	CV560	TSP4	CV618	83	CV684	274B
CV503	5W4	CV561	35L6	CV619	84/6Z4	CV685	VR150-30
CV504	6U5	CV562	35L6	CV620	211	CV686	OC3
CV505	MTI6	CV563	DA30	CV621	801	CV687	446B
CV506	GL8023	CV564	35Z3	CV622	802	CV688	2C43
CV507	REL64	CV565	35Z3	CV623	803	CV689	700A
CV508	4B49	CV566	RG-2	CV624	804	CV690	RK48A
CV509	6V6G	CV567	35Z5	CV625	805	CV691	357A
CV510	6V6	CV568	35Z5	CV626	808	CV692	OZ4
CV511	6V6	CV569	ECC35	CV627	810	CV693	HF300
CV512	6W7	CV570	3Q/195E	CV628	811	CV694	I2SG7
CV513	4J53	CV571	50L6	CV629	814	CV695	700B
CV514	2J36	CV572	6X5	CV630	826	CV696	700C
CV515	6Y6	CV573	6X5	CV631	828	CV697	I2SJ7
CV516	3GPI	CV574	EZ35	CV632	829	CV698	I2SJ7
CV517	OZ4A	CV575	5U4	CV634	832	CV699	700D
CV518	AC/VP1	CV576	IB26	CV633	829A	CV700	I2SR7
CV519	Pen4DD	CV577	IB36	CV635	833	CV701	ESA892
CV520	VP2B	CV578	6A8	CV636	836	CV702	830B
CV521	R4410	CV579	6A8	CV637	837	CV703	I2K8
CV522	7B7	CV580	6A8	CV638	838	CV704	RK20A
CV523	I2Y4	CV581	6C5	CV639	843	CV705	ID5GP
CV524	TT12	CV582	6C5	CV640	860	CV706	6U7
CV525	I2A6	CV583	6G5	CV641	861	CV707	HK54
CV526	I2A6	CV584	GS46	CV642	872A	CV708	161
CV527	DA60	CV585	6C6	CV643	874	CV709	72
CV528	VA16	CV586	EL37	CV644	875A	CV710	368A
CV529	I2AH7	CV587	6Q7	CV645	876	CV711	32
CV530	G7IE	CV588	6Q7	CV646	879	CV712	38
CV531	I2CB	CV589	6Q7	CV647	884	CV713	IB27
CV532	GUII	CV590	6SJ7	CV648	885	CV714	C6A
CV533	CAT17C	CV591	6SJ7	CV649	956	CV716	8013A
CV534	I2J5	CV592	6SJ7	CV650	958	CV717	5R4GY

Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.
CV718	5FP7	CV777	ILC5	CV839	5GPI	CV900	7R7
CV719	2J2IA	CV778	ILC6	CV840	5H4	CV901	7Y4
CV720	723A	CV779	ILD5	CV841	5U4	CV902	7W7
CV722	725A	CV780	ILH4	CV842	5W4	CV904	892R
CV723	1619	CV781	ILN5	CV843	6AB5	CV905	9HP7
CV724	816	CV782	IR5	CV844	6AC5	CV906	1602
CV725	1B24	CV783	IS4	CV845	6AC5	CV907	12A
CV726	35Z3	CV784	IS5	CV846	6AC7	CV908	12A5
CV727	1N2I	CV785	IT4	CV847	6AF6g	CV909	12A7
CV728	IP5GT	CV786	IT5	CV848	6AG5	CV910	12A8
CV729	5V4	CV787	2A7	CV849	6AC7	CV911	12B8
CV730	6A3	CV788	832A	CV850	6AK5	CV913	12DP7
CV731	6F6	CV789	3C24	CV851	6B4	CV914	12DP7
CV732	6W4gt	CV790	2API	CV852	6C4	CV915	12FP7
CV733	REL8D	CV791	2B7	CV854	6C7	CV916	12H6
CV734	228A	CV792	2C22	CV855	6C2I	CV917	12J7
CV735	845	CV793	2C33	CV856	6G8	CV918	12K7
CV736	905	CV794	2D2	CV857	6H7	CV919	12SF5
CV737	906	CV795	2D4A	CV858	6J6	CV920	12SF5
CV738	953	CV796	2D13C	CV859	6J8	CV921	12SF7
CV739	3API	CV797	2D2I	CV860	6K5	CV922	12SH7
CV740	5MPI	CV798	2E22	CV861	6K5	CV923	12SJ7
CV741	5LPI	CV800	2J22	CV862	6L5	CV924	12SL7
CV742	FG67	CV801	2J54	CV864	6P7	CV925	12SN7
CV743	GET2	CV802	2C26	CV865	6SD7	CV926	4B35
CV744	GET4 $\frac{1}{2}$	CV803	2V3	CV866	6SJ7Y	CV927	12Z3
CV745	HK24	CV804	2V3	CV867	6SR7	CV928	13-4
CV746	468PI	CV805	50Y6	CV869	6V5gt	CV929	13SPA
CV747	6AC7	CV807	3A4	CV870	6V7	CV930	14F7
CV748	725A	CV808	3A5	CV871	6Z5	CV931	15
CV749	1N23A	CV809	3A/105B	CV872	6Z7	CV932	446A
CV750	0IA	CV810	3AE	CV873	6ZY5	CV933	15E
CV751	HY75	CV811	129I	CV874	7	CV934	15R
CV752	0A4	CV812	3B24	CV875	1642	CV936	24A
CV753	IA3	CV813	959	CV876	7A6	CV937	25A7
CV754	IA4P	CV814	3DPI	CV877	7A7	CV938	25AC5
CV755	IA5	CV815	3D6	CV878	7A8	CV939	25B6
CV756	IA5	CV816	3DPI	CV879	7B4	CV940	25B8
CV757	IA6	CV817	3EPI	CV880	7B5	CV941	HK24
CV758	1B4P	CV818	3Q4	CV881	7B5	CV942	25Y5
CV759	1B5	CV819	3Q5	CV882	7B6	CV943	26
CV760	1B7	CV820	3S4	CV883	7B8	CV944	27
CV761	1B22	CV821	4AI	CV884	7BP7	CV945	28D7
CV762	1C2I	CV822	4B24	CV885	7C5	CV946	28D7
CV763	ICA4	CV823	7A	CV886	7C5	CV947	31
CV764	ID5	CV824	4E27	CV887	7C6	CV948	32L7
CV765	ID7	CV825	4SHA	CV888	7D7	CV949	33
CV766	1E5GP	CV826	4THA	CV889	7D8	CV951	32A
CV767	IF4	CV828	4TPB	CV890	7E5	CV952	408I
CV768	IF5G	CV829	4TPB	CV891	7E6	CV953	32
CV769	IF6	CV830	4TSP	CV892	7E7	CV954	20K
CV770	IF7	CV831	5API	CV893	7F7	CV955	4409
CV771	IG5	CV832	5API	CV894	7G7	CV956	4602
CV772	IG6	CV833	89	CV895	7H7	CV957	32
CV773	IG6	CV834	5B/300B	CV896	7K7	CV958	26J
CV774	IH4	CV836	5BP4	CV897	7J7	CV959	20K
CV775	ILA6	CV837	12C8	CV898	7N7	CV961	NCI3
CV776	ILB4	CV838	5CP7	CV899	7Q7	CV964	E4205-B7

Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.
CV966	E6504-M16	CV1066	P61	CV1130	HL23	CV1195	KTW63
CV977	Twin CV55	CV1067	6J5	CV1131	4IDS	CV1196	ACSPenDD
CV979	DSL10	CV1068	STV280/40	CV1133	V960	CV1197	EC53
CV984	S2A	CV1069	STV280/80	CV1134	HVR2	CV1198	ACP4
CV986	15A	CV1070	7475	CV1135	E1148	CV1200	202
CV987	NC13A	CV1071	U52	CV1136	EF54	CV1201	4317
CV995	6AJ5	CV1072	GU50	CV1137	EC52	CV1202	304
CV996	EL32	CV1073	H63	CV1140	I2MD6	CV1205	E1007
CV997	3092	CV1074	6J7	CV1141	DPQ	CV1206	D060
CV998	2000T	CV1075	KT66	CV1142	MR75	CV1207	ES450
CV999	3C22	CV1076	DA41	CV1143	GTIA	CV1208	PM256
CV1000	4DI	CV1077	EM31	CV1144	BT19	CV1219	MZ1-100
CV1001	SU2150A	CV1078	DI	CV1145	BT9/A	CV1220	4033A
CV1002	E1192	CV1079	KT8	CV1147	BT35	CV1221	PZ1-75
CV1018	2155G	CV1080	4307A	CV1148	E1289	CV1222	ACT6
CV1019	PM2	CV1081	4052A	CV1149	BT41	CV1223	DET5
CV1020	220P	CV1082	220TH	CV1151	PM3	CV1235	DET12
CV1021	210LP	CV1083	210VPT	CV1152	PM4DX		(SPECIAL)
CV1022	220PA	CV1087	I4L	CV1153	PM254	CV1237	PM24D
CV1023	230XP	CV1088	832	CV1154	PM4DX	CV1238	PM24D
CV1025	DET25	CV1089	TVO3-10A	CV1155	DEQ	CV1240	PZ1-35
CV1027	210LF	CV1090	E1046	CV1156	DEQ	CV1246	PM202
CV1028	220VSG	CV1091	EF50	CV1158	PM14	CV1250	4279A
CV1029	ESU150	CV1092	EA50	CV1159	PM14	CV1252	4212E
CV1030	4060A	CV1095	954	CV1160	I04V	CV1253	E1161
CV1031	ESG250	CV1096	5B/502A	CV1161	I04V	CV1255	E1189
CV1032	220B	CV1097	ECR60	CV1163	PD220A	CV1256	E1232
CV1034	DET3	CV1098	E960T	CV1164	ACSG	CV1257	E1155
CV1035	QP21	CV1099	X66	CV1165	VMS4	CV1259	ESU450
CV1036	220PA	CV1100	KTW62	CV1166	P220	CV1260	ESU208
CV1037	MH4	CV1101	MHLD6	CV1167	PM24A	CV1261	RX3-120
CV1038	MHL4	CV1102	BL63	CV1168	PX4	CV1262	GU1
CV1039	1561	CV1103	Y63	CV1169	VMP4G	CV1263	RGI-125
CV1040	PX25	CV1104	PT15	CV1170	D41	CV1264	U18
CV1041	PM12M	CV1105	ML6	CV1171	AT4	CV1265	U15
CV1042	210LF	CV1106	9D2	CV1172	VMP4G	CV1266	U15
CV1043	210PG	CV1107	15D2	CV1173	354V	CV1267	U4020
CV1044	210DDT	CV1108	8D2	CV1174	KT42	CV1268	5Y3
CV1045	X56	CV1109	4DI	CV1177	KT42	CV1279	MU2
CV1046	PT25H	CV1110	S130	CV1175	AP4	CV1280	6L7
CV1047	TZ05-50	CV1111	V1907	CV1176	AP4	CV1281	KTW61
CV1048	2155G	CV1112	V1026	CV1177	4DI	CV1282	MSP4
CV1049	210SPT	CV1113	U17	CV1178	DA30	CV1283	SP4
CV1050	HL2	CV1114	E1024	CV1179	ML4	CV1284	MS/Pen
CV1051	Pen220A	CV1116	V872	CV1180	244V	CV1285	6N7
CV1052	EL32	CV1117	41MTL	CV1181	KT41	CV1286	6L6
CV1053	EF39	CV1118	KT2	CV1182	H42	CV1287	KT32
CV1054	EB34	CV1119	DDL4	CV1183	W42	CV1288	244V
CV1055	EBC33	CV1120	SU2150A	CV1184	A373	CV1289	1561
CV1056	EF36	CV1121	T41	CV1186	6F6	CV1290	SU2150A
CV1057	EK32	CV1122	41MXP	CV1187	D41	CV1291	HVR2
CV1058	EP60	CV1123	EF8	CV1188	N43	CV1296	MU14
CV1059	955	CV1124	MS/Pen	CV1189	AC6Pen	CV1300	10DI
CV1060	807	CV1125	MS/PenB	CV1190	ACP4	CV1301	6H6
CV1061	DET19	CV1126	4SH	CV1191	KTZ41	CV1302	D42
CV1062	TY1-50	CV1127	Pen46	CV1192	Z62	CV1303	PM1HF
CV1064	UI2/14	CV1128	GTIC	CV1193	X65	CV1304	LP2
CV1065	SP61	CV1129	MS/Pen	CV1194	20A1	CV1305	4DI

Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.
CVI306	HL23DD	CVI372	4069A	CVI444	42SPT	CVI540	33B/152M
CVI307	PMILF	CVI373	PY3-600	CVI445	4012A	CVI543	I2MD6
CVI308	TDD2A	CVI374	807	CVI446	4017B	CVI550	VT1A
CVI309	4019B	CVI375	EF85	CVI447	4030C	CVI551	VTIC
CVI310	KCI	CVI376	EF80	CVI448	4043C	CVI552	VX3B
CVI311	B406	CVI377	GZ34	CVI449	4064B	CVI553	ESU450X
CVI312	220RC	CVI379	20K	CVI450	4227A	CVI554	VT5B
CVI313	220LF	CVI380	20K	CVI451	4274A	CVI555	VU6A
CVI314	DLS10	CVI382	ACR10	CVI452	4300A	CVI557	VT9B
CVI316	4021B	CVI384	4IDS	CVI453	4378	CVI558	VT10D
CVI317	5625	CVI385	E4504/B/L6	CVI454	225DU	CVI559	VRI2C
CVI318	VS24	CVI386	ACR3	CVI455	411U	CVI560	VRI2F
CVI319	PM12V	CVI387	ACR4	CVI456	Pen383	CVI561	VT13B
CVI320	SP2	CVI388	ACR5	CVI457	VPI33	CVI562	VT13C
CVI321	9D2	CVI389	ACR6	CVI458	4IMP	CVI563	VRI4A
CVI322	SP2100	CVI393	ACR17	CVI459	MU2	CVI564	Vu16A
CVI323	VP2	CVI394	ACR18	CVI460	X41	CVI565	230XP
CVI324	SP4	CVI400	CIC	CVI461	U22	CVI566	VR24B
CVI325	42MPT	CVI401	CL33	CVI462	A915	CVI567	2C25
CVI326	AC4Pen	CVI402	CY31	CVI463	CBL31	CVI568	4062A
CVI327	Pen1340	CVI403	DD41	CVI464	EF39	CVI569	R3
CVI328	7D8	CVI404	EF36	CVI466	P57	CVI570	EK32
CVI329	PenA4	CVI405	E1199	CVI467	PY3-600	CVI571	VT58A
CVI330	TSP4	CVI406	HL41	CVI468	SP4	CVI572	807
CVI331	VP23	CVI407	Pen45	CVI469	Z22	CVI573	4074B
CVI332	VP21	CVI408	P41	CVI470	3P/270B	CVI574	SP41
CVI333	220IPT	CVI409	SP2	CVI471	4049A	CVI575	VU71A
CVI334	KT24	CVI410	TH2	CVI472	CMG25	CVI576	KT38
CVI335	SP41	CVI411	TH41	CVI473	CMG25	CVI577	E1143
CVI336	SP42	CVI412	TV4	CVI474	CE20	CVI578	EF50
CVI337	116/Pen	CVI413	UU6	CVI475	M501	CVI579	954
CVI338	220VPT	CVI414	VP41	CVI478	M501	CVI581	ECH35
CVI340	KT44	CVI415	4011A	CVI479	M501	CVI582	S130
CVI341	MSP4	CVI418	10D1	CVI482	M501	CVI585	T41
CVI342	QP25	CVI419	11D3	CVI483	M519	CVI586	HL23
CVI343	KTZ73	CVI420	4078A	CVI486	M519	CVI587	ECR35
CVI344	TP22	CVI422	3D/10A	CVI495	M528	CVI588	ECR30
CVI345	TP25	CVI423	9D2	CVI500	M528	CVI596	091
CVI347	ECH35	CVI424	20A1	CVI501	E1192	CVI600	CAT1
CVI349	RG5-500	CVI425	7D5	CVI502	KT32	CVI601	CAR1
CVI350	TB3/750	CVI426	EK2	CVI503	KT33C	CVI602	CAR4
CVI351	TB4/1250	CVI427	EF9	CVI504	V1901	CVI603	4014A
CVI352	EM80	CVI428	EBC3	CVI505	MH41	CVI604	SS1971
CVI353	0A81	CVI429	EL2	CVI506	ESP450	CVI605	4013C
CVI354	0A85	CVI430	ACSP3	CVI508	V1913	CVI606	CAT2
CVI355	ESU300	CVI431	ACT16	CVI510	E1242	CVI607	OC2.5
CVI356	U22	CVI432	CMG25	CVI518	09D	CVI608	U4
CVI359	ME41	CVI433	EC31	CVI522	E4013-B4	CVI609	SW7
CVI361	MZ05-20	CVI434	EM4	CVI525	E4205/C/7	CVI610	MT4
CVI363	DET16	CVI435	GU2	CVI526	3EGI	CVI611	MR4
CVI364	807	CVI436	HL2	CVI527	VLS492AG	CVI612	VT9B
CVI365	4282B	CVI437	E1143	CVI529	E4412/E/9	CVI614	ES1500A
CVI366	V248A	CVI438	KT61	CVI530	6LY1	CVI615	ESU1500
CVI367	V245	CVI439	MT9F	CVI535	EZ80	CVI618	ES250M
CVI368	V266	CVI440	MT9L	CVI536	1608ABA	CVI619	4212D
CVI369	4061A	CVI441	MT12A	CVI537	3ACP2	CVI620	DET6
CVI370	PVI-35	CVI442	MT14	CVI538	5J32	CVI621	ESW501
CVI371	PZI-35	CVI443	RI	CVI539	D.15	CVI622	4052A

Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.
CVI623	RGL250	CVI686	D418	CVI749	205D	CVI809	2J33
CVI625	RG3-250	CVI687	D418	CVI750	33A/100A	CVI810	3J34
CVI626	RG1-240A	CVI688	4033L	CVI751	34	CVI811	1D8
CVI627	5D/100A	CVI689	PAI	CVI752	35	CVI812	1E7
CVI628	GU8	CVI690	9A1	CVI753	35A5	CVI813	2DPI
CVI629	RG3-1250A	CVI691	DDL4	CVI754	35TG	CVI814	5LPI
CVI630	ESP450	CVI692	AC/P	CVI755	1626	CVI815	6Q5
CVI632	IN82	CVI694	3A/144A	CVI756	1629	CVI816	6Y3
CVI633	3V4	CVI695	DH30	CVI757	9001	CVI817	1G4
CVI634	XB2	CVI696	B21	CVI758	1L4	CVI818	1H5
CVI635	5A/163K	CVI697	X41	CVI759	2C26A	CVI819	6P5
CVI636	LS5	CVI698	A819	CVI760	2J26	CVI820	1H5
CVI637	LS5	CVI699	SP41	CVI761	3FP7	CVI821	1N5
CVI638	4101D	CVI700	SP41	CVI762	6AK6	CVI822	2J48
CVI639	4101E	CVI701	XLO	CVI763	6J4	CVI823	1N5
CVI640	4002D	CVI702	XP	CVI764	CE2	CVI824	1Q5
CVI641	4102E	CVI703	XW	CVI765	5664	CVI825	KT45
CVI642	DER	CVI704	57	CVI766	CX25	CVI826	1Q5
CVI643	E132	CVI705	58	CVI768	7076	CVI827	M510
CVI644	E1532	CVI706	287	CVI769	2A6	CVI828	M512
CVI645	E133	CVI707	2A5	CVI770	7A4	CVI829	1T5
CVI646	E1453	CVI708	80	CVI771	39/44	CVI830	1B3
CVI647	LS5B	CVI709	6D6	CVI772	47	CVI831	2A3
CVI648	4205E	CVI710	6C6	CVI773	82	CVI832	0A2
CVI649	6C5	CVI711	6B7	CVI774	112A/12A	CVI833	0B2
CVI650	LS58	CVI712	42	CVI775	36	CVI834	2A5
CVI651	G455B	CVI713	EF8	CVI776	6D7	CVI835	3B28
CVI652	P220A	CVI714	EF9	CVI777	7C7	CVI836	4B26
CVI653	KCI	CVI715	EB3C	CVI778	101D	CVI837	2B7
CVI655	4019B	CVI716	E1541	CVI779	102D	CVI838	QQZO4-15
CVI656	LS8	CVI717	4307A	CVI780	30TWIN	CVI839	6F13
CVI657	4020B	CVI718	ACTP	CVI781	310B	CVI841	BS52
CVI658	LS9B	CVI719	U22	CVI782	340A	CVI842	2G
CVI659	4022B	CVI720	XLI-5	CVI783	9JPI	CVI843	2Y2
CVI660	LS7	CVI721	XPI-5	CVI784	6AK7	CVI844	GS3/B
CVI661	DL	CVI722	A901	CVI785	1N26	CVI846	5T4
CVI662	P215	CVI723	V257	CVI786	3K33	CVI847	19H4
CVI663	4021B	CVI724	5A/102D	CVI787	4C35	CVI848	20A2
CVI664	B406	CVI726	5A/105A	CVI788	3J31	CVI849	5W4
CVI665	DH	CVI727	Z22	CVI789	5FPI4	CVI850	6L19
CVI666	P610	CVI728	WE262B	CVI790	7Z4	CVI851	5X4
CVI667	LS8A	CVI731	S130	CVI791	5LPI	CVI852	5X4
CVI669	P625	CVI732	ML4	CVI792	1960	CVI853	6P25
CVI670	HLI320	CVI733	4018AG	CVI793	724B	CVI854	5Y3
CVI671	4021A	CVI734	3Q/213E	CVI794	959	CVI855	UU9
CVI672	PEN36C	CVI735	DC2P	CVI795	723A/B	CVI856	5Y3
CVI673	PM2HL	CVI737	MW6-2	CVI796	DW4	CVI857	5Y4
CVI674	AC/S2Pen	CVI738	R5161	CVI797	4081A	CVI858	BS62
CVI675	N43	CVI739	GC10/4B	CVI798	2051	CVI859	BS4A
CVI676	LS8A	CVI740	GS12C	CVI799	350B	CVI860	30D5
CVI677	AC52	CVI741	EL34	CVI800	1A7	CVI861	5Z3
CVI678	HLA2	CVI742	BK44	CVI801	GS118	CVI862	6AQ5
CVI679	DA30	CVI743	BS64	CVI802	1A7	CVI863	5Z4
CVI680	PM202	CVI744	15L01A	CVI803	1C5	CVI864	5Z4
CVI681	TSP4	CVI745	62BT	CVI805	1C5	CVI865	6R4
CVI683	MKT4	CVI746	30C12PI	CVI806	1D5	CVI866	M503
CVI684	APP4C	CVI747	M505	CVI807	2J31	CVI867	6A6
CVI685	APP4C	CVI748	TTR31MC	CVI808	2J32	CVI868	5T01A

Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.
CV1869	I2T01A	CV1937	6J7	CV2003	7D9	CV2175	DG7-5
CV1870	6A7	CV1938	6K6	CV2004	6AL5	CV2179	E2134
CV1871	K307	CV1939	37X50	CV2005	6AL5	CV2180	19H4
CV1873	6AB7	CV1940	6K6	CV2006	12AU7	CV2181	BS104
CV1876	1852	CV1941	6K7	CV2007	12AU7	CV2183	X661
CV1878	6AD7	CV1942	6K7	CV2008	8054	CV2185	88D
CV1879	HP410I	CV1943	6K7	CV2009	V738	CV2187	Z239/IG
CV1880	7BM1A	CV1944	6K8	CV2010	6J6	CV2188	W7/2D
CV1882	6AG7	CV1945	6K8	CV2011	12AU7	CV2189	V240C/2K
CV1883	4H/180E	CV1946	6K8	CV2014	5763	CV2190	V233A/IK
CV1884	33A/158M	CV1947	6L6	CV2015	DDR2	CV2191	DG13-2
CV1885	6B5	CV1948	6L6	CV2101	DF72	CV2192	9MW5AX
CV1886	EC80	CV1949	6D4	CV2102	DL75	CV2193	89D
CV1887	6B6	CV1950	6L7	CV2103	DF73	CV2194	G400/1K
CV1889	TSY4-500	CV1951	6L7	CV2104	DAF70	CV2195	EF91
CV1891	6B7	CV1953	6N6	CV2105	DF70	CV2199	GC10A
CV1892	2K28	CV1954	6N6	CV2106	DL66	CV2201	E2043
CV1893	6B8	CV1955	EF91	CV2107	DF66	CV2202	XE2
CV1894	6B8	CV1956	6N7	CV2108	9M06A	CV2203	FX215
CV1895	STV/70/60	CV1957	6N7	CV2110	E2004	CV2208	G50/IG
CV1896	6C8	CV1958	6N7	CV2115	E2004	CV2209	6F33
CV1897	4J34	CV1959	50C5	CV2124	BK24	CV2210	5544
CV1898	4J35	CV1960	6R6	CV2125	BD78	CV2212	13D3
CV1899	6L18	CV1961	12AU6	CV2126	3V/42DB	CV2213	NT2
CV1900	6D6	CV1962	6R7	CV2127	6CH6	CV2214	3B/240M
CV1901	6F11	CV1963	6R7	CV2128	6AJ8	CV2215	5545
CV1902	6D8	CV1964	6R7	CV2129	5763	CV2216	30E8/PI
CV1903	592	CV1966	6SA7	CV2130	TT16	CV2217	6K25
CV1904	CAA322	CV1967	6SA7	CV2131	5022	CV2218	6157
CV1905	4-65A	CV1969	6SC7	CV2132	90AV	CV2220	5B/257M
CV1906	6E5	CV1970	6SC7	CV2133	90CG	CV2221	V235A-1K
CV1907	CS2-C	CV1971	IT4	CV2134	90CV	CV2223	G10/371K
CV1908	6F5	CV1972	6SF5	CV2135	8D5	CV2224	G1/371K
CV1909	6F5	CV1973	6SF5	CV2136	6BW6	CV2225	150B2
CV1910	6F5	CV1974	6S7	CV2138	GM4	CV2229	M502A
CV1911	6F6	CV1975	6S7	CV2139	EHM2	CV2231	E2266
CV1912	6F6	CV1976	MV6-5	CV2140	B6	CV2232	DDX52
CV1913	CS44X	CV1977	UL41	CV2141	B6E	CV2233	G5H
CV1914	4J31	CV1978	6SG7	CV2142	B12E	CV2234	X662
CV1915	6F7	CV1979	61BT	CV2143	B24	CV2235	EY84
VC1916	4J33	CV1980	185BT	CV2144	B24E	CV2237	1AD4
CV1917	6F8	CV1981	6SK7	CV2145	M6	CV2238	5672
CV1918	6F8	CV1982	6SK7	CV2146	DM6	CV2239	5676
CV1919	6F4	CV1984	6SC7	CV2147	G24H	CV2240	3B4
CV1920	6LD20	CV1985	6SL7	CV2148	GM5B	CV2241	DY70
CV1921	U24	CV1986	6SN7	CV2149	GM1B	CV2245	33/160E
CV1924	TY2-125	CV1988	6SN7	CV2150	MX103	CV2253	ME1501
CV1926	6G6	CV1989	SD6	CV2151	MX105	CV2254	5678
CV1927	B142	CV1990	6SQ7	CV2152	MX107	CV2256	X662
CV1928	12BA6	CV1991	6SQ7	CV2153	MX108	CV2257	UDI66C
CV1929	6H6	CV1992	1267	CV2159	BR153	CV2258	C43B
CV1930	6H6	CV1993	6SS7	CV2160	ESU77	CV2259	DL68
CV1931	6H6	CV1995	6ST7	CV2161	K301	CV2260	DF64
CV1932	6J5	CV1996	6ST7	CV2162	12L01A	CV2263	K305
CV1933	6J5	CV1999	IV	CV2164	K302	CV2266	CC3L
CV1934	6J5	CV2000	EF91	CV2166	4J50	CV2270	90AG
CV1935	6J7	CV2001	EF91	CV2173	G10H	CV2271	GC10B
CV1936	6J7	CV2002	7D9	CV2174	G240/2D	CV2273	K312

Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.
CV2274	BS114	CV2504	41MHL	CV2567	205F	CV2629	350A
CV2275	DC70	CV2505	41MPG	CV2569	210DET	CV2630	351A
CV2276	Z319	CV2506	41MPT	CV2570	210HF	CV2631	352A
CV2277	E222I	CV2507	IU4	CV2571	210HL	CV2632	354A
CV2282	K308	CV2508	41STH	CV2572	450TH	CV2633	362A
CV2284	4J50	CV2509	41FP	CV2573	565I	CV2634	367
CV2287	G10H	CV2510	I Z2	CV2574	210VPA	CV2636	375A
CV2288	DL66	CV2511	420T	CV2575	5670	CV2637	388A
CV2289	U37	CV2512	420TDD	CV2576	211SP	CV2638	393A
CV2291	I909A	CV2514	43	CV2577	26A7	CV2639	394A
CV2293	XB-I	CV2516	2C39a	CV2578	5687	CV2640	405BU
CV2295	3E29	CV2517	2E30	CV2579	218	CV2642	417A
CV2296	NSP2	CV2518	4B32	CV2580	220C	CV2643	2C40
CV2300	3A4	CV2519	4X150A	CV2581	2200T	CV2644	460BU
CV2301	E4412/C/9	CV2520	5C22	CV2582	220VS	CV2645	RI
CV2302	ICPI	CV2521	6AH6	CV2584	231D	CV2647	532
CV2304	K324	CV2522	6AS6	CV2585	39	CV2648	632A
CV2306	BS122	CV2523	6AS7G	CV2586	240B	CV2650	12AY7
CV2307	BS120	CV2524	6AU6	CV2587	242C	CV2651	707B
CV2308	BS116	CV2525	6AV6	CV2588	244A	CV2652	709A
CV2309	BS118	CV2526	6AV6	CV2589	250TH	CV2653	714A
CV2310	GEX64	CV2527	6BA7	CV2591	100TH	CV2654	715A
CV2315	C12B	CV2528	45DS	CV2592	256B	CV2655	715B
CV2316	6260B	CV2529	45IU	CV2593	257A	CV2656	724A
CV2317	6260C	CV2530	45Z5	CV2594	258B	CV2657	800
CV2322	BR161	CV2531	46	CV2595	259A	CV2658	806
CV2323	BR179	CV2532	49	CV2597	262A	CV2659	3D21A
CV2324	CR176	CV2533	50	CV2598	264A	CV2660	809
CV2329	4004B	CV2534	50L6	CV2599	264C	CV2661	812
CV2331	DL64	CV2535	53	CV2600	267B	CV2662	5639
CV2338	F2	CV2536	53A	CV2601	271A	CV2663	815
CV2343	K335	CV2537	55	CV2602	272A	CV2664	822
CV2347	5B/258M	CV2538	59	CV2603	274A	CV2665	825
CV2348	5886	CV2539	61P	CV2604	275A	CV2666	829B
CV2349	EN30	CV2540j	63D	CV2605	282A	CV2668	846
CV2352	DG16-21	CV2541	71A	CV2606	284	CV2669	849
CV2353	R6010	CV2542	72	CV2607	284D	CV2670	849H
CV2354	R6015	CV2543	73	CV2608	300A	CV2671	851
CV2358	W7/ID	CV2544	78	CV2609	330A	CV2672	852
CV2360	5A6	CV2545	79	CV2610	3030	CV2673	852
CV2361	DL69	CV2546	81	CV2611	04TH	CV2674	863
CV2362	M525	CV2547	83V	CV2612	307A	CV2675	864
CV2368	M525	CV2548	84	CV2613	310A	CV2676	865
CV2370	3S4	CV2549	85	CV2614	311A	CV2678	5799
CV2371	DF61	CV2550	100T	CV2615	313C	CV2679	866Jr
CV2373	M502A	CV2551	100TH	CV2616	314A	CV2680	868
CV2374	GD60	CV2552	100TH	CV2617	323A	CV2683	878
CV2375	GD100	CV2553	101F	CV2618	327A	CV2685	880
CV2376	M521	CV2554	111A	CV2619	328A	CV2686	889
CV2383	BR191	CV2556	117L7	CV2620	329A	CV2687	889R
CV2384	ZS10C	CV2557	117N7	CV2621	330B	CV2688	891R
CV2389	CXTI	CV2558	117Z6	CV2622	331A	CV2689	893R
CV2390	3A4	CV2560	2J51	CV2623	332A	CV2690	904V
	DL93	CV2561	122A	CV2624	337A	CV2691	913
CV2500	35Z4	CV2562	164V	CV2625	338A	CV2692	918
CV2501	40	CV2563	204A	CV2626	346A	CV2693	10KP7
CV2502	41FP	CV2565	2050	CV2627	349A	CV2694	930
CV2503	41MH	CV2566	205E	CV2628	349B	CV2695	931

Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.
CV2696	931A	CV2768	8003	CV2837	APP4G	CV2905	3J/170E
CV2697	935	CV2769	9006	CV2839	AR300	CV2907	DFI
CV2698	5896	CV2770	13077	CV2840	5UP7	CV2908	3J/260E
CV2699	6088	CV2772	23043	CV2841	ARPI2T	CV2909	DH73
CV2700	957	CV2773	68503	CV2842	6C4W	CV2910	DK1
CV2701	958A	CV2774	68504	CV2843	6J6W	CV2911	DL2
CV2704	7E5	CV2775	68506	CV2844	6X4W	CV2912	DL63
CV2705	1203	CV2776	68510	CV2847	5704	CV2913	DLSI
CV2706	7C4	CV2777	4B28	CV2848	CK707	CV2914	IB40
CV2707	1231	CV2778	2J21A	CV2849	K105I	CV2916	IN25
CV2709	1R4	CV2779	4B36	CV2850	AT200A	CV2918	IN28
CV2710	3D6	CV2786	26J	CV2851	3D22	CV2919	IN43
CV2711	1500T	CV2788	NT13	CV2852	2J56	CV2920	E1148
CV2712	1609	CV2789	9LP7	CV2853	RZI-250	CV2923	IN69
CV2713	1610	CV2790	C1K	CV2854	6AN5	CV2924	IN70
CV2714	1614	CV2791	K332	CV2855	6K4	CV2925	EBF2
CV2715	1630	CV2792	2K25	CV2856	IN23B	CV2926	EBL31
CV2716	65C7	CV2793	2J50	CV2857	IN23BM	CV2927	EC50
CV2717	1729	CV2794	C10SS/2G	CV2858	3B24W	CV2928	IN81
CV2718	1876	CV2795	1L4	CV2859	5846	CV2929	ECH3
CV2719	1924	CV2796	6L6WGB	CV2860	AZI	CV2930	ECH33
CV2721	6CJ6	CV2797	5894A	CV2861	AZ2	CV2931	2B22
CV2722	3025	CV2798	QQV03-10	CV2862	AZ31	CV2932	2V42
CV2723	869B	CV2799	QQV03-20	CV2864	B21	CV2933	2C46
CV2725	O9	CV2800	A40	CV2865	B30	CV2934	3BP1A
CV2726	6CK6	CV2801	A40/N3	CV2866	2C51W	CV2935	5JPI
CV2727	26D	CV2803	2915	CV2867	BU100/6	CV2936	4B22
CV2728	29D	CV2804	A915A	CV2868	CIA	CV2937	6A05
CV2729	E80F	CV2805	A294	CV2869	3JP7	CV2938	EL33
CV2730	5800	CV2806	AC/2HL	CV2870	CC3D	CV2939	6F4
CV2731	63DS	CV2807	AC2HL	CV2871	CAT6	CV2940	EL36
CV2733	3951	CV2808	AC2Pen	CVS872	CAT9	CV2941	EL40
CV2734	4003A	CV2809	AC5Pen	CV2874	1005	CV2942	EMI
CV2735	4015A	CV2811	AC/HL	CV2875	CL4	CV2943	ESU76
CV2738	RG1-240	CV2812	AC/HL	CV2876	2D21W	CV2944	ESUI500
CV2742	114	CV2813	AC/HLDD	CV2877	6AK5W	CV2945	ESU75
CV2743	4033AF	CV2814	5D21	CV2878	CRT1	CV2946	ESUI50
CV2744	4J34	CV2815	ACP	CV2879	CRT1	CV2947	ESU300
CV2745	4050AG	CV2816	3JP12	CV2880	CRT4/I	CV2948	ESU450
CV2746	4064A	CV2817	6L6GA	CV2882	6AL5W	CV2949	F123A
CV2747	6U5G	CV2818	AC/PT8	CV2883	6A05W	CV2950	129B
CV2748	5Z4GT	CV2819	AC/S	CV2884	6AS6	CV2952	FA13
CV2749	4081	CV2820	AC/SPI	CV2885	54NCP11	CV2953	FA14
CV2750	89J	CV2821	ECC33	CV2886	M2H	CV2954	FC2A
CV2751	4096AB	CV2822	AC/SG	CV2887	DACI	CV2955	FC4
CV2752	4PR60A	CV2823	AC/SP3	CV2888	EL31	CV2956	FC13C
CV2753	5684	CV2824	AC/SPen	CV2889	DD620	CV2957	FG17
CV2754	5685	CV2825	ACT6	CV2890	DDT	CV2958	FG27A
CV2755	4251AX	CV2826	1B63A	CV2891	DE5	CV2959	3B21
CV2756	4260A	CV2827	12C8gt	CV2892	DE5B	CV2960	FP54
CV2759	4304	CV2829	293A	CV2895	DET15W	CV2961	IN54A
CV2760	430B	CV2830	AC/TH1	CV2896	52CG	CV2962	IN38A
CV2761	4304BB	CV2831	2C51	CV2897	7MB1A	CV2963	4D21
CV2762	4316A	CV2832	AC/VP2	CV2898	DET8	CV2964	5D22
CV2764	4606	CV2833	AF3	CV2899	DET10	CV2965	RL7076-2A
CV2765	4673	CV2834	AGT1	CV2900	DET10	CV2966	EY86
CV2766	4687	CV2835	5R4WGY	CV2901	EF86	CV2967	8020
CV2767	4960	CV2836	APP4G	CV2903	OA2	CV2968	7F8

Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.
CV2969	GT1	CV3530	KTZ73	CV3594	717A	CV3654	PT11
CV2970	5656	CV3531	L2	CV3595	721A	CV3655	12SP7
CV2971	5675	CV3532	L21	CV3596	726B	CV3656	PT425
CV2972	5876	CV3533	L22DD	CV3597	726B	CV3657	PV05-15
CV2973	GU7	CV3534	L30	CV3599	829B	CV3658	PV1-35
CV2974	IN72	CV3535	C14HM	CV3600	202PI	CV3666	125W7
CV2975	6BQ5	CV3536	LS408A	CV3601	7193	CV3667	RG1-250
CV2976	NE2	CV3537	L500	CV3602	5J26	CV3668	12SY7
CV2977	H2	CV3538	L610	CV3604	GL464	CV3669	2K48
CV2978	H12	CV3539	6024	CV3605	GL464	CV3670	RG4-1000
CV2979	H30	CV3540	HT415	CV3606	5J29	CV3671	RK25
CV2980	DM70	CV3541	LS6A	CV3607	NP90	CV3672	RK28
CV2981	H410	CV3542	LS532	CV3608	5J30	CV3673	RK28A
CV2982	H610	CV3543	4D32	CV3609	5517/ CK1017	CV3674	RK31
CV2983	DL94	CV3545	5939	CV3610	5663	CV3675	9004
CV2984	6080	CV3546	MHD4	CV3611	5586	CV3676	2J42
CV2985	HD24	CV3547	MHI4	CV3612	5686	CV3677	RK47
CV2986	HD203A	CV3548	1B24A	CV3613	6AR6	CV3678	2BP1
CV2987	HF100	CV3549	1B38	CV3614	6BL6	CV3679	RK49
CV2988	HF200	CV3550	1B41	CV3615	6BM6	CV3680	RK60
CV2989	HK354E	CV3551	1N38	CV3616	6BN6	CV3681	RK62
CV2990	6136	CV3552	MPT4	CV3618	6L6wga	CV3683	RKR47
CV2991	HL2	CV3553	MS4B	CV3619	6SJ7wgt	CV3685	QK283
CV2992	6106	CV3554	MPT42	CV3620	P220	CV3686	QK284
CV2993	KU25	CV3555	IQ22	CV3621	P410	CV3687	4J49
CV2994	HL23	CV3557	MR300	CV3622	P610	CV3688	2C33
CV2995	HL23DD	CV3558	MR300/E	CV3623	PA40	CV3689	3B29
CV2996	HL41DD	CV3559	2C53	CV3624	PE7B	CV3690	RZ1-150
CV2997	HL63	CV3560	2J51	CV3625	PE8	CV3691	S23
CV2998	HL133	CV3561	MS/Pen	CV3626	PenB4	CV3692	S23
CV2999	HL133DD	CV3562	MSP41	CV3627	6SN7wgt	CV3693	10KP7
CV3500	HL210	CV3563	MT11SW	CV3628	1B35A	CV3694	S130A
CV3501	HL610	CV3564	MT12	CV3629	6130	CV3695	S215
CV3502	HL1320	CV3565	ME41	CV3630	Pen44	CV3696	S215A
CV3503	HLDDI320	CV3567	MUI	CV3631	Pen45DD	CV3697	125X7gt
CV2505	HY114B	CV3569	4J52	CV3632	6131	CV3698	S610
CV3506	HY615	CV3570	MU4250	CV3633	Pen231	CV3699	S693
CV3508	6208	CV3571	MVSPen	CV3634	Pen428	CV3702	SG215
CV3509	1N31	CV3572	MVSPenB	CV3635	Pen1340	CV3703	SP4B
CV3510	4B31	CV3573	MZ05-20	CV3636	Pen1346	CV3704	SPI3C
CV3511	371B	CV3574	MZ1/76	CV3637	7BP7A	CV3705	S691
CV3512	5696	CV3575	3B26	CV3638	PenA4	CV3706	S796
CV3514	K8140824	CV3576	MX40	CV3639	6F4	CV3707	6AL7gt
CV3515	KB2	CV3577	25A7gt	CV3640	PJ8	CV3709	STVI50/200
CV3516	KK2	CV3578	PM22D	CV3641	PM1HL	CV3710	AR63
CV3517	5933	CV3579	PT5E	CV3642	PMILF	CV3711	N78
CV3518	5948/1754	CV3580	304TL	CV3643	PM2A	CV3712	STV280/80A
CV3519	KT30	CV3581	V1501	CV3644	726C	CV3714	822SPec
CV3520	KT31	CV3582	VP4B	CV3645	PM2DX	CV3715	SW5
CV3521	5949/1907	CV3583	5HP1	CV3646	845W	CV3719	SW7
CV3522	6079	CV3584	21/2	CV3647	PM22A	CV3721	T4D
CV3523	6146	CV3586	471A	CV3648	PM24E	CV3722	T20
CV3524	GI/235G	CV3687	705A	CV3649	PM22	CV3723	T41
CV3525	IN21C	CV3588	706A	CV3650	12AY7	CV3724	T200
CV3526	EL85	CV3589	707A/B	CV3651	12SH7gt	CV3725	GL446
CV3527	KTW73	CV3590	708A	CV3652	PT5	CV3726	TDD2A
CV3528	M513	CV3592	UX6653	CV3653	PT6	CV3727	TDD4
CV3529	KTZ41	CV3593	713A			CV3729	IN47

Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.
CV3730	TMC15B	CV3791	VP21	CV3854	RS47	CV3916	5647
CV3731	TMC16B	CV3792	VP23	CV3855	RS329	CV3917	5703
CV3732	TMC20B	CV3793	VP24	CV3856	RS330	CV3918	5JP2A
CV3733	3KPI	CV3794	VP210	CV3857	RS283A	CV3919	U82
CV3734	6X5wgt	CV3795	VP215	CV3858	RS18	CV3920	A2196
CV3735	TP26	CV3796	VPI322	CV3859	RV271A	CV3921	A2244
CV3736	KI105P2	CV3797	V944A	CV3860	RS282	CV3923	IN21B
CV3737	QK353	CV3798	OA3	CV3861	RS281	CV3924	6AC7w
CV3738	VXR130	CV3799	OB3	CV3862	RS55	CV3926	7C23
CV3739	TX3-200	CV3800	VS2	CV3863	RS289	CV3927	12K8
CV3740	TX5-400	CV3802	VS24	CV3864	RS389	CV3928	5636
CV3741	TZ2-300	CV3803	VS24	CV3865	RS288	CV3929	5840
CV3742	TZ20	CV3804	W21	CV3866	RS203	CV3930	5718
CV3743	U5	CV3805	W30	CV3867	RSQ15/40	CV3931	5906
CV3744	U6	CV3806	W31	CV3868	RSQ15/5	CV3932	5977
CV3745	IB58	CV3808	6T4	CV3869	RSQ15/5	CV3933	5783
CV3746	UI4	CV3809	807w	CV3870	RGQ10/4D	CV3934	IN34A
CV3747	UI5	CV3810	WD30	CV3871	RS254	CV3935	14R7
CV3748	2X2	CV3812	IP31	CV3872	RS255	CV3936	14S7
CV3749	576	CV3813	8A	CV3873	RS566	CV3937	14R7
CV3750	U22	CV3815	3BZ2	CV3874	ATR388	CV3938	12CS7gt
CV3751	U21	CV3816	X21	CV3875	KU54	CV3939	6BM6a
CV3752	U30	CV3817	X21	CV3876	SAL39	CV3940	2C39
CV3753	U31	CV3818	X22	CV3877	1B56	CV3941	3RPI
CV3754	U50	CV3819	X24	CV3878	2-150D	CV3942	5692
CV3755	5755	CV3820	X24	CV3879	4-400A	CV3943	5852
CV3756	U600	CV3021	X31	CV3880	4-100A	CV3944	2J30
CV3758	UR3C	CV3822	X31	CV3881	EB41	CV3945	2K45
CV3759	R2	CV3823	X41	CV3882	EBC41	CV3946	3WP1
CV3760	UU5	CV3825	X63	CV3883	EAF42	CV3947	4J54
CV3761	UU7	CV3826	X65	CV3884	ECC40	CV3948	4J55
CV3762	VI20	CV3827	12C8gt	CV3885	EF40	CV3949	4J56
CV3763	VI23B	CV3828	X66	CV3886	EF41	CV3950	4J57
CV3765	V226	CV3829	293a	CV3887	EF42	CV3951	4J58
CV3766	V312	CV3830	XH1.5	CV3888	ECH42	CV3952	4J59
CV3767	V339	CV3831	XL2	CV3889	EL41	CV3953	4J78
CV3768	V503	CV3832	XP2	CV3890	EL42	CV3954	5CP7
CV3769	V877	CV3833	XSG2.OV	CV3891	EZ40	CV3955	5CP12
CV3770	V955	CV3834	XW2	CV3892	AZ41	CV3956	719A
CV3772	V970	CV3835	Z21	CV3893	4X150G	CV3957	1258
CV3773	VI010	CV3836	Z21	CV3894	6BF7	CV3958	5657
CV3774	VI020	CV3837	Z21	CV3895	5702	CV3959	5FP7A
CV3775	VI021	CV3838	Z62	CV3896	5784	CV3960	5783
CV3776	VI023	CV3839	Z66	CV3897	5787	CV3961	6111
CV3777	VI029	CV3840	TTR31MR	CV3898	5829	CV3963	559
CV3778	VI105	CV3841	6FI	CV3899	5932	CV3964	354
CV3779	4J26	CV3842	5J29	CV3900	5963	CV3965	2C46
CV3780	4J27	CV3843	5J30	CV3901	6161	CV3966	QK428
CV3781	4J28	CV3844	5J31	CV3902	6002	CV3967	IN63
CV3782	4J29	CV3845	RS366	CV3903	QK338	CV3968	3DPIA
CV3783	4J30	CV3846	RS261	CV3904	2K41	CV3969	577
CV3784	5B/102A	CV3847	RS250	CV3905	5847	CV3970	5721
CV3785	VMP4G	CV3848	RS260	CV3906	6117	CV3971	89L
CV3786	VMP4G	CV3849	RS217	CV3907	720C	CV3972	6095
CV3787	VP2	CV3850	RS207	CV3908	6BH6	CV3973	6AC7Y
CV3788	VP4	CV3851	RS253	CV3909	6BJ6	CV3974	6AS7Y
CV3789	5842	CV3852	RS285	CV3912	1U5	CV3975	6236
CV3790	VPI3C	CV8853	RS15	CV3915	8025A	CV3976	M509

Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.
CV3977	IN35	CV4039	6062	CV5038	6BC4	NR46	D41
CV3978	6AG7Y	CV4043	6061	CV5039	6BL7	NR47	PX25
CV3979	OD3W	CV4044	6443	CV5040	6BQ6	NR48	EBC33
CV3980	12SR7GT	CV4045	F/6061	CV5041	6CL6	NR49	EF36
CV3981	G553	CV4047	G400/2G	CV5042	12BH7	NR50	AT4
CV3982	M506	CV4048	QS1212	CV5043	811A	NR51	VMP4G
CV3983	12SW7GT	CV4049	F/5726	CV5044	5836	NR52	354V
CV3985	6SL7WGT	CV4050	F/5654	CV5045	5837	NR53	KT42
CV3986	6021	CV4051	F/6158	CV5046	5844	NR54	AP4
CV3987	5644	CV4052	QS1202	CV5047	G7B	NR54A	AP4
CV3988	6442	CV4053	QS1203	CV5048	V239C/IK	NR55	4DI
CV3989	6AN4	CV4054	F/5654	CV5049	V241C/IK	NR56	DA30
CV3990	2E26	CV4055	6132	CV5050	212-G11A	NR57	ML4
CV3991	4X150D	CV4056	F/6132	CV5051	HD2016A	NR58	244V
CV3992	HD6002	CV4058	6C4WA	CV5053	6098CT	NR59	KT41
CV3993	IN67A	CV4063	6516	CV5054	6390	NR60	H42
CV3994	IV2	CV4066	M8190	CV5055	EM.81	NR61	W42
CV3995	6CB6	CV4067	M8167	CV5056	A2094	NR64	KTW62
CV3996	U709	CV4069	F/6158	CV5057	5702WA	NR65	MSP4
CV3997	JP9-15	CV4080	M8999	CV5058	5784WA	NR66	D41
CV3998	E180F	CV5001	601C	CV5059	5829WA	NR67	6L7
CV3999	MW22/22	CV5002		CV5060	Z759	NR68	6Q7
CV4001	F/6063	CV5003	BU28/4	CV5061	7YP2	NR69	Y63
CV4002	F/6064	CV5004	3JP2	CV5062	5841	NR70	MS/Pen
CV4003	12AU7	CV5005	6110	CV5065	6U8	NR71	MS/PenT
CV4004	6057	CV5006	6021	CV5066	BL25	NR72	N43
CV4005	6X4	CV5007	6112	CV5067	6SH7L	NR73	6N7
CV4006	6059	CV5008	6080WA	CV5068	ES75H	NR74	PVI-35
CV4007	6AL5W	CV5009	6203	CV5069	6621	NR75	ACP4
CV4008	5719	CV5010	5644	CV5070	5FP11	NR76	KTZ41
CV4009	6BA6W	CV5011	TH1657A	CV6008	2B41	NR77	6L6
CV4010	5654	CV5012	IN23C	NGT1	DPQ	NR78	6C5
CV4011	6AS6W	CV5013	IN23CR	NGT2	GTIC	NR78A	L63
CV4012	5750	CV5014	IN78	NGT4	GTIA	NR79	Z62
CV4013	5670	CV5015	IN53	NGT121	T41	NR80	E1148
CV4014	6064	CV5016	IN32	NGT128	GTIC	NR81	6K7
CV4015	6065	CV5017	450TL	NR15	PM3	NR82	X65
CV4016	5814	CV5018	4J52A	NR15A	PM4DX	NR83	6J7
CV4017	5751	CV5019	QK387	NR16	PM254	NR84	20AI
CV4018	2D21W	CV5020	QK388	NR16A	PM4DX	NR85	6F6
CV4019	6AQ5W	CV5021	6V3A	NR18	DEQ	NR86	KTW63
CV4020	OA2	CV5022	CS31A	NR22	PM14	NR87	ACSPenDD
CV4021	3B24WA	CV5023	{ 6D4 mod./ AFX212	NR23	PM14	NR94	ACP4
CV4022	6135			NR26	MHL4	NS1	STV280/80
CV4023	6AU6WA	CV5024	MX-408/U	NR27	104V	NS3	202
CV4024	12AT7WA	CV5025	XB2	NR27A	104V	NS4	4713
CV4025	6AL5	CV5026	IN320	NR28	PM2	NS5	304
CV4026	6R4wga	CV5027	3V/390A	NR31	MH4	NT18	D060
CV4027	5Y3wgta	CV5028	3V/390B	NR35	PD220A	NT20	PM256
CV4028	OB2wa	CV5029	6J4WA	NR37	ACSG	NT36	DA100
CV4029	5902	CV5030	26Z5W	NR38	VMS4	NT37	4033A
CV4030	G75/3G	CV5031	M.548	NR39	PM22A	NT38A	PZ1-75
CV4031	6J6wa	CV5032	IX2A	NR40	PM24D	NT39	ACT36
CV4032	5814a	CV5033	3-14	NR41	210VPT	NT40	DET5
CV4033	F/6060	CV5034	3JPI1	NR42	P220	NT58	DET12
CV4034	F/6067	CV5035	5ADPI	NR43	PM24A	NT62	PM24D
CV4035	F/6057	CV5036	6AF4	NR44	PX4	NT62A	PM24D
CV4037	F/5750	CV5037	6BA6W	NR45	VMP4G	NT65A	PZ1-35

Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.	American Army No.	Civilian No.
NT82	PM202	VR102	BL63	VT501	E1192	VT47	47
NU3	U12/14	VR105	ML6	VT501A	E1192	VT48	41
NU5	RX3-120	VR106	9D2	VU29	ESU150	VT49	39/44
NU12	U18	VR107	15D2	VU39	MUI2/14	VT50	50
NU13	U15	VR108	8D2	VU64	U12/14	VT51	841
NU13A	U15	VR109	4DI	VU71	U52	VT54	34
NU15	U4020	VR109A	4DI	VU71A	U52	VT55	865
NU16	GU5	VR116	V872	VU72	GU5	VT56	56
NU17	UU5	VR117	4IMTL	VU111	V1907	VT57	57
NU18	U17	VR117A	4IMTL	VU113	U17	VT58	58
NU20	U50	VR118	KT2	VUI20	SU2150A	VT60	850
NU31	MU2	VR119	DDL4	VUI20A	SU2150A	VT62	801
NU33	SU2150A	VR122	4IMXP	VUI33	V960	VT63	42
NU33A	HVR2	VR123	EF8	VUI34	HVR2	VT64	800
NU34	HVR2	VR124	MS/Pen	VU504	V1901	VT65	6C5
VI77	EM31	VR125	MS/PenB	VU508	V1913	VT65A	6C5G
VI103	Y63	VR126	4SH	VW36	220PA	VT66	6F6
VR18	215SG	VR129	MS/Pen	VW42	210LF	VT66A	6F6G
VR19	PM2	VR130	HL23	VW48	215SG	VT67	30 spec.
VR21	210LF	VR135	E1148			VT68	6B7
VR22	220PA	VR136	EF54	American Army No.	Civilian No.	VT69	6D6
VR27	210LF	VR137	EC52	VT1	203A	VT70	6F7
VR28	220VSG	VR502	KT32	VT2	205B	VT72	842
VR32	220B	VR503	KT33C	VT4B/C	211	VT73	843
VR35	QP21	VR505	MH41	VT5	215A	VT74	5Z4
VR37	MH4	VS68	STV280/40	VT6	212A	VT75	75
VR38	MHL4	V569	STV280/80	VT7	WX12	VT76	76
VR40	PX25	VS70	7475	VT8	UV204	VT77	77
VR41	PM12M	VT20	220P	VT17	860	VT78	78
VR43	210PG	VT23	230XP	VT19	861	VT80	80
VR44	210DDT	VT23A	230XP	VT22	204A	VT83	83
VR45	X56	VT25	DET25	VT24	864	VT84	84/6Z4
VR46	PT25H	VT45	X56	VT25	10	VT85	6K7
VR47	TZ05-20	VT46	PT25H	VT25A	10 spec.	VT86	6K7
VR49	210SPT	VT50	HL2	VT26	22	VT86A	6K7g
VR53	EF39	VT51	Pen 220A.	VT27	30	VT86B	6K7gt
VR54	EB34	VT52	EL32	VT28	24	VT87	6L7
VR55	EBC33	VT60	807	VT29	27	VT87A	6L7g
VR56	EF36	VT60A	807	VT30	01A	VT88	6R7
VR57	EK32	VT61	DET19	VT31	31	VT88A	6R7g
VR57A	EK32	VT61A	TV03-10	VT33	33	VT88B	6R7gt
VR59	955	VT62	TY1-50	VT34	207	VT89	89
VR65	SP61	TV73	6F5	VT35	35/51	VT90	6H6
VR65A	SP41	VT74	617	VT36	36	VT90A	6H6gt
VR66	P61	VT75	KT66	VT37	37	VT91	6J7
VR67	6J5	VT75A/B	KT44	VT38	38	VT91A	6J7gt
VR78	D1	VT76	DA41	VT39	869	VT92	6Q7
VR82	220TH	VT79	KT8	VT39A	869A	VT92A	6Q7g
VR83	210VPT	VT80	4307A	VT40	40	VT93	6B8
VR91	EF50	VT81	4052A	VT41	851	VT93A	6B8g
VR91A	EF50	VT88	832	VT42	872	VT94	6J5
VR92	EA50	VT96	5B/502A	VT42A	872 spec.	VT94A	6J5g
VR95	954	VT104	PT15	VT43	845	VT94B	6J5
VR95A	954	VT105	ML6	VT44	32	VT94C	6J5
VR99	X66	VT127	Pen46	VT45	45	VT94D	6J5gt
VR99A	ECH35	VT139	MH4	VT46	866	VT95	2A3
VR100	KTW62	VT180	EF39	VT46A	866A	VT96	6N7
VR101	MHLD6	VT195	5Z4G			VT96B	6N7

American Army No.	Civilian No.	American Army No.	Civilian No.	American Army No.	Civilian No.	American Army No.	Civilian No.
VT97	5W4	VT136	1625	VT184	VR90/30	VT232	E1148
VT98	6U5/6G5	VT137	1626	VT185	3D6	VT233	6SR7
VT99	6F8	VT138	1629	VT186	Spec.	VT234	114B
VT100	807	VT139	VR150-30	VT187	575A	VT235	615
VT100A	807 mod.	VT140	1628	VT188	7E6	VT236	836
VT101	837	VT141	531	VT189	7F7	VT237	957
VT103	65Q7	VT142	W.E39DY	VT190	7H7	VT238	956
VT104	125Q7	VT143	805	VT191	316A	VT239	1LE3
VT105	65C7	VT144	813	VT192	7A4	VT240	710A
VT106	803	VT145	5Z3	VT193	7C7	VT241	7E5
VT107	6V6	VT146	IN5GT	VT194	7J7	VT243	7C4
VT107A	6V6gt	VT147	1A7	VT195	1005	VT244	5U4
VT107B	6V6g	VT148	1D8	VT196	6W5	VT245	2050
VT108	450TH	VT149	3A8	VT197A	5Y3G	VT246	918
VT109	205I	VT150	6SA7	VT198A	6G6	VT247	6AG7
VT111	5BP4/ 1802P4	VT150A	6SA7gt	VT199	6SS7	VT248	3CPI/180pl
VT112	6AC7	VT151	6A8	VT200	VR105-30	VT249	1006
VT114	5T4	VT151A	6A8gt	VT201	25L2	VT250	EF50
VT115	6L6	VT152	6K6	VT201C	25L6gt	VT251	WL44I series
VT115A	6L6gt	VT152A	6K6gt	VT202	9006		
VT116	6SJ7	VT153	12C8	VT203	9003	VT252	923
VT116A	6SJ7gt	VT154	814	VT204	HK24G	VT254	304TH
VT116B	6SJ7y	VT161	12SA7	VT205	6ST7	VT255	705A
VT117	6SK7	VT162	12SJ7	VT206A	5V4G	VT256	GL486
VT117A	6SK7gt	VT163	6C8	VT207	12AH7	VT257	K-7
VT118	832	VT164	1619	VT208	7B8	VT259	829
VT119	2X2	VT165	1624	VT209	12SG7	VT260	OA3
VT120	954	VT166	371A	VT210	1S4	VT264	3Q4
VT121	955	VT167	6K8	VT211	6SG7	VT266	1616
VT122	530	VT167A	6K8g	VT212	958	VT267	WLS78
VT123	5586	VT168A	6Y6	VT213A	6L5	VT268	12SC7
VT124	1A5	VT169	12C8	VT214	12H6	VT269	717A
VT125	1C5	VT170	1E5GP	VT215	6E5	VT277	417
VT126	6X5	VT171	1R5	VT216	816	VT279	GY2
VT126A	6X5g	VT171A	Loctal equiv. of 1R5	VT217	811	VT280	C7063
VT126B	6X5gt	VT172	1S5	VT218	100TH	VT281	HY145ZT
VT127	Nil	VT173	1T4	VT220	250TH	VT282	ZG489
VT127A	Nil	VT174	3S5	VT221	305	VT283	QF-206
VT128	1630	VT175	1613	VT222	884	VT284	QF-197
VT129	304TL	VT176	6AB7	VT223	1H5	VT285	QF-200C
VT130	250TL	VT177	1LH4	VT224	RK34	VT286	832A
VT131	12SK7	VT178	1LC5	VT225	307A	VT287	815
VT132	12K8	VT179	1LN5	VT226	3EPI/1806PI	VT288	12SH7
VT133	12SR7	VT180	3LF4	VT227	7184	VT289	12SL7
VT134	12A6	VT181	7Z4	VT228	8012		
VT135	12J5	VT182	3B7	VT229	6SL7		
VT135A	12J5	VT183	1R4	VT230	350A		
				VT231	6SN7		

B.V.A. UTILITY EQUIVALENTS

The last figure of this number denotes the manufacturer and can be disregarded.
e.g., All the 260 series are equivalent to an EL33.

B.V.A. No.	Civilian No.	B.V.A. No.	Civilian No.	B.V.A. No.	Civilian No.	B.V.A. No.	Civilian No.
132	HL23DD	162	Pen25	211	DW4/350	264	EL33
142	VP23	172	TP25	243	EF39	274	ECH35

ABBREVIATIONS USED FOR MANUFACTURERS' NAMES

B.T.H. ...	...	British Thompson Houston	M.O.V. ...	...	Marconi Osram Valve Co.
COSS. ...	...	A. C. Cossor	M.W.T. ...	...	Marconi Wireless & Telegraph Co.
E.S. ...	...	Edison & Swan (Ediswan)	MULL....	...	Mullard
E.M.I. ...	...	Electric & Musical Industries (Emitron)	PHIL. ...	...	Phillips
E.T. ...	...	Electronic Tubes	R.C.A....	...	Radio Corporation of America
E.E.V. ...	...	English Electric Co.	RAY. ...	...	Raytheon
FERR. ...	...	Ferranti	S.T.C. ...	...	Standard Telephones & Cables
G.E.C. ...	...	General Electric Co.	TUNG. ...	...	British Tungsram Ltd.
MAZ. ...	...	Mazda	W.E. ...	...	Western Electric
			20th. ...	...	20th Century Electronics

Commercial Valve	Maker	Service Equip. (or nearest in brackets)	Commercial Valve	Maker	Service Equip. (or nearest in brackets)	Commercial Valve	Maker	Service Equip. (or nearest in brackets)
OIA	U.S.A.	CV750	IB32/532A	U.S.A.	CV2648	IG6GT/G	R.C.A.	CV773
	S.T.C.		IB32	U.S.A.	CV2648	IH4G	R.C.A.	CV774
O2DF	MULL.	(CV2260)	IB35	U.S.A.	CV369	IH5G	U.S.A.	CV1818
O9	COSS.	CV2725	IB35A	U.S.A.	CV3628		S.T.C.	
O9D	COSS.	(CV1596)	IB36	U.S.A.	CV577		COSS.	
O9J	COSS.	(CV1518)	IB38	U.S.A.	CV3549		TUNG.	
OA2	U.S.A.	CV1832	IB40	U.S.A.	CV2914	IH5GT	U.S.A.	CV1820
OA3	U.S.A.	(CV3798)	IB41	U.S.A.	CV3550		S.T.C.	
OA4	U.S.A.	CV752	IB49	U.S.A.	CV508	IH5GT/G	U.S.A.	CV1820
OB2	U.S.A.	CV1833	IB56	U.S.A.	CV3877		FERR.	
OB3	U.S.A.	CV3799	IB58	U.S.A.	CV3745	IL4	U.S.A.	(CV1758)
OC3	U.S.A.	(CV686)	IB63A	U.S.A.	CV2826		S.T.C.	
OD3	U.S.A.	(CV216)	ICI	MAZ.	(CV782)		COSS.	
OG3	MULL.	(CV449)	IC5G	U.S.A.	CV1803	ILA6	R.C.A.	CV775
OZ4	U.S.A.	CV692		COSS.		ILB4	R.C.A.	CV776
	S.T.C.			FERR.		ILC5	R.C.A.	CV777
OZ4A	U.S.A.	CV517		S.T.C.		ILC6	R.C.A.	CV778
IA3	U.S.A.	CV753	IC5GT	U.S.A.	CV1805	ILD5	R.C.A.	CV779
	Hivac			S.T.C.		ILH4	R.C.A.	CV780
	COSS.		IC5GT/G	U.S.A.	CV1805	ILN5	R.C.A.	CV781
IA4P	U.S.A.	CV754		FERR.			S.T.C.	
IA5G	U.S.A.	CV755		S.T.C.		ILN5E	S.T.C.	CV781
	S.T.C.		IC2I	U.S.A.	CV762	IN5G	U.S.A.	CV1821
	TUNG.		ICPI	E.T.	(CV2302)		S.T.C.	
IA5GT	U.S.A.	CV756	ID5	S.T.C.	CV764		COSS.	
	S.T.C.		ID5GP	R.C.A.	CV705		TUNG.	
IA5GT/G	U.S.A.	CV756	ID5GT	R.C.A.	CV1806	IN5GT	U.S.A.	CV1823
	FERR.		ID7	R.C.A.	CV765		S.T.C.	
IA6	U.S.A.	CV757	ID8GT	R.C.A.	CV1811	IN5GT/G	U.S.A.	CV1823
IA7G	U.S.A.	CV1800	ID13	MAZ.	(CV753)		FERR.	
	S.T.C.		IE5GP	R.C.A.	CV766	IN2I	U.S.A.	CV727
	COSS.		IE5GT	R.C.A.	CV766	IN2IB	U.S.A.	CV367
	TUNG.		IE7	R.C.A.	CV1812	IN2IC	U.S.A.	CV3525
IAD4	U.S.A.	(CV2237)	IF2	MAZ.	(CV1758)	IN23A	U.S.A.	CV749
IB3GT	U.S.A.	CV1830	IF3	MAZ.	(CV785)	IN23B	U.S.A.	CV2856
IB4P	U.S.A.	CV758	IF4	R.C.A.	CV767	IN23BM	U.S.A.	CV2857
IB5/25S	U.S.A.	CV759	IF5	R.C.A.	CV768	IN25	U.S.A.	CV2916
IB7GT	U.S.A.	CV760	IF6	R.C.A.	CV769	IN26	U.S.A.	CV1785
IB21A	U.S.A.	CV3586	IF7GV	R.C.A.	CV770	IN28	U.S.A.	CV2918
IB22	U.S.A.	CV761	IFD9	MAZ.	(CV784)	IN3I	U.S.A.	CV3509
IB23	U.S.A.	CV539	IG4	R.C.A.	CV1817	IN34	U.S.A.	CV2829
IB24	U.S.A.	CV725	IG4GT/G	R.C.A.	CV1817	IN38	U.S.A.	CV3551
IB24A	U.S.A.	CV3548	IG5	R.C.A.	CV771	IN38A	U.S.A.	CV2962
IB26	U.S.A.	CV576	IG6G	R.C.A.	CV772	IN43	U.S.A.	CV2919
IB27	U.S.A.	CV713	IG6GT	R.C.A.	CV773	IN47	U.S.A.	CV3729

Commercial Valve	Maker	Service Equip. (or nearest in brackets)	Commercial Valve	Maker	Service Equip. (or nearest in brackets)	Commercial Valve	Maker	Service Equip. (or nearest in brackets)
IN54A	U.S.A.	CV2961	2B4	U.S.A.	CV648	2V3	R.C.A.	CV803
IN69	U.S.A.	CV2923	2B7	U.S.A.	CV1837	2V3G	R.C.A.	CV804
IN70	U.S.A.	CV2924		TUNG.		2V/400A	S.T.C.	(CV32)
IN72	U.S.A.	CV2974	2B21	U.S.A.	CV597	2V/401C	S.T.C.	CV1446
IN81	U.S.A.	CV2928	2B22	U.S.A.	CV2931	2V/470C	S.T.C.	(CV1355)
IP5	R.C.A.	CV728	2B36	U.S.A.	(CV1078)	2V/471A	S.T.C.	(CV1449)
IPIO	MAZ.	(CV820)	2C21	U.S.A.	CV875	2V/500C	S.T.C.	(CV5)
IP21	U.S.A.	(CV337)	2C22	R.C.A.	CV792	2V/530E	S.T.C.	CV1420
IP23	U.S.A.	(CV2680)	2C26	U.S.A.	CV802	2W/540E	S.T.C.	(CV1601)
IP30	U.S.A.	(CV1764)	2C26A	U.S.A.	(CV1759)	2X2	U.S.A.	CV3748
IP31	U.S.A.	CV3812	2C33	U.S.A.	CV793	2X2/897	U.S.A.	CV3748
IP32	U.S.A.	(CV405)	2C34	U.S.A.	(CV18)	2X2A	U.S.A.	CV597
IQ5G	U.S.A.	CV1824	2C39A	U.S.A.	CV2516	2X/105G	S.T.C.	(CV448)
	S.T.C.		2C40	U.S.A.	CV2643	2X106G	S.T.C.	(CV425)
	TUNG.		2C42	U.S.A.	CV2932	2Y2	R.C.A.	CV597
IQ5GT	U.S.A.	CV1826	2C43	U.S.A.	CV688	2-150D	U.S.A.	CV3878
	S.T.C.		2C46	U.S.A.	CV2933	2-150D/	U.S.A.	CV3878
	FERR.		2C51	U.S.A.	CV2831	152RA		
IQ5GT/G	U.S.A.	CV1826	2C51W	U.S.A.	CV2866	3A	W.E.(U.S.A.)	CV3812
	FERR.		2C53	U.S.A.	CV3559	3AE	W.E.(ENG.)	CV3812
IQ22	U.S.A.	CV3555	2D2	MULL.	CV794	3API/	U.S.A.	CV602
IR4/1294	U.S.A.	CV2709	2D4A	MULL.	CV795	906PI		
IR5	U.S.A.	(CV782)	2D13C	MULL.	CV796	3API	U.S.A.	CV602
	FERR.		2D21	S.T.C.	(CV797)	3A4	U.S.A.	(CV807)
	E.T. S.T.C.			U.S.A.			S.T.C.	
	TUNG.			MULL.			COSS.	
IS4	U.S.A.	(CV783)		Hivac		3A5	U.S.A.	(CV808)
	FERR.		2D21W	U.S.A.	CV2876	3A/105-B	S.T.C.	CV809
	COSS.		2DPI	U.S.A.	CV1813	3A/107A	S.T.C.	(CV249)
	S.T.C.		2E22	U.S.A.	CV798	3A/107B	S.T.C.	(CV1655)
	TUNG.		2E30	U.S.A.	CV2517	3A/108A	S.T.C.	(CV1653)
IS5	U.S.A.	(CV784)	2G	Siemens	CV1842	3A/108B	S.T.C.	(CV1657)
	FERR.		2J21	U.S.A.		3A/109A	S.T.C.	(CV1671)
	E.T. S.T.C.		2J21A	Siemens	CV719	3A/1663	S.T.C.	(CV1663)
	TUNG.		2J22	Siemens	CV800	3A/110B	S.T.C.	(CV1659)
IT4	U.S.A.	(CV785)	2J26	Siemens	CV1760	3A/135A	S.T.C.	CV2598
	FERR.		2J31	Siemens	CV1807	3A/141A	S.T.C.	(CV1639)
	TUNG.		2J32	Siemens	CV1808	3A/142A	S.T.C.	(CV1641)
	E.T.		2J33	Siemens	CV1809	3A/144A	S.T.C.	(CV1694)
	Hivac		2J34	Siemens	CV1810	3A/145J	S.T.C.	(CV16)
IT5GT	R.C.A.	CV1829	2J36	Siemens	CV514	3A/146J	S.T.C.	(CV53)
IU4	U.S.A.	CV2507	2J42	Siemens	CV3676	3A/147J	S.T.C.	(CV82)
IU5	U.S.A.	CV3912		MULL.		3A/148J	S.T.C.	(CV88)
	S.T.C.		2J48	Siemens	CV1822	3B4	U.S.A.	(CV2240)
IV	R.C.A.	CV1999	2J49	Siemens	CV3687	3B7/1291	U.S.A.	CV811
IZ2	U.S.A.	CV2510	2J50	Siemens	CV2793	3B21	U.S.A.	CV2959
2A3	U.S.A.	CV1831	2J51	Siemens	CV3560	3B22	U.S.A.	CV3815
	S.T.C.		2J54	Siemens	CV801	3B24	U.S.A.	CV812
2A5	U.S.A.	CV1834	2J56	Siemens	CV2852	3B24W	U.S.A.	CV2858
	S.T.C.		2J58	RAY.	CV997	3B24WA	U.S.A.	CV4021
	TUNG.		2K25	U.S.A.	CV2792	3B26	U.S.A.	CV3575
2A6	U.S.A.	CV1769	2K28	U.S.A.	CV1892	3B28	U.S.A.	CV1835
	TUNG.		2K33	RAY.	CV1786		MULL.	
2A7	U.S.A.	CV787	2K41	U.S.A.	CV3904	3B29	U.S.A.	CV3689
	TUNG.		2K48	U.S.A.	CV3669	3B/100-B	S.T.C.	(CV1689)
2API	U.S.A.	CV790	2S/140G	S.T.C.	(CV469)	3B/102-B	S.T.C.	(CV84)
2APIA	U.S.A.	CV790	2T/270K	S.T.C.	(CV261)	3B/151A	S.T.C.	(CV1648)
2BPI	U.S.A.	CV3678	2T/450E	S.T.C.	(CV3587)	3B/200-B	S.T.C.	(CV1047)

Commercial Valve	Maker	Service Equiv. (or nearest in brackets)	Commercial Valve	Maker	Service Equiv. (or nearest in brackets)	Commercial Valve	Maker	Service Equiv. (or nearest in brackets)
3B/240M	S.T.C.	(CV2214)	3Q/211E	S.T.C.	(CV1604)	5API/	U.S.A.	CV832
3B/252B	S.T.C.	(CV1688)	3Q/212E	S.T.C.	CV1797	1805PI		
3B/351A	S.T.C.	(CV1148)	3Q/213E	S.T.C.	(CV1734)	5A/102A	S.T.C.	CV3784
3B/400A	S.T.C.	CV1452	3Q/260E	S.T.C.	(CV446)	5A/102D	S.T.C.	(CV1724)
3B/401J	S.T.C.	(CV127)	3Q/293E	S.T.C.	(CV1447)	5A/105	S.T.C.	(CV1726)
3B/501A	S.T.C.	(CV49)	354	S.T.C. E.T.	(CV820)	5A/128B	S.T.C.	(CV244)
3B/504B	S.T.C.	(CV1288)		U.S.A.		5A/136A	S.T.C.	CV2619
3B850A	S.T.C.	(CV25)	3V/420B	S.T.C.	(CV2126)	5A/136D	S.T.C.	(CV245)
3B/851A	S.T.C.	(CV1620)	3V/530E	S.T.C.	(CV477)	5A/157D	S.T.C.	(CV358)
3BPI	U.S.A.	CV814	4-65A	U.S.A.	CV1905	5A/159N	S.T.C.	(CV2000)
3BPIA	U.S.A.	CV2934	4/125A	Eimac	(CV2963)	5A/164K	S.T.C.	CV3536
3C22	U.S.A.	CV999	4/250A	Eimac	(CV2964)	5B1	S.T.C.	(CV1018)
3C24	U.S.A.	CV789	4-400A	U.S.A.	CV3879	5B/100A	S.T.C.	(CV1369)
3C31/C1B	U.S.A.	CV1765	4-1000A	U.S.A.	CV3880	5B/151A	S.T.C.	(CV1080)
3C34	U.S.A.	CV941	4A1	U.S.A.	CV821	5B/250A	S.T.C.	(CV124)
3C45	U.S.A.	(CV372)	4A/137B	S.T.C.	(CV243)	5B/251M	S.T.C.	(CV428)
3C/250A	S.T.C.	(CV1034)	4B22	U.S.A.	CV2936	5B/252M	S.T.C.	(CV391)
3C/270A	S.T.C.	(CV1252)	4B24	U.S.A.	CV822	5B/253M	S.T.C.	(CV499)
3C/350E	S.T.C.	(CV30)	4B26	U.S.A.	CV1836	5B/254M	S.T.C.	(CV428)
3C351H	S.T.C.	(CV27)	4B28	U.S.A.	CV2777	5B/255M	S.T.C.	(CV391)
3D6/1299	U.S.A.	CV815	4B30	U.S.A.	CV934	5B/256M	S.T.C.	(CV499)
3D21A	U.S.A.	CV2659	4B31	U.S.A.	CV3510	5B/257M	S.T.C.	(CV2220)
	S.T.C.		4B32	U.S.A.	CV2518	5B/258M	S.T.C.	(CV2347)
3D22	U.S.A.	CV2851		MULL.		5B/300B	S.T.C.	CV834
	S.T.C.		4B35	U.S.A.	CV926	5B/502A	S.T.C.	(CV1096)
3D/100A	S.T.C.	CV1422	4C21	R.C.A.	CV2576	5B/600A	S.T.C.	(CV1081)
3D/150G	S.T.C.	CV2735	4C22	U.S.A.	CV2987	5B/700A	S.T.C.	(CV631)
3DPI	U.S.A.	CV816	4C27	U.S.A.	(CV92)	5BPI	U.S.A.	CV601
3EGI	Cintel	(CV1526)	4C30	U.S.A.	CV933	5BP4/	R.C.A.	CV836
3EPI	U.S.A.	CV817	4C35	U.S.A.	CV1787	1802P4		
3EPI/	U.S.A.	CV817		MULL.		5C22	U.S.A.	(CV2520)
1806PI			4C/100A	S.T.C.	CV2756		MULL.	
3E29	U.S.A.	CV3599	4CSUA	COSS.	(CV1267)	5C/100A	S.T.C.	(CV26)
3FP7	U.S.A.	CV1761	4DI	S.T.C.	(CV1109)	5C/101A	S.T.C.	(CV1372)
3GPI	U.S.A.	CV516	4D21	U.S.A.	(CV2963)	5C/450A	S.T.C.	(CV1506)
3GRK	G.E.C.	(CV442)	4D32	U.S.A.	CV3543	5CPI	U.S.A.	CV600
3H/151J	S.T.C.	CV2516	4E27	U.S.A.	CV824	5CPIA	U.S.A.	(CV2191)
3JP1	U.S.A.	CV2945	4G/280K	S.T.C.	(CV797)	5CP7	U.S.A.	CV838
3JP7	U.S.A.	CV2869	4H/135M	S.T.C.	CV2519	5D21	U.S.A.	(CV2814)
3JP12	U.S.A.	CV2816	4J31	U.S.A.	CV1914	5D22	U.S.A.	(CV2964)
3J31	U.S.A.	CV1788	4J33	U.S.A.	CV1916	5D/100A	U.S.A.	(CV1627)
3J160E	S.T.C.	(CV2245)	4J34	U.S.A.	CV1897	5FP7(spec.)	U.S.A.	CV1789
3J/170E	S.T.C.	CV2905	4J35	U.S.A.	CV1898	5FP7	U.S.A.	CV718
3J/260E	S.T.C.	CV2908	4J50	U.S.A.	(CV2284)	5FP7A	U.S.A.	CV3959
3KPI	U.S.A.	CV3733	4J52	U.S.A.	CV3569	5GPI	U.S.A.	CV839
3P/270B	S.T.C.	CV2950	4J53	U.S.A.	CV513	5HPI	U.S.A.	CV3583
3Q4	S.T.C.	CV818	4PR60A	U.S.A.	CV2752	5HP1A	U.S.A.	CV3583
	U.S.A.		4SH	COSS.	(CV1126)	5H4	U.S.A.	CV840
3Q5GT	U.S.A.	CV819	4SHA	COSS.	CV825	5JPI	U.S.A.	CV1791
	S.T.C.		4THA	COSS.	CV826	5J23	U.S.A.	CV542
3Q5GT/G	U.S.A.	CV819	4TPB(clear)	COSS.	CV828	5J26	U.S.A.	CV3602
	FERR.		4TPB(met)	COSS.	CV829	5J29	U.S.A.	CV3642
3Q/120G	S.T.C.	(CV1605)	45TP	COSS.	CV830	5J30	U.S.A.	CV3843
3Q/150E	S.T.C.	CV1450	4XP	COSS.	(CV1168)	5J/180E	S.T.C.	(CV445)
3Q/180E	S.T.C.	(CV1603)	4X150A	U.S.A.	CV2519	5L/444	G.E.C.	CV311
3Q/181E	S.T.C.	(CV1600)	4X150G	U.S.A.	CV3893	5LPI	U.S.A.	CV741
3Q/191E	S.T.C.	(CV570)	5A6	U.S.A.	(CV2360)	5MPI	U.S.A.	CV740
3Q/195E	S.T.C.	(CV570)	5API	U.S.A.	CV832	5R4GY	U.S.A.	(CV717)

Commercial Valve	Maker	Service Equip. (or nearest in brackets)	Commercial Valve	Maker	Service Equip. (or nearest in brackets)	Commercial Valve	Maker	Service Equip. (or nearest in brackets)
5R4WGY	U.S.A.		6AG6	U.S.A.		6BE6	U.S.A.	
5TOIA	Cintel	CV2835		S.T.C.			S.T.C.	
5T4	R.C.A.	CV1846	6AG7	R.C.A.	CV1882	6BH6	U.S.A.	CV3908
5UP4	U.S.A.	CV2840	6AH6	U.S.A.	CV2521		S.T.C.	
5U4G	U.S.A.	(CV575)	6AJ7/6AC7	U.S.A.	CV849	6BJ6	U.S.A.	CV3909
	S.T.C.		6AJ7	U.S.A.	CV849		S.T.C.	
	Cossor		6AJ8	MULL.	(CV2128)	6BL6	U.S.A.	CV3614
5U4GT	R.C.A.	(CV841)		PHIL.		6BM6	U.S.A.	CV3615
5V4	U.S.A.	CV729	6AK5	U.S.A.	(CV850)	6BR7	S.T.C.	(CV2135)
	S.T.C.			FERR.		6BW6	S.T.C.	(CV2136)
	FERR.		6AK5W	U.S.A.	CV2877	6B4G	S.T.C.	CV851
5W4	R.C.A.	CV1849	6AK6	U.S.A.	CV1762		U.S.A.	
5W4G	R.C.A.	CV842		S.T.C.		6B5	S.T.C.	CV1885
5W4GT	R.C.A.	CV503	6AK7	U.S.A.	CV1784		U.S.A.	
5X4	U.S.A.	CV1852		MULL.		6B6G	S.T.C.	CV1887
5X4G	U.S.A.	CV1851	6AL5	S.T.C. E.T.	(CV283)		U.S.A.	
	S.T.C.			TUNG.		6B7	S.T.C.	(CV1891)
	TUNG.			FERR.			U.S.A.	
5Y3G	U.S.A.	CV1854	6AL5W	U.S.A.	CV2882		TUNG.	
	S.T.C.		6AL7G	U.S.A.	CV3707		FERR.	
	TUNG.		6AM5	E.T. S.T.C.	(CV136)	6B8	U.S.A.	CV1894
	COSS.		6AM6	U.S.A.	(CV138)		FERR.	
	FERR.			S.T.C. E.T.		6B8G	U.S.A.	CV1893
5Y3GT	U.S.A.	CV1856	6AN5	U.S.A.	CV2854		FERR.	
	S.T.C.		6AQ5	U.S.A.	CV1862		S.T.C.	
	TUNG.			S.T.C.		6C4	U.S.A.	(CV133)
5Y3GTA	U.S.A.	CV4027	6AQ5W	U.S.A.	CV2883		S.T.C.	
5Y3GT/G	U.S.A.	CV1856	6AQ6	U.S.A.	CV2937		Hivac	
5Y4	U.S.A.	CV1857	6AR6	U.S.A.	CV3613		TUNG.	
5Z3	U.S.A.	CV1861	6AS6	U.S.A.	CV2522	6C4W	U.S.A.	CV2842
	S.T.C.		6AS6W	U.S.A.	CV2884	6C5	U.S.A.	CV582
	TUNG.		6AS7G	U.S.A.	CV2523		FERR.	
5Z4	U.S.A.	CV1864	6AT6	U.S.A.	(CV452)		COSS.	
	S.T.C.			A.T.C.		6C5G	U.S.A.	CV581
	FERR.		6AU6	U.S.A.	CV2524		FERR.	
5Z4G	U.S.A.	(CV1863)		S.T.C.			S.T.C.	
	S.T.C.		6AU6WA	U.S.A.	CV4023		TUNG.	
	COSS.		6AV6	U.S.A.	CV2526		FERR.	
	TUNG.		6A3	U.S.A.	CV730	6C5G	U.S.A.	CV583
5Z4GT	U.S.A.	(CV2748)		S.T.C.			FERR.	
	COSS.		6A6	U.S.A.	CV1867		COSS.	
	MULL.			S.T.C.		6C5GT/G	U.S.A.	CV583
6AB5	U.S.A.	CV843		FERR.		6C6	U.S.A.	CV585
6AB5/6N5	U.S.A.	CV843	6A7	U.S.A.	CV1870		S.T.C.	
6AB7	U.S.A.	CV1873		S.T.C.			TUNG.	
	FERR.			TUNG.			FERR.	
	COSS.		6A8	U.S.A.	CV579	6C7	U.S.A.	CV584
6AB7/1853	U.S.A.	CV1873	6A8G	U.S.A.	CV578	6C8G	U.S.A.	CV1896
6AC5G	R.C.A.	CV844		S.T.C.		6C21	U.S.A.	CV855
6AC5GT	R.C.A.	CV845		FERR.		6CH6	S.T.C.	(CV2127)
6AC7	U.S.A.	CV660	6A8GT	U.S.A.	CV580	6CK6	MULL.	CV2726
	FERR.			S.T.C.			PHIL.	
6AC7/1852	R.C.A.	CV660		FERR.		6CJ6	MULL.	(CV2721)
6AD7	R.C.A.	CV1878		TUNG.			PHIL.	
	MULL.		6BA6	U.S.A.	(CV454)	6CQ6	U.S.A.	CV2937
	PHIL.			S.T.C.		6D2	MAZ.	(CV140)
6AF6G	R.C.A.	CV847	6BA7	U.S.A.	CV2527	6D4	U.S.A.	CV1949
6AG5	U.S.A.	CV848						

32								
Commercial Valve	Maker	ServiceEquiv. (or nearest in brackets)	Commercial Valve	Maker	ServiceEquiv. (or nearest in brackets)	Commercial Valve	Maker	ServiceEquiv. (or nearest in brackets)
6D6	U.S.A. S.T.C. TUNG. FERR. COSS.	CV1900	6J5G	U.S.A. COSS. S.T.C. MULL.	(CV1932)	6L5G	R.C.A. U.S.A. FERR. COSS.	CV862 CV1948
6D7	R.C.A.	CV1776	6J5GT	U.S.A. FERR. COSS. S.T.C.	(CV1934)	6L6G	U.S.A. S.T.C. TUNG. FERR. COSS.	(CV1947)
6D8	R.C.A.	CV1902	6J5GT/G	U.S.A.	(CV1934)	6L6GA	U.S.A.	CV2817
6E5	U.S.A.	CV1906	6J6	U.S.A.	(CV858)	6L6WGA	U.S.A.	CV3618
6F1	MAZ.	CV3841	6J6W	U.S.A.	CV2843	6L6WGB	U.S.A.	CV2796
6F4	MAZ.	CV2939	6J7	U.S.A. FERR. COSS.	CV1936	6L7	U.S.A.	CV1951
6F5	R.C.A. S.T.C.	CV1909	6J7G	U.S.A. FERR. COSS. S.T.C.	(CV1935)	6L6G	U.S.A. S.T.C. TUNG.	CV1950
6F5G	U.S.A.	CV1908	6J7GT	U.S.A. FERR. TUNG.	(CV1937)	6L18	MAZ.	CV1899
6F5GT	R.C.A.	CV1910	6J8G	U.S.A.	CV859	6L19	MAZ.	CV1850
6F6	U.S.A. FERR.	CV1912	6K4	U.S.A.	CV2855	6L34	MAZ.	(CV417)
6F6G	U.S.A. S.T.C. COSS. FERR. TUNG.	(CV1911)	6K5G	U.S.A. S.T.C.	CV860	6LD3	MAZ.	(CV3882)
6F6GT	U.S.A.	CV731	6K5GT	U.S.A.	CV861	6LD20	MAZ.	CV1920
6F6GT/G	U.S.A.	CV731	6K5GT/G	U.S.A.	CV861	6N5	U.S.A.	CV843
6F7	U.S.A. S.T.C.	CV1915	6K6G	U.S.A. FERR. S.T.C.	CV1938	6N6	U.S.A.	CV1954
6F8	U.S.A. COSS. FERR.	CV1918	6K6GT	U.S.A.	CV1940	6N6G	U.S.A. S.T.C.	CV1953
6F8G	U.S.A. FERR. COSS.	CV1917	6K6GT/G	U.S.A. FERR. S.T.C.	CV1942	6N7	U.S.A. FERR.	CV1957
6F11	MAZ.	CV1901	6K7	U.S.A. FERR. COSS.	(CV1941)	6N7G	U.S.A. S.T.C.	CV1956
6F12	MAZ.	(CV138)	6K7G	U.S.A. TUNG. COSS.	(CV1943)	6N7GT	U.S.A. FERR. S.T.C.	CV1958
6F13	MAZ.	CV1839	6K7GT	U.S.A. FERR. S.T.C. COSS.	(CV1943)	6P5GT/G	R.C.A.	CV1819
6F14	MAZ.	CV1919	6K8	U.S.A. FERR. COSS.	CV1945	6P7GT/G	R.C.A.	CV864
6F17	MAZ.	(CV416)	6K8G	U.S.A. FERR. S.T.C. TUNG.	(CV1944)	6P25	MAZ.	CV1853
6F32	MAZ.	(CV1116)	6K8GT	U.S.A. FERR. S.T.C. TUNG.	CV1946	6Q4	MULL. PHIL.	CV1886
6F33	MAZ.	(CV329)	6K25	MAZ.	(CV2217)	6Q5	U.S.A.	CV1815
6G6G	U.S.A. FERR.	CV1926				6Q7	U.S.A.	CV588
6G8G	R.C.A.	CV856				6Q7G	U.S.A. COSS. S.T.C. TUNG. FERR.	(CV587)
6H6	U.S.A. COSS. FERR.	CV1930				6Q7GT	U.S.A. FERR. S.T.C. TUNG. COSS.	(CV589)
6H6G	U.S.A. FERR. S.T.C. TUNG.	CV1929				6R4	MULL.	CV1865
6H6GT	U.S.A. FERR. S.T.C.	CV1931				6R6G	U.S.A.	CV1960
6H6GT/G	U.S.A.	CV1931				6R7	U.S.A.	CV1963
6J4	U.S.A.	CV1763				6R7G	U.S.A. S.T.C. FERR. TUNG.	CV1962
6J5	U.S.A. FERR. COSS.	CV1933				6R7GT	U.S.A.	CV1964

Commercial Valve	Maker	Service Equiv. (or nearest in brackets)	Commercial Valve	Maker	Service Equiv. (or nearest in brackets)	Commercial Valve	Maker	Service Equiv. (or nearest in brackets)
6R7GT/G	U.S.A.	CV1964	6S57	U.S.A.	CV1993	6Z5	U.S.A.	CV871
6SA7	U.S.A.	CV1966		FERR.		6Z7G	U.S.A.	CV872
	S.T.C.			COSS.		7	U.S.A.	CV874
	FERR.		6ST7	U.S.A.	CV1996	7A	U.S.A.	CV823
	COSS.		6ST7G	U.S.A.	CV1995	7A2	S.T.C.	(CV1174)
6SA7GT	U.S.A.	CV1967	6S7	U.S.A.	CV1975	7A3	S.T.C.	(CV1181)
6SA7GT/G	U.S.A.	CV1967	6S7G	U.S.A.	CV1974	7A4	U.S.A.	CV1770
6SC7	U.S.A.	CV1969	6T4	U.S.A.	CV3808	7A6	U.S.A.	CV876
6SC7GT	U.S.A.	CV1970	6T7G	U.S.A.	CV500	7A7	U.S.A.	CV877
6SD7GT	U.S.A.	CV865	6U5/6G5	U.S.A.	CV504		S.T.C.	
6SF5	U.S.A.	CV1972		S.T.C.			FERR.	
6SF5GT	U.S.A.	CV1973		TUNG.		7A7LM	U.S.A.	CV877
6SG7	U.S.A.	CV1978	6U5G	S.T.C.	(CV2747)	7A8	U.S.A.	CV878
	FERR.			TUNG.			S.T.C.	
	S.T.C.		6U7G	U.S.A.	CV706	7B		CV824
6SH7	U.S.A.	CV594		S.T.C.		7B4	U.S.A.	CV884
	FERR.			TUNG.		7B5	U.S.A.	CV880
	S.T.C.			FERR.			S.T.C.	
	COSS.		6V6	U.S.A.	CV510	7B5E	S.T.C.	(CV880)
6SH7GT	U.S.A.	CV595		COSSOR		7B5LT	R.C.A.	CV881
	FERR.			FERR.		7B6	U.S.A.	CV882
6SJ7	U.S.A.	CV591	6V6G	TUNG.	(CV509)		S.T.C.	
	FERR.			U.S.A.			FERR.	
	S.T.C.			COSS.		7B6LM	U.S.A.	CV882
	COSS.			FERR.		7B7	U.S.A.	CV522
6SJ7G	U.S.A.	CV590		S.T.C.			S.T.C. E.T.	
6SJ7GT	U.S.A.	CV592	6V6GT	TUNG.	(CV511)		FERR.	
	FERR.			U.S.A.		7B8	U.S.A.	CV883
	TUNG.			COSS.			S.T.C.	
6SJ7WGT	U.S.A.	CV3619		FERR.		7B8LM	U.S.A.	CF883
6SJ7Y	R.C.A.	CV866	6V6GT/G	S.T.C.	(CV511)	7BP7	U.S.A.	CV884
6SK7	U.S.A.	CV1981	6V7G	U.S.A.	CV870	7BP7A	U.S.A.	CV3637
	FERR.		6W7G	U.S.A.	CV512	7C4/1203A	R.C.A.	CV2706
6SK7GT	U.S.A.	CV1982	6X2	MULL.	(CV426)	7C5	U.S.A.	CV885
	FERR.			PHIL.			FERR.	
	TUNG.		6X4	U.S.A.	(CV493)		S.T.C. E.T.	
	COSS.			S.T.C.		7C5LT	R.C.A.	CV886
6SK7GT/G	U.S.A.	CV1982	6X4W	U.S.A.	CV2844	7C6	U.S.A.	CV887
6SL7GT	U.S.A.	CV1985	6X5	R.C.A.	CV573		S.T.C. E.T.	
	FERR.		6X5G	TUNG.	(CV572)	7C7	FERR.	
	S.T.C.			U.S.A.			U.S.A.	CV1777
	COSS.			S.T.C.			S.T.C.	
6SN7GT	U.S.A.	(CV1988)		FERR.		7D5	S.T.C.	CV1425
	FERR.			COSS.		7D6	S.T.C.	(CV1672)
	S.T.C.		6X5GT	U.S.A.	(CV574)	7D8	S.T.C.	CV889
	TUNG.			S.T.C.		7D8S	S.T.C.	(CV1328)
6SN7WGT	U.S.A.	CV3627		FERR.		7D9	S.T.C.	(CV136)
6SQ7	U.S.A.	CV1990		COSS.		7D10	S.T.C.	(CV2127)
	FERR.		6X5GT/G	U.S.A.	(CV574)	7E5	U.S.A.	CV2704
	S.T.C.		6X5WGT	U.S.A.	CV3734	7E5/1201	U.S.A.	CV2704
	COSS.		6Y3	Canada	CV1816	7E6	U.S.A.	CV891
6SQ7GT	U.S.A.	CV1991	6Y6G	U.S.A.	CV515	7E7	U.S.A.	CV892
	FERR.			FERR.		7F7	U.S.A.	CV893
	TUNG.			COSS.			S.T.C.	
6SQ7GT/G	U.S.A.	CV1991	6ZY5G	U.S.A.	CV873	7F8	U.S.A.	CV2968
6SR7	U.S.A.	CV867		S.T.C.		7G7	U.S.A.	CV894
			6Z4	U.S.A.	CV619	7G7/1232	U.S.A.	CV894

Commercial Valve	Maker	Service Equiv. (or nearest in brackets)	Commercial Valve	Maker	Service Equiv. (or nearest in brackets)	Commercial Valve	Maker	Service Equiv. (or nearest in brackets)
7H7	U.S.A. S.T.C. FERR. E.T.	CV895	12A6	U.S.A. FERR. S.T.C.	CV525	12SA7GT	U.S.A. TUNG.	CV538
7J7	U.S.A. S.T.C.	CV897	12A6GT	R.C.A.	CV526	12SC7	U.S.A. FERR.	CV540
7K7	U.S.A. S.T.C. FERR.	CV896	12A7	U.S.A. S.T.C.	CV909	12SF5	R.C.A.	CV919
7MBIA	Cintel	(CV1880)	12A8GT	R.C.A.	CV910	12SF5GT	R.C.A.	CV920
7N7	U.S.A. COSS. S.T.C.	CV898	12A8GT/G	R.C.A.	CV910	12SF7	R.C.A.	CV921
7Q7	U.S.A. FERR. COSS.	CV899	12AH7GT	U.S.A. FERR.	CV529	12SG7	U.S.A. COSS. FERR.	CV694
7R7	U.S.A. FERR. S.T.C.	CV900	12AT7	U.S.A. S.T.C. E.T.	(CV455)	12SH7	U.S.A. FERR.	CV922
7UP7	U.S.A.	CV3639	12AT7WA	U.S.A.	(CV4024)	12SH7GT	U.S.A. FERR.	CV3651
7VW7	U.S.A.	CV902	12AU6	U.S.A. S.T.C.	CV1961	12SJ7	U.S.A. FERR. S.T.C.	CV697
7Y4	U.S.A. FERR. S.T.C. E.T.	CV901	12AU7	U.S.A. S.T.C. Hivac	(CV491)	12SJ7GT	U.S.A. FERR. TUNG.	CV698
7Z4	U.S.A. FERR. S.T.C. COSS.	CV1790	12AX7	U.S.A. S.T.C.	(CV492)	12SK7	U.S.A. FERR. S.T.C.	CV543
8A1	S.T.C.	(CV1282)	12AY7	U.S.A.	CV3650	12SK7GT	U.S.A.	CV544
8A3	W.E.	CV3813	12B8GT	R.C.A.	CV911	12SK7GT/G	U.S.A.	CV544
8D2	S.T.C.	(CV1108)	12BA6	U.S.A. S.T.C.	(CV1928)	12SL7GT	R.C.A.	CV924
8D3	S.T.C.	(CV138)	12C8	U.S.A. FERR.	CV531	12SN7GT	U.S.A. S.T.C.	VC925
8D5	S.T.C.	(CV2135)	12C8	U.S.A.	CV837	12SQ7	U.S.A. FERR. S.T.C.	CV546
9-3		(CV368)	(Special)			12SQ7GT	U.S.A. FERR. TUNG.	CV547
9A1	S.T.C.	(CV1172)	12C8GT	S.T.C.	CV3827	12SQ7GT/G	U.S.A.	CV547
9D2	S.T.C.	(CV1106)	12DP7	U.S.A.	CV913	12SP7	U.S.A.	CV3655
9D5	S.T.C.	(CV1053)	12DP8	U.S.A.	CV914	12SR7	U.S.A.	CV700
9D6	S.T.C.	(CV131)	12E1	MAZ.	(CV345)	12SW7	U.S.A.	CV3666
9HP7	U.S.A.	CV905	12FP7	U.S.A.	CV915	12SX7	U.S.A.	CV3697
9JPI	U.S.A.	CV1783	12H6	R.C.A.	CV916	12SY7	U.S.A.	CV3668
9LOIA	Cintel	(CV464)	12J5	R.C.A.	CV534	12TOIA	Cintel	CV1869
9LP7	U.S.A.	CV2789	12J5GT	U.S.A. COSS. FERR.	CV535	12Y4	Canadian	CV523
9MD6	Cintel	(CV262)		TUNG.		12Z3	R.C.A. S.T.C. MULL.	CV927
9MO6A	Cintel	(CV2108)	12J7GT	U.S.A.	CV917	13D1	S.T.C.	(CV423)
9MW5AX	Cintel	(CV2127)		S.T.C.		13D3	S.T.C.	(CV2212)
9PK5	E.M.I.	(CV109)	12J8GT/G	U.S.A.	CV917	13SPA	COSS.	CV929
10	R.C.A. TUNG.	CV603	12K7GT	U.S.A. FERR. S.T.C.	CV918	13VPA	COSS.	(CV1106)
10 (Special)	R.C.A.	CV906		TUNG.		14A7	U.S.A. FERR.	CV3935
10D1	S.T.C.	(CV1300)	12K7GT/G	U.S.A.	CV918	14F7	U.S.A.	CV930
10KP7	U.S.A.	CV3693	12K8	U.S.A. FERR.	CV703	14L	COSS.	(CV1087)
10Y	U.S.A.	(CV603)		FERR.		14R7	U.S.A.	CV3937
11A2	S.T.C.	(CV2813)	12K8GT	U.S.A. FERR. S.T.C.	CV3927			
11D3	S.T.C.	CV1419		TUNG.				
11E2	MAZ.	(CV276)	12LOIA	Cintel	(CV2162)			
11E3	MAZ.	(CV73)	12SA7	U.S.A. COSS.	CV537			
12A/112A	R.C.A.	CV1774						
12A5	R.C.A.	CV908						

Commercial Valve	Maker	Service Equiv. (or nearest in brackets) CV3936	Commercial Valve	Maker	Service Equiv. (or nearest in brackets) CV555	Commercial Valve	Maker	Service Equiv. (or nearest in brackets) CV562
14S7	U.S.A. S.T.C. E.T. FERR.		25Z5	U.S.A. S.T.C. COSS.		35L6GT/G	U.S.A. COSS. S.T.C.	
15	R.C.A. S.T.C. COSS.	CV931	25Z6	U.S.A. U.S.A. TUNG.	CV558 CV559	35T	Eimac M.O.V.	CV668
15A	Siemens	(CV986)	25Z6	U.S.A. TUNG.		36TG	U.S.A.	CV1754
15A2	S.T.C.	(CV3576)	25Z6GT/G	U.S.A.	CV559	36Z3	U.S.A. S.T.C.	CV564
15B	Siemens	(CV326)	26	U.S.A.	CV943		FERR.	
15DI	S.T.C.	(CV2956)	26A7GT	U.S.A.	CV3577	35Z3	U.S.A.	CV565
15D2	S.T.C.	(CV1107)	26D	COSS.	CV2727	35Z3LT	U.S.A.	CV726
15E	U.S.A.	CV933	26J	COSS.	CV2786	35Z4GT	TUNG.	CV2500
15LO1A	Cintel	CV1744	27	U.S.A. S.T.C.	CV944		U.S.A. FERR.	
15R	U.S.A.	CV934		COSS.			S.T.C.	
19E2	MAZ.	(CV265)		TUNG.		35Z5	U.S.A.	CV567
19G3	MAZ.	(CV277)	27MI	MAZ.	(CV337)	35Z5GT	U.S.A.	CV568
19G6	MAZ.	(CV371)	28D7	U.S.A.	CV945		TUNG.	
19H1	MAZ.	(CV121)	28D7GT/G	U.S.A.	CV946	35Z5GT/G	U.S.A.	CV568
19H4	MAZ.	(CV2180)	29CI	MAZ.	(CV430)	35/51	U.S.A.	CV1752
19H5	MAZ.	(CV490)	29D	COSS.	CV2728	36	U.S.A.	CV1775
20A1	S.T.C.	CV1424	30	U.S.A. COSS.	CV604		COSS. MULL.	
20A2	MAZ.	CV1848		S.T.C.			S.T.C.	
20A3	MAZ.	(CV797)	30TWIN	Eimac	CV1780	37	U.S.A.	CV606
20K	COSS.	(CV954)	30C8	MAZ.	(CV987)		S.T.C.	
		(CV1379)	30C12PI	MAZ.	CV1746		COSS.	
21/2	U.S.A.	CV3584	30D5	MAZ.	CV1860		MULL.	
22/11BXA	M.O.V.	(CV439)	30E8PI	—	(CV2216)	38	U.S.A.	CV712
22S/200A	S.T.C.	CV1451	30HM/HD	—	(CV1140)	38	COSS.	(CV712)
23D	COSS.	(CV1588)	31	R.C.A.	CV947	38A	U.S.A.	CV712
		(CV1382)	32	S.T.C.	CV711	39/44	U.S.A.	CV1771
24A	U.S.A. S.T.C.	CV936		U.S.A.			S.T.C.	
24B2	MAZ.	(CV339)	32	COSS.	(CV711)	40	U.S.A.	CV2501
25A6	U.S.A. S.T.C.	CV549	32A	COSS.	(CV951)	40SUA	COSS.	(CV1276)
	COSS.		32E	COSS.	(CV957)	40Z5	U.S.A.	CV2530
	MULL.		32E	U.S.A.	(CV711)	40Z5GT	U.S.A.	CV2530
25A6	U.S.A.	CV550		S.T.C.		41	S.T.C.	CV608
25A6GT/G	U.S.A.	CV550	32G	COSS.	(CV953)		U.S.A.	
25A7GT/G	U.S.A.	CV937	32J	COSS.	(CV958)	41DS	S.T.C.	(CV1131)
25AC5GT/G	U.S.A.	CV938	32L7GT	U.S.A.	CV948	41FP	COSS.	CV2502
25B6	U.S.A.	CV939		S.T.C.		41MH	COSS.	(CV2503)
25B8	U.S.A. S.T.C.	CV940	33	U.S.A. TUNG.	CV949	41MHF	COSS.	(CV1037)
						41MHL	COSS.	CV2504
25L6	U.S.A.	CV552	33A/100A	S.T.C.	CV1750	41MLF	COSS.	(CV1038)
35L6G	U.S.A.	CV551	33A/138A	S.T.C.	(CV18)	41MP	COSS.	(CV1458)
	FERR.		33A/158M	S.T.C.	(CV1884)	41MPG	COSS.	CV2505
	TUNG.		34	U.S.A.	CV1751	41MPT	COSS.	CV2506
25L6GT	U.S.A.	CV553	34E	S.T.C.	(CV1751)	41MTL	COSS.	(CV1117)
	S.T.C.		35	U.S.A. TUNG.	CV1752	41MXP	COSS.	(CV1122)
	TUNG.					41STH	COSS.	(CV2508)
25L6GT/G	U.S.A.	CV553		COSS.		42	U.S.A.	CV609
25SN7GT	S.T.C.	(CV423)		MULL.			FERR.	
25T	Eimac	CV941	35A5LT	U.S.A.	CV1753		S.T.C.	
25TG	Eimac	CV789	35L6	U.S.A.	CV561		COSS.	
25Y5	U.S.A. S.T.C.	CV942	35L6GT	U.S.A. FERR.	CV562	42E	U.S.A.	CV609
	MULL.			S.T.C.			COSS. S.T.C.	

Commercial Valve	Maker	Service Equip. (or nearest in brackets)	Commercial Valve	Maker	Service Equip. (or nearest in brackets)	Commercial Valve	Maker	Service Equip. (or nearest in brackets)
42MP/Pen	COSS.	(CV1181)	63SPT	COSS.	(CV1091)	100R	—	CV2967
42MPT	COSS.	(CV1325)	64SU	COSS.	(CV135)	100TH	Eimac	CV2552
420T	COSS.	CV2511	70B1	MULL.	(CV470)	101D	U.S.A.	CV1778
420TDD	COSS.	CV2512	71A	U.S.A.	CV2541	101F	U.S.A.	CV2553
42SPT	COSS.	CV1444	71A3	U.S.A.	(CV1764)	102D	U.S.A.	CV1779
43	U.S.A.	CV2514	72	U.S.A.	CV709	104V	MULL.	(CV1161)
	S.T.C.		72R	RAY.	CV709	108C1	MULL.	(CV1833)
	TUNG.		73	U.S.A.	CV2543	111A	U.S.A.	CV2554
43E	COSS.	CV2514	73R	RAY.	CV2543	112A	U.S.A.	CV1774
	S.T.C.		75	R.C.A.	CV614	116Pen	COSS.	(CV1337)
43IU	COSS.	(CV1039)		COSS.		117L7GT	U.S.A.	CV2556
44A/160M	S.T.C.	(CV415)		S.T.C.		117N7GT	R.C.A.	CV2557
44IU	COSS.	(CV1039)	76	U.S.A.	CV615		S.T.C.	
45	R.C.A.	CV610		TUNG.		117Z6GT	R.C.A.	CV2558
	COSS.			S.T.C.		117Z6GT/G	U.S.A.	CV2558
	S.T.C.		77	U.S.A.	CV616	121A	U.S.A.	CV2560
	TUNG.			S.T.C.		122A	U.S.A.	CV2561
45DS	COSS.	CV2528		FERR.		129B	Federal Union	CV2950
45IU	COSS.	CV2529		TUNG.		143D	U.S.A.	CV597
45SP	R.C.A.	CV596	78	U.S.A.	CV2544	150B2	MULL.	(CV2225)
45Z5GT	R.C.A.	CV2530		S.T.C.		150C2	MULL.	(CV1832)
46	R.C.A.	CV2531		FERR.		152RA	U.S.A.	CV3878
47	U.S.A.	CV1772		TUNG.		154V	MULL.	(CV1037)
	S.T.C.		78DS	S.T.C.	(CV1328)	161	G.E.C.	CV708
	TUNG.		79	R.C.A.	CV2545	164V	MULL.	CV2562
49	R.C.A.	CV2532		COSS.		185BT	COSS.	CV1980
50	U.S.A.	CV2533		S.T.C.		200	U.S.A.	CV2988
	TUNG.		80	COSS.	CV617	202	—	(CV1200)
50C5	U.S.A.	(CV1959)		U.S.A.		203B	U.S.A.	CV2986
50L6G	U.S.A.	CV2534		S.T.C.		204A	U.S.A.	CV2563
	FERR.			TUNG.		205D	U.S.A.	CV1749
50L6GT	U.S.A.	CV571		FERR.		205E	W.E.	CV2566
	S.T.C.		81	R.C.A.	CV2546	205F	W.E.	CV2567
	TUNG.			TUNG.		210DDT	COSS.	CV2569
50Y5GT	U.S.A.	CV805	83	R.C.A.	CV618	210HF	COSS.	CV2570
50Y6GT/G	U.S.A.	CV805		S.T.C.		210HL	COSS.	CV2571
51	E.M.I.	(CV487)	83V	R.C.A.	CV2547	210LF	COSS.	(CV1021)
52CG	MULL.	CV2896	84	R.C.A.	(CV2548)	210PG	COSS.	(CV1043)
52KU	COSS.	(CV1863)		COSS.		210RC	COSS.	CV2977
53	U.S.A.	CV2535	84/6Z4	R.C.A.	CV619	210SPT	COSS.	(CV1049)
53A	U.S.A.	CV2536		S.T.C.		210VPA	COSS.	CV2574
53KU	E.T.	(CV378)	85	R.C.A.	CV2549	210VPT	COSS.	(CV1083)
54KU	COSS.	(CV729)		COSS.		211	R.C.A.	CV620
54NCPII	U.S.A.	CV2885		S.T.C.		211 (Special)	R.C.A.	CV2576
55	U.S.A.	CV2537	85A1	MULL.	(CV431)	212E	W.E.	CV2577
56	U.S.A.	CV611	85A2	MULL.	(CV449)	215P	COSS.	(CV1019)
	TUNG.		88D	COSS.	(CV2185)	215SG	COSS.	(CV1018)
57	U.S.A.	CV612	89	U.S.A.	CV833	218	R.C.A.	CV2579
	TUNG.		89D	COSS.	(CV2193)	220B	COSS.	(CV1032)
58	U.S.A.	CV613	89J	COSS.	CV2750	220C	Federal Union	CV2580
	TUNG.		89Y	U.S.A.	CV833	220HPT	COSS.	(CV1118)
59	U.S.A.	CV2538	90AG	MULL.	(CV2270)	220IPT	COSS.	(CV1333)
59A3	U.S.A.	(CV2692)	90AV	MULL.	(CV2132)	220LF	COSS.	(CV1313)
59A4	U.S.A.	(CV2692)	90CG	MULL.	(CV2133)	220LPT	COSS.	(CV1195)
61BT	COSS.	CV1979	90CV	MULL.	(CV2134)	220/OT	COSS.	(CV1118)
61P	COSS.	CV2539	90EG4	Cintel	(CV1587)	220P	COSS.	(CV1020)
62BT	E.T.	CV1745	100B1	MULL.	(CV1199)	220PA	COSS.	(CV1022)
63D	COSS.	CV2540	63DS	COSS.	CV2731	220PT	COSS.	(CV1051)

Commercial Valve	Maker	ServiceEquiv. (or nearest in brackets)	Commercial Valve	Maker	ServiceEquiv. (or nearest in brackets)	Commercial Valve	Maker	ServiceEquiv. (or nearest in brackets)
220RC	COSS.	(CV1312)	337A	W.E.	CV2624	700D	W.E.	CV699
220SG	COSS.	(CV1018)	338A	W.E.	CV2625	701A	W.E.	CV677
220TH	COSS.	(CV1082)	340A	W.E.	CV1782	702A	W.E.	CV678
220VS	COSS.	CV2582	346A	W.E.	CV2626	703A	W.E.	CV679
220VSG	COSS.	(CV1028)	349A	W.E.	CV2627	705A	W.E.	CV3587
225DU	COSS.	CV1454	349B	W.E.	CV2628	706A	W.E.	CV3588
228A	W.E.	CV734	350A	W.E.	CV2629	707A	W.E.	CV3589
230XP	COSS.	(CV1023)	350B	W.E.	CV621	707B	W.E.	CV1768
231D	W.E.	CV2584	351A	W.E.	CV2630	708A	W.E.	CV3590
239	U.S.A.	CV1771	352A	W.E.	CV2631	709A	W.E.	CV2652
240B	COSS.	CV2586	354A	W.E.	CV2632	710A	W.E.	(CV62)
240QP	COSS.	(CV1035)	354V	MULL.	(CV1173)	713A	W.E.	CV3593
242C	W.E.	CV2587	357A	W.E.	CV691	714AY	W.E.	CV2653
244A	W.E.	CV2588	362A	W.E.	CV2633	715A	U.S.A.	CV2654
244V	MULL.	(CV1038)	367	MULL.	CV2634	715B	U.S.A.	CV2655
250TH	Eimac	CV2589	368A	W.E.	CV710	715C	U.S.A.	CV598
256B	W.E.	CV2592	371B	U.S.A.	CV3511	717A	W.E.	CV3594
257A	W.E.	CV2593	375A	U.S.A.	CV2636	720C	W.E.	CV3907
258B	Taylor	CV2594	388A	U.S.A.	CV2637	721A	W.E.	CV3595
259A	W.E.	CV2595	393A	U.S.A.	CV2638	722A	W.E.	CV3596
262A	W.E.	CV2597		FERR.		723A	W.E.	CV720
262B	W.E.	CV2597	394A	U.S.A.	CV2639	723A/B	W.E.	CV1795
264A	W.E.	CV2598	401CHA	G.E.C.	(CV389)	724A	W.E.	CV2656
264C	W.E.	CV2599	402Pen	COSS.	CV1672	724B	W.E.	CV1793
267B	W.E.	CV2600	405BU	COSS.	CV2640	725A	W.E.	CV722
270A	W.E.	(CV30)	408CHA	G.E.C.	(CV2211)	726A	W.E.	CV676
271A	W.E.	CV2601	410LF	COSS.	(CV1152)	726B	W.E.	CV3597
272A	W.E.	CV2602	410PT	COSS.	(CV1167)	726C	W.E.	CV3644
274A	W.E.	CV2603	415XP	COSS.	(CV1154)	729A	U.S.A.	(CV539)
274B	W.E.	CV684	417A	Westinghouse	CV2642	731A	W.E.	(CV850)
275A	W.E.	CV2604	420XP	COSS.	(CV1040)	732A	W.E.	CV812
279A	W.E.	CV669	425XP	COSS.	(CV1655)	800	TUNG.	CV2657
282A	W.E.	CV2605	428T	U.S.A.	CV812		R.C.A.	
293A	W.E.	CV3829	442BU	COSS.	(CV1796)		COSS.	
300A	W.E.	CV2608	446	U.S.A.	CV3725		S.T.C.	
300B	W.E.	CV2609	446A	U.S.A.	CV932	801	U.S.A.	CV621
303	G.E.C.	CV2610	446B	U.S.A.	CV687	801A	U.S.A.	CV621
303A	U.S.A.	CV2986	450TH	U.S.A.	CV2572	802	R.C.A.	CV622
304	G.E.C.	(CV1202)	460BU	COSS.	CV2644	803	R.C.A.	CV623
304TH	U.S.A.	CV2611	464A	U.S.A.	CV688	804	R.C.A.	CV624
304TL	U.S.A.	CV3580	471A	U.S.A.	CV3586	805	R.C.A.	CV625
307A	W.E.	CV2612	484V	MULL.	(CV1678)	806	R.C.A.	CV2658
310A	W.E.	CV2613	506BU	COSS.	CV2645	807	U.S.A.	(CV124)
310B	W.E.	CV1781	522	U.S.A.	CV999		COSS.	
311A	W.E.	CV2614	532	Westinghouse	CV2647		TUNG.	
313C	W.E.	CV2615	532A	Westinghouse	CV2648		S.T.C.	
314A	W.E.	CV2616	576	U.S.A.	CV3749	807W	U.S.A.	CV3809
316A	W.E.	CV683	578	U.S.A.	CV2967	808	R.C.A.	CV626
322A	W.E.	CV623	610XP	COSS.	(CV1154)	809	R.C.A.	CV2660
323A	W.E.	CV2617	615	—	CV3506	810	R.C.A.	CV627
327A	U.S.A.	CV2618	625P	COSS.	(CV1208)	811	R.C.A.	CV628
327A	W.E.	CV926	631PI	U.S.A.	(CV220)	812	R.C.A.	CV2661
328A	W.E.	CV2619	645	Heinz-Kaufman	CV670	813	U.S.A.	(CV26)
329A	W.E.	CV2620	648PI	U.S.A.	CV746		S.T.C.	
330B	W.E.	CV2621	653B	U.S.A.	CV666		COSS.	
331A	W.E.	CV2622	700A	W.E.	CV689	814	R.C.A.	CV629
332A	W.E.	CV2623	700B	W.E.	CV695	815	R.C.A.	CV2663
332Pen	COSS.	(CV1401)	700C	W.E.	CV696	816	R.C.A.	CV724

Commercial Valve	Maker	Service Equip. (or nearest in brackets)	Commercial Valve	Maker	Service Equip. (or nearest in brackets)	Commercial Valve	Maker	Service Equip. (or nearest in brackets)
822	U.S.A.	CV2664	906PI	R.C.A.	CV602	1655	U.S.A.	CV2716
825	R.C.A.	CV2665	913	R.C.A.	CV2691	1729	MULL.	CV2717
826	R.C.A.	CV630	918	U.S.A.	CV2692	1754	U.S.A.	CV3518
828	R.C.A.	CV631	927	R.C.A.	(CV405)	1805PI	R.C.A.	CV832
829	U.S.A.	CV2666	929	R.C.A.	CV2693	1806PI	U.S.A.	CV817
829A	U.S.A.	CV3599	930	R.C.A.	CV2694	1809PI	R.C.A.	CV1783
829B	U.S.A.	(CV2666)	930B	U.S.A.	CV702	1813P7	U.S.A.	CV884
830B	U.S.A.	CV702	931	R.C.A.	CV2695	1814PI	U.S.A.	CV790
832	R.C.A.	(CV1088)	931A	R.C.A.	CV2696		PHIL.	
832A	R.C.A.	CV788	935	R.C.A.	CV2697	1821	PHIL.	(CV1443)
833	R.C.A.	CV635	953	R.C.A.	CV738	1851	R.C.A.	CV599
833A	R.C.A.	CV635	954	U.S.A.	(CV1095)	1852	R.C.A.	CV660
836	U.S.A.	CV636	955	U.S.A.	(CV1059)	1852/6AC7	R.C.A.	CV660
837	U.S.A.	CV637	956	U.S.A.	CV649	1853	R.C.A.	CV1873
838	R.C.A.	CV638	957	U.S.A.	CV2700	1853/6AB7	R.C.A.	CV1873
841	U.S.A.	CV906	958	U.S.A.	CV650	1861	PHIL.	(CV1039)
843	R.C.A.	CV639	958A	U.S.A.	CV2601	1876	PHIL.	CV2718
845	R.C.A.	CV735	959	U.S.A.	CV1794	1907	U.S.A.	CV3521
845W	U.S.A.	CV3646	972	U.S.A.	(CV642)	1909A	PHIL.	(CV2291)
846	R.C.A.	CV2668	991	R.C.A.	CV651	1924	U.S.A.	CV2719
849	R.C.A.	CV2669	1005	U.S.A.	CV2874	1960	U.S.A.	CV1792
849H	R.C.A.	CV2670	1043	MAZ.	(CV1097)	2000T	U.S.A.	CV998
851	R.C.A.	CV2671	1201	R.C.A.	CV2704	2050	Westinghouse	CV2565
852	R.C.A.	CV2672	1201A	R.C.A.	CV2704	2051	Westinghouse	CV1798
857B	R.C.A.	CV2673	1203	R.C.A.	CV2705	2501A3	Dumont Lab	CV602
859	U.S.A.	CV2779	1229	U.S.A.	(CV711)	2505A5	Dumont Lab	CV740
860	R.C.A.	CV640	1231	U.S.A.	CV2707	2511A5	Dumont Lab	CV741
861	R.C.A.	CV641	1267	U.S.A.	CV1992	2529A5	Dumont Lab	CV1791
863	R.C.A.	CV2674		MULL.		3025	U.S.A.	CV2722
864	R.C.A.	CV2675	1282	U.S.A.	CV902	3071	U.S.A.	CV2723
865	R.C.A.	CV2676	1294	—	CV2709	3209	COSS.	CV2725
866	R.C.A.	(CV32)	1299	R.C.A.	CV815	3220K	COSS.	(CV954)
866A	R.C.A.	(CV32)	1378X	U.S.A.	CV761	3226D	COSS.	CV2727
866JR	R.C.A.	CV2679	1500T	Eimac	CV2711	3226J	COSS.	CV2786
868	U.S.A.	CV2680	1547	U.S.A.	(CV3789)	3229D	COSS.	CV2728
868/PJ23	U.S.A.	(CV2680)	1561	PHIL.	(CV1064)	3263DS	COSS.	CV2731
869B	U.S.A.	CV2723	1601ABC	M.O.V.	(CV440)	3530	PHIL.	(CV405)
872	U.S.A.	CV642		G.E.C.		3951	U.S.A.	CV2733
872A	U.S.A.	CV642	1603	R.C.A.	CV652	3982	U.S.A.	(CV2680)
874	U.S.A.	CV643	1609	R.C.A.	CV2712	4003A	S.T.C.	CV2734
875A	Taylor	CV644	1610	R.C.A.	CV2713	4004B	S.T.C.	(CV2329)
876	U.S.A.	CV645	1611	R.C.A.	CV653	4006A	S.T.C.	(CV1600)
878	U.S.A.	CV2683	1612	R.C.A.	CV654	4008B	S.T.C.	(CV1601)
878A	U.S.A.	CV2683	1613	R.C.A.	CV655	4011A	S.T.C.	CV1415
879	U.S.A.	CV597	1614	R.C.A.	CV2714	4012A	S.T.C.	CV1445
880	U.S.A.	CV2685	1616	U.S.A.	CV656	4013C	S.T.C.	(CV1605)
884	U.S.A.	CV647	1619	R.C.A.	CV723	4014A	S.T.C.	(CV1603)
885	U.S.A.	CV648	1620	R.C.A.	CV657	4015A	S.T.C.	CV2735
889	U.S.A.	CV2686	1622	R.C.A.	CV658	4017B	S.T.C.	CV1446
889R	U.S.A.	(CV2687)	1625	R.C.A.	CV659	4018G	S.T.C.	(CV1733)
889RA	U.S.A.	(CV2687)		S.T.C.		4019A	S.T.C.	(CV249)
891	U.S.A.	CV2688	1626	R.C.A.	CV1755	4019B	S.T.C.	(CV1655)
892R	U.S.A.	CV904		Hytron		4020A	S.T.C.	(CV1653)
893R	U.S.A.	CV2689	1629	R.C.A.	CV1756	4020B	S.T.C.	(CV1657)
902	U.S.A.	CV3600		S.T.C.		4021A	S.T.C.	(CV1671)
904V	MULL.	CV2690	1630	R.C.A.	CV2715	4021B	S.T.C.	(CV1663)
905	R.C.A.	CV736	1637	R.C.A.	(CV1052)	4022AR	S.T.C.	(CV1664)
906	R.C.A.	CV737	1642	U.S.A.	CV875	4022B	S.T.C.	(CV1659)

Commercial Valve	Maker	Service Equip. (or nearest in brackets)	Commercial Valve	Maker	Service Equip. (or nearest in brackets)	Commercial Valve	Maker	Service Equip. (or nearest in brackets)
4030A	S.T.C.	CV1447	4304	S.T.C.	CV2759	5654/	U.S.A.	CV4010
4030C	S.T.C.	CV1447	4304B	S.T.C.	CV2760	6AK5W		
4033A	S.T.C.	(CV1220)	4304BB	S.T.C.	CV2761	5656	U.S.A.	CV2970
4033AF	S.T.C.	CV2743	4304CB	S.T.C.	(CV1288)	5657	U.S.A.	CV3958
4033L	S.T.C.	(CV1688)	4307A	S.T.C.	(CV1080)	5663	U.S.A.	CV3610
4043C	S.T.C.	(CV1448)	4307AF	S.T.C.	(CV1080)	5664	U.S.A.	CV1765
4045A	S.T.C.	(CV243)	4313C	S.T.C.	(CV75)	5667	U.S.A.	(CV2687)
4046A	S.T.C.	(CV244)	4316A	S.T.C.	CV683	5670	U.S.A.	CV4013
4047B	S.T.C.	(CV1600)	4317	MULL.	(CV1201)	5670WA	U.S.A.	CV4013
4049C	S.T.C.	(CV1355)	4328A	MULL.	CV2619	5672	U.S.A.	(CV2238)
4049D	S.T.C.	(CV5)	4328D	MULL.	(CV245)	5675	U.S.A.	CV2971
4050AG	S.T.C.	CV2745	4357A	MULL.	(CV27)	5676	U.S.A.	(CV2239)
4052A	S.T.C.	(CV1081)	4378	PHIL.	CV1453	5678	U.S.A.	CV2753
4053	M.O.V.	(CV950)	4407	G.E.C.	(CV1084)	5683	U.S.A.	CV2574
4053A	G.E.C.	(CV967)	4409	G.E.C.	(CV955)	5684	U.S.A.	CV2753
4056A	S.T.C.	(CV1025)	4410	G.E.C.	(CV1087)	5684/C3J/A	U.S.A.	CV2753
4059A	S.T.C.	(CV1611)	4502	G.E.C.	(CV1086)	5685/C3J	U.S.A.	CV2574
4060A	S.T.C.	(CV1030)	4602	G.E.C.	(CV956)	5686	U.S.A.	CV3612
4061A	S.T.C.	(CV1369)	4605	G.E.C.	(CV1085)	5687	U.S.A.	CV2578
4062A	S.T.C.	(CV1568)	4606	—	CV2764	5691	U.S.A.	CV3705
4064A	S.T.C.	CV2746	4607	M.O.V.	(CV690)	5692	U.S.A.	CV3942
4064B	S.T.C.	CV1449	4608	G.E.C.	(CV1511)	5693	U.S.A.	CV3699
4066A	S.T.C.	(CV1181)	4671	MULL.	(CV1059)	5696	U.S.A.	CV3512
4069A	S.T.C.	(CV1372)	4672	MULL.	(CV4695)	5702	U.S.A.	CV3895
4074A	S.T.C.	(CV18)	4673	MULL.	CV2765	5704	U.S.A.	CV2847
4074B	S.T.C.	(CV1573)	4687	MULL.	CV2766	5718	U.S.A.	CV3930
4077A	S.T.C.	(CV33)	4690	—	CV2767	5719	U.S.A.	CV4008
4078A	S.T.C.	CV1420	4701A	—	CV677	5725	U.S.A.	CV4011
4078GA	S.T.C.	(CV447)	4702A	—	CV678	5725/	U.S.A.	CV4011
4081	S.T.C.	CV2749	4703A	—	CV679	6AS6W		
4081A	S.T.C.	CV1797	4705A	—	CV3587	5726	U.S.A.	CV4007
4094A	S.T.C.	(CV1620)	4706	—	CV3588	5726/	U.S.A.	CV4007
4096AB	S.T.C.	CV2751	4707A	—	CV3589	6AL5W		
4100BU	COSS.	(CV1264)	4708A	—	CV3590	5727	U.S.A.	CV4018
4101	G.E.C.	(CV1588)	4713A	—	CV3593	5727/	U.S.A.	CV4018
4101D	S.T.C.	(CV2845)	4717A	—	CV3594	2D21W		
4101E	S.T.C.	(CV1639)	4721A	—	CV3595	5749	U.S.A.	(CV4009)
4102D	S.T.C.	(CV1640)	4722A	—	CV3596		S.T.C.	
4102E	S.T.C.	(CV1641)	4726A	—	CV676	5749/	U.S.A.	(CV4009)
4104D	S.T.C.	(CV1694)	5215A	E.S.	(CV1081)	6BA6W	S.T.C.	
4120AA	S.T.C.	(CV536)	5517	U.S.A.	CV3609	5750	U.S.A.	(CV4012)
4201	G.E.C.	(CV1097)	5517/	U.S.A.	CV2609		S.T.C.	
4203	G.E.C.	(CV1587)	CK1013			5750/	U.S.A.	(CV4012)
4205E	S.T.C.	(CV1648)	5544	U.S.A.	(CV2210)	6BE6W	S.T.C.	
4212D	S.T.C.	(CV1619)	5545	U.S.A.	(CV2215)	5751	U.S.A.	CV4017
4212E	S.T.C.	(CV1619)	5556	U.S.A.	CV2640	5751WA	U.S.A.	CV4017
4212E	S.T.C.	(CV1252)	5557	U.S.A.	CV2957	5755	U.S.A.	CV3755
4222B	S.T.C.	(CV1601)	5586	U.S.A.	CV3611	5755/420A	U.S.A.	CV3755
4228A	S.T.C.	CV1450	5626	U.S.A.	(CV298)	5763	U.S.A.	(CV2129)
4242A	S.T.C.	(CV25)	5628	U.S.A.	CV2952		S.T.C.	
4251AX	S.T.C.	CV2755	5629	U.S.A.	CV2662	5783	U.S.A.	CV3933
4260A	S.T.C.	CV2756	5641	U.S.A.	(CV473)	5784	U.S.A.	CV3896
4264A	S.T.C.	CV2598	5642	U.S.A.	(CV2241)	5787	U.S.A.	CV3897
4270A	S.T.C.	(CV30)	5643	U.S.A.	(CV474)	5796	U.S.A.	CV3706
4274A	S.T.C.	CV1451	5647	U.S.A.	CV3916	5799	U.S.A.	CV2678
4279A	S.T.C.	(CV1250)	5651	U.S.A.	CV2573	5800	U.S.A.	(CV2730)
4282BZ	S.T.C.	(CV1365)	5654	U.S.A.	CV4010	5814	U.S.A.	CV4016
4300A	S.T.C.	CV1452				5814A	U.S.A.	CV4016

40											
Commercial Valve	Maker	Service Equip. (or nearest in brackets)	Commercial Valve	Maker	Service Equip. (or nearest in brackets)	Commercial Valve	Maker	Service Equip. (or nearest in brackets)	Commercial Valve	Maker	Service Equip. (or nearest in brackets)
5814WA	U.S.A.	CV4032	6135	U.S.A.	CV4022	A2087	M.O.V.	(CV2171)			
5829	U.S.A.	CV3998	6136	U.S.A.	CV2990	A4229	U.S.A.	CV824			
5840	U.S.A.	CV3929	6146	U.S.A.	CV3523	ACO44	MULL.	(CV1168)			
5842	U.S.A.	CV3789	6155	U.S.A.	(CV2130)	AC2/HL	MAZ.	CV2806			
5846	U.S.A.	CV2859	6155/4-125A	Amperex	(CV2130)	AC2/HLMet	MAZ.	CV2807			
5847	U.S.A.	CV3905	6156	U.S.A.	(CV2131)	AC2/Pen	MAZ.	CV2808			
5852	U.S.A.	CV3943	6156/4-125A	Amperex	(CV2131)	AC2PenDD	MAZ.	(CV519)			
5861	MULL.	(CV273)	6161	U.S.A.	CV3901	AC/4Pen	MAZ.	(CV1326)			
	PHIL.		6187	U.S.A.	(CV4011)	AC/5Pen	MAZ.	CV2809			
5876	U.S.A.	CV2972	6201	U.S.A.	CV3508	AC/5PenDD	MAZ.	(CV1196)			
5886	U.S.A.	(CV495)	6410	U.S.A.	CV3903	AC/6Pen	MAZ.	(CV1189)			
5894	MULL.	(CV424)	7193	U.S.A.	CV3601	AC/7	Hivac	(CV1683)			
	PHIL.		7475	MULL.	(CV1070)	AC104	MULL.	(CV1161)			
5894A	MULL.	CV2797	8001	—	CV824	AC/DD	MAZ.	(CV1170)			
	PHIL.		8003	R.C.A.	CV2768		Hivac				
5896	U.S.A.	CV2698	8011	R.C.A.	(CV62)	AC/DDT	Hivac	(CV2813)			
5899	U.S.A.	(CV475)	8012	R.C.A.	CV662	AC/JHL	MAZ.	CV2811			
5902	U.S.A.	CV4029	8013A	R.C.A.	CV716	AC/JHmet	MAZ.	CV2812			
5932	U.S.A.	CV3899	8016	U.S.A.	CV541	AC/JHL/DD	MAZ.	CV2813			
5933	U.S.A.	CV3517	8020	R.C.A.	CV2967	ACH/P	Hivac	(CV1282)			
5939	U.S.A.	CV3545	8021	R.C.A.	CV3587	AC/L	Hivac.	(CV1732)			
5948/1754	U.S.A.	CV3518	8022	R.C.A.	CV934	ACP	MAZ.	CV2815			
5948	U.S.A.	CV3518	8023	R.C.A.	CV933	AC/Pen	MAZ.	(CV1174)			
5949	U.S.A.	CV3521	8025	R.C.A.	CV663	ACPT	M.O.V.	CV2818			
5949/1907	U.S.A.	CV3521	8025A	R.C.A.	(CV3915)	AC/P4	MAZ.	(CV207)			
5963	U.S.A.	CV3900	8026	R.C.A.	(CV92)	AC/Q	Hivac	(CV1326)			
6002	U.S.A.	CV3902	9001	R.C.A.	CV1757	AC/S	—	CV2819			
6005	U.S.A.	CV4019	9002	R.C.A.	CV664	AC/S2	MAZ.	(CV1677)			
6005/	U.S.A.	CV4019	9003	R.C.A.	CV665	AC/S2Pen	MAZ.	(CV1282)			
6AQ5W			9004	R.C.A.	CV666	AC/SG	MAZ.	CV2822			
6024	U.S.A.	CV3539	9005	R.C.A.	CV667	AC/SGVM	MAZ.	(CV1165)			
6038	U.S.A.	CV3628	9006	R.C.A.	CV2769	AC/SH	Hivac	(CV1677)			
6057	S.T.C.	(CV4004)	13077	U.S.A.	CV2770	AC/SPen	—	CV2824			
6058	S.T.C.	(CV4007)	23042	U.S.A.	CV2772	AC/SPI	MAZ.	CV2820			
6059	S.T.C.	(CV4006)	68503	MAX.	CV2773	AC/SP3	MAZ.	CV2923			
6060	S.T.C.	(CV4024)	(modified)			AC/SP3RH	MAZ.	CV1430			
6063	S.T.C.	(CV4005)	68504	E.S.	CV2774	AC/SP3RH	MAZ.	CV545			
6064	S.T.C.	(CV4014)	68506	E.S.	CV2775	(sel.)					
6065	S.T.C.	(CV4015)	68510	E.S.	CV2776	AC/SIVM	MAZ.	(CV1165)			
6067	S.T.C.	(CV4003)	68530/U600	E.S.	CV3756	ACT/TP	MAZ.	(CV1718)			
6073	U.S.A.	CV2903	189048	U.S.A.	CV2777	ACT6	M.O.V.	CV2825			
6074	U.S.A.	(CV4028)	859483	Westinghouse	CV2779	ACT9	M.O.V.	(CV28)			
6079	U.S.A.	CV3522	A40	MAZ.	CV2800	ACT10	M.O.V.	CV2827			
6080	U.S.A.	CV2984	A41	MAZ.	(CV1175)	ACT16	M.O.V.	CV1431			
	MULL.		A40/N3	MULL.	CV2801	ACT17	M.O.V.	(CV225)			
6088	U.S.A.	CV2699	A41	MAZ.	(CV1175)	ACT19	M.O.V.	(CV379)			
6095	U.S.A.	(CV4019)	A373	M.O.V.	(CV1184)	ACT22	M.O.V.	(CV257)			
6096	U.S.A.	(CV4010)	A800	M.O.V.	(CV412)	ACT23	M.O.V.	(CV288)			
6097	U.S.A.	(CV4007)	A819	M.O.V.	(CV1698)	ACT24	M.O.V.	(CV240)			
6101	U.S.A.	(CV4031)	A901	M.O.V.	(CV1722)	ACT25	M.O.V.	(CV436)			
6101/	U.S.A.	(CV4031)	A915	M.O.V.	CV1462	ACT27	M.O.V.	(CV2163)			
6J6WA			A915met	M.O.V.	CV2803	ACT/THI	MAZ.	CV2830			
6106	U.S.A.	CV2992	A915Amet	M.O.V.	CV2804	AC/VH	Hivac	(CV3788)			
6111	U.S.A.	CV3961	A924	M.O.V.	CV2805	AC/VP	Hivac	(CV1169)			
6117	U.S.A.	CV3906	A1065	M.O.V.	(CV1343)	AC/VPB	Hivac	(CV2832)			
6130	U.S.A.	CV3629	A1714	M.O.V.	(CV408)	AC/VPI	MAZ.	CV518			
6130/3C45	U.S.A.	CV3629	A1820	M.O.V.	(CV409)	AC/VP2	MAZ.	CV2832			
6131	U.S.A.	CV3632	A1834	M.O.V.	(CV2523)	AC/VS	Hivac	(CV1165)			

Commercial Valve	Maker	Service Equip. (or nearest in brackets)	Commercial Valve	Maker	Service Equip. (or nearest in brackets)	Commercial Valve	Maker	Service Equip. (or nearest in brackets)
AC/Y	Hivac	(CV1174)	BLC/JC	S.T.C.	(CV433)	CAT6	M.O.V.	(CV2871)
AC/YY	Hivac	(CV1326)	BK44	B.T.H.	CV1742	CAT9	M.O.V.	(CV2872)
AC/Z	Hivac	(CV1181)	BL63	M.O.V.	(CV1102)	CAT17	M.O.V.	CV533
AC/ZDD	Hivac		BOLO14	S.T.C.	CV984	CAT20C	M.O.V.	(CV421)
AD/P4	MAZ.	(CV1198)	MW			CBLI	PHIL.	CV1463
AF3	MULL.	CV2833	BR153	E.E.V.	(CV2159)		TUNG.	
AF350	COSS.	(CV1252)	BR161	E.E.V.	(CV2322)		MULL.	
AFH202	E.E.V.	(CV12)	BR179	E.E.V.	(CV2322/2323)	CC3D	Hivac	CV2870
AFX203	E.E.V.	(CV2868)				CC3L	Hivac	(CV2266)
AH200	E.E.V.	(CV2168)	BS4	B.T.H.	(CV189)	CE1C	U.S.A.	(CV2692)
AH201	E.E.V.	(CV32)	BS4A	B.T.H.	CV1859	CE1D	U.S.A.	(CV2680)
AH205	E.E.V.	(CV532)	BS5	B.T.H.	(CV233)	CE1E	U.S.A.	(CV2680)
AH221	E.E.V.	(CV5)	BS48	B.T.H.	CV460	CE2	U.S.A.	CV1764
ALI	—	(CV159)	BS52	B.T.H.	CV1841	CE20	U.S.A.	CV1474
AL60	MULL.	(CV9)	BS60	MAZ.	(CV527)	CE25	U.S.A.	(CV405)
AP4	MULL.	(CV175)	BS62	—	CV1858	CE72	U.S.A.	CV709
APP4A	TUNG.	(CV1683)	BS64	B.T.H.	CV1743	CE230	U.S.A.	CV812
APP4B	TUNG.	(CV1181)	BS82	B.T.H.	(CV463)	CGI-C	B.T.H.	(CV425)
APP4C	TUNG.	(CV1684)	BS84	B.T.H.	(CV462)	CGI-E	B.T.H.	(CV425)
APP4G	TUNG.	CV2836	BS92	B.T.H.	(CV461)	CG14	—	(CV496)
APP4G	TUNG.	(CV2837)	BS100	MAZ.	(CV1219)	CK502AX	RAY.	(CV385)
APV4	TUNG.	(CV1039)	BT5	B.T.H.	(CV1147)	CK505AX	RAY.	(CV443)
AR63	E.E.V.	CV3710	BT9	B.T.H.	CV1145	CK506AX	RAY.	(CV387)
AR300	Rogers	CV2839	BT9A	B.T.H.	(CV1146)	CK707	RAY.	CV2848
AT4	MULL.	(CV1171)	BT9B	B.T.H.	(CV13)	CK1005	RAY.	CV2874
AZ1	MULL.	CV2860	BT19	B.T.H.	(CV1144)	CK5704	RAY.	CV2847
	TUNG.		BT35	B.T.H.	(CV1147)	CL4	PHIL.	CV2875
AZ2	MULL.	CV2861	BT45	B.T.H.	(CV22)		MULL.	
	TUNG.		BT75	B.T.H.	(CV489)		TUNG.	
AZ31	MULL.	CV2862	BT79	B.T.H.	(CV372)	CL33	MULL.	CV1401
	TUNG.		BT83	B.T.H.	(CV1120)		TUNG.	
	PHIL.		BTR32	FERR.	(CV458)	CMG8	G.E.C.	(CV1432)
AZ32	MULL.	(CV2861)	BTR34	FERR.	CV459	CMG22	G.E.C.	(CV1473)
	TUNG.		BU100/6	E.S.	CV2867	CMG25	G.E.C.	(CV242)
AZ41	PHIL.	CV3892	BW140	E.E.V.	(CV2871)	CMG25	G.E.C.	(CV250)
BIC/IC	S.T.C.	CV2734	BW153	E.E.V.	(CV2872)	(R.S.)		
BIC/IE	S.T.C.	(CV433)	C1A	U.S.A.	(CV2868)	CMG25	G.E.C.	(CV1472)
B2A	U.S.A.	CV2565	C1B	U.S.A.	CV1765	short		
B4B/IC	S.T.C.	(CV536)	C1C	PHIL.	CV1400	CRT4/1	E.M.I.	CV2880
B6	20th	(CV2140)	C1K	U.S.A.	CV2790	CRT/51	E.M.I.	(CV487)
B6E	20th	(CV2141)	C6A	U.S.A.	CV714	CRI76	E.E.V.	(CV2324)
B12	20th	(CV494)	C10/SS/2G	S.T.C.	(CV2794)	CS2-A	B.T.H.	(CV103)
B12E	20th	(CV2142)	C12B	S.T.C.	(CV2315)	CS2-C	B.T.H.	CV1907
B21	M.O.V.	CV2864	C12R	S.T.C.	(CV429)	CS3-A	B.T.H.	(CV253)
B24	20th	(CV2143)	C14HM	S.T.C.	CV3535	CS3-B	B.T.H.	CV1844
B24E	20th	(CV2144)	C16GS/2G	S.T.C.	CV2745	CS4B	B.T.H.	(CV2258)
B30	M.O.V.	CV2865	C143	E.E.V.	(CV26)	CWS24A	G.E.C.	CV1968
B36	M.O.V.	(CV925)	C144	E.E.V.	(CV2666)	CX25	U.S.A.	CV1766
B65	M.O.V.	(CV278)	C180	E.E.V.	(CV788)	CY31	MULL.	CV1402
B142	E.E.V.	CV1927	C200	U.S.A.	CV2988		PHIL.	
B217	PHIL.	(CV1021)	C203A	U.S.A.	CV2986		TUNG.	
B228	PHIL.	(CV1673)	C243N	PHIL.	(CV1118)	D1	MAZ.	(CV1078)
B230	Hivac	(CV1032)	C7501	U.S.A.	CV2869	D2	U.S.A.	CV2778
B240	PHIL.	(CV1032)	CAA322	U.S.A.	CV1904	D4	FERR.	(CV1037)
B262	PHIL.	(CV1018)	CAR1	M.O.V.	(CV1601)	D41	M.O.V.	(CV1187)
B309	M.O.V.	(CV455)	CAR4	M.O.V.	(CV1602)	D42	M.O.V.	CV557
B406	PHIL.	(CV3621)	CAT1	M.O.V.	(CV1600)	D61	MAZ.	(CV1092)
BD78	B.T.H.	(CV2125)	CAT2	M.O.V.	(CV1606)	D63	M.O.V.	CV554

Commercial Valve	Maker	Service Equip. (or nearest in brackets)	Commercial Valve	Maker	Service Equip. (or nearest in brackets)	Commercial Valve	Maker	Service Equip. (or nearest in brackets)
D77	M.O.V.	(CV140)	DF91	MULL.	(CV785)	E1046	M.O.V.	(CV1090)
D210	Hivac	(CV1021)	DF92	MULL.	(CV1758)	E1097	M.O.V.	(CV1111)
D400	TUNG.	(CV1170)	DGP	COSS.	(CV1141)	E1132	M.O.V.	(CV1111)
D418	TUNG.	(CV1686)	DG7-5	MULL.	(CV2175)	E1143	M.O.V.	(CV1577)
DA30	M.O.V.	CV563	DG13-2	MULL.	(CV2191)	E1148	M.O.V.	(CV6)
DA41	M.O.V.	(CV1076)	DH	M.O.V.	(CV1665)	E1155	M.O.V.	(CV44)
DA60	M.O.V.	CV527	DH30	M.O.V.	(CV1695)	E1161	M.O.V.	(CV1253)
DA90	MULL.	(CV753)	DH63	M.O.V.	(CV587)	E1164	M.O.V.	(CV1091)
DA100	M.O.V.	(CV1219)	DH63M	M.O.V.	(CV587)	E1180	M.O.V.	(CV1077)
DA	FERR.	(CV1109)	DH73M	M.O.V.	CV2909	E1189	M.O.V.	(CV1255)
DAC1	MULL.	CV2887	DH77	M.O.V.	(CV452)	E1190	M.O.V.	(CV55)
DAC32	MULL.	(CV8120)	DH81	M.O.V.	(CV882)	E1191	M.O.V.	(CV12)
DAF70	MULL.	(CV2104)	DK1	MULL.	CV2910	E1192	M.O.V.	(CV1501)
DAF91	MULL.	(CV784)	DK32	MULL.	(CV1802)	E1198	M.O.V.	(CV38)
DAG1	MULL.	CV2	DK91	MULL.	(CV782)	E1199	M.O.V.	CV1405
DC2P	MAZ.	(CV1735)	DL	M.O.V.	(CV1661)	E1209	M.O.V.	(CV7)
DC51	MULL.	(CV1)	DL510	Ediswan	(CV190)	E1228	M.O.V.	CV3
DC70	MULL.	(CV2275)	DL2	MULL.	CV2911	E1229	M.O.V.	CV4
DCC90	MULL.	CV808	DL33	MULL.	(CV819)	E1231	M.O.V.	(CV52)
DDL	COSS.	(CV1691)	DL35	MULL.	(CV1803)	E1232	M.O.V.	(CV92)
DD4	COSS.	(CV1170)	DL63	M.O.V.	CV2912	E1235	M.O.V.	(CV29)
	TUNG.		DL64	MULL.	(CV2331)	E2236	M.O.V.	(CV69)
DD6	COSS.	(CV140)	DL66	MULL.	(CV2106)	E1242	M.O.V.	(CV1510)
	FERR.		DL68	MULL.	(CV2105)	E1248	M.O.V.	(CV8)
DD6G	TUNG.	(CV140)	DL71	MULL.	(CV385)	E1255	M.O.V.	(CV40)
DD41	MAZ.	CV1403	DL72	MULL.	(CV387)	E1256	M.O.V.	(CV42)
DD620	MAZ.	CV2889	DL73	MULL.	(CV2299)	E1266	M.O.V.	(CV15)
DDL13	COSS.	(CV1695)	DL75	MULL.	(CV2102)	E1267	M.O.V.	(CV41)
DDPP4BM	TUNG.	(CV519)	DL92	MULL.	(CV820)	E1271	M.O.V.	(CV57)
DDR2	MULL.	(CV173)	DL93	MULL.	(CV807)	E1273	M.O.V.	(CV58)
DDT	COSS.	CV2813	DL94	MULL.	CV2983	E1287	M.O.V.	(CV23)
DDTmet	TUNG.	CV2890	DL95	MULL.	(CV818)	E1289	M.O.V.	(CV1148)
DDT4	TUNG.	(CV2813)	DM6	20th	(CV2146)	E1297	M.O.V.	(CV5)
DDX52	MULL.	(CV2232)	DM70	MULL.	CV2980	E1320	M.O.V.	(CV51)
DEQ	M.O.V.	(CV1156)	DO26	MULL.	(CV1178)	E1323	M.O.V.	(CV63)
DER	M.O.V.	(CV1642)	DO30	MULL.	(CV1178)	E1325	M.O.V.	(CV56)
DET1SW	M.O.V.	CV2895	DO60	MULL.	(CV1206)	E1326	M.O.V.	(CV69)
DET3	M.O.V.	(CV1034)	DQP	COSS.	(CV1121)	E1331	M.O.V.	(CV1510)
DET5	M.O.V.	(CV1223)	DS	FERR.	(CV2979)	E1335	M.O.V.	(CV61)
DET6	M.O.V.	(CV1620)	DS103	M.W.T.	(CV94)	E1337	M.O.V.	(CV78)
DET9	M.O.V.	CV2899	DT70	U.S.A.	CV798	E1342	M.O.V.	(CV64)
DET10	M.O.V.	CV2900	DV32	S.T.C.	(CV88)	E1355	M.O.V.	(CV1343)
DET12	M.O.V.	(CV1288)	DV34	S.T.C.	(CV127)	E1359	M.O.V.	(CV76)
DET16	M.O.V.	(CV1363)	DV40B	S.T.C.	(CV228)	E1362	M.O.V.	(CV126)
DET18	M.O.V.	(CV419)	DV55	S.T.C.	(CV230)	E1365	M.O.V.	(CV114)
DET19	M.O.V.	(CV18)	DV56	S.T.C.	(CV234)	E1368	M.O.V.	(CV90)
DET20	M.O.V.	(CV6)	DW2	MULL.	(CV1443)	E1371	M.O.V.	(105)
DET22	M.O.V.	(CV273)	DW4/350	MULL.	CV1796	E1373	M.O.V.	(CV99)
DET23	M.O.V.	(CV354)	DW4/500	MULL.	(CV1064)	E1379	M.O.V.	(CV79)
DET24	M.O.V.	(CV397)	DY70	MULL.	(CV2241)	E1380	M.O.V.	(CV89)
DET25	M.O.V.	(CV1025)	E80F	PHIL.	CV2729	E1411	M.O.V.	(CV153)
DE5	M.O.V.	CV2891	E132	M.O.V.	(CV1643)	E1415	M.O.V.	(CV115)
DET5B	M.O.V.	CV2892	E133	M.O.V.	(CV1645)	E1416	M.O.V.	(CV281)
DF33	MULL.	(CV1823)	E406N	PHIL.		E1416	M.O.V.	(CV281)
DF66	MULL.	(CV2107)	E446	PHIL.	(CV1282)	E1417	M.O.V.	(CV117)
DF70	MULL.	(443)	E960	M.O.V.	(CV1058)	E1419	M.O.V.	(CV154)
DF72	MULL.	(CV2101)	E960T	M.O.V.	(CV1098)	E1423	M.O.V.	CV406
DF73	MULL.	(CV2103)	E1024	M.O.V.	(CV1184)	R1429	M.O.V.	(CV79)

Commercial Valve	Maker	Service Equip. (or nearest in brackets)	Commercial Valve	Maker	Service Equip. (or nearest in brackets)	Commercial Valve	Maker	Service Equip. (or nearest in brackets)
E1436	G.E.C.	(CV188)	E4412/M/9	G.E.C.	(CV1521)	ECR60	MULL.	(CV1097)
E1453	M.O.V.	(CV1646)	E4504/B/16	G.E.C.	(CV1385)	EE8020		CV2967
E1457	M.O.V.	(CV257)	E4504/C/16	G.E.C.	(CV252)	EF8	MULL.	(CV1713)
E1458	M.O.V.	(CV178)	E4504/E/16	G.E.C.	(CV1391)		TUNG.	
E1459	M.O.V.	(CV174)	E4504/M/16	G.E.C.	(CV966)	EF9	MULL.	CV1427
E1465	M.O.V.	(CV236)	EA50	MULL.	(CV1092)		TUNG.	
E1468	M.O.V.	(CV172)	EA76	MULL.	(CV469)	EF22	MULL.	(CV303)
E1474	M.O.V.	(CV78)	EAC91	MULL.	(CV137)	EF36	MULL.	(CV1056)
E1481	M.O.V.	(CV192)	EAF42	PHIL.	CV3883	EF37	MULL.	(CV358)
E1485	M.O.V.	(CV807)	EB34	MULL.	(CV1054)	EF37A	MULL.	(CV358)
E1487	M.O.V.	(CV208)		TUNG.		EF39	MULL.	(CV1053)
E1494	M.O.V.	(CV191)	EB41	PHIL.	CV3881		TUNG.	
E1495	M.O.V.	(CV259)	EBC41	PHIL.	CV3882	EF40	PHIL.	CV3885
E1496	M.O.V.	(CV240)	EB91	MULL.	(CV140)	EF41	PHIL.	CV3886
E1497	M.O.V.	(CV215)	EBC3	MULL.	CV1428	EF42	PHIL.	CV3887
E1511	M.O.V.	(CV355)		TUNG.		EF50	MULL.	(CV1091)
		(CV356)	EBC21	MULL.	(CV347)	EF51	MULL.	(CV1035)
E1516	M.O.V.	(CV221)	EBC33	MULL.	(CV1055)	EF52	MULL.	(CV327)
E1524	M.O.V.	(CV338)		TUNG.		EF54	MULL.	(CV1136)
E1527	M.O.V.	(CV290)	EBC90	MULL.	(CV452)	EF55	MULL.	(CV173)
E1531	M.O.V.	(CV214)		PHIL.		EF70	MULL.	(CV467)
E1432	M.O.V.	(CV1624)	EBF2	MULL.	CV2925	EF72	MULL.	(CV465)
E1541	M.O.V.	(CV1716)	EBF32	MULL.	CV2925	EF73	MULL.	(CV466)
E1563	M.O.V.	(CV1863)	EBL131	MULL.	CV2926	EF86	MULL.	CV2901
E1591	M.O.V.	(CV181)		TUNG.		EF91	MULL.	(CV138)
E1599	M.O.V.	(CV273)	EC31	MULL.	CV1433	EF92	MULL.	(CV131)
E1606	M.O.V.	(CV278)	EC50	MULL.	CV2927	EF93	MULL.	(CV354)
E1633	M.O.V.	(CV456)	EC52	MULL.	(CV1137)	EF95	MULL.	(CV850)
E1647	M.O.V.	(CV288)	EC53	MULL.	(CV1197)	EHA5000	E.S.	CV2687
E1648	M.O.V.	(CV135)	EC54	MULL.	(CV66)	EHM2	G.E.C.	(CV2139)
E1659	M.O.V.	(CV453)	EC55	MULL.	(CV273)	EHT1	M.O.V.	(CV19)
E1706	M.O.V.	(CV437)		PHIL.		EHW3000	E.S.	CV2686
E1714	M.O.V.	(CV408)	EC70	MULL.	(CV468)	EK2	TUNG.	CV1426
E1769	M.O.V.	(CV397)	EC80	PHIL.	CV1886		MULL.	
E1860	M.O.V.	(CV240)		MULL.		EK32		(CV1057)
E1935	M.O.V.	(CV415)	EC81	PHIL.	CV1865	EK90	PHIL.	(CV453)
E1938	M.O.V.	(CV493)		MULL.			MULL.	
E1954	M.O.V.	(CV25)	EC90	MULL.	(CV133)	EL2	MULL.	CV1429
E1955	M.O.V.	(CV797)	EC91	MULL.	(CV417)		TUNG.	
E1956	M.O.V.	(CV261)	ECC31	MULL.	(CV1285)	EL3C	U.S.A.	CV822
E1959	M.O.V.	(CV495)	ECC32	MULL.	(CV181)	EL5B	20th.	CV2936
E1996	M.O.V.	(CV436)	ECC35	MULL.	CV569)	EL22	MULL.	(CV304)
E2004	M.O.V.	(CV2115)	ECC40	PHIL.	CV3884	EL31	MULL.	CV2888
E2016	M.O.V.	(CV1758)	ECC81	MULL.	(CV455)	EL32	MULL.	(CV1052)
E2018	M.O.V.	(CV454)	ECC82	MULL.	(CV491)	EL33	MULL.	CV2938
E2095	M.O.V.	(CV471)	ECC83	MULL.	(CV492)		TUNG.	
E2133	M.O.V.	(CV2276)	ECC91	MULL.	(CV858)	EL35	MULL.	(CV1286)
E2134	M.O.V.	(CV2179)	ECH3	MULL.	(CV2929)	EL36	MULL.	CV2940
E2163	M.O.V.	(CV491)		TUNG.			TUNG.	
E2164	M.O.V.	(CV492)	ECH22	MULL.	(CV302)	EL37	MULL.	CV586
E2221	M.O.V.	(CV2277)	ECH33	MULL.	CV2930	EL38	MULL.	(CV450)
E4103/B/4	G.E.C.	(CV1522)	ECH35	MULL.	(CV1347)	EL41	MULL.	CV3889
E4103/E/4	G.E.C.	(CV2205)		TUNG.		EL42	PHIL.	CV3890
E4205/B/7	G.E.C.	(CV1588)	ECH42	PHIL.	CV3888	EL50	MULL.	CV2941
E4205/C/7	G.E.C.	(CV1525)	ECH81	PHIL.	(CV2128)	EL70	MULL.	(CV471)
E4412/B/9	G.E.C.	(CV1587)		MULL.		EL81	MULL.	(CV2721)
E4412/C/9	G.E.C.	(CV2301)	ECR30	MULL.	(CV1588)		PHIL.	
E4412/E/9	G.E.C.	(CV1529)	ECR35	MULL.	(CV1587)			

44								
Commercial Valve	Maker	Service Equip. (or nearest in brackets)	Commercial Valve	Maker	Service Equip. (or nearest in brackets)	Commercial Valve	Maker	Service Equip. (or nearest in brackets)
EL83	MULL.	CV2726	F123A	U.S.A.	CV2949	GEX45/I	G.E.C.	(CV425)
	PHIL.		F129B	U.S.A.	CV2950	GEX64	G.E.C.	(CV2310)
EL84	MULL.	CV2975	F328A	Federal	CV734	GEX402	E.E.V.	CV2902
EL85	MULL.	CV3526	F353	Federal	CV642	GL203A	U.S.A.	CV2986
EL90	MULL.	(CV1862)	F353A	Federal	CV642	GL446	U.S.A.	CV3725
EL91	MULL.	(CV136)	F366A	Federal	(CV32)	GL446A	U.S.A.-	CV932
EM4	MULL.	CVI434	F869B	U.S.A.	CV2723	GL446B	U.S.A.	CV687
	TUNG.		F872A	U.S.A.	CV642	GL455	U.S.A.	CV2789
EM31	MULL.	(CV1077)	F872B	U.S.A.	CV642	GL464	U.S.A.	CV3604
EM34	MULL.	(CV394)	F892R	Federal	CV904	GL464A	U.S.A.	CV688
EM35	MULL.	(CV1103)	F/6063	S.T.C.	(CV4001)	GL471A	U.S.A.	CV3586
EN30	FERR.	(CV2349)	F/6064	S.T.C.	(CV4002)	GL532	U.S.A.	CV2647
EN32	MULL.	(CV2253)	FA13	U.S.A.	CV2952	GL532	U.S.A.	CV2647
EN70	MULL.	(CV474)	FA14	U.S.A.	CV2953	GL592	U.S.A.	CV1903
EN707	—		FA15	U.S.A.	(CV298)	GL806	U.S.A.	CV2658
EN91	MULL.	(CV797)	FC2	MULL.	(CV1043)	GL868	U.S.A.	(CV2680)
ES15	E.S.	CV3853	FC2A	MULL.	CV2954	GL889R	U.S.A.	(CV2687)
ES85	E.S.	(CV25)	FC4	MULL.		GL889RA	U.S.A.	(CV2687)
ES240A	E.S.	CV2563	FC13C	MULL.	CV2956	GL892R	U.S.A.	(CV904)
ES207	E.S.	CV3850	FG17	U.S.A.	CV2957	GL918	U.S.A.	(CV2692)
ES250M	E.S.	(CV1618)	FG27A	U.S.A.	CV2958	GL2050	U.S.A.	CV2565
ES253	E.S.	CV3851	FG67	U.S.A.	CV742	GL8020	U.S.A.	CV2967
ES357	E.S.	(CV27)	FP54	U.S.A.	CV2960	GL8023	U.S.A.	CV933
ES450	E.S.	(CV1207)	FVD7	FERR.	(CV404)	GM1B	Cintel	(CV2149)
ES833	E.S.	(CV635)	FW4/500	MULL.	(CV1264)	GM4	G.E.C.	(CV2138)
ES1500	E.S.	(CV1614)	FW4/800	MULL.	(CV31)	GM5	Cintel	(CV411)
ES1500A	E.S.	(CV1614)	FX215	E.E.V.	(CV2203)	GM5B	Cintel	(CV2148)
ESA891	E.S.	CV2688	FX219	E.E.V.	(CV2520)	GS10C	Ericsson	(CV2325)
ESA892	E.S.	CV701	GI/235G	S.T.C.	CV3524	GS1650		
ESA892C	E.S.	CV904	GI/371K	S.T.C.	(CV2224)	(80-110)	Cintel	(CV2694)
ESA5000	E.S.	(CV2687)	G5H	20th.	CV2247	GS16 (160)	Cintel	(CV248)
ESG250	E.S.	(CV1031)			(CV2233)	GS16		
ESP450	E.S.	(CV1506)	G10H	20th.	(CV2173)	(80-110)	Cintel	(CV1473)
ESU74	E.S.	(CV74)	G10HE	20th.	CV2287	GS18	Cintel	(CV242)
ESU75	E.S.	CV2943	G10/241E	S.T.C.	(CV2223)	GS26	Cintel	(CV1432)
ESU76	E.S.	CV2945	G24	20th.	CV411	GS44X	Cintel	CV1913
ESU150	E.S.	CV2946	G24E	20th.	(CV2148)	GS46	Cintel	CV584
ESU200	E.S.	(CV5)	G24H	20th.	(CV2147)	GS47X	Cintel	(CV405)
ESU208	E.S.	(CV1260)	G50/IG	S.T.C.	(CV2208)	GS118	Cintel	CV1801
ESU300	E.S.	CV2947	G60E	20th.	(CV2149)	GS146	Cintel	CV2692
ESU450	E.S.	(CV1259)	75/2D	S.T.C.	(CV3798)	GT1	M.O.V.	CV2969
ESU866	E.S.	(CV32)	G105/ID	S.T.C.	(CV686)	GT1A	M.O.V.	(CV1143)
ESU872	E.S.	CV642	G120/ID	S.T.C.	(CV438)	GT1C	M.O.V.	(CV1128)
ESU1500	E.S.	CV2944	G150/IA	S.T.C.	(CV75)	GT1E	M.O.V.	CV530
ESWS01	E.S.	(CV1621)	G150/2D	S.T.C.	(CV413)	GT1I	Unknown	(CV435)
ESW5000	E.S.	(CV2686)	G150/3D	S.T.C.	(CV216)	GTR95M/S	Ericsson	(CV286)
ET30	E.S.	(CV1030)	G180/2M	S.T.C.	(CV395)	GTR150M/S	Ericsson	(CV287)
EW2A	20th.	CV2139	G210/IC	S.T.C.	(CV212)	GUI	M.O.V.	(CV1262)
EY51	MULL.	(CV426)	G240/2D	S.T.C.	(CV2174)	GU5	M.O.V.	(CV1072)
EY70	MULL.	(CV473)	G400/IK	S.T.C.	(CV2194)	GU7	M.O.V.	CV2973
EY84	MULL.	(CV2235)	G445B	N.K.	(CV1651)	GU8	M.O.V.	(CV1628)
EY91	MULL.	(CV135)	GA5A	U.S.A.	CV2647	GUI1	M.O.V.	CV532
EZ22	MULL.	(CV346)	GC10A	Ericsson	(CV2199)	GU20	M.O.V.	CV1435
EZ35	MULL.	(CV574)	GC10B/S	Ericsson	(CV2271)	GU21	M.O.V.	(CV5)
	TUNG.		GC10/4B	Ericsson	CV1739	GU50	M.O.V.	(CV1072)
EZ40	PHIL.	CV3891	GDT4B	COSS.	(CV1141)	GX402	E.E.V.	(CV2902)
EZ90	MULL.	(CV493)	GD86W	Ericsson	(CV2321)	GZ32	Mullard	CV593
F2	Siemens	(CV2338)	GEX35	G.E.C.	(CV442)			

Commercial Valve	Maker	Service Equiv. (or nearest in brackets)	Commercial Valve	Maker	Service Equiv. (or nearest in brackets)	Commercial Valve	Maker	Service Equiv. (or nearest in brackets)
H2	M.O.V. MAZ.	CV2977	HP415	TUNG.	(CV1169)	KT30	M.O.V.	CV3519
H2D	FERR.	(CV1044)	HP4101	TUNG.	(CV1124)	KT31	M.O.V.	CV3530
HI2	M.O.V.	CV2978	HP4101C	TUNG.	(CV1282)	KT32	M.O.V.	(CV1287)
H30	M.O.V.	CV2979	HP4106	TUNG.	(CV1169)	KT33C	M.O.V.	(CV1503)
H42	M.O.V.	(CV1182)	HP4115	TUNG.	(CV1169)	KT38	M.O.V.	(CV1576)
H45	U.S.A.	(CV372)	HR2	FERR.	(CV261)	KT41	M.O.V.	(CV1181)
H63	M.O.V.	(CV1073)	HR7	FERR.	(CV404)	KT42	M.O.V.	(CV1174)
H210	M.O.V.	(CV1673)	HR210	TUNG.	(CV1673)	KT44	M.O.V.	(CV1577)
	Hivac		HT415	U.S.A.	CV3540	KT44T	M.O.V.	(CV1576)
H410	M.O.V.	CV2981	HV18	U.S.A.	CV2988	KT45	M.O.V.	CV1825
H610	M.O.V.	CV2982	HVR2	MULL.	(CV1134)	KT61	M.O.V.	CV1438
HAD	FERR.	(CV1419)	HY51B	Hytron	(CV702)	KT63	M.O.V.	(CV1186)
HA1	M.O.V.	(CV1171)	HY61	Hytron	(CV124)	KT66	M.O.V.	(CV1075)
HA2	M.O.V.	(CV1059)	HY75	Hytron	CV751	KT67	M.O.V.	(CV437)
HD14	M.O.V.	(CV1818)	HY114B	Hytron	CV3505	KT81	M.O.V.	(CV885)
HD24	M.O.V.	CV2985	HY615	Hytron	CV3506	KU25	U.S.A.	CV2993
HD203A	Taylor	CV2986	IFW1	Dario	(CV1039)	KU45	U.S.A.	CV3875
HF93	MULL.	(CV1928)	IW3	MULL.	(CV1039)	L2	MAZ.	CV3531
HF100	Amperex	CV2987	IW4/500	MULL.	(CV1039)	L9	Siemens	(CV328)
HF130	Amperex	CV638	JP9-7	MULL.	(CV3676)	L21	M.O.V.	CV3532
HF200	Amperex	CV2988	JP9-7A	MULL.	(CV370)	L21DD	MAZ.	(CV1308)
HF300	Amperex	CV693	K3A	FERR.	(CV410)	L22DD	MAZ.	CV3533
HK24	U.S.A.	CV941	K7RF4	R.C.A.	CV1808	L30	M.O.V.	CV3534
HK24G	U.S.A.	CV789	K302	E.E.V.	(CV2164)	L63	M.O.V.	(CV1067)
HK54	U.S.A.	CV707	K305	E.E.V.	(CV2263)	L77	M.O.V.	(CV133)
HK257	U.S.A.	CV824	K307	E.E.V.	CV1871	L210	M.O.V.	(CV1021)
HK354E	U.S.A.	CV2989	K308	E.E.V.	(CV2283)		MAZ.	
HLA2	S.T.C.	(CV1678)	K322	E.E.V.	(CV2791)		Hivac	
HLB1	S.T.C.	(CV1021)	K324	E.E.V.	(CV2304)	L410	M.O.V.	(CV1152)
HLDD/I320	MAZ.	CV3503	K1051	U.S.A.	CV2849	L600	U.S.A.	CV3537
HL2	MAZ.	(CV1673)	K1105P2	U.S.A.	CV3736	L610	M.O.V.	CV3538
	MOV.		K814024	U.S.A.	CV3514	LD210	TUNG.	CV502
	TUNG.		KB2	MULL.	CV3515	LG210	TUNG.	(CV1021)
	FERR.		KK2	PHIL.	CV3516	LP2	M.O.V.	CV548
HL2Met	M.W.T.	CV2991	KR3	E.M.I.	(CV217)	LP2	FERR.	(CV1023)
HL2K	M.O.V.	(CV1050)			(CV218)	LP4	FERR.	(CV1168)
HL4	TUNG.	(CV1173)	KR6/1	E.M.I.	(CV116)		M.O.V.	
HL4X	TUNG.	(CV1037)	KR6/2	E.M.I.	(CV237)	LP220	TUNG.	(CV1166)
HL13C	MULL.	(CV1109)	KR6/3	E.M.I.	(CV238)	LS5	M.O.V.	(CV1637)
HL21	M.O.V.	(CV1303)	KR6/4	E.M.I.	(CV272)	LS5A	M.O.V.	(CV1650)
HL21DD	MAZ.	(CV1044)	KRN2	E.M.I.	(CV87)	LS5B	M.O.V.	(CV2846)
HL23	MAZ.	(CV1130)	KRN3	E.M.I.	(CV217)	LS5X	M.O.V.	(CV1667)
HL23DD	MAZ.	CV2995	KS9-20	MULL.	(CV1795)	LS6A	M.O.V.	(CV3541)
HL41	MAZ.	(CV24)	KS9-20A	MULL.	(CV2792)	LS7	M.O.V.	(CV1660)
HL41DD	MAZ.	CV2996	KTW61	M.O.V.	(CV1100)	LS8	M.O.V.	(CV1656)
HL92	MULL.	(CV1959)	KTW62	M.O.V.	(CV1100)	LS8A	M.O.V.	(CV1676)
HL133	MAZ.	CV2998	KTW63	M.O.V.	(CV1195)	LS9B	M.O.V.	(CV1676)
HL133DD	MAZ.	CV2999	KTW73	M.O.V.	(CV1056)	LS408A	S.T.C.	CV2536
HL210	MAZ.	CV3500	KTW73M	M.O.V.	CV3527	LS532	S.T.C.	CV3542
	M.O.V.		KTW74M	M.O.V.	(CV918)	LS650	S.T.C.	(CV391)
HL210A	M.O.V.	CV1303	KTZ41	M.O.V.	CV3529	LS731	S.T.C.	(CV273)
HL610	M.O.V.	CV3501	KTZ63	M.O.V.	(CV1074)	M2H	20th.	(CV2886)
HL1320	MAZ.	CV3502	KTZ73M	M.O.V.	CV3530	M6	20th.	(CV2145)
HP2	FERR.	(CV1032)	KT2	M.O.V.	(CV1118)	M215H	COSS.	(CV177)
HP6	TUNG.	(CV138)	KT8	M.O.V.	(CV1079)	M500	E.E.V.	(CV353)
HP210	TUNG.	(CV1322)	KT8C	M.O.V.	(CV1079)	M501	E.E.V.	(CV76)
HP215	Hivac	(CV1322)	KT24	M.O.V.	(CV1334)	M502	E.E.V.	(CV2166)

Commercial Valve	Maker	Service Equip. (or nearest in brackets)	Commercial Valve	Maker	Service Equip. (or nearest in brackets)	Commercial Valve	Maker	Service Equip. (or nearest in brackets)
M503	E.E.V.	CV1866	MT9L	M.O.V.	CV1440	NU40T2	N.U.	(CV1076)
M505	E.E.V.	CV1747	MT11SW	M.O.V.	CV3563	NU75H	U.S.A.	CV751
M507	E.E.V.	(CV69)	MT12	M.O.V.	CV3564	NU114B	U.S.A.	CV3505
M508	E.E.V.	(CV370)	MT12A	M.O.V.	CV1441	NU200	U.S.A.	CV2988
M510	E.E.V.	CV1827	MT13	M.O.V.	(CV1614)	NU615	U.S.A.	CV3506
M512	E.E.V.	CV1828	MT14	M.O.V.	CV1442	OC2.5	MULL.	(CV1607)
M513	E.E.V.	CV3528	MT16	M.O.V.	(CV1030)	OM1	COSS.	(CV1402)
M8079	MULL.	(CV4025)	MT17	MULL.	(CV2957)	OM3	COSS.	(CV1054)
M8081	MULL.	(CV4031)	MT5544	MULL.	(CV2210)	OM4	COSS.	(CV1055)
M8083	MULL.	(CV4014)	MT5545	MULL.	(CV2215)	OM5	COSS.	(CV1056)
M8100	MULL.	(CV4010)	MUI		CV3567	OM6	COSS.	(CV1063)
ME41	MAZ.	CV3565	MU2	MAZ.	CV1459	OM9	COSS.	(CV1052)
ME1001	MULL.	(CV273)	MUI2	M.O.V.	(CV1039)	OM10	COSS.	(CV1581)
ME1005	MULL.	(CV354)	MUI2/14	M.O.V.	(CV1039)	P2	M.O.V.	(CV1246)
ME1100	MULL.	(CV1795)	MU4250	COSS.	(CV1072)	P12/250	TUNG.	(CV1168)
ME1400	MULL.	(CV432)	MV6-5	PHIL.	CV1976	P27/500	TUNG.	(CV1040)
ME1401	MULL.	(CV495)	MVSG	COSS.	(CV1165)	P41	MAZ.	CV1408
ME1500	MULL.	(CV474)	MVSPen	COSS.	CV3571	P57		CV1466
ME1501	MULL.	(CV2253)	MVSPen	COSS.	(CV1169)	P61	MAZ.	(CV1066)
ME1502	MULL.	(CV1128)	MVSPenB	COSS.	CV3572	P215	MAZ.	(CV1019)
ME1503	MULL.	(CV1787)	MW6-2	MULL.	CV1737		M.O.V.	
MF13-1	MULL.	CV3959	MW100	COSS.	(CV25)		TUNG.	
MF31-55	MULL.	(CV429)	MX1	E.M.I.	(CV1515)		Hivac	
MH4	M.O.V.	(CV1037)	MX2	E.M.I.	(CV418)	P220	MAZ.	(CV3620)
MH4met	M.O.V.	(CV399)	MX40	M.O.V.	CV3576		Hivac	
MH41	M.O.V.	(CV1505)	MX52	B.T.H.	(CV306)	P220A	MAZ.	(CV1023)
MHD4	M.O.V.	CV3546	MX57	B.T.H.	(CV209)	P410	M.O.V.	CV3621
MHL4	M.O.V.	(CV1038)	MX103	MULL.	(CV2150)	P415	M.O.V.	(CV1154)
MHLD6	M.O.V.	(CV1101)	MX105	MULL.	(CV2151)	P425	MAZ.	(CV1154)
MHT4	—	(CV2955)	MX107	MULL.	(CV2152)	P495	TUNG.	(CV1181)
MKT4	M.O.V.	(CV1683)	MX108	MULL.	(CV2153)	P435/1E	S.T.C.	(CV398)
ML4	M.O.V.	(CV1732)	MZ05-20	MULL.	CV3573	P552/1E	S.T.C.	(CV427)
ML6	M.O.V.	(CV1105)	MZ05-60	MULL.	(CV1206)	P610	M.O.V.	CV3622
ML5667	Machlett	(CV2687)	MZ1-70	MULL.	(CV25)	P625	M.O.V.	(CV1208)
MM4V	MULL.	(CV1165)	MZ1-75	MULL.	(CV444)	PA1	S.T.C.	(CV1689)
MP/Pen	COSS.	(CV1683)	MZ1-76	MULL.	CV3574	PA40	MAZ.	CV3623
MPT4	M.O.V.	(CV1174)	MZ1-1000	MULL.	(CV1219)	PD22A	MULL.	(CV1163)
MPT4K	M.O.V.	CV3552	MZ2-200	MULL.	(CV200)	PD220	MAZ.	(CV1032)
MPT42	M.O.V.	CV2554	N14	M.O.V.	(CV1803)	PD220A	MAZ.	(CV1696)
MR4	M.O.V.	(CV1611)	N16	M.O.V.	(CV819)	PE7	MAZ.	CV3624
MR10	M.O.V.	(CV34)	N17	M.O.V.	(CV820)	PE8	MAZ.	CV3625
MR75	E.S.	(CV1142)	N18	M.O.V.	(CV818)	Pen4DD	MULL.	CV519
MR300	E.S.	CV3557	N41	M.O.V.	(CV1181)	Pen4VA	MULL.	(CV1174)
MR300E	E.S.	CV3558	N43	M.O.V.	(CV1675)	Pen13C	MULL.	(CV889)
MS4	M.O.V.	(CV1164)	N77	M.O.V.	(CV136)	Pen25	MAZ.	(CV65)
MS4B	M.O.V.	CV3553	N78	M.O.V.	CV3711	Pen36A	—	(CV1672)
MSG/LA	COSS.	(CV1677)	N727	M.O.V.	(CV1862)	Pen36C	MULL.	(CV1672)
MS Pen	COSS.	CV3561	NE2	U.S.A.	CV2976	Pen44	MAZ.	CV3630
MS Pen clear	COSS.	(CV1124)	NE16	U.S.A.	CV651	Pen45	MAZ.	CV1407
MS Pen (5 Pin)	COSS.	(CV244)	NE17	E.S.	(CV359)	Pen45DD	MAZ.	CV3631
MS/PenB	COSS.	(CV1125)	NE18	E.S.	(CV360)	Pen46	MAZ.	(CV1127)
MS/Pen/T	COSS.	(CV1129)	NHPI	FERR.	(CV310)	Pen220	MAZ.	(CV1118)
MSP4	M.O.V.	(CV1282)	NP90	U.S.A.	CV3607	Pen220A	MAZ.	(CV1051)
MSP41	M.O.V.	CV3562	NSPI	FERR.	(CV220)	Pen231	MAZ.	CV3633
MT4	M.O.V.	(CV1610)	NSP2	FERR.	(CV2269)	Pen383	MAZ.	CV1456
MT9F	M.O.V.	CV1439	NT2	Hivac	(CV2213)	Pen428	MULL.	CV3634
			NUI	U.S.A.	(CV2680)	Pen1340	MAZ.	CV3635
			NU20	U.S.A.	(CV1474)	Pen1346	—	CV3636

Commercial Valve	Maker	Service Equip. (or nearest in brackets)	Commercial Valve	Maker	Service Equip. (or nearest in brackets)	Commercial Valve	Maker	Service Equip. (or nearest in brackets)
PenA4	MULL.	CV3638	PZI-35	MULL.	(CV1240)	R2/10	G.E.C.	(CV97)
PenB1	S.T.C.	(CV1118)	PZI-75	MULL.	(CV1221)	R2/38	G.E.C.	(CV98)
PenB4	MULL.	CV3626	QA2400	M.O.V.	(CV4015)	R3	S.T.C.	(CV1039)
PJ8	U.S.A.	CV3640	QA2403	M.O.V.	(CV4014)	R3/10	G.E.C.	(CV95)
PJ23	U.S.A.	(CV3680)	QA2404	M.O.V.	(CV4025)	R3/16	G.E.C.	(CV96)
PK150	E.M.I.	(CV150)	QA2406	M.O.V.	(CV4024)	R4	FERR.	(CV1796)
PL522	PHIL.	(CV2520)	QA2407	M.O.V.	(CV4005)	R4A	FERR.	(CV1064)
PM1A	MULL.	CV2977	QFI96	U.S.A.	(CV1078)	R10	S.T.C.	(CV261)
PM1HF	MULL.	(CV1673)	QK26	Raytheon	CV1768	R11	S.T.C.	(CV1111)
PM1HL	MULL.	(CV3641)	QK221	U.S.A.	CV3902	R12	S.T.C.	(CV426)
PM1LF	MULL.	CV3642	QK283	U.S.A.	CV3685	R17	S.T.C.	(CV2218)
PM2	MULL.	(CV1019)	QK284	U.S.A.	CV3686	R18	S.T.C.	(CV2235)
PM2A	MULL.	(CV3643)	QK338	U.S.A.	CV3903	R52	FERR.	(CV1863)
PM2B	MULL.	(CV1032)	QK353	U.S.A.	CV3737	R612G	U.S.A.	CV597
PM2BA	MULL.	(CV1163)	QMG159	U.S.A.	(CV2874)	R4410	R.C.A.	CV521
PM2BA	MULL.	(CV1163)	QP21	M.O.V.	(CV1035)	R6010	E.M.I.	(CV2353)
PM2DX	MULL.	CV3645	QP22B	MULL.	(CV1035)	R6015	E.M.I.	(CV2354)
PM2HL	MULL.	(CV1050)	QP25	MAZ.	CV556	RG1-125	MULL.	(CV1263)
PM3	MULL.	(CV1151)	QP230	MAZ.	(CV1035)	RG1-240	MULL.	(CV1626)
PM4DX	MULL.	(CV1152)	QPT2	FERR.	(CV1035)	RG1-250	MULL.	CV3667
PM12	MULL.	(CV1018)	QQE03-12	PHIL.	CV2798	RG3-250	MULL.	(CV1625)
PM12A	MULL.	(CV1018)	QQE06-40	PHIL.	(CV424)	RG3-250A	MULL.	(CV32)
PM12M	MULL.	(CV1041)	QQV03-10	MULL.	(CV2798)	RG3-1250	MULL.	(CV1629)
PM12V	MULL.	(CV319)	QQV03-20	MULL.	(CV2799)	RG3-1250A	MULL.	(CV5)
PM14	MULL.	(CV1159)	QQV03-20A	MULL.	(CV2799)	RG4-1000	MULL.	CV3670
PM22	MULL.	CV3649	QQV04-20	MULL.	(CV2663)	RG5-500	MULL.	(CV1349)
PM22A	MULL.	CV3647	QQV06-40	MULL.	(CV424)	RK20A	RAY.	CV704
PM22D	MULL.	CV3578	QQV06-40A	MULL.	(CV2797)	RK28	RAY.	3672
PM24A	MULL.	(CV1167)	QQV07-40	MULL.	(CV2666)	RK28A	RAY.	CV3673
PM24D	MULL.	(CV1237)	QQZ04-15	MULL.	CV1838	RK30	RAY.	CV2657
PM24E	MULL.	CV3648	QS70/20	E.E.V.	(CV284)	RK31	RAY.	CV3674
PM202	MULL.	(CV185)	QS75/20	E.E.V.	(CV284)	RK33	RAY.	CV875
PM254	MULL.	(CV1153)	QS75/60	E.E.V.	(CV434)	RK34	RAY.	(CV18)
PM256	MULL.	(CV1208)	QS83/3	E.E.V.	(CV449)	RK38	RAY.	CV2591
PP3/250	MAZ.	(CV1168)	QS92/10	E.E.V.	(CV188)	RK44	RAY.	CV637
PP5/400	MAZ.	(CV1040)	QS95/10	E.E.V.	(CV286)	RK47	RAY.	CV3677
PP222	TUNG.	(CV1118)	QS105/45	E.E.V.	(CV422)	RK48A	RAY.	CV690
PT2	M.O.V.	(CV1118)	QS108/45	E.E.V.	(CV422)	RK49	RAY.	CV3679
PT4	M.O.V.	(CV1181)	QS150/15	E.E.V.	(CV287)	RK57	RAY.	CV625
	FERR.		QS150/30	E.E.V.	(CV216)	RK58	RAY.	CV638
PT5	M.O.V.	CV3652	QS150/40	E.E.V.	(CV216)	RK60	RAY.	CV3680
PT5E	M.O.V.	CV3579	QS150/45	E.E.V.	(CV395)	RK62	RAY.	CV3681
PT6	M.O.V.	CV3653	QS1200	E.E.V.	(CV2225)	RK63	RAY.	CV2589
PT11	M.O.V.	CV3654	QS1205	E.E.V.	(CV3798)	RK6112	E.M.I.	(CV2116)
PT15	M.O.V.	(CV1104)	QS1206	E.E.V.	(CV686)	RKR47	U.S.A.	CV3683
PT25	M.O.V.	(CV1046)	QS1207	E.E.V.	(CV1832)	RKR72	RAY.	(CV709)
PT25H	M.O.V.	(CV1046)	QS1208	E.E.V.	(CV1833)	RKR73	RAY.	CV2543
PT425	M.O.V.	CV3656	QV03-12	MULL.	(CV2129)	RL7	MULL.	(CV1136)
PT425X	M.O.V.	(CV1167)	QV04-7	MULL.	(CV309)	RL16	MULL.	(CV1137)
PTA	FERR.	(CV889)	QV05-25	MULL.	(CV124)	RL18	MULL.	(CV1197)
PV05-15	MULL.	CV3657	QV06-20	MULL.	(CV3523)	RL37	MULL.	(CV66)
PV1-35	MULL.	CV3658	QV1-150A	MULL.	(CV2519)	RR3-250	MULL.	(CV1835)
PV495	TUNG.	(CV1443)	QV1-150	MULL.	(CV2519)	RR3-1250	MULL.	(CV2518)
PX4	M.O.V.	(CV1168)	QY2-100	MULL.	(CV26)	RV120/250	TUNG.	(CV1064)
PX5	Hivac	(CV1040)	QY3-125	MULL.	(CV2130)	RX3-120	MULL.	(CV1261)
PX25	M.O.V.	(CV1040)	QY4-250	MULL.	(CV2131)	RX233	RAY.	CV3688
PX41	Hivac	(CV1168)	QY5-3000A	MULL.	(CV1098)	RX233A	RAY.	CV793
PY3-600	MULL.	(CV1373)	RI	S.T.C.	(CV1443)	RX235	RAY.	CV709

48								
Commercial Valve	Maker	Service Equiv. (or nearest in brackets)	Commercial Valve	Maker	Service Equiv. (or nearest in brackets)	Commercial Valve	Maker	Service Equiv. (or nearest in brackets)
RZ1-150	MULL.	CV3690	SU44	COSS.	(CV261)	TTR31MR		
RZ1-250	MULL.	(CV2853)	SU45	COSS.	(CV371)	(9100)	FERR.	CV3840
S2	FERR.	(CV1018)	SU150	COSS.	(CV128)	TTR31MR		
S2A	S.T.C.	(CV984)	SU2150A	COSS.	(CV1290)	(9375)	FERR.	CV1923
S3A	S.T.C.	CV374	SU4150A	COSS.	(CV1134)	TV03-10	MULL.	CV1573
S4VB	MULL.	(CV1677)	SV2C39A	S.T.C.	(CV2516)	TV03-10A	MULL.	CV1089
SS22AF	S.T.C.	(CV39)	SV4X/150A	S.T.C.	(CV2519)	TV4	MULL.	CV1412
S23	M.O.V.	CV3691	SV280/40		(CV1068)	TX3-200	MULL.	CV3739
S23 (met.)	M.O.V.	CV3692	SV280/80		(CV1069)	TX4	TUNG.	(CV1194)
S24	M.O.V.	(CV1018)	SV813	S.T.C.	(CV26)	TX5-400	MULL.	CV3740
S25A	S.T.C.	(CV16)	SV828	S.T.C.	(CV631)	TSY4-500	MULL.	CV1889
S26A	S.T.C.	(CV53)	SW5	COSS.	CV3715	TY1-50	MULL.	(CV1288)
S27A	S.T.C.	(CV82)	SW7	COSS.	CV3719	TY2-125	MULL.	(CV1924)
S28A	S.T.C.	(CV88)	SW7	MULL.	(CV1069)	TZ03-20	MULL.	(CV1047)
S30A	S.T.C.	(CV127)	SW35 Pen	COSS.	(CV1370)	TZ2-250	MULL.	(CV1618)
SI30	COSS.	(CV1110)	SW40H	COSS.	(CV1076)	TZ2-300	MULL.	CV3741
	M.O.V.		SW40 Pen	COSS.	(CV1104)	TZ20	U.S.A.	CV3742
SI3A	CUSS.	CV3694	SW75 Pen	COSS.	(CV1371)	TZ40	U.S.A.	(CV1076)
SI30P	COSS.	(CV45)	T4D	MULL.	CV3721	U4	M.O.V.	(CV1608)
S215	M.O.V.	CV3695	T20	U.S.A.	CV3722	U5	M.O.V.	CV3743
S215A	MAZ.	CV3696	T20G	U.S.A.	(CV1047)	U6	M.O.V.	CV3744
S215B	MAZ.	(CV1018)	T21	MAZ.	CV3679	U10	M.O.V.	CV1443
S215VM	MAZ.	(CV1028)	T41	MAZ.	CV3723	U12	M.O.V.	(CV1064)
S410	M.O.V.	(CV1159)	T200	U.S.A.	CV3723	U14	M.O.V.	(CV1064)
S610	M.O.V.	CV3698	T250	M.O.V.	(CV1030)	U15	M.O.V.	CV3747
S625	M.O.V.	CV1317	T814	U.S.A.	CV2658	U16	M.O.V.	(CV1290)
SAL39	U.S.A.	CV3876	T2000		(CV1121)	U17	M.O.V.	(CV1113)
SD6	COSS.	CV1989	TDD2A	MULL.	CV3726	U18	M.O.V.	(CV1264)
SG215	MAZ.	CV3702	TDD4	MULL.	CV3727	U18/20	M.O.V.	(CV31)
	Hivac		TDD13C	MULL.	(CV1419)	U19	M.O.V.	(CV187)
SG220	Hivac	(CV1018)	TD03-5	MULL.	(CV345)	U19/23	M.O.V.	(CV187)
SG250	MULL.	(CV1031)	TD03-10	MULL.	(CV273)	U20	M.O.V.	(CV31)
SM95	COSS.	(CV286)	TH2	MULL.	CV1410	U21	MAZ.	CV3751
SM150	COSS.	(CV287)	TH4A	MULL.	(CV1194)	U22	MAZ.	CV3750
SN947D	U.S.A.	(CV471)		TUNG.		U23	M.O.V.	CV235
SN954	U.S.A.	(CV473)	TH4B	MULL.	(CV1194)	U24	MAZ.	CV1921
SN956B	U.S.A.	(CV2241)		TUNG.		U27	M.O.V.	(CV1111)
SP2	MULL.	(CV1320)	TH41	MAZ.	CV1411	U30	M.O.V.	CV3752
SP4	MULL.	(CV1324)	TMC15B	COSS.	CV3730	U31	M.O.V.	CV3753
	TUNG.		TMC16B	COSS.	CV3731	U37	M.O.V.	(CV2289)
SP4B	MULL.	CV3703	TMC20B	COSS.	CV3732	U41	M.O.V.	(CV2115)
	TUNG.		TP22	MAZ.	(CV1344)	U50		(CV1268)
SP6	COSS.	(CV136)	TP25	MAZ.	(CV1345)	U52	M.O.V.	(CV1071)
SPI3C	MULL.	CV3704	TP26	MAZ.	CV3735	U78	M.O.V.	(CV493)
SP42	MAZ.	(CV1336)	TS70	U.S.A.	CV798	U82	M.O.V.	CV3919
SP61	MAZ.	(CV1065)	TSP4	MULL.	CV560	U143		(CV2862)
SP210	MAZ.	(CV1332)	TSW50	COSS.	(CV1288)	U600	E.S.	CV3756
SP215	MAZ.	(CV1320)	TSW50A	COSS.	(CV1235)	U4020	MAZ.	(CV1267)
SPT2	FERR.	(CV1049)	TT4	MULL.	(CV1179)	UDI43	Hivac	(CV2293)
SPT4A	FERR.	(CV1282)	TT10		(CV26)	UDI66C	Hivac	(CV2257)
SSI971	S.T.C.	(CV1604)	TT11	M.O.V.	(CV1501)	UE301	U.S.A.	CV621
STV70/20	E.E.V.	(CV284)	TT12	M.O.V.	(CV524)	UE905	U.S.A.	CV625
STV70/60	E.E.V.	CV1895	TT15	M.O.V.	(CV415)	UE938	U.S.A.	CV638
STV150/200	M.O.V.	CV3709	TT16	M.O.V.	(CV2963)	UE945	U.S.A.	(CV735)
STV280/40	M.O.V.	(CV1068)	TT18	M.O.V.	(CV2666)	UE792	U.S.A.	CV642
STV280/80	M.O.V.	(CV1069)	TTR31	FERR.	(CV221)	UL41	MULL.	CV1977
STV280/80A	M.O.V.	CV3712	TTR31MC			UR3C	MULL.	CV3758
SU41	COSS.	(CV1113)	(9375)	FERR.	CV1748	UU4	MAZ.	CV3759

Commercial Valve	Maker	Service Equip. (or nearest in brackets)	Commercial Valve	Maker	Service Equip. (or nearest in brackets)	Commercial Valve	Maker	Service Equip. (or nearest in brackets)
UU5	MAZ.	(CV1039)	VI507A	E.S.	(CV1504)	VS2	FERR.	CV3800
UU6	MAZ.	CV1413	VI901	E.S.	(CV1504)	VS18BO	Cintel	(CV3625)
UU7	MAZ.	CV3761	VI904		(CV1072)	VS24	M.O.V.	CV3802
UU9	MAZ.	CV1855	VI906	MAZ.	(CV20)	VS24/K		
UUI20/350	MAZ.	(CV1796)	VI907	MAZ.	(CV1111)	(met)	M.O.V.	CV3803
	Hivac		VI913	MAZ.	(CV1508)	VS26	M.O.V.	(CV161)
UU120/500	Hivac	(CV1064)	VI920	MAZ.	(CV121)	W7/1	S.T.C.	(CV2352)
UV203A	U.S.A.	CV2986	VI922	MAZ.	(CV74)	W7/2	S.T.C.	(CV2188)
UX6653	U.S.A.	CV3592	VI924	E.S.	(CV100)	W17	M.O.V.	(CV785)
V20	TUNG.	(CV764)	VI928	MAZ.	(CV261)	W21-4 Pin	M.O.V.	CV171
VI20	MAZ.	CV3762	VI939	MAZ.	(CV371)	W21-7 Pin	M.O.V.	CV3804
VI23	MAZ.	CV3763	V2024	E.S.	(CV125)	W30K	M.O.V.	CV3805
V226	MAZ.	CV3765	V2030F	E.S.	(CV349)	W31	M.O.V.	CV3806
V230A/IK	S.T.C.	(CV234)	V2046A	E.S.	(CV486)	W63	M.O.V.	(CV1183)
V230C/LD	S.T.C.	(CV230)	V2053	E.S.	(CV403)	W77	M.O.V.	(CV131)
V233A/IK	S.T.C.	(CV2190)	VA16	Cintel	(CV528)	W727	M.O.V.	(CV454)
V235A/IK	S.T.C.	(CV2221)	VA35	Cintel	(CV285)	WD30	M.O.V.	CV3810
V240C/2K	S.T.C.	(CV2189)	VA50	Cintel	(CV2132)	XB1	Hivac	(CV2293)
V245	MAZ.	(CV1367)	VF01	B.T.H.	(CV80)	XE1	Hivac	(CV495)
V246A/IK	S.T.C.	(CV228)	VF03	B.T.H.	(CV81)	XE2	Hivac	(CV2202)
V248A	MAZ.	(CV1366)	VG11	U.S.A.	CV2976	XGR3		(CV151)
V257	MAZ.	(CV1723)	VHT2A	FERR.	(CV1043)	XG5-500	MULL.	(CV2957)
V312	MAZ.	CV3766	VHT4	FERR.	(CV2955)	XH1.5	Hivac	CV3830
V339	MAZ.	CV3767	VH2A	FERR.	(CV1043)	XH3-045	MULL.	(CV372)
V248A	MAZ.	(CV1366)	VHTA	FERR.	(CV2956)	XH8-100	MULL.	(CV1787)
V503	MAZ.	CV3768	VLS452	S.T.C.	CV3784	XH16-200	MULL.	(CV2520)
V625	Hivac	(CV93)	VLS492AG	S.T.C.	(CV1527)	XL02.0V	Hivac	(CV1701)
V630	MAZ.	(CV201)	VMP4	M.O.V.	(CV1169)	XLI.5	Hivac	(CV1720)
V872	MAZ.	(CV1116)	VMP4G	M.O.V.	(CV1169)	XL2.0V	Hivac	CV3831
V877	MAZ.	CV3769	VMP4(met)	M.O.V.	(CV1169)	XN		(CV14)
V884	MAZ.	(CV131)	VMS4	M.O.V.	(CV1165)	XPI.5	Hivac	(CV176)
V885	MAZ.	(CV132)	V04	TUNG.	(CV2955)	XP2.0V	Hivac	CV1702
V887	MAZ.	(CV136)	VPT4	FERR.	(CV1083)	XRI-3200	MULL.	(CV2210)
V914	MAZ.	(CV1170)	VPT4	FERR.	(CV1169)	X17	M.O.V.	(CV782)
V994A	MAZ.	CV3797	VPT4B	FERR.	(CV1169)	X21	M.O.V.	CV3816
V995	MAZ.	CV3770	VPT210	FERR.	(CV1083)	X21 met	M.O.V.	CV3817
V970	MAZ.	CV3772	VP2	MULL.	CV3787	X22	M.O.V.	CV3818
VI010	MAZ.	CV3773	VP2B	MULL.	CV520	X23	M.O.V.	(CV1082)
VI020	MAZ.	CV3774	VP4 (met)	MULL.	CV3788	X24	M.O.V.	CV3819
VI021	MAZ.	CV3775	VP4A	MULL.	(CV1169)	X24 met	M.O.V.	CV3820
VI023	MAZ.	CV3776		TUNG.		X31	M.O.V.	CV3821
VI029	MAZ.	CV3777	VP4B	MULL.	CV3582	X31 met	M.O.V.	CV3822
VI040	MAZ.	(CV987)		TUNG.		X41	M.O.V.	(CV1460)
VI042	MAZ.	(CV275)	VP13C	MULL.	CV3790	X41 met	M.O.V.	(CV3823)
VI043	MAZ.	(CV401)	VP21	M.O.V.	(CV1083)	X42	M.O.V.	(CV3576)
VI047	MAZ.	(CV961)	VP23	MAZ.	CV3792	X61M	M.O.V.	(CV281)
VI052	MAZ.	(CV441)	VP24 (met)		CV3793	X63	M.O.V.	CV3825
VI063PI	MAZ.	(CV400)	VP41	MAZ.	(CV21)	X64	M.O.V.	(CV1280)
VI101	COSS.	(CV1361)	VP133	MAZ.	CV1457	X65	M.O.V.	CV3826
VI105	MAZ.	CV3778	VP210	MAZ.	CV3794	X66	M.O.V.	(CV1099)
VI111	MAZ.	(CV1127)	VP215	MAZ.	CV3795	X66I	Hivac	(CV2183)
VI120	MAZ.	(CV72)		Hivac		X662	Hivac	(CV2234)
VI120B	MAZ.	(CV73)	VP1322	MAZ.	CV3796			(CV2256)
VI133	MAZ.	(CV276)	VR90-30	U.S.A.	CV3799	X727	M.O.V.	(CV453)
VI135B	MAZ.	(CV345)	VR105-30	U.S.A.	CV686	XRI-6400	MULL.	(CV2215)
VI135C	MAZ.	(CV277)		S.T.C.		XSG1.5V	Hivac	(CV175)
VI501	E.S.	CV3581	VR150-30	U.S.A.	(CV216)	XSG2.0V	Hivac	CV3833
VI505	E.S.	(CV1252)		S.T.C.		XW2.0V	Hivac	(CV1703)

Commercial Valve	Maker	Service Equiv. (or nearest in brackets)	Commercial Valve	Maker	Service Equiv. (or nearest in brackets)	Commercial Valve	Maker	Service Equiv. (or nearest in brackets)
Y61	M.O.V.	(CV1103)	Z77	M.O.V.	(CV138)	ZD17	M.O.V.	(CV784)
Y63	M.O.V.	(CV1103)	Z90	M.O.V.	(CV1091)	ZG532	U.S.A.	CV2647
Y65	M.O.V.	(CV51)	Z319/1G	S.T.C.	(CV2187)	ZG547	U.S.A.	(CV372)
Y220	Hlvac	(CV1118)	Z300T	MULL.	(CV1992)	ZP455	U.S.A.	CV2789
Z21	M.O.V.	CV3836	Z319	M.O.V.	CV2276	ZP477	U.S.A.	CV914
Z21 (7 Pin)	M.O.V.	CV3837	Z800U	MULL.	(CV2236)	ZP527	U.S.A.	CV855
Z22	M.O.V.	(CV1322)	Z801U	MULL.	(CV2255)	ZP579	U.S.A.	CV3842
Z62	M.O.V.	CV3838	ZAI	M.O.V.	(CV1175)	ZP584	U.S.A.	CV3843
Z66	M.O.V.	CV3839	ZA2	M.O.V.	(CV1095)	ZP590	U.S.A.	CV3844

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
OZ4	007 060 010		—		250		58	3K Ω	No Data Available			A08	CCR
OO	364 200 000		5	0	40		1·	0·66	No Data Available			UX4	T
00A	364 200 000		5	0	45		1·5	0·66	No Data Available			UX4	T
OI	364 200 000		5	4·5	90		2·5		80			UX4	T
OIA	364 200 000		5	9	125		3	0·8	80		0·72	UX4	T
OIAA	364 200 000		5	4·5	90		3·2	0·90	90		0·85	UX4	T
OIB	364 200 000		5	4·5	90		2·5	0·72	90		0·72	UX4	T
OB4	642 300 000		4	2·0	125		4·0	1·4	125		1·4	B4	T
I	281 300 000		6				60		REC		20mA	UX4	R
IA3	281 008 300		1·4						D			B7G	D
IA4E	365 200 000	G ₁	2	3	150	75	2·2	0·65	100	75	0·6	UX4	P
IA4P	365 200 000	G ₁	2	3	90	75	2·2	0·72	80	75	0·7	UX4	P
IA4T	265 300 000	G ₁	2	3	150	75	2·2	0·625	100	75	0·6	UX4	P
IA5	036 540 200		1·4	4·5	90	90	4	0·85	80	75	0·8	A08	P
IA6	266 453 000	G ₁	2	0	150	75	3	0·425	80	60	0·4	UX6	P
IA7	026 546 300	G ₁	1·4	0	90	50	1·8	0·55	80	60	0·5	A08	H
IAB5	365 004 220		1·2	1·5	150	150	6·8	1·35	100	100		B8B	P
IAB6	265 461 300		1·4	4·1	60	60	1·65	0·1	No Data Available			B7G	H
IAC5	*4* 23* 650		1·25	4·5	60	60	2·0	0·75	60	60	0·75	A08	P
IAC6	266 464 300		1·4	4·0	60		4	1·2	80			B7G	H
IAD4	652 430 000		1·25	1·6	90	90	5·7	2·3	80	75	2	B5A	P
IAD5	*4* 23* 650		1·25	3·0	60	60	1·85	0·73	60	60	0·73	B8D	P
IAE4	265 024 300		1·25	0	90	90	3·5	1·55	90	90	1·55	B7G	P
IAF4	265 024 300		1·4	0	90	90	1·65	0·95	80	90	0·9	B7G	P
IAF5	208 564 300		1·4	0	90	90	1·1	0·6	80	90	0·6	B7G	DP
IAH5	208 564 300		1·4	1·5	60	60	0·17	0·17	60	60	0·17	B7G	DP
IAJ4	265 *24 300		1·4	0·8	75	75	1·4	0·65	80	75	0·75	B7G	P
IAN5	265 224 300		1·4	0	60	60	1	·75	80	75	0·8	B7G	P
IAS4	265 024 300		1·4	0	90	90	1·6	·85	100	90		B7G	P
IAX2	230 232 032	D ₁	1·4						D			B9A	D
IB3	020 000 300		1·25						D			A08	R
IB4P	365 200 000	G ₁	2	3	90	75	1·6	0·6	80	60	0·6	UX4	P
IB4(T)	265 300 000	G ₁	2	2	175	75	1·7	0·65	100	60	0·6	UX4	P
IB5	268 943 000		2	3	150		0·8	0·57	100		0·5	UX6	DDT
IB6	265 406 300		1·4	1·5	90	75	1·5	0·75	80	75	0·75	B7G	P
IB7	026 546 300	G ₁	1·4	0	90	50	1·5	0·875	80	60	0·8	A08	H
IB8	037 546 280		1·4	{ 0 6	90	0	0·15	0·27	80		0·15	A08	PDT
					90	90	6·3	1·15	80	75	1·1		
IC	289 300 000		6				1·0	D				UX4	D
IC1	266 424 300		1·4	4	75		4·5	1·2	80		1·4	B7G	H
IC2	266 464 300		1·4	4	60		4	1·2	80		1·4	B7G	H
IC3 (U.S.A.)	260 406 300		1·4	3	90		1·4	0·76	80		0·7	B7G	T
IC4	365 200 000	G ₁	2	0	175	75	2·5	1	150	75	1	UX4	P
IC5	036 540 200		1·4	7·5	90	90	7·5	1·55	80	75	1·5	A08	P
IC6	366 452 000	G ₁	2	0	175	75		1·05	150	75	1·05	UX6	H

VALVE	SELECTOR SWITCH No.	T.C.	Vr	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
IC7	026 546 300	G ₁	2	0	175	75		1.05	150	75	1.05	A08	P
IC8	240 236 540		1.25	0	30	30	.3	.1	No Data Available			B8D	H
ID3	402 306 060		1.2	5	90		12.5	3.4	100		3.4	B8A	T
ID4	264 530 000		2	6	175	175	9.5	2.4	100	100		UX5	P
ID5	802 310 000		40				120		REC		60mA	B5	R
ID5eg	026 500 300	G ₁	2	3.0	125	60	2.2	0.68	100	60	0.6	A08	P
ID5GP	036 500 200	G ₁	2	3	90	75	2.2	0.72	80	60	0.7	A08	P
ID5GT	036 500 200	G ₁	2	3	150	75	2.2	0.65	100	60	0.6	A08	P
ID6	280 183 000		25				60		REC		60mA	UX6	R
ID7	036 546 200	G ₁	2	0	150	75	3	0.425	150	75	1.05	A08	P
ID8	037 546 280	G ₁	1.4	{ 0 9	90	0	1.1	0.575	80	60	0.5	A08	DTP
					90	90	5	0.925	80	75	0.9		
ID13	281 0*8 300		1.4						D			B7G	D
IE3	402 203 060		1.2	0	150		20	3.5	100			B9A	T
IE4	026 040 300		1.4	3	90		1.4	0.76	80		0.76	A08	T
IE5GP	036 500 200	G ₁	2	3	90	75	1.6	0.6	80	60	0.6	A08	P
IE5	036 500 200	G ₁	2	3	175	75	1.7	0.65	100	60	0.6	A08	P
IE7	036 447 250		2	4.5	150	150	7.5	1.425	100	100	1.4	A08	PP
IE8	240 236 540		1.25	0	60	60	1.8	.74	No Data Available			B8D	H
IF1	265 024 300		1.4	0	60	60	1.65	0.75	80	60	0.75	B7G	P
IF2	265 024 300		1.4	1	90	75	2.9	0.92	80	75	0.92	B7G	P
IF3	265 024 300		1.4	1	90	50	1.8	0.75	80	60	0.75	B7G	P
IF4	364 520 000		2	3	90	90	4	1.4	80	75	1.4	UX5	P
IF5	036 540 200		2	3	90	90	4	1.4	80	75	1.4	A08	P
IF6	365 892 000	G ₁	2	1.5	175	75	2.2	0.65	150	75	0.6	UX6	DDP
IF7	036 985 200	G ₁	2	1.5	175	75	2.2	0.65	150	75	0.6	A08	DDP
IF7GV	036 895 200	G ₁	2	1.5	175	75	2.2	0.65	150	75	0.6	A08	DDP
IFD1	2*8 564 300		1.4	1.5	60	60	0.17	0.17	80	60	0.17	B7G	DP
IFD9	208 564 300		1.4	1	75	75	1.6	0.63	80	75	0.63	B7G	DP
IG4	036 040 200		1.4	6	90		2.3	0.825	80		0.825	A08	T
IG5	036 540 200		2	6	90	90	8.5	1.5	80	75	1.5	A08	P
IG6	026 447 300		1.4	0	90		1.0	0.675	80		0.67	A08	TT
IH4	026 040 300		2	9	150		3	0.9	100		0.9	A08	T
IH5	036 080 200	G ₁	1.4	0.5	100		0.13	.22	80		0.27	A08	DT
IH6	036 894 200		2	3	150		0.8	0.575	100		0.57	A08	DDT
IJ5	036 540 200		2	16.5	150	150	7	0.95	100	100	0.9	A08	P
IJ6	026 447 300		2	3	150		1.7		100			A08	TT
IJ6GX	026 447 300		2	0	125		2		125			A08	TT
IK4	365 200 000	G ₁	2	0	150	75	2.5	1.05	150	75	1.05	UX4	P
IK5	026 500 300	G ₁	2	0	125	75	2.5	1.05	125	75	1.05	A08	P
IK5B	026 500 300	G ₁	2	0	125	75	2.5	1.05	125	75	1.05	A08	P
IK6	369 852 000	G ₁	2	3	150	90	0.9	0.6	100	75	0.6	UX6	DDP
IK7	026 895 300	G ₁	2	4.5	125	150	1.5	0.7	100	100	0.7	A08	DDP
IL4	265 024 300		1.4	0	90	75	2.9	0.925	80	75	0.9	B7G	P
IL5	026 540 300		2	6	175	175	9.5	2.4	100	150	2.4	A08	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
IL6	266 451 300		1.4	0	90	50	4	0.55	80	60		B7G	H
IL60	642 300 000		1.0		150		6.0	1.2	150		1.2	B4	T
ILA4	365 004 020		1.4	4.5	90	90	4	0.85	80	75	0.85	B8B	P
ILA4E	365 004 020		1.4	4.5	90	90	3.5	0.8	80	75	0.8	B8B	P
ILA6	366 454 020		1.4	0	90	50	1.8	0.55	80	60	0.5	B8B	H
ILA6E	366 454 020		1.4	0	90	50	1.8	0.55	80	60	0.5	B8B	H
ILB4	365 004 020		1.4	9	90	90	5	0.925	80	75	0.9	B8B	P
ILB6	276 554 430		1.4	0	75		1.2		80			B8B	H
					90	75	0.4		80	75			
ILC5	365 124 020		1.4	0	90	50	1.15	0.775	80	60	0.77	B8B	P
ILC6	266 454 030		1.4	0	90	50	3	0.55	80	60	0.5	B8B	H
ILD5	365 804 020		1.4	0	90	50	0.6	0.578	80	60	0.5	B8B	DP
ILE3	350 0*4 020		1.4	3	90		1.4	0.76	80		0.76	B8B	T
ILF3	360 004 020		1.4	3	90		1.4	0.76	80		0.76	B8B	T
ILG5	365 124 020		1.4	1.5	90	90	3.7	1.15	80	90	1.15	B8B	P
ILH4	360 804 020		1.4	J	90		0.15	0.275	80		0.27	B8B	DT
ILN5	365 124 020		1.4	0	90	90	1.6	0.8	80	90	0.8	B8B	P
ILN5E	365 124 020		1.4	0	90	90	1.6	0.8	80	90	0.8	B8B	P
IM5G	036 500 200	G ₁	2	0	150	75	2.5	1	150	75	1	A08	P
IN5	036 500 200	G ₁	1.4	0	90	90	1.2	0.750	80	90	0.75	A08	P
IN6	036 548 200		1.4	4.5	90	90	3.4	0.8	80	75	0.8	A08	DP
IPI	365 024 300		1.4	5.2	90	90	5.0	1.4	80	75	1.4	B7G	P
IP5	036 500 200	G ₁	1.4	0	90	90	2.3	0.75	80	90	0.75	A08	P
IP10	264 536 200		1.4	7	90	75	7.4	1.57	80	60	1.57	B7G	P
IP11	365 024 300		1.4	4.5	90	90	9.5	2.15	80	75	2	B7G	P
IQ5	036 540 200		1.4	4.5	90	90	9.5	2.2	80	75	2.2	A08	P
IQ6	040 238 650		1.25	0	60	60	1.6	0.6	No Data Available			B8D	DP
IR	026 510 300	G ₁	1.4	0	90	90	1.2	0.75	80	90	0.75	A08	P
IR4	200 800 130		1.4						D			B8B	D
IR5	266 424 300		1.4	4	75		4.5	1.2	80		1.4	B7G	H
IS2A	32* 323 *23	D ₁	1.4						D			B9A	D
IS4	264 526 300		1.4	7	90	75	7.4	1.575	80	60	1.5	B7G	P
IS5	208 564 300		1.4	0	75	75	1.6	0.625	80	75	0.625	B7G	DP
IS6	604 238 050		1.2	0	60	60	1.6	0.6	No Data Available			B8D	DP
ISA6	021 405 360		1.4	0	90	75	2.45	0.97	80	75	0.97	A08	P
ISB6	036 580 240		1.4	0	90	75	1.45	0.665	80	75	0.66	A08	DP
IT	036 500 320	G ₁	1.4	4.5	90	90	9.9	2.1	80	75	2.1	A08	P
IT2	123 000 000	D ₁	1.4						D			B3G	D
IT4	265 024 300		1.4	0	90	75	3.5	0.9	80	75	0.9	B7G	P
IT5	036 540 200		1.4	6	90	90	6.5	1.15	80	75	1.15	A08	P
IT6	604 238 050		1.2	0	60	60	1.6	0.6	No Data Available			B8D	DP
IU4	265 024 300		1.4	0	90	90	1.0	0.9	80	90	0.9	B7G	P
IU5	265 804 300		1.4	0	75	75	1.6	0.625	80	75	0.6	B7G	DP
IU6	266 451 300		1.4	0	75	50	1.7	0.3	No Data Available			B7G	H
IV	281 300 000		6				60		REC		20mA	UX4	R

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
IV2	8** 230 **8		0.625						D			B9A	D
IV4	260 *24 300		1.25	0	125	100	1.6		125	100		B7G	P
IV5	*4* 23* 650		1.2	4.5	60	60	2	0.75	No Data Available			B7G	P
IW4	265 004 300		1.4	9	90	90	5	0.925	80	75	0.9	B7G	P
IW5	040 230 650		1.25	0	60	60	1.8	.73	No Data Available			B8A	P
IW50	642 300 000		1						D			B4	D
IX2	230 232 032	D ₁	1.25						D			B9A	R
IY2	200 300 000	D ₁	1.4						D			UX4	R
IZ1	020 000 300	D ₁	.7						D			A08	D
IZ2	232 232 300	D ₁	1.25				2		D			B7G	R
2	642 300 000		2	4	150		1.5		100			B4	T
2/25A	200 300 000	D ₁	6				30		REC		18mA	UX4	R
2/50A	200 300 000	D ₁	5				60		REC		20mA	UX4	R
2A3	264 300 000		2.5	45	250		60	5.2	100		5.2	UX4	T
2A3H	364 200 000		2.5	62	300		40	5.25	100		5.25	UX4	T
2A5	265 413 000		2.5	16.5	250	250	34	2.5	100	PenLF	2.5	UX6	P
2A6	268 913 000	G ₁	2.5	2	250		0.9	1.11	150		1.1	UX6	DDT
2A7	265 541 300	G ₁	2.5	8	250	100	3.5	1.15	150	100	1.1	5m7	H
2AF4	642 314 600		2.5	4.0	100		15	6.6	80		6.0	B7G	T
2B3	*20 000 3*0	D ₁	1.7						D			A08	D
2B5	267 413 000		2.5		300		9		No Data Available			UX6	TT
2B7	265 891 300	G ₁	2.5	3	250	125	9	1.125	100	100	1.12	UX7	DDP
2B75	265 891 300	G ₁	2.5	3	250	100	6	1	100	100	1	UX7	DDP
2B21	300 200 000	D ₁	2.5				5		D			UX4	R
2B22	021 010 310	D ₁	6						D			A08	D
2B25	200 800 300		1.4						D			B7G	D
2B26	280 300 000		2.5				120		REC		30mA	UX4	R
2B35	123 000 000	D ₁	6						D			B3G	D
2B36	123 000 000	D ₁	4						D			B3G	D
2BN4	142 351 400		2	2	150		9	6.8	100		7.0	B7G	T
2C21	217 461 300	G ₁	6	16.5	250		8.3	1.375	100		1.37	UX7	TT
2C22	020 000 310	A ₁ G ₁	6	10.5	300		11	3	100		3	A08	T
2C23	264 300 000		7.5	32	350		16	1.55	100		1.5	UX4	T
2C25	264 300 000		7	100	350		50		No Data Available			UX4	T
2C26	020 000 310	A ₁ G ₁	6	15	350		16		100			A08	T
2C48	265 004 130		6	15	250	250	70		100	150		B8B	P
2C50	265 004 130		12	15	250	250	70		100	150		B8B	P
2C51	214 607 413		6	2	150		8.2	5.5	125		5.5	B9A	TT
2C52	461 471 230		12.5	2	250		1.3	1.9	200		1.9	A08	TT
2CY5	412 365 100		2.5	1	125	80	10	8	125	75	8	B7G	P
2D1	289 130 000		2.5						D			UX5	DD
2D2	892 310 000		2						D			B5	DD
2D4	892 310 000		4						D		4.5	B5	DD
2D4A	892 310 000		4						D		4.5	B5	DD
2D4B	091 231 800		4						D			B7	DD

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
2D13	023 180 000	D ₁	13						D			B5	DD
2D13a	823 190 000		13						D			B5	DD
2D13C	892 310 000		13						D			B5	DD
2D21	412 316 100		6		400		50	6kΩ	No Data Available			B7G	Thyratron
2E22	254 130 000	A ₁	6		400	250	100		100	PenLF		UX5	P
2E24	235 242 300	A	3	18.5	400	200	16	3.2	200	100	3.2	A08	P
2E25	020 540 320		6	22.5	400	250	40		No Data Available			A08	P
2E26	125 141 300	A	6	20	200	200	20	3.5	100	75	3.5	A08	P
2E30	413 365 200		3	20	250	250	40	3.7	100	PenLF	3.7	B7G	P
2E31	652 430 000		1.25	0	20	20	.4	.5	No Data Available			B5A	P
2E32	652 430 000		1.25	0	20	20	.4	.5	No Data Available			B5A	P
2E35	652 430 000		1.25	0	20	20	.27	.38	No Data Available			B5A	P
2E36	652 430 000		1.25	0	20	20	.27	.38	No Data Available			B5A	P
2E41	658 243 000		1.25	0	20	20	.36	.37	No Data Available				P
2E42	658 243 000		1.25	0	20	20	.35	.37	No Data Available				P
2E50	412 265 300		6	20	250	250	10	3.4	100	100		B7G	P
2F7	275 641 300	G ₁	2.5	{ 3.0 3.0	100		4.0		100	60	3.8	UX7	TP
					250	100	2.8		100	100			
2HMD	452 310 000	A ₁ A ₂	4		200	100	3.8	1.14	100	100	1.1	B5	PP
2K2	026 500 300	G ₁	2	2.0	100	100	2.5	0.9	100	100	0.9	A08	P
2P	642 300 000		2	22	250		40	7	100		7	B4	T
2S	289 130 000		2.5				15		REC		10mA	UX5	RR
2T4	642 314 600		2.3		75		18	7	75		7	B7G	T
2T/270K	112 311 100	D ₁	4						REC		5mA	B7G	R
2U14	642 300 000		2		125		2	0.6	125		0.6	B4	T
2U15	642 300 000		2		150		4	0.8	100		0.8	B4	T
2V2	020 000 03*	D ₁	2.5						D			A08	D
2V3	020 000 300	D	2.5						D			A08	R
2W3	020 800 030		2.5			60			REC		20mA	A08	R
2X2	300 200 000	D ₁	2.5				5		D			UX4	R
2X2A	300 200 000	D ₁	2.5				5		D			UX4	R
2X3	020 800 030		2.5				120		REC		30mA	A08	R
2XP	642 300 000		2	36	300		50	7	100		7	B4	T
2Y2	200 300 000	D ₁	2.5				5		D			UX4	R
2Z2	280 300 000		2.5				60		REC		20mA	UX4	R
3	642 300 000		2	7.5	150		3.4	0.9	100		0.9	B4	T
3A2	230 232 032	D ₁	3						D			B9A	D
3A3	*2* 0*0 3*0	D ₁	3						D			A08	D
3A4	365 426 300		1.4	8.4	150	90	13.3	1.9	100	75	1.9	B7G	P
3A5	264 347 200		1.4	2.5	90		3.7	1.8	80		1.8	B7G	TT
3A8	237 546 380	G ₁	1.4	{ 0 0	90	0	0.2	0.325	80	60	0.32	A08	DTP
					90	90	1.2	0.75	80	60			
3A/107A	264 300 000		4	8	125		6.5	1.6	100		1.6	UX4	T
3A/107B	642 300 000		4	8	125		6.5	1.6	100		1.6	B4	T
3A/108A	264 300 000		2	1.5	125		0.9	0.5	100		0.5	UX4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
3A/108B	642 300 000		2	1.5	125		0.9	0.5	100		0.5	B4	T
3A/109A	264 300 000		4	8	125		19	1.2	100		1.2	UX4	T
3A/109B	642 300 000		4	8	125		19	1.2	100		1.2	B4	T
3A/154M	260 0*4 130		6	2	250		12	3	100		3	B8B	T
3AF4A	642 314 600		3	4	100		15	6.6	100		7.5	B7G	T
3AL5	192 310 800		3				5		D			B7G	DD
3AU6	412 365 100		3	1.0	250	150	10.0	5.2	100	150	5.0	B7G	P
3AV6	412 398 600		3	2.0	250		1.2	1.6	200		1.6	B7G	DDT
3AY6	412 389 600		3	2.0	250		1.2	1.6	200		1.6	B7G	DDT
3B2	*2* 0** 3*0	D ₁	3						D			B8A	D
3B4	524 332 600		1.25	7.5	150	125		1.7	No Data Available			B7G	P
3B5	036 540 320		1.4	7	75	75	6.7	1.5	80	60	1.5	A08	P
3B7	364 204 730		1.4	0	90		5.2	1.85	80		1.85	B8B	TT
3B21	289 300 000		2.5				120		REC		30mA	UX4	RR
3B22	289 300 000		2.5				120		REC		30mA	UX4	RR
3B23	200 300 000	D ₁ D ₂	2.5				120		REC		30mA	UX4	RR
3B24	320 200 000	D ₁	2.5				30		REC		15mA	UX4	R
3B25	200 300 000	D ₁	2.5				120		REC		15mA	UX4	R
3B26	030 000 200	D ₁	2.5				15		REC		10mA	A08	R
3B27	280 300 000		2.5				120		REC		30mA	UX4	R
2B/240M	214 444 130	A	6	1	300		50	27	No Data Available			B8B	T
3B/241M	214 444 130	A	19	1	300		50	27	No Data Available			B8B	T
3B/252B	642 310 000		6	20	400		60	10	100		8	B5	T
3BA6	412 365 100		3	1.0	250	100	11.0	4.4	100	100	4.4	B7G	P
3BC5	412 365 100		3	1.3	250	150	7.5	5.7	100	150	5.8	B7G	P
3BE6	412 366 100		3	2.0	100		11.0	7.0	100		5.0	B7G	H
3BN4	142 361 400		2.8	2	150		9	6.8	100		6	B7G	T
3BN6	412 354 600		3	1.0	60	60	0.25	1.0	80	60	1.0	B7G	P
3BU8	157 231 461		3	1.0	100	60	1	1.5	100	60	1.5	B9A	PP
3BY6	412 365 400		3	2.5	250	100	6.5	2.4	100	100	2.0	B7G	H
3BZ6	412 365 100		3	1.0	125	125	14.0	8.0	200	150	6.0	B7G	P
3C2	020 *3* 2*0	D ₁	1.5						D			A08	D
3C4	365 *24 300		1.4	5.2	90	75	5.0	1.4	80	75	0.75	B7G	P
3C5	036 540 320		1.4	9	90	90	6	1.4	80	75	1.4	A08	P
3C6	206 447 320		1.4	0	90		4.5	1.3	80		1.3	B8D	TT
3C36	412 365 100		3	2.2	200	150	9.5	6.2	100	150	6.0	B7G	P
3CB6	412 365 100		3	1.0	125	125	13.0	8.0	100	150	6.0	B7G	P
3CF6	412 365 100		3	1.0	125	125	12.0	7.8	100	150	6.0	B7G	P
3CS6	412 365 100		3	1.0	100	30	1.0	1.1	100		1.1	B7G	H
3D6	365 004 230		1.4	4.5	150	90	10.2	2.4	100	75	2.4	B8B	P
3DT6	412 365 100		3	2.2	150	100	11	0.8	150	100	2.0	B7G	P
3E5	365 024 300		1.4	8	90	90	6	1.2	80	75	1.2	B7G	P
3E6	265 134 020		1.4	0	90	90	2.5	1.8	90	90	1.8	A08	P
3GI0	892 300 000		2.5				30		REC		15mA	B4	RR
3GI30	892 300 000		2.5				30		REC		15mA	B4	RR

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
3LE4	365 004 230		1.4	9	90	90	1.8	1.6	80	75	1.6	A08	P
3LF4	365 004 230		1.4	4.5	90	90	8	2	80	75	2	B8B	P
3Q4	364 526 300		1.4	5	90	90	6.9	1.975	80	75	1.9	B7G	P
3Q5	036 540 320		1.4	4.6	90	90	8	2	80	75	2	A08	P
354	364 526 300		1.4	7	90	75	7.4	1.574	80	60	1.5	B7G	P
3V4	365 024 300		1.4	4.5	90	90	7.7	2	80	75	2	B7G	P
4	642 300 000		2	1	150		1	0.9	150		0.9	B4	T
4/100BU	892 300 000		4				120		REC		30mA	B4	RR
4A6G	026 447 230		2	1.5	90		1.2	0.9	80		0.9	A08	TT
4A07	642 300 000		4	2	100		1.4	1.2	100		1.2	B4	T
4A08	642 300 000		4		150		4	1.8	100		1.0	B4	T
4A10	642 300 000		4	2.5	125		6	1.8	125		1.8	B4	T
4A15	642 300 000		4		100		7	2.2	100		2.2	B4	T
4A80	642 310 000		4		150		6	2	150		2	B5	T
4A90	642 310 000		4		200		8	3.5	100		3.0	B5	T
4A120	642 310 000		4		125			1.4	125		1.4	B5	T
4AU6	412 365 100		4	1	250	150	10	5.2	100	150	5.2	B7G	P
4BA6	412 365 100		4.2	1	250	100	11	4.4	100	100	4.4	B7G	P
4BC5	412 365 100		4.2	1.3	250	150	7.5	5.7	100	150	5.7	B7G	P
4BC8	741 236 410		4	2.2	150		10.0	6.2	150		5.0	B9A	TT
4BE6	412 366 100		4.2	2	100		11	7	100		5	B7G	H
4BN6	142 354 600		4.2	1	60	60	25	1.0	80	60	1.0	B7G	P
4BQ7A	741 236 410		4	2.0	150		9.0	6.4	100		6.0	B9A	TT
4BS8	641 237 410		4.2	4.4	150		10	7.2	100		7	B9A	TT
4BU8	157 231 461		4.2	1	150	100	4	3.5	150	100	3.5	B9A	PP
4BX8	641 237 410		4.2		125		11	7.5	125			B9A	TT
4BZ7	741 236 410		4	2.2	150		10.0	6.8	100		6.0	B9A	TT
4BZ8	641 237 410		4.2	2	125		10	8	125		8	B9A	TT
4C1	264 300 000		3	3	90		5	1	80		1	UX4	T
4C1A	364 200 000		3	3	90		5	1	90		1	UX4	T
4C2	642 310 000		4	5	125		11	2.5	125		2.5	B5	T
4C3	642 310 000		4	3.5	200		6	2.4	100		2.0	B5	T
4C4	642 310 000		4	3.5	200		6	2.4	100		2.0	B5	T
4C5	642 300 000		4	10	400		30	4	No Data Available			B4	T
4C102	642 300 000		4	45	250		40	2	No Data Available			B4	T
4C103	642 300 000		4	35	225		45	3.5	No Data Available			B4	T
4CB6	412 365 100		4.2	1	125	125	13	8	125	125	8	B7G	P
4CE5	412 365 100		4.2	1	125	125	11	7.6	125	125	7.6	B7G	P
4CX7	641 237 410		4.2	10	150		9	6.4	150			B9A	TT
4CY5	412 365 100		4.2	1	125	80	10	8	125	75	8	B7G	P
4D1	000 231 600	G ₁	13	3	250		10	5	100		4	B7	T
4D80	642 310 000		4		100		2	1	100		1	B5	T
4G30	892 300 000		4				15		D			B4	RR
4G105	892 300 000		4				30		REC		15mA	B4	RR
4G200	892 300 000		4				60		REC		20mA	B4	RR

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
4H07	642 300 000		4		150		3	1.1	100		1.0	B4	T
4H08	642 300 000		4		150		5	1.2	100		1.0	B4	T
4H80	642 310 000		4		200		6	2	100		0.2	B5	T
4K30	642 300 000		4	10	150		20	3.6	100		3.0	B4	T
4K32	642 300 000		4	15	200		30	3.6	100		3.0	B4	T
4K50	642 300 000		4	20	200		60	5	No Data Available			B4	T
4K60	642 300 000		4	20	300		60	3.5	No Data Available			B4	T
4K61	642 300 000		4		300			3	No Data Available			B4	T
4K100	642 300 000		4	3	300	200	50	4	No Data Available			B4	T
4L11	642 300 000		4		150		7	1.4	100		1.0	B4	T
4L12	642 300 000		4		150		9	2	100		1.5	B4	T
4L13	642 300 000		4		200		8	2	100		2	B4	T
4L13a	642 300 000		4	11	200		14	2.5	100			B4	T
4L14	642 300 000		4		200		10	2.2	No Data Available			B4	T
4L15	642 300 000		4		100			2.2	100		2.2	B4	T
4L16	642 300 000		4	8	150		100	2.2	100		2.0	B4	T
4L20	642 300 000		2		100			1.4	100		1.4	B4	T
4L28	642 300 000		4	4	150		10.5	4	100		3.0	B4	T
4L29	642 300 000		4	8	150		20	3.6	100			B4	T
4LMBT	642 310 000		4	1	200		3.4	2.6	100		2	B5	T
4N08	642 300 000		4		100		8	1.2	100		1.2	B4	T
4N100	642 310 000		4		150			3.5	100		3	B5	T
4N110	642 310 000		4		200		5	1.5	100		1.3	B5	T
4NG	892 300 000		4				30		REC		15mA	B4	RR
4P25	642 300 000	G ₂	4	19	250	150	12	1.3	100	100		B4	P
4S	289 130 000		2.5						D			UX5	D
4S09	542 300 000	A ₁	4		200		1	0.6	100			B4	P
4S120	542 310 000	A ₁	4		200		2	0.7	100	100		B5	P
4S121	542 310 000	A ₁	4		200	100	6	1.0	100	100		B5	P
4S126	642 310 000	A ₁	4	2	200	100	3	2	100	100		B5	P
4THA	645 231 700	G ₁	4	{ 5 2	100		1.5	1.5	80	60	1.5	} B7	TH
4TP	446 231 500	A ₂	4		250	100	3.5	2.5	100	100	2.2		
4TPB	061 231 500	G ₁	4	5	150	150	16	4.5	150	100	4.5	B7	TP
4TSA	045 231 600	A ₁	4	3	250	150	12	8	100	100	7	B7	P
4TSP	041 231 500	A	4	0	250	100	5.0	1.6	250	100	1.6	B7	P
			4	3	250	150	12	8	100	100	7	B7	P
4W03	642 300 000		4		80		0.04	1.1	80		1.1	B4	T
4W03n	642 300 000		4		200		0.04	1.1	100		1.0	B4	T
4W08	642 300 000		4		150				100			B4	T
4W100	642 310 000		4		200		1.5	3.5	100		3	B5	T
4W120	642 310 000		4		200		2	0.07	100			B5	T
4W200	642 310 000		4		150			3.3	100		3	B5	T
4XP	642 300 000		4	28.5	250		48	5	100		7	B4	T
5A6	601 225 413		2.5	15	150	150	20		100	100		B9A	P
5A/102D	026 510 310	G ₁	7.5	18	175	150	42	2.5	100	100	2.5	A08	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
5A/136D	026 510 310	G ₁	7.5	5.5	250	150	5.2	2	100	100	2	A08	P
5A/137D	026 510 310		6.3	2	250	100	1.8		100	100		A08	P
5A/150A	265 113 000	G ₁	10	5.5	250	150	5.2	2	100	100	2	UX6	P
5A/152M	265 104 130		6	2	250	150	10	7.5	100	100	5	B8B	P
5A/155M	256 101 403		6	2	250	250		6.5	100	100	5	B9G	P
5A/156M	256 101 403		6	1.7	250	250		7.7	100	150	6	B9G	P
5A/157D	026 510 310	G ₁	6	2	250	100		1.8	100	100	1.8	A08	P
5A/163K	141 236 115		6	1.5	200	200	15	15	No Data Available			B9A	P
5A/170K	141 230 615		6.3	1.5	175	150	13	16.5	No Data Available			B9A	P
5A/171G	102 513 410	A ₁	6	5	100	100	20	2.7	100	100	2.5	B8D	P
5AM8	145 236 181		5	1.7	200	150	11.5	7.0	100	150	7.0	B9A	DP
5AN8	641 237 541		5	6.0	200		13.0	3.3	100	60	3.0	B9A	TP
				2.2	200	150	9.5	6.2	100	150	6.0		
5AQ5	412 365 400		5	12.5	250	250	45.0	4.1	100	PenLF	4.0	B7G	P
5AR4	*30 809 020		5				120		REC		30mA	A08	RR
5AS4	030 908 020		5				120		REC		30mA	A08	RR
5AS8	541 238 116		5	2.2	200	150	9.5	6.2	100	150	6.0	B9A	DP
5AT8	461 237 514		5	1.0	100		8.5	5.8	100	60	5.0	B9A	TP
				1.8	250	150	7.7	4.6	100	150	4.0		
5AU4	020 809 030		5				180		REC		40mA	A08	R
5AV8	146 234 157		5	6	200		13	3.3	No Data Available			B9A	TP
				2.2	200	150	1	9.5					
5AW4	020 809 030		5				120		REC		40mA	A08	RR
5AX4	020 809 030		5				60		REC		20mA	A08	RR
5AZ4	020 809 030		5				60		REC		20mA	B8B	RR
5BI	542 300 000	A ₁	2	1	150	90	2	1.3	150	90	1.3	B9A	P
5B8	146 234 157		5	6	200		13	3.3	100	60	3	B9A	TP
				1.8	200	150	9.5	6.3	100	150	6		
5B/110M	265 104 130		6	6	250	150	38	6.5	100	100	5	B8B	P
5B/250A	254 130 000	A	6	12.5	400	250	83	6.3	100	150	6	UX5	P
5B/251M	215 044 130	A	6	15	250	250	72	6	100	100	5	B8B	P
5B/252M	265 044 130		6	15	250	250	72	6	100	100	5	B8B	P
5B/253M	265 044 130		19	15	250	250	72	6	100	100	5	B8B	P
5B/254M	215 144 130	A	6	20	300	250	50	5.6	100	100	5	B8B	P
5B/255M	265 144 130		6	20	300	250	50	5.6	100	100	5	B8B	P
5B/256M	215 144 130	A	19	20	300	250	50	5.6	100	100	5	B8B	P
5B/257M	265 144 130		12	20	300	250	50	5.6	100	100	5	B8B	P
5BE8	461 237 414		4	1	150		18	8.5	100	60	7	B9A	TP
				1	250	100	10	5.2	150	100	5		
5BK7a	741 236 411		5	2	150		10.7	9.3	100		9	B9A	TT
5BQ7A	741 236 410		5.6	2	150		9	6.4	100		5	B9A	TT
5BR8	461 237 514		5	1.0	150		18	8.5	100	60	8	B9A	TP
				0.95	250	100	10	5.2	100	100			
5BT8	981 236 541		4.7	2.2	200	150	9.5	6.2	100	100		B9A	DDP
5BZ7	741 236 410		5.6	2.2	150		10	6.8	100		6	B9A	TT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
5CG8	461 237 514		4.7	{ .85	100		8.5	5.8	100	60	5.8	B9A	TP
				{ 1.5	250	150	7.7	4.6	100	100			
5CL8	461 237 514		4.7	{ .95	125		15	8	100	60	.8	B9A	TP
				{ 1	125	125	12	5.8	100	100	5.5		
5CZ5	504 234 1*6		45	{ 6.7	100	100	43	9	100	100		B9A	P
5DH8	461 237 514		5.2	{ 2.5	250		7	4.4	100		4	B9A	TP
				{ 1	125	125	13	8.6	125	125	8.6		
5CM8	641 237 514		4.7	{ 2	250		1.8	2	100	60		B9A	TP
				{ 2.2	200	150	9.5		100	100			
5E255	642 350 000		2	4.5	150	150	9.5	2.5	100	100	2.5	B5	P
5E415	642 350 000		4	25	300	200	20	1.7	100	PenLF	1.7	B5	P
5MK9	002 380 000		5				60		REC		20mA	B7G	R
§ 5J6	672 344 100		5	{ .85	100		8.5	5.3	100		5.3	B7G	TT
				{ 3.0	150		5.0	4.5	100		5.3		
5PT4A	041 231 500	A ₁	4	4.5	250	150	4.5	1.7	100	100		B7	P
5P29	120 540 310	A ₁	6	7	250	250	100	14.3	No Data Available			A08	P
5Q5	036 540 320		1.4	4.6	90	90	4.5	2	80	75	2	A08	P
5R4	020 809 030		5				60		REC		25mA	A08	RR
5R4GY	030 809 020		5				60		REC		20mA	A08	RR
5T4	020 809 030		5				120		REC		30mA	A08	RR
5T8	†91 238 146		5	3.0	250		1.0	1.2	150		1.3	B9A	DDDT
5U4	020 809 030		5				120		REC		70mA	A08	RR
5U8	645 237 114		5	{ 1.0	150		18.0	8.5	100	60	7.0	B9A	TP
				{ 1.0	250	100	10.0	5.2	150	100	5.0		
5V3	020 809 030		5				120		REC		30mA	A08	RR
5V4	030 809 020		5				60		REC		60mA	A08	RR
5V6	026 540 310			12.5	250	250	45.0	4.1	100	PenLF	4.0	A08	P
5W4	020 809 030		5				60		REC		20mA	A08	RR
5X3	289 300 000		5				15		REC		10mA	A08	RR
5X4	008 090 230		5				120		REC		30mA	A08	RR
5X8	146 231 457		5	{ 1.0	100		8.5	5.8	100	60	5.0	B9A	TP
				{ 1.8	250	150	7.7	4.6	100	150	4.0		
5Y3GB	030 809 020		5				60		REC		20mA	A08	RR
5Y3GR	020 809 030		5				60		REC		20mA	A08	RR
5Y3GT	020 809 030		5				60		REC		20mA	A08	RR
5Y4	008 090 230		5				60		REC		30mA	A08	RR
5Y4SG	008 090 230		5				60		REC		20mA	A08	RR
5Z3	289 300 000		5				120		REC		30mA	UX4	RR
5Z4	030 809 020		5				60		REC		30mA	A08	RR
5Z4G	030 809 020		5				60		REC		30mA	A08	RR
6/30L2	741 236 410		6.3	7.9	200		10	3.4	100		3	B9A	TT
6A3	264 300 000		6	36	250		60	5.25	100		5	UX4	T
6A4	264 530 000		6	9	150	150	14	1.9	100	100	1.9	UX5	P
6A5	026 040 310		6	45	250		60	5.25	100		5	A08	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6A6	274 146 300		6	5	250		6	3.1	100		3.1	UX7	TT
6A7	265 541 300	G ₁	6	8	250	100	3.5	1.15	100	100	1.15	Sm7	H
6A7E	265 541 300	G ₁	6	8	250	100	3.5	1.15	100	100	1.15	Sm7	H
6A7S	265 541 300	G ₁	6	8	250	100	3.5	1.15	100	100	1.15	Sm7	H
6A8GT	026 545 310	G ₁	6	8	250	100	3.5	1.15	100	100	1.15	A08	H
6AB4	602 304 100		6	2	250		10	5.5	200		5.5	B7G	T
6AB7	021 415 360		6	3	300	200	12.5	5	100	150	5	A08	P
6AB8	641 237 154		6	{ 2 8.0	100 200	0 200	4 17.5	1.4 3.5	100 100	60 150	1.4 3.5	B9A	TP
6AC5	026 040 310		6	0	250		2.5		No Data Available			A08	T
6AC7	021 415 360		6	2	300	150	10	9	100	100	8	A08	P
6AD4	402 013 080		6	11.5	100		1.4	2	100		2	B8B	T
6AD5	026 040 310		6	2	250		0.9	1.5	200		1.5	A08	T
6AD7	427 546 310		6	{ 25 16.5	250 250	0 250	4 34	0.325 2.5	100 100	60 PenLF	0.32 2.5	A08	TP
6AD8	541 236 891		6	2.0	250	85	6.7	2.3	100	90		B9A	DDP
6AE5	026 040 310		6	15	100		7	1.2	80		1.2	A08	T
6AE6	026 740 310		6	1.5	250		6.5	1	200		1	A08	TT
6AE7	026 414 310		6	13.5	250		10	3	100		3	A08	TT
6AE8	541 237 46*		6	{ 2 2	100 250		5.2 3.5	2.2	100 150	60 90	2.8	B9A	TH
6AF4	642 314 600		6	4	100		15	6.6	80		6	B7G	T
6AF4A	642 314 600		6	3	100		20	7.5	100		7.5	B7G	T
6AF5	026 040 310		6	18	175		7	1.5	100		1.5	A08	T
6AG5	412 365 100		6	1.5	250	150	6.5	5	100	100	5	B7G	P
6AG6	026 540 310		6	6	250	250	32	10	100	PenLF	9	A08	P
6AG7	120 415 360		6	3	300	150	30	11	100	100	10	A08	P
6AH4	420 060 310		6	23	250		30	4.5	100		4	A08	T
6AH5	520 604 310		6	18	350	250	54	5.2	100	PenLF	5	A08	P
6AH6	412 365 100		6	2	300	150	10	9	100	100	8	B7G	P
6AH7	461 471 230		6	16	250		10	2.2	100		2.2	A08	TT
6AH7GT	417 146 230		6	9	250		12	2.4	100		2.4	A08	TT
6AJ4	414 464 234		6	2	125		8	7	100		10	B9A	T
6AJ5	412 365 100		6	7.5	175	75	2.9	2.75	100	75		B7G	P
6AJ7	020 415 360		6		300	150	10.0	9.0	150	150	.75	A08	P
6AJ8	541 237 164		6	{ 3.0 2.0	100 250		5.0 6.5	2.3 2.4	100 150	60 100	2.3 2.4	B9A	TH
6AK4	402 013 060		6	2.5	200		9.5	3.8	100		3	B8D	T
6AK5	412 365 100		6	2.3	150	150	7	4.3	100	100	4	B7G	P
6AK6	412 365 100		6	9	175	175	15	2.3	100	100	2.3	B7G	P
6AK7	120 415 360		6	3	300	150	30	11	100	100	9	A08	P
6AK8	191 238 146		6	3.0	250		1.0	1.2	100		1.3	B9A	DDDT
6AL5	192 310 800		6						D		6.0	B7G	RR
6AL6	020 540 310	A	6	14	250	250	72	6	100	PenLF	6	A08	P
6AM4	414 464 234		6	1.0	200		10	9.8	100		9	B9A	T

VALVE	SELECTOR SWITCH No.	T.C.	V _f	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	I _a mA	mA/V	Anode Volts	Screen Volts	mA/V		
6AM5	412 360 500		6	13.5	250	250	16	2.6	100	PenLF	2.6	B7G	P
‡ 6AM6	412 361 500		6	{ 2 1.5	250 200	250 150	10 4	7.5 6.4	100 100	PenLF PenLF	5 5	B7G	P
6AM8	145 236 181		6	1.7	200	150	11.5	7.0	100	150	7.0	B9A	DP
6AN4	642 314 600		6	1.3	200		13	1.0	100			B7G	T
6AN5	412 365 100		6	6	125	125	35	8	100	100	7	B7G	P
6AN6	289 †† 300		6						D			B7G	DDDD
6AN7	541 236 074		6	{ 2.0 2.0	100 250	100	5.0 3.0	2.0 0.75	100 100	60 100	2.8	B9A	TP
6AN8	641 237 541		6	{ 6 2.2	200 200	150	13 9.5	3.3 6.2	100 100	60 150	3 6		TP
6AQ4	412 314 600		6	2.0	250		6.0	8.5	200		8.0	B7G	T
6AQ5	412 365 400		6	12.5	250	250	45	4.1	100	PenLF	4	B7G	P
6AQ6	412 398 600		6	3	250		1.0	1.2	150		1.2	B7G	DDT
6AQ7	918 461 230		6	2	250		2.3	1.6	100		1.6	A08	DDT
6AQ8	741 236 410		6	2.3	250		10.0	5.5	100		5.0	B9A	TT
6AR5	412 365 000		6	16	250	250	34	2.4	100	PenLF	2.4	B7G	P
6AR6	106 052 430		6	36	300	300	58	4.3	100	PenLF	4.3	A08	P
6AR7GT	206 598 130	G	6	2	250	100	7	2.5	100	100	2.5	A08	DDP
6AR7	461 891 230		6	2	250		1.3	1.05	200		1.05	A08	DDT
6AS4	001 080 230		6						REC			A08	R
6AS5	142 345 600		6	8.5	150	125	35	5.6	100	100	5	B7G	P
6AS6	412 365 100		6	2	125	125	5.5	3.5	100	100	3.5	B7G	P
6AS7	471 461 230		6	31.5	150		125	7	100		7	A08	TT
6AS8	541 238 116		6	2.2	200	150	9.5	6.2	100	150	6	B9A	DP
6AT6	412 389 600		6	3	250		1	1.2	150		1.2	B7G	DDT
6AT7n	641 237 410		6	{ 2 1	250 100		10 3.7	5.5 4.0	100 100		5 4.0	B9A	TT
6AT8	461 237 514		6	{ 1.0 1.8	100 250	150	8.5 7.7	5.8 4.6	100 100	60 150	5.8 4.0		TP
6AU4	001 080 230		6				120		REC		40mA	A08	R
6AU5	421 060 350		6	20	175	150	50	5.6	80	60	6	A08	P
6AU6	412 365 100		6	1	250	150	10.0	5.2	100	100	3.9	B7G	P
6AU7	641 227 413		3	8.5	250		10.5	2.2	100		2.0	B9A	TT
6AU8	146 231 457		6	{ 1.25 1.5	150 200	125	8.5 15.0	4.9 7.0	100 100	60 100	5.0 7.0	B9A	TP
6AV4	802 309 100		6				30		REC		15mA	B7G	RR
6AV5	421 060 350		6	22.5	250	150	57	5.9	100	100	5.8	A08	P
6AV6	412 389 600		6	2	250		1.2	1.6	100		1.2	B7G	DDT
6AW4	289 130 000		6				30		REC		15mA	UX5	RR
6AW5	208 190 310		6				30		REC		15mA	A08	RR
6AW6	412 365 100		6	1.8	250	150	7	5	100	150	5	B7G	P
6AW7	149 816 230		6	0	100		1.4	1.2	100		1.2	A08	DDT

‡ See note on Page 8

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6AW8	146 231 457		6	{ 2.0 3.0	200 200	150	4.0 13.0	4.0 9.0	100 100	60 100	4.0 9.0	B9A	TP
6AX2	23* 232 *32	D ₁	6						D			B9A	D
6AX4	001 080 230		6				120		REC		35mA	A08	R
6AX5	029 080 310		6				60		REC		20mA	A08	RR
6AX6	028 190 310		6				120		REC		30mA	A08	RR
6AX7	641 227 413		3	2	250		1.2	1.6	100		1.2	B9A	TT
6AX8	645 237 114		6	{ 1 1.2	150 250	100	18 10	8.5 4.8	100 100		8	B9A	TP
6AY5	023 540 310		6	12.5	250	250	47	4.1	100	PenLF	4	A08	P
6AY8	026 589 310	G ₁	6	5	250	100	52	9.5	100	90	9	A08	DDP
6AZ5	810 230 190		6						D			B8A	DD
6AZ8	751 324 164		6	{ 6.0 2.3	200 200	150	13.0 9.5	3.3 6.0	100 100	60 100	3.0 6.0	B9A	TP
6B4	026 040 300		6	45	250		60	5.25	100		5	A08	T
6B6	026 980 310	G ₁	6	2	250		0.9	1.1	100		1.1	A08	DDT
6B7	265 891 300	G ₁	1	3	250	125	9	1.125	100	100	1.1	Sm7	DDP
6B7E	265 891 300	G ₁	6	3	250	125	9	1.125	100	100	1.1	Sm7	DDP
6B7S	265 891 300	G ₁	6	3	250	125	9	1.125	100	100	1.1	Sm7	DDP
6B8	026 985 310	G ₁	6	3	250	125	10	1.325	100	100	1.3	A08	DDP
6B8G	026 985 310	G ₁	6	3	250	125	9	1.125	100	100	1.2	A08	DDP
6B8SG	026 985 310	G ₁	6	3	250	125	9	1.125	100	100	1.2	A08	DDP
6BA5	402 063 190		6	2	100	100	5.5	2.1	100	100	2	B8A	P
6BA6	412 365 100		6	1	250	100	11	4.4	100	100	4.4	B7G	P
6BA7	641 231 106		6	2	100		187		100		7	B9A	H
6BA8	146 231 457		6	{ 8 2.5	200 200	150	8 13	2.7 9.0	100 100	60 100	5.0 9.0	B9A	TP
6BC4	642 314 460		6	1.5	150		14.5	10	100		10.0	B8A	T
6BC5	412 365 100		6	1.3	250	150	7.5	5.7	100	150	5.7	B7G	P
6BC7	180 239 111		6				5		D			B9A	RRR
6BC8	741 236 410		6	2.2	150		10.0	6.2	150		5	B9A	TT
6BD5	421 060 350		6	12	200	200		5	100	100	5	A08	P
6BD6	412 365 100		6	3	250	100	9	2	100	100	2	B7G	P
6BD7	641 238 09*		6	3.0	250		1.0	1.2	150		1.2	B9A	DDT
6BE6	412 366 100		6	2	100		11	7.0	100		5	B7G	H
6BE7	541 236 114		6	1	250	20	0.95	0.7	No Data Available			B9A	N
6BE8	461 237 514		6	{ 1 1	150 250	100	18 10	8.5 5.2	100 100	60 100	8	B9A	TP
6BF5	412 365 400		6	7.5	100	100	36	7.5	100	90	7	B7G	P
6BF6	412 398 600		6	9	250		9.5	1.9	100		1.9	B7G	DDT
6BF7	642 113 470		6	0.8	100		8	4.8	100		4.8	B8D	TT
6BG6	021 040 350	A	6	8	250	250	70	6	100	PenLF	5	A08	P
6BG7	742 113 460		6	0.8	100		8	4.8	100		4.8	B9A	TT
6BH5	541 236 000		6	2.5	250	100	6.0	1.7	150	100	1.7	B9A	P
6BH6	412 365 100		6	1	250	150	7.4	4.6	100	100	3.4	B7G	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6BH8	146 231 457		6	{ 5.0 1.6	150 200		9.5 15.0	3.3 7.0	100 100	60 100		B9A	TP
6BJ5	412 36* 500		6	5	250	250	35	10.5	100	150	10	B7G	P
6BJ6	412 365 100		6	1	250	100	9.2	3.6	100	100	3.6	B7G	P
6BJ7	170 239 181		6						D			B9A	DDD
6BJ8	811 239 641		6	9	250		8	2.8	100			B9A	DDT
6BK5	604 231 450		6	5	250	250	35	8.5	100	150	8	B9A	P
6BK6	412 389 600		6	2	250		1.2	1.6	100		1.6	B7G	DDT
6BK7	741 236 410		6	1.0	100		9.0	6.1	100		6.0	B9A	TT
6BK7-A	741 236 410		6	2	150		10.7	9	100		9	B9A	TT
6BK8	501 236 014		6		250	150	3	1.8	100	100		B9A	P
6BL4	**1 *8* 230		6				180		REC		40mA	A08	R
6BL7	471 461 230		6	9	250		40	6.2	100		6	A08	TT
6BL8	645 237 114		6	{ 2 2	100 175		14 10	5 6.2	100 100	60 150	5 6	B9A	TP
6BM5	412 365 400		6	6	250	250	30	7	No Data Available			B9A	P
6BM8	414 237 516		6	{ 0 16	100 200		3.5 35	2.5 6.4	100 100	60 100	2.5 6	B9A	TP
6BN4	142 361 400		6	2.2	150		9	7.0	100		7.0	B7G	T
6BN5	441 231 615		6	10.8	225	225	26.0	3.2	100	150	3.2	B9A	P
6BN6	142 354 600		6	1	60	60	0.25	1	80	60	1	B7G	P
6BN7	741 231 406		6	{ 15 1	250 125		24 5	5.5 2	No Data Available			B9A	TT
6BN8	026 895 310	G ₁	6	3	250	125	9	1.13	100	100	1.1	A08	DDP
6BQ5	*41 23* 6*5		6	7.3	250	250	48.0	11.3	100	150	10.0	B9A	P
6BQ6	020 540 310	A	6	22.5	250	150	57	5.9	100	100	5	A08	P
6BQ7	741 236 410		6	2	150		9	6	150		6	B9A	TT
6BQ7-A	741 236 410		6	2	150		9	6.4	100		5	B9A	TT
6BR7	041 230 651		6	3	250	100	2	1.225	100	100	1.2	B9A	P
6BR8	461 237 514		6	{ 1.0 0.85	150 250		18 10	8.5 5.2	100 100	60 100	8	B9A	TP
6BS4	642 314 600		6	4	100		16.0	8.0	100		8	B7G	T
6BS5	541 236 **1		6	7.5	250	250	50	7	100	100		B9A	P
6BS7	001 230 651	G ₁	6	3	250	100	2	1.25	100	100	1.2	B9A	P
6BS8	641 237 410		6	2.2	150		10	7.2	100		7	B9A	TT
6BT4	280 009 130		6				30		REC		15mA	B8A	RR
6BT6	412 389 600		6	3	250		1	1.2	150		1.2	B7G	DDT
6BT8	891 236 541		6	2.2	200	150	9.5	6.2	100	100		B9A	DDP
6BU6	412 389 600		6	9	250		9.5	1.9	100		1.9	B7G	DDT
6BU8	157 231 461		6		100	60	2.2	1.5	100	60		B9A	PP
6BV7	865 239 141		6	5	250	250	38	10	100	150	10	B9A	DDP
6BV8	146 239 118		6	3.7	200		11	5.6	100			B9A	DDT
6BW4	800 230 901		6				30		REC		15mA	B9A	RR
6BW6	*41 230 651		6	13	300	225	34	3.75	100	150	3.7	B9A	P
6BW7	141 230 651		6	1.4	250	250	9.7	8.2	100	100	7	B9A	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6BW8	918 234 156		6.3	1.1	250	100	10	5.2	100	100		B9A	DDP
6BX4	802 308 100		6				30		REC		15mA	B7G	RR
6BX6	141 230 651		6	3	200	200	8	7.2	100	100	7	B9A	P
6BX7	471 461 230		6	16.4	250		42	7.6	100		6	A08	TT
6BX8	641 237 410		6	5	125		11	7.5	125		7	B9A	TT
6BY5	120 980 310		6				60		REC		20mA	A08	RR
6BY6	412 365 400		6	2.5	250	100	6.5	2.4	100	100	2	B7G	H
6BY7	141 230 651		6	2.0	250	100	10.0	6.0	150	100	5.0	B9A	P
6BY8	026 598 310	G ₁	6	4	250	250	44	12	100	PenLF	10	A08	DD
6BZ6	412 365 100		6	1.0	125	125	14	8	125	125	7	B7G	P
6BZ7	741 236 410		6	2.2	150		10.0	6.8	100		6.0	B9A	TT
6BZ8	641 237 410		6	1	125		10	8	125		8	B9A	TT
6C4	602 364 100		6	8.5	250		10.5	2.2	100		3	B7G	T
6C5	026 040 310		6	8	250		8	2	100		2	A08	T
6C6	265 113 000	G ₁	6	3	250	100	2	1.225	100	100	1.2	UX6	P
6C7	260 981 300	G ₁	6	9	250		4.5	1.25	100		1.2	Sm7	DDT
6C8	026 147 310	G ₁	6	4.5	250		3.2	1.6	100		1.6	A08	TT
6C9	276 454 130		6	2.5	100		5.0	3.0	100	60	3.0	B8A	TH
				2.5	250	100	8.0	2.5	100	100	2.5		
6C10	276 454 130		6	2.0	100		5.0	2.2	100	60	2.8	B8A	TH
				2.0	250	100	8.0	2.4	100	100	3.5		
6C11	276 454 130		6	3	100		5	2.3	100	60	2.3	B9A	TH
					125	125	5		100	100			
6C12	541 237 164		8	3	100		3	2	100	60	3	B9A	TH
				2	250	100	6.5	2.4	100	100	2.4		
6C31	027 546 310	G ₁	6	4.0	100		7	3.4	100	60	5	A08	TH
				3.0	250	100	5	2.8	100	100	3.1		
6CA4	8*1 23* 9**		6				60		REC		20mA	B9A	RR
6CA5	142 345 600		6	4.5	125	125	36	9.2	125	126	9.2	B7G	P
6CA7	126 540 310		6	14.5	250	250	57	8.5	100	100	9.0	A08	P
6CB5	521 441 350	A	6	30.0	175	175	90	8.8	100	100	8.0	A08	P
6CB6	412 365 100		6	1.0	125	125	13	8.0	100	150	6	B7G	P
6CD6	021 040 350	A	6	30	175	175	75	7.7	100	100	7.0	A08	P
6CE5	412 365 100		6	1	125	125	11	7.6	125	125	7.6	B7G	P
6CF6	412 365 100		6	1.0	125	125	12	7.8	100	150	6	B7G	P
6CF8	501 236 014		6	2	250	150	3	1.85	100	100		B9A	P
6CG6	412 365 100		6	8.0	250	150	9	2	100	100		B7G	P
6CG7	641 237 410		6	8.0	250		9.0	2.6	100		3.0	B9A	TT
6CG8	461 237 514		6	2	100		8.5	5.8	100	60	5.9	B9A	TP
					250	150	7.7	4.6	100	150	4		
6CH6	041 230 651		6	4.5	250	250	40	11.0	100	150	9.0	B9A	P
6CH7	741 236 411		6	2.2	150		10	6.8	150		6.8	B9A	TT
6CH8	175 321 446		6	2	200		13	3.3	100		4.9	B9A	TP
				2.2	200	150	9.5	6.3	100	150	5		
6CH9	260 054 130		6	2.5	250	100	6	2.2	100	100	2.2	B8A	P
6CH10	*41 23* *51	A	6	22	175	175	45	6.2	100	100	5	B9A	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6CK5	260 054 130		6	7	250	250	36	10	100	PenLF	8	B8A	P
6CK6	541 231 600		6	5.5	250	250	36.0	10.0	100	150	9.0	B9A	P
6CL5	521 441 350	A ₁	6	40	175	175	90	6.5	100	100		A08	P
6CL6	145 236 154		6	3	250	150	30	11	No Data Available			B9A	P
6CL8	461 237 514		6	{ .85 1	125		15	8	100	60	8	B9A	TP
					125	125	12	5.8	100	100	5		
6CM5	026 540 310	A ₁	6	7	250	250	72	14.5	100	PenLF		A08	P
6CM6	504 234 106		6	12.5	250	250	45	4.1	100	100		B9A	P
6CM7	701 236 441		6	{ 7.0 8.0	200		5.0	2.0	100	60	2.8	B9A	TT
					250		20.0	4.4	100	100	4.7		
6CM8	641 237 514		6	{ 2	250		1.8	2	100	60		B9A	TP
					200	150	9.5	6.2	100	100			
6CN6	120 540 310	A	6	7	250	250	100	14.3	100	PenLF	10	A08	P
6CN7	981 331 462		3	3	250		1.0	1.2	100		1.3	B7G	DDT
6CQ6	412 361 500		6	2.5	250	200	8.0	2.5	100	150	2.5	B7G	P
6CQ8	645 237 114		6	{ .85 1	125		15	8	100		8	B9A	TP
					125	125	12	5.8	125	125	5.8		
6CR6	182 365 400		6	2.0	250	100	9.5	2.0	250	100	1.95	B7G	DT
6CS5	514 234 1*6		6	10	200	125	47	8	100	100		B9A	P
6CS6	412 365 100		6	1.0	100	30	1.0	1.1	No Data Available			B7G	H
6CS7	604 237 411		6	{ 8.5 10.6	250		10.5	2.2	100		2	B9A	TT
					250		19	4.5	100		4		
6CT7	268 154 130		6	2	250	100	5	1.8	100	100	1.8	B8A	DP
6CU5	142 345 600		6	8	125	100	50	7.5	125	100	7.5	B7G	P
6CU6	020 540 310	A	6	22.5	250	150	57	5.5	100	100	6.0	A08	P
6CU7	276 454 130		6	{ 2 2	100		5	2.2	100	60	2.8	B8A	TH
					250	100	8	2	100	100	3.5		
6CV7	264 089 130		6	3	250		1	1.3	150		1.3	B8A	DDT
6CW7	147 234 116		6	1.5	90		12	6	100		6	B9A	TT
6CX7	641 237 411		6	2	150		9	6.4	100		6	B9A	TT
6CX8	146 231 456		6	{ 1.5 2	150		9	4.6	100	60	4.6	B9A	TP
					200	125	24	10	100	60			
6CW5	*41 23* 6*5		6	12.5	175	175	70	10	100	100	9	B9A	P
6CZ5	504 234 1*6		6	14	250	250	46	4.8	100	100		B9A	P
6D1	123 000 000	D ₁	6						D			B3G	D
6D2	192 310 800		6						D			B7G	RR
6D3	812 380 000		6						D			B7G	R
6D5	026 040 310		6	40	275		31	2.1	100		2.1	A08	T
6D6	265 113 000	G ₁	6	3	250	100	8.2	1.6	100	100	1.6	UX6	P
6D7	265 101 300	G ₁	6	3	250	100	2	1.225	100	100	1.2	Sm7	P
6D8	027 546 310	G ₁	6	{ 3	150		4.2		100	60		A08	H
					250	100	3.5		150	100			
6DA6	041 230 651		6	2.0	250	100	9.0	3.6	250	100	3.6	B9A	P
6DB6	412 365 100		6	1	150	150	5.8	2	100	100		B7G	P
6DC6	412 365 100		6	2.2	200	150	9.5	5.5	150	100	5.0	B7G	P
6DE6	412 365 100		6	1.1	125	125	16	8	100	100	8	B7G	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6DG6	026 540 310		6	7.5	200	125	47	8	100	PenLF		A08	P
6DN6	021 040 350	A ₁	6	18	200	125	70	9	100	100		A08	P
6DQ6	020 540 310	A	6	22.5	250	150	75	6.6	125	100		A08	P
6DR4	123 000 000	D ₁	6						D			B3G	D
6DR6	*41 23* *51		6	23	175	175	45	6.6	100	100		B9A	P
6DT6	412 365 100		6	2.2	150	100	1.1	0.8	150	100	2.0	B7G	P
6E6	274 146 300		6	27.5	250		18	1.7	100		1.7	UX7	TT
6E7	265 101 300	G ₁	6	3	250	100	8.2	1.6	100	100	1.6	Sm7	
6E8G	027 546 310	G ₁	6	4.8	150		3.3	2.8	150	60	2.8	A08	TH
6EH6	412 365 100		6	1	250	100	2.3		100	100			P
6EX4	802 309 100		6				30		REC		15mA	B9A	RR
6F1	261 514 130		6	1.8	200	200	10	9	100	60	8	B8A	P
6F5	020 600 310	G ₁	6	2	250		0.9	1.5	100		1.5	A08	T
6F6	026 540 310		6	16.5	250	250	34	2.5	100	PenLF	2.5	A08	P
6F7	275 641 300	G ₁	6	3.0	100		3.5	0.5	100	60	0.5	Sm7	TP
				3.0	100	100	6.3	1.05	100	100	1.05		
6F7B	275 641 300	G ₁	6	3.0	100		3.5	0.5	100	60	0.5	UX7	TP
				3.0	100	100	6.3	1.05	100	100	1.05		
6F7E	275 641 300	G ₁	6	3.0	100		3.5	0.5	100	60	0.5	UX7	TP
				3.0	100	100	6.3	1.05	100	100	1.05		
6F7M	023 756 410	G ₁	6	3.0	100		3.5	0.5	100	60	0.5	UX7	TP
				3.0	100	100	6.3	1.05	100	100	1.05		
6F8	027 146 310	G ₁	6	8	250		9	2.6	100		2.6	A08	TT
6F11	260 154 130		6	1.8	250	100	4.4	2.2	100	100	2.2	B8A	P
‡ 6F12	412 361 500		6	2	250	250	10	7.5	100	PenLF	5	B7G	P
				1.5	200	150	4	6.4	100	PenLF	5		
6F13	260 154 130		6	1.8	200	200	10	9	150	150	8	B8A	P
6F14	260 154 130		6	1.25	150	150	28	10.6	100	100	8	B8A	P
6F15	260 154 130		6	2.5	250	100	7	2.3	100	100	2.3	B8A	P
6F16	261 154 130		6	2.5	250	100	6	2.2	100	100	2.2	B8A	P
6F17	412 361 500		6	2	150	150	46	6	100	100		B7G	P
6F18	141 230 651		6	1.3	175	100	12	4.5	125	100		B9A	P
6F19	141 230 651		6	2	250	100	10	6	150	100	5	B9A	P
6F32	216 510 030	G ₁	6	4.5	200	200	5.1	3	100	150	3	M08	P
6F33	412 361 500		6	4	200	200	5.75	3.55	100	150	3.5	B7G	P
6FX4	902 309 100		6				30		REC		15mA	B7G	RR
6G6	026 540 310		6	9	175	175	15	2.3	100	100	2.3	A08	P
6G7	026 985 310	G ₁	6	3	250	125	10	1.325	100	100	1.3	A08	DDP
6G8	026 985 310	G ₁	6	3	250	125	9	1.125	100	100	1.1	A08	DDP
6GG6	802 300 190		6				30		REC		15mA	F8	RR
6H4	020 800 310		6						D			A08	D
6H6	029 180 310		6						D		4	A08	DD

‡ See note on Page 8

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6H8G	026 895 310	G ₁	6	2	250	125	8.5	2.4	100	100	2.4	A08	DDP
6H8MG	026 895 310	G ₁	6	2	250	125	6	1.8	100	100	1.8	A08	DDP
6J4	412 344 600		6	1.5	150		15	12	100		10	B7G	T
6J5	026 040 310		6	8	250		9	2.6	100		2.6	A08	T
6J6	762 344 100		6	3	150		5	4.5	100		5.3	B7G	TT
6J7	026 510 310	G ₁	6	3	250	100	2	1.225	100	100	1.2	A08	P
6J8	027 546 310	G ₁	6	$\begin{Bmatrix} 3 \\ 3 \end{Bmatrix}$	$\begin{Bmatrix} 150 \\ 250 \end{Bmatrix}$	$\begin{Bmatrix} 100 \\ 100 \end{Bmatrix}$	$\begin{Bmatrix} 1.3 \\ 1.1 \end{Bmatrix}$	$\begin{Bmatrix} 1.6 \\ 1.2 \end{Bmatrix}$	$\begin{Bmatrix} 100 \\ 100 \end{Bmatrix}$	$\begin{Bmatrix} 60 \\ 100 \end{Bmatrix}$	$\begin{Bmatrix} 1.6 \\ 1.5 \end{Bmatrix}$	$\begin{Bmatrix} A08 \\ A08 \end{Bmatrix}$	$\begin{Bmatrix} TH \\ TH \end{Bmatrix}$
6K5	026 000 310	G ₁	6	3	250		1.1	1.4	200		1.4	A08	T
6K6	026 540 310		6	18	250	250	32	2.3	100	PenLF	2.3	A08	P
6K7	026 510 310	G ₁	6	3	250	125	10.5	1.65	100	100	1.6	A08	P
6K8	027 546 310	G ₁	6	$\begin{Bmatrix} 1 \\ 3 \end{Bmatrix}$	$\begin{Bmatrix} 100 \\ 250 \end{Bmatrix}$	$\begin{Bmatrix} 100 \\ 100 \end{Bmatrix}$	$\begin{Bmatrix} 8 \\ 4 \end{Bmatrix}$	$\begin{Bmatrix} 2.5 \\ 1.2 \end{Bmatrix}$	$\begin{Bmatrix} 100 \\ 100 \end{Bmatrix}$	$\begin{Bmatrix} 60 \\ 100 \end{Bmatrix}$	$\begin{Bmatrix} 3 \\ 1.6 \end{Bmatrix}$	$\begin{Bmatrix} A08 \\ A08 \end{Bmatrix}$	$\begin{Bmatrix} TH \\ Thyratron \end{Bmatrix}$
6K25	026 040 310		6		100		30	2K Ω	No Data Available			A08	Thyratron
6L1	274 164 130		6	8.6	200		10	2.8	100		2.0	B8A	TT
6L5G	026 040 310		6	9	250		8	1.9	100		1.9	A08	T
6L6	026 540 310		6	18	350	250	54	5.2	100	PenLF	5.2	A08	P
6L7	026 540 310	G ₁	6	3	250	100	5.3	1.1	100	100	1.1	A08	H
6L12	741 236 410		6	2.3	250		10	5.9	100		5	B9A	TT
6L18	260 064 130		6	13.3	250		12.0	5.5	80		7.0	B8A	T
6L19	274 164 130		6	1.8	200		5	3.1	150		3.1	B8A	TT
6L34	412 314 600		6	1.5	250		10	9	150		7	B7G	T
6LD3	264 098 130		6	1.9	250		0.85	1.95	150		1.9	B8A	DDT
6LD12	191 238 146		6	3	250		1	1.2	100		1.3	B9A	DDDT
6LD20	264 098 130		6	5.9	250		5	2.3	100		3.0	B8A	DDT
6M3	*28 0*0 *30		6						D			A08	R
6M5	541 230 600		6	7	250	250	36	10.0	100	100	10.0	B9A	P
6M6	026 540 310		6	6	250	250	36	9.5	100	PenLF	8	A08	P
6M7	026 510 310	G ₁	6	2.5	250	125	10.5	3.4	100	100	3.2	A08	P
6M7MG	026 510 310	G ₁	6	2.5	250	125	6	2	100	100	2	A08	P
6M8	137 546 280	G ₁	6	$\begin{Bmatrix} 1.0 \\ 3.0 \end{Bmatrix}$	$\begin{Bmatrix} 100 \\ 100 \end{Bmatrix}$	$\begin{Bmatrix} 100 \\ 100 \end{Bmatrix}$	$\begin{Bmatrix} 0.5 \\ 8.5 \end{Bmatrix}$	$\begin{Bmatrix} 1.1 \\ 1.9 \end{Bmatrix}$	$\begin{Bmatrix} 100 \\ 100 \end{Bmatrix}$	$\begin{Bmatrix} 60 \\ 100 \end{Bmatrix}$	$\begin{Bmatrix} 1.1 \\ 1.9 \end{Bmatrix}$	$\begin{Bmatrix} A08 \\ A08 \end{Bmatrix}$	$\begin{Bmatrix} DTP \\ R \end{Bmatrix}$
6N3	*** 23* **8		6				180		REC		50mA	B9A	R
6N4	412 361 400		6	3	175		12	6	150		6	B7G	T
6N7	027 446 310		6	5	250		3	1.6	100		1.6	A08	TT
6N8	541 236 891		6	2	250	90	5	2.2	100	90	2.2	B9A	DDP
6NK7	026 510 310	G ₁	6	2	250	100	5	2.3	100	100	2.3	A08	P
6PI	026 540 310		6	8.5	250	250	40	8.8	100	150	8	A08	P
6P5	026 040 310		6	13.5	250		5	1.25	100		1.4	A08	T
6P6	215 413 000	A	6	8.0	250	150	34		100	100		UX6	P
6P7	023 756 410	G ₁	6	$\begin{Bmatrix} 3.0 \\ 3.0 \end{Bmatrix}$	$\begin{Bmatrix} 100 \\ 100 \end{Bmatrix}$	$\begin{Bmatrix} 100 \\ 100 \end{Bmatrix}$	$\begin{Bmatrix} 3.5 \\ 6.3 \end{Bmatrix}$	$\begin{Bmatrix} 0.5 \\ 1.05 \end{Bmatrix}$	$\begin{Bmatrix} 100 \\ 100 \end{Bmatrix}$	$\begin{Bmatrix} 60 \\ 100 \end{Bmatrix}$	$\begin{Bmatrix} 0.5 \\ 1.05 \end{Bmatrix}$	$\begin{Bmatrix} A08 \\ A08 \end{Bmatrix}$	$\begin{Bmatrix} TP \\ TH \end{Bmatrix}$
6P8	027 546 310	G	6	$\begin{Bmatrix} 2.4 \\ 2.4 \end{Bmatrix}$	$\begin{Bmatrix} 100 \\ 250 \end{Bmatrix}$	$\begin{Bmatrix} 100 \\ 75 \end{Bmatrix}$	$\begin{Bmatrix} 2.2 \\ 1.5 \end{Bmatrix}$		$\begin{Bmatrix} 100 \\ 100 \end{Bmatrix}$	$\begin{Bmatrix} 60 \\ 75 \end{Bmatrix}$		$\begin{Bmatrix} A08 \\ B9A \end{Bmatrix}$	$\begin{Bmatrix} TH \\ P \end{Bmatrix}$
6P9	412 365 400		6	6	250	250	30	7	No Data Available			B9A	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6P15	041 230 605		6	7.5	250	250	49	11.3	100	150	10	B9A	P
6P25	026 540 310		6	8.5	250	250	40	8.8	100	100	8	A08	P
6P26	026 540 310		6	8.5	250	250	40	8.8	100	PenLF	8	A08	P
6P28	020 540 310	A	6	8.8	100	250	72	9.5	100	PenLF	9	A08	P
6PX6	026 540 310		6	6	250	35	9.2	9.2	100	PenLF	8	A08	P
6PZ8	026 589 310	G ₁	6	6	250	250	36	9.2	100	PenLF	8	A08	DDP
6Q4	441 230 446		6	1.5	250		15	12.0	No Data Available			B9A	T
6Q6	026 080 310		6	3	250		1.2	1.05	150		1.05	A08	DT
6Q7	026 980 310	G ₁	6	3	250		1	1.2	100		1.5	A08	DDT
6QL6	541 236 154		6	11.5	175	175	52	9.5	125	100		B9A	P
6R	026 510 310	G	6	2	250	100	3.7	2.0	100	100		A08	P
6R3	*** 23* **8	C	6				120		REC		30mA	B9A	R
6R4	401 230 060		6	2	150		30	5.5	100		5.	B9A	T
6R6	026 500 310	G ₁	6	3	250	100	7	1.45	100	100	1.4	A08	P
6R7	026 980 310	G ₁	6	9	250		9.5	1.9	100		1.9	A08	DDT
6R8	8†1 239 146		6	9	250		9.5	1.9	100		1.9	B9A	DDDT
6RV	026 510 310	G ₁	6	2	250	100	6.4	2.1	100	100	2.1	A08	P
6S2	*** 23* ***	D ₁	5						D			B9A	D
6S4	* * 234 **6		6	8	250		26	4.5	100		4.5	B9A	T
6S6	120 600 350	G ₁	6	2	250	100	13	4	100	100	4	A08	P
6S7	026 510 310	G ₁	6	3	250	100	8.5	1.75	100	100	1.7	A08	P
6S8	†18 916 230	G ₁	6	2	250		0.9	1.1	200		1.1	A08	DDDT
6SA7	126 641 310		6	3.6	100		12	4.3	100		4.5	A08	H
6SA7G	026 641 310		6	3.6	100		12	4.3	100		4.5	A08	H
6SB7Y	126 541 310		6	1	250	100	3.8		100	100		A08	H
6SC5	026 400 310		6	4	250		7.5	2.7	100		2.7	A08	T
6SC7	074 461 230		6	2	250		2	1.325	200		1.3	A08	TT
6SD7	021 415 360		6	2	250	100	6	3.6	100	100	3.6	A08	P
6SE7	021 415 360		6	1.5	250	100	4.5	3.4	100	100	3.4	A08	P
6SF5	014 060 320		6	2	250		0.9	1.5	200		1.5	A08	T
6SF7	041 586 230		6	1	250	100	12.4	2.05	100	100	2	A08	DP
6SG7	021 415 360		6	1	250	125	11.8	4.7	100	100	4.7	A08	P
6SH7	021 415 360		6	1	250	150	10.8	4.9	100	150	4.9	A08	P
6SJ7	021 415 360		6	3	250	100	3	1.65	100	100	1.6	A08	P
6SK7	021 415 360		6	3	250	100	9.2	2	100	100	2	A08	P
6SL7	461 471 230		6	2	250		2.3	1.6	150		1.6	A08	TT
6SN7	461 471 230		6	8	250		9	2.6	100		2.6	A08	TT
6SQ7	041 896 230		6	2	250		0.9	1.1	200		1.1	A08	DDT
6SR7	041 986 230		6	9	250		9.5	1.9	100		1.9	A08	DDT
6SS7	021 415 360		6	3	250	100	9	1.85	100	100	1.8	A08	P
6ST7	041 896 230		6	9	250		9.5	1.9	100		1.9	A08	DDT
6SU7	471 461 230		6	2	250		2.3	1.6	200		1.6	A08	TT
6SV7	041 586 230		6	1	250	150	7.5	3.4	100	150	3.5	A08	DP
6SZ7	041 986 230		6	3	250		1	1.2	200		1.2	A08	DDT
6T	205 413 000	A ₁	6	12.5	250	250	4.5	4.1	100	PenLF	4	UX6	P

VALVE	SELECTOR SWITCH No.	T.C.	Vr	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6T4	642 314 600		6	3.0	80		18.0	7.0	80		7.0	B7G	T
6T6	026 500 310	G ₁	6	1	250	100	10	5.5	100	100	5.5	A08	P
6T7	026 980 310	G ₁	6	3	250		1.2	1.05	150		1.05	A08	DDT
6T8	†91 238 146		6	3	250		1	1.2	150		1.2	B9A	DDDT
6TE8	427 546 310	G ₁	6	$\begin{Bmatrix} 2 \\ 2 \end{Bmatrix}$	$\begin{Bmatrix} 100 \\ 250 \end{Bmatrix}$	$\begin{Bmatrix} \\ 100 \end{Bmatrix}$	$\begin{Bmatrix} 3.7 \\ 3.5 \end{Bmatrix}$		$\begin{Bmatrix} 100 \\ 100 \end{Bmatrix}$	$\begin{Bmatrix} 60 \\ 100 \end{Bmatrix}$		$\begin{Bmatrix} \\ A08 \end{Bmatrix}$	TH
6TE9	651 237 440		6	$\begin{Bmatrix} 2.5 \\ 7.0 \\ 1.5 \end{Bmatrix}$	$\begin{Bmatrix} 100 \\ 200 \\ 150 \end{Bmatrix}$	$\begin{Bmatrix} \\ 90 \end{Bmatrix}$	$\begin{Bmatrix} 4 \\ 3 \\ 6 \end{Bmatrix}$	$\begin{Bmatrix} 2 \\ 0.75 \\ 1.1 \end{Bmatrix}$	$\begin{Bmatrix} 100 \\ 100 \\ 150 \end{Bmatrix}$	$\begin{Bmatrix} \\ 90 \\ 60 \end{Bmatrix}$	$\begin{Bmatrix} 2 \\ \\ 75 \end{Bmatrix}$	$\begin{Bmatrix} B9A \\ A08 \end{Bmatrix}$	TH
6TH8	027 546 310	G ₁	6	14.5	300	75	3.5		100	75		A08	TH
6TP	205 413 000	A ₁	6		250	250	72	6	100	PenLF	6	UX6	P
6U3	**1 23* **8		6				180		REC		40mA	B9A	R
6U4	001 080 230		6				120		REC		30mA	A08	R
6U6	026 540 310		6	14	200	150	56	6.2	100	100	6.2	A08	P
6U7	026 510 310	G ₁	6	3	250	100	8	1.5	100	100	1.5	A08	P
6U8	645 237 114		6	$\begin{Bmatrix} 1 \\ 1 \end{Bmatrix}$	$\begin{Bmatrix} 150 \\ 250 \end{Bmatrix}$	$\begin{Bmatrix} 0 \\ 100 \end{Bmatrix}$	$\begin{Bmatrix} 18 \\ 10 \end{Bmatrix}$	$\begin{Bmatrix} 8.5 \\ 5.2 \end{Bmatrix}$	$\begin{Bmatrix} 100 \\ 150 \end{Bmatrix}$	$\begin{Bmatrix} 60 \\ 100 \end{Bmatrix}$	$\begin{Bmatrix} 7 \\ 5 \end{Bmatrix}$	$\begin{Bmatrix} B9A \\ B9A \end{Bmatrix}$	TP
6V3	080 230 808	C	6				120		REC		30mA	B9A	R
6V3P	000 230 009	C	6				120		REC		30mA	B9A	R
6V4	8*1 23* 9**		6				30		REC		15mA	B9A	RR
6V5	006 540 320		6	12.5	250	250	45	4.1	100	PenLF	4.1	A08	P
6V6	026 540 310		6	12.5	250	250	45	4.1	100	PenLF	4	A08	P
6V7	026 980 310	G ₁	6	20	250		8	1.1	100		1.1	A08	DDT
6V8	681 234 †19		6	3	250		1	1.2	100		1.3	B9A	DDDT
6W2	023 000 000	D ₁	6						D			B3G	D
6W3	**1 23* **8		6				120		REC		40mA	B9A	R
6W4	001 080 230		6				120		REC		30mA	A08	R
6W5	028 090 310		6				60		REC		20mA	A08	RR
6W6	026 540 310		6	9.5	150	150	58	8	100	100	8	A08	P
6W7	026 510 310	G ₁	6	3	250	100	2	1.225	100	100	1.2	A08	P
6WC5	265 414 300		6	1.5	250	100			125	100		UX7	O
6X2	023 000 000	D ₁	6						D			B3G	D
6X3	020 000 310	D ₁	6				5		D			A08	R
6X4	802 309 100		6				30		REC		35mA	B7G	RR
6X5	028 090 310		6				30		REC		35mA	A08	RR
6X8	146 231 457		6	$\begin{Bmatrix} 1.0 \\ 1.8 \end{Bmatrix}$	$\begin{Bmatrix} 100 \\ 250 \end{Bmatrix}$	$\begin{Bmatrix} \\ 150 \end{Bmatrix}$	$\begin{Bmatrix} 8.5 \\ 7.7 \end{Bmatrix}$	$\begin{Bmatrix} 5.8 \\ 4.6 \end{Bmatrix}$	$\begin{Bmatrix} 100 \\ 100 \end{Bmatrix}$	$\begin{Bmatrix} 60 \\ 150 \end{Bmatrix}$	$\begin{Bmatrix} 5.0 \\ 4.0 \end{Bmatrix}$	$\begin{Bmatrix} A08 \\ B9A \end{Bmatrix}$	TP
6Y3	020 000 300	D ₁	6				30		REC		15mA	A08	R
6Y5	208 193 000		6				30		REC		15mA	UX6	RR
6Y6	026 540 310		6	13.5	150	150	58	7	100	100	7	A08	P
6Y7	027 446 310		6	0	250		5.3	1.8	150		1.8	A08	TT
6Z3	381 200 000		6				60		REC		20mA	UX4	R
6Z4	289 130 000		6				30		REC		45mA	UX5	RR
6Z5	328 192 000		6				30		REC		15mA	UX6	RR
6Z6	028 190 310		6				30		REC		15mA	A08	RR

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6Z7	026 447 310		6	0	175		4.2	0.55	150		0.55	A08	TT
6ZDH3A	264 813 000		6	2	225		1.5	1.5	100		1.2	UX6	DT
6ZPI	265 413 000		6	9	200	200	15	1.75	100	100		UX6	P
6ZY5	028 090 310		6				15		REC		15mA	A08	RR
7A2	642 310 000	S	4	17	250	250	40	3.2	100	PenLF	2.3	B5	P
7A2	045 231 600		4	17	250	250	40	3.2	100	PenLF	2.3	B7	P
7A3	045 231 600		4	6	250	250	32	10	100	100	10	B7	P
7A4	260 0*4 130		6	8	250		9	2.6	100		2.6	B8B	T
7A5	265 004 130		6	9	125	125	44	6	100	90	6	B8B	P
7A6	219 008 130		6				5		D			B8B	RR
7A7	265 104 130		6	3	250	100	9.2	2	100	100	2	B8B	P
7A8	266 451 130		6	1	250	100	14	1.4	100	100	1.6	B8B	O
7AB7	526 141 310		6	2	250	100	4	1.8	100	100	1.2	B8B	P
7AC7	412 365 100		6		300	150	10	9	100	100	8	B7G	P
7AD7	265 104 130		6	2.3	300	150	28	9.5	100	150	9	B8B	P
7AF7	217 446 130		6	9	250		9	2.1	100		2.1	B8B	TT
7AG7	265 114 130		6	2	250	250	6	4.2	200	200	4.2	B8B	P
7AH7	265 114 130		6	2	250	250	6.8	3.3	100	150	3.3	B8B	P
7AJ7	265 104 130		6	3	250	100	2.2	1.575	100	100	1.5	B8B	P
7AK7	265 104 130		6	0	150	90	40	6.5	150	90	6	B8B	P
7AN7	147 234 116		7.5	1.5	90		12	6	100		6	B9A	TT
7AU7	741 226 413		3.5	8.5	250		10.5	2.2	100		2.2	B9A	TT
7B4	260 004 130		6	2	250		0.9	1.5	200		1.5	B8B	T
7B5	265 004 130		6	18	250	250	32	2.3	100	PenLF	2.3	B8B	P
7B6	264 *89 130		6	2	250		0.9	1.1	200		1.1	B8B	DDT
7B7	265 104 130		6	3	250	100	8.5	1.75	100	100	1.7	B8B	P
7B8	265 454 130		6	2	250	100		1.15	100	100	1.1	B8B	H
7C4	2*0 800 130		6				5		D			A08	R
7C5	265 004 130		6	12.5	250	250	45	4.1	100	PenLF	4.1	B8B	P
7C5LT	265 004 130		6	12.5	250	250	45	4.1	100	PenLF	4.1	B8B	P
7C6	264 198 130		6	1	250		1.3	1	250		1	B8B	DDT
7C7	265 114 130		6	3	250	100	2	1.3	100	100	1.3	B8B	P
7D3	045 231 600		40	20	150	125	36	2.4	100	100	3.8	B7	P
7D5	045 231 600		13	16.5	250	250	34	2.35	100	PenLF	2.3	B7	P
7D6	045 231 600		40	6	250	250	32	10	100	100	10	B7	P
7D7	076 451 130		6	3	250	100	1.3	0.27	125	100		B8B	TH
7D8	045 231 600		13	6	250	250	32	10	100	100	10	B7	P
7D9	412 360 500		6	13.5	250	250	16	2.6	100	PenLF	2.6	B7G	P
7D9	045 231 600		13	25	250	250	32	1.8	100	PenLF	1.8	B7	P
7D10	*41 230 651		6	4.5	250	250	40	11	100	150	9	B9A	P
7E5	426 141 630		6	3	175		5.5	3	150		3	B8B	T
7E6	264 *98 130		6	8	250		9.5	1.9	100		1.9	B8B	DDT
7E7	269 854 130		6	3	250	100	7.5	1.3	100	100	1.3	B8B	DDP
7F7	217 446 130		6	2	250		2.3	1.6	200		1.6	B8B	TT
7F8	427 116 340		6	3	250		6	3.3	200		3.3	B8B	TT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
7F16	261 154 130		6	2.5	250	100	6	2.2	100	100	2.2	B8A	P
7G7	265 114 130		6	2	250	100	6	4.5	100	100	4.6	B8B	P
7G8	265 441 730		6	2.5	250	100	4.5	2.1	100	100	2.1	B8B	PP
7H6	265 114 130		6	2.5	250	150	9.5	3.5	100	150	3.5	B8B	P
7H7	265 114 130		6	2	250	150	10	4.2	100	150	4.2	B8B	P
7J7	276 454 130		6	{ 3 3	150 250		6.6 1.4	1.4	150 100	60 100	1.4	B8B	TH
7K7	216 498 130		6	2	250		2.3	1.6	200		1.6	B8B	DDT
7L7	265 104 130		6	1.5	250	100	4.5	3.1	100	100	3.1	B8B	P
7N7	217 446 130		6	8	250		9	2.6	100		2.6	B8B	TT
7Q7	266 414 130		6	2	100		15	6	100		4.5	B8B	H
7R1	280 300 000		7.5				60		REC		20mA	UX4	R
7R7	269 854 130		6	1	250	100	6.2	3.4	100	100	3.4	B8B	DDP
7S7	276 454 130		6	{ 1 2	100 250		4.8 4	1.4 2	100 100	60 100	1.8 2.2	B8B	TH
7T7	265 104 130		6	1	250	150	10.8	4.9	100	150	4.9	B8B	P
7V7	265 114 130		6	2	300	150	10	5.8	100	150	5.8	B8B	P
7W7	265 114 130		6	2	300	150	10	5.8	100	150	5.8	B8B	P
7X6	218 009 130		6				30		REC		15mA	B8B	RR
7X7	264 189 130		6	1	250		1.9	1.5	250		1.5	B8B	DDT
7Y4	208 009 130		6				30		REC		30mA	B8B	RR
7Z4	209 008 130		6				60		REC		20mA	B8B	RR
8A1	041 231 500	A	4	1.5	200	75	3.5	4	100	75	4	B7	P
8A1	542 310 000	A	4	1.5	200	75	3.5	4	100	75	4	B5	P
8A2	542 310 000	A	4	2.1	200	100	3	2.4	100	100	2.4	B5	P
8A8	645 237 114		9	{ 2.0 2.0	100 175		14.0 10.0	5.0 6.2	100 100	60 150	5.0 6.0	B9A	TP
8AU8	146 231 457		8.5	{ 1.25 1.5	150 200		8.5 16	4.9 7	100 100	60 100	5 7	B9A	TP
8AW8	146 231 456		8.4	{ 2 3	200 200		4 13	4 9	100 100	60 100	4 9	B9A	TP
8BA8	146 231 456		8.4	{ 8 3	200 200	150	8 13	2.7 9	100 100	60 100	5	B9A	TP
8BQ7A	641 237 410		8.4	2	150		9	6.4	100		6	B9A	TT
8CG7	741 236 410		8.4	8	250		9	2.6	100		3	B9A	TT
8CM7	701 236 441		8.4	{ 7 8	200 250		5 20	2.0 4.4	100 100		2.8 4.7	B9A	TT
8CN7	891 221 643		4.2	3	250		1	1.2	100		1.3	B9A	DDT
8CX8	146 231 456		8.0	{ 1.5 2	150 200		9 25	4.6 10	100 100	60 60	4.6	B9A	TP
8D2	061 231 500	G ₁	13	3	250	100	2	1.25	100	100	1.25	B7	P
† 8D3	412 361 500		6	{ 2 1.5	250 200	250	10 4	7.5 6.4	100 100	PenLF PenLF	5 5	B7G	P
8D4	026 510 310	G ₁	6	2	250	100	3	1.8	100	100	1.8	A08	P

† See note on Page 8

VALVE	SELECTOR SWITCH No.	T.C.	V _f	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	I _a mA	mA/V	Anode Volts	Screen Volts	mA/V		
8D5	041 230 651		6	3	250	100	2	1.225	100	100	1.2	B9A	P
8D6	141 230 651		6	2.0	175	175	10.0	2.5	100	100	2.5	B9A	P
8D7	001 230 651	G ₁	6	3	250	100	2	1.25	100	100	1.2	B9A	P
8G140	892 300 000		8				60		REC		20mA	B4	RR
9A1	045 231 500	A	4	1.5	200	75	5	4.25	100	75	4.2	B7	P
9A1	542 310 000	A	4	1.5	200	75	5	4.25	100	75	4.2	B5	P
9A3	061 231 500	G ₁	4	2	250	125	10	1.8	100	100	1.8	B7	P
9A8	645 237 114		9	{ 2 2	100 175		14 10	5 6.2	100 150	60 150	5 10	B9A	TP
9AB4	602 304 100		9	2	250		10	5.0	100		5.0	B7G	T
9AK8	†91 238 146		9.5	2.3	200		1.0	1.4	100		1.4	B9A	DDDT
9AQ8	641 237 410		9	2.1	200		10	5.8	200		5.8	B9A	TT
9AU7	741 226 413		4.7	3.5	250		10.5	2.2	100		2.2	B9A	TT
9BQ7A	641 237 410		8.4	2	150		9	6.4	100		6	B9A	TT
9BM5	412 365 400		9	6	250	250	30	7				B9A	P
9BW6	*41 130 651		9	12.5	250	250	45	4.1	100	150	4	B9A	P
9D2	061 231 500	G ₁	13	3	250	125	10.5	1.65	100	100	1.8	B7	P
9D6	412 361 500		6	2.5	250	200	8	2.5	100	100	2.5	B7G	P
9D7	141 230 651		6	1.5	250	100	10	8.4	100	100		B9A	P
9J6	762 344 100		9	0.85	100		8.5	5.3	100		5.3	B7G	TT
9P9	412 365 400		9	6	250	250	30	7	100	100		B9A	P
9U8	645 237 114		9.5	{ 1.0 1.0	150 250		18.0 10.0	8.5 5.2	100 100	60 100	8.5 5.0	B9A	TP
10	264 300 000		7.5	32	350	100	16	1.55	100		1.55	UX4	T
10C1	276 454 130		28	{ 3.3 2.5	100 175		6 8	3 2.5	100 100	60 100	3 2.5	B8A	TH
10C2	276 454 130		28	{ 3.3 1.5	100 175		6.0 3.0	3.0 5.0	100 100	60 100	3.0 5.0	B8A	TP
10C8	641 237 541		10.5	{ 2.7 1.5	250 125	125	7.3 11.5	4.4 8.0	100 125	60 125	5 8	B9A	TP
10D1	892 310 000		13				5		D			B5	RR
10D2	192 310 800		19				5		D			B7G	RR
10F1	261 514 130		22	1.8	200	200	10	9	100	150	7	B8A	P
10F3	260 154 130		22	2.35	200	200	6	6.5	100	150	7	B8A	P
10F9	260 154 130		13	2.5	175	100	7	2.3	100	100	2.3	B8A	P
10F18	141 230 651		13	1.3	175	100	12	4.5	100	100		B9A	P
10L1	412 314 600		19	1.5	250		10	8.5	100		8	B7G	T
10LD3	264 098 130		14	1.1	150		0.5	1.95	150		1.9	B8A	DDT
10LD11	264 098 130		15	5.9	250		5	2.3	100		3	B8A	DDT
10P13	260 054 130		30	6.0	150	150	30	7.5	100	100	6.0	B8A	P
10P14	026 540 310		40	9.4	175	175	40	7.2	100	PenLF	6	A08	P
11	362 400 000		1.1	4.5	90		2.5	0.425	80		0.4	UX4	T
11A2	908 231 600	G ₁	4	2	200		3	2.8	100		2.8	B7	DDT
11D3	908 231 600	G ₁	13	2	250		0.6	1.1	100		1.1	B7	DDT
11D5	908 231 600	G ₁	13	3	250		3.8	1.5	150		1.5	B7	DDT

VALVE	SELECTOR SWITCH No.	T.C.	V _i	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	I _a mA	mA/V	Anode Volts	Screen Volts	mA/V		
11E1	216 540 030		6		250	250	50	7.3	100	100	7	M08	P
11E2	020 540 310	A	6		200	200	25	9	100	150	8	A08	P
11E8	200 647 310	G ₁	11		150		20		100			A08	TT
11X5	028 090 310		11				30		REC		15mA	A08	RR
12	364 200 000		1-1	4.5	90		2.5	0.425	80		0.4	UX4	T
12A	264 300 000		5	4.5	90		5	1.5	80		1.5	UX4	T
12A4	142 330 406		6	9.0	250		23	8.0	250		8.0	B9A	T
12A5	265 413 200		6	15	100	100	17	1.7	100	90	1.7	UX7	P
12A6	026 540 310		12.5	12.5	250	250	30	3	100	PenLF	3	A08	P
12A7	265 181 300	G ₁	12.5	{ 12.5	150	150	30 9	0.975	REC 100		15mA 0.9	{ Sm7	RP
12A8	026 545 310	G ₁	12.5	8	250	100	3.5	1.15	100	100	1.1	A08	H
12AB5	504 234 156		12	12.5	250	250	45.0	4.1	250	200	4.0	B9A	P
12AC5	26* *54 130		12	3	200	125	7.2	2.3	100	150	2.3	B8A	P
12AD7	641 227 413		6	2	250		1.25	1.6	100			B9A	TT
12AH7	417 146 230		12.5	3.6	100		3.7	1.55	80		1.55	A08	TT
12AH8	541 227 463		6	{ 0 3	100 250		5.7 2.6	3.5	100 100	60 100	3.5 2.8	{ B9A	TH
12AK7	741 226 413		6	2	250	100	1.2	1.6	150		1.6	B9A	TT
12AJ7	541 237 464		12	{ 2.5	100 225		4 3	2.0 0.65	100 100	60 100	2	{ B9A	TH
12AJ8	541 237 464		12	{ 1.2	60 100		2.5 1.7		60 100	60 60		{ B9A	TH
12AL5	192 310 800		12.5			60	5		D			B7G	RR
12AQ5	412 365 400		12.5	12.5	250	250	45	4.1	100	150	4	B7G	P
12AS5	142 345 600		12	8.5	150	100	35	5.6	150	100	5.6	B7G	P
12AT6	412 389 600		12.5	3	250		1	1.2	200		1.2	B7G	DDT
12AT7	741 226 413		6	2	250		10	5.5	200		5	B9A	TT
12AU4	001 080 230		12				120		REC		40mA	A08	R
12AU6	412 365 100		12.5	1	250	150	10.8	5.2	100	100	5.2	B7G	P
12AU7	741 226 413		6	8.5	250		10.5	2.2	100		2.2	B9A	TT
12AV5	421 060 350		12	22.5	250	150	57	5.9	100	100	5.8	A08	P
12AV6	412 389 600		12.5	2	250		1.2	1.6	100		1.2	B7G	DDT
12AV7	741 226 413		6	1.0	150		18	8.5	100		7	B9A	TT
12AW6	412 365 100		12.5	1.5	250	150	7	5	100	PenLF	5	B7G	P
12AW7	412 365 100		12.5	1.8	250	150	7	5	100	150	5	B7G	P
12AX4	001 080 230		12.5				120		REC		35mA	A08	R
12AX7	741 226 413		6	2	250		1.2	1.6	150		1.6	B9A	TT
12AY7	641 227 413		6	4	250		3	1.75	100		1.7	B9A	TT
12AZ7	741 226 413		12	6	250		10.0	5.5	100		5.5	B9A	TT
12B4	142 330 406		6	17.5	150		34.0	6.4	150		6.3	B9A	T
12B6	026 080 310	G ₁	12.5	2	250		0.9	1.1	150		1.1	A08	DT
12B7	265 104 130		12.5	3	250	100	9.2	2	100	100	2	B8B	P
12B8	127 561 340	G ₁	12.5	{ 0 3	90 100	0 100	2.8 8	2.4 2.1	100 90	60 90	1.5 1.8	{ A08	TP

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
12BA6	412 365 100		12.5	1	250	100	11	4.4	100	100	4.4	B7G	P
12BA7	641 231 106		12.5	2	100		18	7	100		7	B9A	H
12BD6	412 365 100		12.5	3	250	100	9	2	100	100	2	B7G	P
12BE6	412 366 100		12.5	2	100		11	7	100		5	B7G	H
12BF6	412 398 600		12.5	9	250		9.5	1.9	100		1.9	B7G	DDT
12BH7	741 226 413		6	10.5	250		11.5	3.1	100		4	B9A	TT
12BK5	604 231 450		12	5.0	250	250	35.0	8.5	100	150	8.0	B9A	P
12BK6	412 389 600		12.5	2	250		1.2	1.6	150		1.6	B7G	DDT
12BN6	142 354 600		12.5	1	60	60	0.25	1	80	60	1	B7G	P
12BQ6	020 540 310	A ₁	12	22.5	250	150	57	5.9	100	100	5	A08	P
12BR7	641 228 913		6	2	250		10	5.5	100		4	B9A	DDT
12BT6	412 389 600		12.5	3	250		1.0	1.2	150		1.2	B7G	DDT
12BU6	412 389 600		12.5	9	250		9.5	1.9	150		1.9	B7G	DDT
12BV7	141 223 651		6	2.2	250	150	27	13	100	100		B9A	P
12BW4	800 230 901		12				30		REC		15mA	B9A	RR
12BY7	141 223 651		6	2.1	250	150	25	12.0	150	100	10.0	B9A	P
12BZ7	741 226 413		6	2.0	250		2.5	3.2	100		3.0	B9A	TT
12C5	142 345 500		12	7.5	125	100	49	7.5	100	90	6	B7G	P
12C8	026 985 310	G ₁	12.5	3	250	125	10	1.325	100	100	1.3	A08	DDP
12CA5	142 345 600		12	4.5	125	125	36	9.2	100	100	8	B7G	P
12CM6	504 234 106		12	12.5	250	250	45	4.1	100	100		B9A	P
12CR6	182 365 400		12	2	250	100	9.6	2.2	100	100	2	B7G	DP
12CS6	112 365 400		12	1	100	30	0.8	1.5	No Data Available			B7G	P
12CT8	641 237 541		12	1.4	150		9	4.9	100	60	4.5	B9A	TP
12CU5	142 345 600		12	1.5	200	125	15	7	100	100			P
				8	125	100	50	7.5	100	100	7	B7G	
12CU6	020 540 310	A ₁	12	22	250	150	57	5.9	100	100		A08	P
12D4	**1 *8* 230		12						D			A08	D
12DA6	041 230 651		12	1	175	100	12	4.4	100	100		B9A	P
12DQ6	020 540 310	A ₁	12	22.5	250	150	75	6.6	100	100		A08	P
12EI	020 540 310	A ₁	6	18	150	150	100	9.6	100	100	10	A08	P
12E5	026 040 310		12.5	13.5	250		5	1.45	100		1.4	A08	T
12E8	027 546 310	G ₁	12	2	100		3.3		100	60		A08	TH
					100	100	3	0.56	100	100	0.56		
12F	280 300 000		5				60		REC		20mA	UX4	R
12F5	020 600 310	G ₁	12.5	2	250		0.9	1.5	150		1.5	A08	T
12G7	026 980 310	G ₁	12.5	3	250				D			A08	DD
12G8	714 226 143		6										
12H4	623 364 100		6	8	250		9	2.6	90		3	B7G	T
12H6	029 180 310		12.5						D		4	A08	DD
12J5	026 040 310		12.5	8	250		9	2.6	100		2.6	A08	T
12J7	026 510 310	G ₁	12.5	3	250	100	2	1.225	100	100	1.2	A08	P
12K7	026 510 310	G ₁	12.5	3	250	125	10.5	1.65	100	100	1.6	A08	P
12K8	027 546 310	G ₁	12.5	3	100		8	2.5	100	60	3	A08	TH
					250	100	4	1.2	100	100	1.6		

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
I2L6	026 540 310		12	8.25	200	125	46	8.0	100	100	8.0	A08	P
I2L8	414 752 360		12.5	9	175	175	13	2.15	100	100	2.1	A08	PP
I2M7	026 510 310	G ₁	12	2.5	100	100	6	2.2	100	100	2.2	A08	P
I2NK7	026 510 310	G ₁	12.5	2	250	100	5	2.3	100	100	2.3	A08	P
I2Q7	026 980 310	G ₁	12.5	3	250		1	1.2	150		1.2	A08	DDT
I2S7	268 154 130		13	2	200	90	5	2	100	100	1.9	B8A	DP
I2S8	†18 916 230	G ₁	12.5	2	250		0.9	1.1	150		1.1	A08	DDDT
I2SA7	126 641 340		12.5	3.6	100		12	4.3	100		4.5	A08	H
I2SA7G	026 641 340		11.5	3.6	100		12	4.3	100		4.5	A08	H
I2SC7	074 461 230		12.5	2	250		2	1.325	150		1.3	A08	TT
I2SF5	014 060 320		12.5	2	250		0.9	1.5	150		1.5	A08	T
I2SF7	041 586 230		12.5	1	250	100	12.9	2.05	100	100	2	A08	DP
I2G4	602 364 100		12	8	250		10	3.0	100		3	B7G	T
I2SG7	021 415 360		12.5	1	250	125	11.8	4.7	100	100	4.7	A08	P
I2SH7	021 415 360		12.5	1	250	150	10.8	4.9	100	150	4.9	A08	P
I2SJ7	021 415 360		12.5	3	250	100	3	1.65	100	100	1.6	A08	P
I2SK7	021 415 360		12.5	3	250	100	9.2	2	100	100	2	A08	P
I2SL7	461 471 230		12.5	2	250		2.3	1.6	150		1.6	A08	TT
I2SN7	461 471 230		12.5	8	250		9	2.6	100		2.6	A08	TT
I2SQ7	041 896 230		12.5	2	250		0.9	1.1	150		1.1	A08	DDT
I2SR7	041 986 230		12.5	9	250		9.5	1.9	100		1.9	A08	DDT
I2SS7	021 415 360		12.5	3	250	100	9	1.85	100	100	1.8	A08	P
I2SW7	041 986 230		12.5	9	250		9.5	1.9	100		1.9	A08	DDT
I2SX7	471 461 230		12.5	8	250		9	2.6	100		2.6	A08	TT
I2SY7	126 641 340		12.5	1	100		22	4.5	100		4.5	A08	H
I2TE8	427 546 310		12	{	100		3.4		100	60		{	A08
					250	100	3.7		100	100			
					100		3.4		100	60			
I2TE9	651 237 440		12	{	250	100	3		100	100		{	B9A
I2V6	026 540 310		12.5	12.5	250	250	45	4.1	100	150	4	A08	P
I2W6	026 540 310		12	9.5	150	150	58	8.0	100	100	8.0	A08	P
I2WC5	265 414 300		12	1.5	250	100			No Data Available			UX7	O
I2X3	210 300 000	D ₁	12.5				60		REC		20mA	UX4	R
I2X4	802 309 100		12.5				30		REC		15mA	B7G	RR
I2Y4	892 310 000		12				31		REC		15mA	UX4	RR
I2Z3	281 300 000		12.5				60		REC		60mA	UX4	R
I2Z5	281 319 200		6				30		REC		15mA	UX7	RR
I2ZDH3A	264 813 000		12	2	225		1.5	1.5	125		1.2	UX6	DT
I2ZPIA	265 413 000		12	9	200	200	30	2.3	100	PenLF		UX6	P
I3	298 300 000		5				60		REC		20mA	UX4	RR
I3BCIU	206 081 930	G ₁	12.5	1.8	200		3	2	150		2	B8B	DDT
I3BF2U	206 581 930	G ₁	12.5	2.1	200	200	5	2	100	200	2	B8B	DDP
I3D1	461 471 230		25	8	250		2	2.6	100		2.5	A08	TT
I3D2	461 471 230		6	8	250		9	2.6	100		2.6	A08	TT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
I3D3	741 226 413		6	4.6	250		6	2.3	100		2.3	B9A	TT
I3DHA	908 231 600	G ₁	13	1.5	250		1	1.5	100		1.5	B7	DDT
I3F9U	206 501 130	G ₁	12.5	2.6	200	200	6.2	2.2	100	200	2.2	B8B	P
I3HI	023 110 560	G ₁	3	2	200	100	3	2	100	100	2	8SC	P
I3H2	023 110 560	G ₁	13	3	200	100	8.2	1.8	100	100	1.8	8SC	P
I3PGA	645 231 700	G ₁	13	{ 20 3	200 250		4 3.5		100 100	60 100		{ B7	H
I3SPA	061 231 500	G ₁	13	3	200	100	2.3	1.7	100	100	2.25	B7	P
I3VI	023 189 560	G ₁	13	8.5	200	200	45	4.4	100	PenLF	4	8SC	DDP
I3VPA	061 231 500	G ₁	13	3	200	100	7	1.8	100	100	1.8	B7	P
I4	265 130 000	G ₁	14	3	250	90	4	1.05	100	90	1	UX5	P
I4A4	260 0*4 130		12.5	8	250		9	2.6	100		2.6	B8B	T
I4A5	265 004 130		12.5	12.5	250	250	30	3	100	PenLF	3	B8B	P
I4A7	265 104 130		12.5	3	250	100	9.2	2	100	100	2	B8B	P
I4AF4	216 447 130		12	10	250		9	2.1	100		2	B8B	TT 8
I4AF7	216 447 130		12.5	9	250		9	2.1	100		2.1	B8B	TT
I4B6	264 *89 130		12.5	2	250		0.9	1.1	150		1.1	B8B	DDT
I4B8	265 454 130		12.5	2	250	100		1.15	100	100	1.1	B8B	H
I4C5	265 004 130		12.5	12.5	250	250	47	4.1	100	PenLF	4.1	B8B	P
I4C7	265 114 130		12.5	3	250	100	2.2	1.575	100	100	1.5	B8B	P
I4E6	264 *98 130		12.5	8	250		9.2	1.9	100		1.9	B8B	DDT
I4E7	269 854 130		12.5	3	250	100	7.5	1.3	100	100	1.3	B8B	DDP
I4F6	026 540 310		14	16.5	250	250	35	2.5	100	150	2.5	A08	P
I4F7	217 446 130		12.5	2	250		2.3	1.6	150		1.6	B8B	TT
I4F8	427 116 340		12.5	3	250		6	3.3	150		3.3	B8B	TT
I4H7	265 114 130		12.5	2	250	150	10	4.2	100	100	4.2	B8B	P
I4J7	276 454 130		12.5	{ 3 3	150 250		6.6 1.4	1.4	100 100	60 100	1.4	{ B8B	TH
I4K7	276 454 130		14	{ 2.0 2.0	100 200	90	6.4 2.7	2.2 1.5	100 100	60 75	2.8 1.5	{ B8A	TH
I4L7	264 098 130		14	1.6	175		15	1.65	150		1.65	B8A	DDT
I4N7	217 446 130		12.5	8	250		9	2.6	100		2.6	B8B	TT
I4Q7	266 414 130		12.5	2	100		15	6	100		4.5	B8B	H
I4R7	269 854 130		12.5	1	250	100	6.2	3.4	100	100	3.4	B8B	DDP
I4S7	276 454 130		12.5	{ 1 2	100 250	100	4.8 4	1.4 2	100 100	60 100	1.6 2.2	{ B8B	TH
I4V7	265 104 130		12.5	2	300	150	9.6	5.8	100	100	5.8	B8B	P
I4W7	265 114 130		12.5	2.2	300	150	10	5.8	100	100	5.8	B8B	P
I4X7	264 189 130		12.5	1	250		1.9	1.5	150		1.5	B8B	DDT
I4Y4	208 009 130		12.5				30		REC		15mA	B8B	RR
I4Z3	281 300 000		12.5				60		REC		20mA	UX4	R
I5	265 130 000	G ₁	2	1.5	150	75	1.85	0.75	100	75	0.75	UX5	P
I5	264 300 000		2.5	33	250		22	2.35	100		2.0	UX4	T
I5A2	645 231 700	G ₁	4	{ 20 3	200 250	100	4 3.5		100 100	60 100		{ B7	H

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
15A6	541 231 600		15	2.9	175	175	36	10	100	100	9	B9A	P
15A8	124 541 360	A ₂	15	{ 8 7.5	250 100	100	9 45	2.6 7.3	100 100	60 100	2 7.5	A08	TP
15D1	645 231 700	G ₁	13	{ 20 3	200 250	100	4 3.5		100 100	60 100		B7	H
15D2	645 231 700	G ₁	13	{ 20 3	200 250	100	4 3.5		100 100	60 100	0.6 4.6	B7	H
15X6	029 180 310		25				30		REC		15mA	A08	RR
16	280 300 000		7.5				60		REC		20mA	UX4	R
16A5	*41 23* 6*5		16	14.2	200	200	45	7.5	100	100	7	B9A	P
16A8	414 237 516		16	{ 0 11.5	100 175	175	3.0 41	2.2 7.5	100 100	60 100	3.0 6.0	B9A	TP
160N8	414 237 516		15	{ 100 16	100 200	200	3.3 35	3.6 6.4	100 100	60 100	3.6	B9A	TP
16D1	046 231 700		13		300		45		100			B7	TT
17	264 130 000		14	6	90		2.7	0.8	80		0.8	UX5	T
17AV5	421 060 350		16	22.5	250	150	57	5.9	100	100	5.8	A08	P
17AX4	001 080 230		16				120		REC		35mA	A08	R
17BQ6	020 540 310	A ₁	17	22.5	250	150	75	6.6	125	100		A08	P
17C5	142 345 600		16	7.5	125	100	49	7.5	100	90	6	B7G	P
17C8	541 236 891		17	2	200	125	5	2.2	100	100	2	B9A	DDP
17D1	869 231 500	G ₁	13	3	250	125	9	1.1	100	100	1.1	B7	DDP
17DQ6	020 540 310	A ₁	16	22.5	250	150	75	6	125	100		A08	P
17N8	541 236 891		17	2.0	200	75	5	2.2	100	75	2	B9A	DDP
17Z3	*** 23* **8	C	17				120		REC		60mA	B9A	R
18	265 413 000		14	16.5	250	250	34	2.5	100	PenLF	2.5	UX6	P
18A5	421 060 350		18	17	200	125	40	4.8	100	100		A08	P
18AK5	412 365 100		18	2.5	175	125	7.7	5.1	125	100	5.1	B7G	P
18AQ5	412 365 100		18	7.2	175	175	28	3.5	100	125	3.5	B7G	P
18C51	214 607 413		18	2	150		8.2	5.5	125		5.4	B9A	TT
18J6	672 344 100		18	1	100		6.5	5	100		5	B7G	T
19	364 472 000		2	3	150		1.7		100			UX6	TT
19AJ8	541 237 164		19	{ 3.0 2.0	100 250	100	5.0 6.5	2.3 2.4	100 150	60 100	2.3 2.4	B9A	TH
19AQ5	412 365 400		19	12.5	250	250	47	4.1	100	150	4	B7G	P
19AU4	**1 080 230		19				120		REC		40mA	A08	R
19BD	**1 23* **8		19				60		REC		16mA	B9A	R
19BG6	021 040 350	A	19	15	250	250	75	6.0	100	PenLF	6.0	A08	P
19BY7	141 231 651		19	2	170	100	9.7	5.9	200	100	6	B9A	P
19C8	8†1 239 146		19	1	100		0.5	1.25	100		1.2	B9A	DDDT
19D8	541 237 464		19	{ 0 2.6	100 200	125	13.5 7.6	3.7 2.4	100 100	60 100	3.7 2.4	B9A	TH
19G3	020 000 300	D ₁	4				30		REC		17mA	A08	R
19G6	112 311 100	D ₁	4				30		REC		15mA	B7G	R
19H1	002 300 000	D ₁	4				60		REC		23mA	B4	R
19H4	020 000 300	D ₁	2.5				30		REC		13mA	A08	R

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
19J6	762 344 100		19	1	100		8.5	5.3	100		5.3	B7G	TT
19SU	**1 23* **8		19				120		REC		36mA	B9A	R
19T8	†91 238 146		19	3	250		1	1.2	150		1.2	B9A	DDDT
19U3	**1 23* **8		19				120		REC		40mA	B9A	R
19V8	681 234 †19		19	3	250		1	1.2	100		1.3	B9A	DDDT
19W3	**1 23* *08		19				120		REC		35mA	B9A	R
19X3	**1 23* **8		19				120		REC		60mA	B9A	R
19X8	146 231 457		19	{ 1.0 1.8	100 250	150	8.5 7.7	5.8 4.6	100 100	60 150	5.0 4.0	B9A	TP
19Y3	**1 23* **8		19				120		REC		60mA	B9A	R
20	364 200 000		3	16.5	90		3	0.415	80		0.4	UX4	T
20A1	645 231 700	G ₁	4	{ 12.5 1.5	100 250	75	2.3 2.2		100 100	60 75	1.2 2.8	B7 B7G	TH RR
20D1	182 310 900		9.5				5		D				
20D2	745 231 600	G ₁	13	{ 7.5 3	100 250	100	3.8 2.5		100 100	60 100		B7	TH
20D3	541 227 463		6	{ 1 3	100 250	100	3.6		100 100	60 100	3.6	B9A	TH
20F2	260 154 130		11	1.25	150	150	27	10.6	100	100	9.0	B8A	P
20J8	027 546 310	G ₁	20	{ 1.5 3	100 250	100	1.5		100 100	100		A08	H
20L1	274 164 130		12	12.0	250		10.0	2.8	100		2.8	B8A	TT
20P1	020 540 310	A	38	30	200	200	80	6	100	100	5	A08	P
20P2	020 540 310	A	38	7.5	225	225		13.5	100	100	10	A08	P
20P3	026 540 310		20	9.4	175	175	42	7.2	100	100	6	A08	P
20P4	020 540 310	A	38	33	200	200	70	10.0	No Data Available			A08	P
20P5	260 054 130		20	6.3	180	150	29	7.5	100	100	7.0	A08	P
21A6	*41 23* *51	A	21	28	200	200	40	6	100	100	5	B9A	P
21A7	276 454 130		21	{ 3	150 250		3.5 1.3		100 100	60 100		B8B	TH
21B6	*41 23* *51	A ₁	21	23	175	175	45	6.5	100	100		B9A	P
21TH8	027 546 310	G ₁	21	{ 2.5 1.5	100 200	90	4 3	2 0.75	100 100	60 90	2	A08	TH
22	365 200 000	G ₁	3	1.5	150	50	1.7	0.375	125	60	0.5	UX4	P
22AC	265 300 000	G ₁	2.5	3	90	90	4	1.05	80	90	1	UX4	P
24	264 300 000		2	13.5	175		8	1.6	100		1.2	UX4	T
24A	265 130 000	G ₁	2.5	3	175	90	4	1	100	90	1	UX5	P
24E	265 130 000	G ₁	2.5	3	175	90	4	1	100	90	1	UX5	P
24NG	281 193 000		40				30		REC		15mA	UX6	RR
24S	265 130 000	G ₁	2.5	3	175	90	4	1	100	90	1	UX5	P
25	542 300 000	A	2		150	75	2.5	1	100	75	1	B5	P
25	268 843 000		2	3	125		1	0.5	125		0.5	UX6	DDT
25A6	026 540 310		25	18	150	125	33	2.375	100	90	3.5	A08	P
25A7	126 548 310		25	{ 15	100	100	60 20.5	1.8	REC 100	90	20mA 1.8	A08	RP
25ACID	206 008 030	G ₁	1.4	0	125		0.76	0.4	100		0.4	A08	DT

VALVE	SELECTOR SWITCH No.	T.C.	V _f	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	I _a mA	mA/V	Anode Volts	Screen Volts	mA/V		
25AV5GA	421 060 350		25	22.5	250	150	57	5.9	100	100	5.8	A08	P
25AX4	001 080 230		25				120		REC		30mA	A08	R
25B6	026 540 310		25	22	150	150	61	5	100	100	5	A08	P
25B8	127 561 340	G ₁	25	{ 1.0 3.0	100 100		0.6 7.6	1.5 2.0	100 100	60 100	1.5 2.0	A08	TP
25BG6	021 040 350	A ₁	25	22	125	125	69	5.0	No Data Available			A08	P
25BK5	604 231 450		25	5	250	250	35	8.5	100	150	8	B9A	P
25BQ6	020 540 310	A	25	22.5	250	150	57	5.9	100	100	5	A08	P
25C5	142 345 600		25	7.5	125	100	49	7.5	100	90	6	B7G	P
25C6	026 540 310		25	14	200	150	61	7.1	100	100	7	A08	P
25CA5	142 345 600		25	4.5	125	125	36	9.2	125	125	9.2	B7G	P
25CD6	021 040 350	A	25	30	175	175	75	7.5	100	100	7.5	A08	P
25CU6	020 540 310	A	25	22.5	250	150	57	5.9	100	100	6.0	A08	P
25D8	127 546 380	G ₁	25	{ 1.0 3.0	100 100		0.5 8.5	1.1 1.9	100 100	60 100	1.1 1.9	A08	DTP
25DN6	021 040 350	A ₁	25	18	125	125	70	9	No Data Available			A08	P
25DQ6	020 540 310	A ₁	25	22.5	250	150	75	6	100	100		A08	P
25E5	020 540 310	A ₁	25	21	175	175	100	11	No Data Available			A08	P
25EC6	021 040 350	A ₁	25	22.5	125	125	70	7.5	No Data Available			A08	P
25FID	206 501 030	G ₁	1.4	2.5	125	125	1.2	0.72	100	100	0.7	A08	P
25F5	142 345 600		25	7.5	100	100	37	5.8	No Data Available			B7G	P
25L6	026 540 310		25	8.25	200	125	46	8	100	90	8	A08	P
25MK15	002 380 100		25				25		REC		20mA	B7G	R
25RE	281 193 000		25				30		REC		15mA	UX6	RR
25SN7	461 471 230		25	8	250		9	2.6	REC		2.5	A08	TT
25S	268 943 000		2	3	150		0.8	0.57	100		0.57	UX6	DDT
25T3G	020 000 310	D ₁ D ₂	25				60		REC		15mA	A08	RR
25U4	001 080 230		25				120		100		30mA	A08	R
25V5	028 190 310		25				60		REC		20mA	A08	RR
25W4	001 080 230		25				120		REC		30mA	A08	R
25W6	026 540 310		25	8.5	250	125	46	8	100	100	8	A08	P
25W9	001 080 230		25				120		REC		30mA	A08	R
25X4	020 080 310		25				120		REC		30mA	A08	R
25X5	020 080 310		25				120		REC		30mA	A08	RR
25X6	028 190 310		25				30		REC		15mA	A08	RR
25Y4	020 080 310		25				60		REC		20mA	A08	R
25Y5	281 193 000		25				60		REC		40mA	UX6	RR
25Y5G	028 190 310		25				60		REC		40mA	A08	RR
25Y6	028 190 310		25				30		REC		15mA	A08	RR
25Z3	281 300 000		25				60		REC		20mA	UX4	R
25Z4	028 080 310		25				120		REC		60mA	A08	R
25Z5	291 183 000		25				60		REC		60mA	UX6	RR
25Z6	029 180 310		25				60		REC		60mA	A08	RR
26	264 300 000		1.5	10	150		5.5	1.1	100		1.1	UX4	T
26A6	412 365 100		26	1.8	250	250	10.5	4	100	100	4	B7G	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
26A7	414 752 360		26	4.5	30	30	20	5.5	No Data Available			A08	PP
26AQ8	641 237 410		26	1.5	175		8.7	6	100		6	B9A	TT
26B6	026 540 310		35	18	250	125	33	2.375	100	90	2.3	A08	P
26BK6	412 389 600		26	2	250		1.2	1.6	150		1.6	B7G	DDT
26BQ6	020 540 310	A ₁	25	22.5	250	150	55	5.8	100	100		A08	P
26C6	412 398 600		26	9	250		9.5	1.9	100		1.9	B7G	DDT
26CG6	412 365 100		26		250	150	9	2	100	100		B7G	P
26D6	412 365 100		26	0	100	100	2.7	7.2	100	100	6	B7G	H
26E6	026 540 310		26	14	200	125	60	7.1	100	100	7	A08	P
26NG	281 193 000		40				30		REC		15mA	UX6	RR
26Z5W	801 229 013		13				30		REC		15mA	B9A	RR
26Z6	801 239 010		26				60		REC		15mA	B9A	RR
27	264 130 000		2.5	21	250		5.2	0.95	100		0.95	UX5	T
27S	264 130 000		2.5	21	250		5.2	0.95	100		0.95	UX5	T
27SU	320 080 210		13				120		REC		70mA	A08	R
27SV	230 080 310		13				180		REC		40mA	A08	R
28AK8	8†1 239 146		28	2	200		1.3	1.5	100		1.4	B9A	DDDT
28AX8	8†1 239 146		28	1.0	100		0.8	1.4	100		1.45	B9A	DDDT
28D7	245 671 430		28	3.5	30	30	12.5	3.4	No Data Available			B8B	PP
28Z5	208 009 130		28				60		REC		20mA	B8B	RR
29	264 413 000		2.5	3	175		4.5	1.45	100		1.4	UX6	T
29CI	220 283 330		4						D			A08	D
30	364 200 000		2	9	150		3	0.9	100		0.9	UX4	T
30A5	142 345 600		30	6.7	100	100	43	9.2	No Data Available			B7G	P
30CI	645 237 114		9	{ 2.0 2.0	100 175		14 10.0	5.0 6.6	100 100	60 150	5.1 6.0	B9A	TP
30F5	141 230 651		7.5	1.8	175	175	10	8.8	100	100			
30FLI	641 237 541		9.4	{ 7.9 2.1	200 175		10 10	3.6 7.5	100 100	60 100		B9A	TP
30GP9	026 543 100		30	19	200	100	45	3.5	100	100			
30LI	147 234 116		7.5	3.4	150		16.0	6.6	100		6.0	B9A	TT
30P4	*2* 540 310	A ₁	25	21	175	175	100	11	No Data Available			A08	P
30PI2	*41 23* 6*5		12	10.3	175	175	31	6.7	100	100		B9A	P
30PI4	026 540 310		13	9.4	175	175	42	7.2	100	100		A08	P
30PI6	041 230 605		16	14.2	200	200	45	8.2	100	100	7	B9A	P
30PLI	641 237 154		13	{ 7.9 9.6	200 175		10 28	3.4 6	100 100	60 100		B9A	TP
30X	264 300 000		2	12.5	175		3.1	9.3	100		9		
31	364 200 000		2	22.5	150		8	0.925	100		0.9	UX4	T
31A3	280 000 130		31				60		REC		20mA	B8A	R
32	365 200 000	G ₁	2	3	150	75	1.7	0.64	100	75	0.6	UX4	P
32E	365 200 000	G ₁	2	3	150	75	1.7	0.64	100	75	0.6	UX4	P
32L7	126 548 310		32.5	{ 5	90	90	60 38		REC 80		20mA 6	A08	RP
								6		75			
33	364 520 000		2	14	150	150	14.5	1.45	100	100	1.4	UX5	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
33A/100A	020 440 310	A ₁ A ₂	6	14	300		10	3	No Data Available			A08	TT
33A/138A	204 140 300	A ₁ A ₂	6	7	250		15	3	100		3	UX7	TT
33A/158M	216 447 130		6	5	200		20	2.8	100		2.8	B8B	TT
33B/152M	421 342 134	A ₁ A ₂	6	1	300			18.5	No Data Available			B9G	TT
34	365 200 000	G ₁	2	3	150	75	2.8	0.6	100	75	0.6	UX4	P
34E	365 200 000	G ₁	2	3	150	75	2.8	0.6	100	75	0.6	UX4	P
35	265 130 000	G ₁	2.5	3	250	90	6.5	1.05	100	75	1.05	UX5	P
35A5	265 004 130		35	8	200	100	41	5.9	100	90	5.9	B8B	P
35B5	412 365 400		35	7.5	125	100	40	5.8	100	90	5.8	B7G	P
35C5	142 345 600		35	7.5	125	100	40	5.8	100	90	5.8	B7G	P
35L6	026 540 310		35	7.5	200	100	40	5.8	100	90	5.8	A08	P
35QL6	451 236 154		35	11.5	175	175	52	9.5	100	100	8.3	B8A	P
35RE	281 193 000		35				60		REC		20mA	UX6	RR
35S	265 120 000	G ₁	2.5	3	250	90	6.5	1.08	100	90	1.8	UX5	P
35V4	002 383 100		27.5				60		REC		70mA	B7G	R
35X4	**2 38* 100		35				60		REC		20mA	B7G	R
35Y4	280 200 130		27.5				60		REC		20mA	B8B	R
35Y5	280 200 130		27.5				60		REC		20mA	B8B	R
35Z3	280 000 130		35				120		REC		60mA	B8B	R
35Z3LT	280 000 130		35				120		REC		60mA	B8B	R
35Z4	020 080 310		35				120		REC		60mA	A08	R
35Z4GT	020 080 310		35				120		REC		60mA	A08	R
35Z5	022 080 310		27.5				60		REC		60mA	A08	R
35Z6	028 190 310		35				60		REC		20mA	A08	RR
36	265 130 000	G ₁	6	3	250	90	3.2	1.08	100	90	1.08	UX5	
37	264 130 000		6	18	250		7.5	1.1	100		1.1	UX5	T
38	265 130 000	G ₁	6	18	175	175	14	1.05	100	100	1.05	UX5	P
39	265 130 000	G ₁	6	3	175	90	5.8	1	100	90	1	UX5	P
40	364 200 000		5	1.5	175		0.2	0.2	150		0.2	UX4	T
40PPA	045 231 600		40	25	150	150	36	2	100	100	4	B5	P
40SUA	802 310 000		40				60		REC		60mA	B5	R
40Z5	022 080 310		35				120		REC		30mA	A08	R
41	265 413 000		6	18	250	250	32	2.3	100	100	2.3	UX6	P
41E	265 413 000		6	18	250	250	32	2.3	100	100	2.3	UX6	P
41FP	642 310 000		4	18	250		19	2.8	100		2.8	B5	T
41M	026 540 310		6	18	250	250	32	2.3	100	PenLF	2.3	A08	P
41MDG	652 310 000	G ₁	4	0	150	100		0.25	150	100	0.25	B5	P
41MH	642 310 000		4	1.5	200		3.2	3	100		4	B5	T
41MHF	642 310 000		4	2	150		2.5	2.8	125		2.8	B5	T
41MHL	642 310 000		4	3	200		4	3.1	100		4.5	B5	T
41MLF	642 310 000		4	4.5	175		7.5	1.9	125		1.9	B5	T
41MP	642 310 000		4	7.5	200		24	6.0	100		7.5	B5	T
41MPG	545 231 600	G ₁	4	1.5	250	100	3.3		100	100		B7	H
41MPT	041 231 500	A ₁	4	1.5	250	100	12	4.8	100	100	4.8	B7	P
41MRC	642 310 000		4	1	200		2.5	2.6	150		2.6	B5	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
41MSG	465 230 574		4	1.5	125	60	0.8	2.5	100	60	2.5	B9	PP
41MTA	642 310 000		4	1	100		4.9	4	100		4	B5	T
41MTB	642 310 000		4	1	100		3.6	2.6	100		2.6	B5	T
41MTL	642 310 000		4	2.5	200		5.9	3	100		3	B5	T
41MTS	645 231 700		4	1	250	100	5	1.6	100	100	1.6	B7	PP
41MVSG	542 310 000	A ₁	4	1.5	200	100	3	2	100	100	2	B5	P
41MXP	642 310 000		4	12.5	200		40	6.0	100		7.5	B5	T
41STH	645 231 700	G ₁	4	1.5	100		2		200	100	1.6	B7	TH
				1.5	200	60	1		100	60	2.5		
42	264 300 000		1.5	13.5	175		3.9	0.8	100			UX4	T
42	265 413 000		6	16.5	250	250	34	2.5	100	PenLF	2.5	UX6	P
42E	265 413 000		6	16.5	250	250	34	2.5	100	PenLF	2.5	UX6	P
42MP/Pen	045 231 600		4	5.5	250	250	32	6	100	PenLF	7	B7	P
42MPT	041 231 500	A	4	3	200	200	34	8.5	100	PenLF	8	B7	P
42/OT	045 231 600		4	5.5	250	275	34	7	100	PenLF	7	B7	P
42/OTDD	968 231 500	G ₁	4	5.5	250	250	34	7	100	PenLF	7	B7	DDP
42PTB	061 231 500	G ₁	4	3	200	200	34	8.5	100	150	8	B7	P
42SPT	041 231 500	A	4	10.5	250	250	64	11	100	PenLF	10	B7	P
43	265 413 000		25	18	150	125	33	2.375	100	100	2.3	UX6	P
43E	265 413 000		25	18	150	125	33	2.375	100	100	2.3	UX6	P
43MG	026 540 310		25	18	250	125	33	2.375	100	100	2.3	A08	P
43IU	892 300 000		4				60		REC		20mA	B4	RR
44	265 130 000	G ₁	6	3	175	90	5.8	1	100	90	1	UX5	P
44A/160M	241 657 143		6	14	250	150	30	3.9	100	100	3	B9G	PP
44IU	892 300 000		4				60		REC		30mA	B4	RR
44SU	802 300 000		4				30		REC		15mA	B4	R
45	264 300 000		2.5	50	250		34	2.175	100		2.1	UX4	T
45A	264 300 000		2.5	68	325		43	2.37	100		2.37	UX4	T
45A5	26* *54 130	45	9	175	175	54	9.5	100	100	100	7	B8A	P
45B5	041 23* 6*5	45	12.5	175	175	70	10	100	100	100		B9A	P
45IU	892 300 000		4			120			REC		30mA	B4	RR
45LIU	206 540 130		45	13	200	200	45	7.5	100	100	7	A08	P
45Z3	28* 108 300		45				60		REC		70mA	B7G	R
45Z5	022 080 310		37.5				60		REC		20mA	A08	R
46	264 630 000		2.5	33	250		22	2.35	100		2.3	UX5	T
47	264 530 000		2.5	16.5	250	250	31	2.5	100	PenLF	3.8	UX5	P
48	265 413 000		30	10	100	100	52	3.8	100	90	3.8	UX6	P
49	264 630 000		2	20	125		6	1.125	100		1.1	UX5	T
50	264 300 000		7.5	70	400		55	2.1	100		2.1	UX4	T
50A5	265 004 130		50	7.5	125	100	49	8	100	90	7	B8B	P
50AX6	028 190 310		50				120		REC		30mA	A08	RR
50CID	206 089 030	G ₁	1.4	1.5	100		1.5	0.92	100		0.92	A08	DDT
50B5	412 365 400		50	7.5	125	100	49	7.5	100	90	6	B7G	P
50BK5	604 231 450		50	5	250	250	35	8.5	100	PenLF		B9A	P
50C5	142 345 600		50	7.5	125	100	49	7.5	100	90	6	B7G	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
50C6	026 540 310		50	13.5	150	150	58	7	100	100	7	A08	P
50CD6	021 040 350	A	50	30	175	175	75	7.5	100	100	7	A08	P
50F2D	206 501 030	G ₁	1.4	1.5	100	125	1.4	1	100	100	1	A08	P
50LID	206 540 030		1.4	4.5	100	125	4.8	1	100	100	1	A08	P
50L6	026 540 310		50	8.25	200	125	46	9.5	100	75	8	A08	P
50X6	219 008 130		50				60		REC		20mA	B8B	RR
50YIU	388 208 120		45				120		REC		30mA	A08	R
50Y6	029 180 310		50				60		REC		20mA	A08	RR
50Y7	028 193 310		46				60		REC		20mA	A08	RR
50Z6	029 180 310		50				120		REC		30mA	A08	RR
50Z7	029 183 310		48				60		REC		20mA	A08	RR
51	265 130 000	G ₁	2.5	3	250	90	6.5	10.5	175	90	10.2	UX5	P
52	264 530 000		6	1	125	100	41	2	125	100	2	UX5	P
52CD6	021 040 350	A	52									A08	P
52KU	030 908 020		5				60		REC		30mA	A08	RR
53	274 146 300		2.5	5	250		6	3.1	100		3.1	UX7	TT
53KU	030 908 020		5				120		REC		40mA	A08	RR
54KU	030 908 020		5				120		REC		60mA	A08	RR
55	269 813 000	G ₁	2.5	20	250		8	1.1	100		1.1	UX6	DDT
55A/165M	245 761 430		12	15	150	150	60	4	100	100		B8G	PP
56	264 130 000		2.5	13.5	250		5	1.45	100		1.45	UX5	T
56AS	264 130 000		6	13.5	250		5	1.45	100		1.45	UX5	T
57	265 113 000	G ₁	2.5	3	250	100	2	1.225	100	100	1.2	UX6	P
57AS	265 113 000	G ₁	6	3	250	100	2	1.22	100	100	1.2	UX6	P
58	265 113 000	G ₁	2.5	3	250	100	8	1.5	100	100	1.5	UX6	P
58AS	265 113 000	G ₁	6	3	250	100	8	1.5	100	100	1.5	UX6	P
59	265 411 300		2.5	18	250	250	35	2.5	100	PenLF	2.5	UX7	P
59B	265 410 300		2.5	26	250	250	26	6	100	PenLF	6	UX7	P
60/250	892 300 000		4				30		REC		15mA	B4	RR
61BT	020 540 310	A	6	20	200	200	40	4	100	100	4	A08	P
61SPT	520 604 310		6	10.5	250	250	64	11	100	PenLF	9	A08	P
61SPT	021 540 310	A	6	10.5	250	250	64	11	100	PenLF	9	A08	P
62BT	020 540 310	A	6	18	175	175	100	10	100	100	9	A08	P
62DDT	264 098 130		6	3	250		1.0	1.3	150		1.3	B8A	DDT
62TH	276 454 130	G ₁	6	$\begin{Bmatrix} 2 \\ 2 \end{Bmatrix}$	$\begin{Bmatrix} 100 \\ 150 \end{Bmatrix}$	$\begin{Bmatrix} 100 \\ 100 \end{Bmatrix}$	$\begin{Bmatrix} 5 \\ 8 \end{Bmatrix}$	$\begin{Bmatrix} 2.2 \\ 2 \end{Bmatrix}$	$\begin{Bmatrix} 100 \\ 100 \end{Bmatrix}$	$\begin{Bmatrix} 60 \\ 100 \end{Bmatrix}$	$\begin{Bmatrix} 2.6 \\ 3.5 \end{Bmatrix}$	$\begin{Bmatrix} B8A \\ B8A \end{Bmatrix}$	TH
62VP	261 154 130		6	2.5	250	100	6	2.2	100	100	2	B8A	P
63	020 540 230	A ₁	1.2	22.5	250	125	25		100	100		A08	P
63SPT	256 101 403		6	2	250	250	10	6.5	100	PenLF	6	B9G	P
63TI	641 237 154		6	$\begin{Bmatrix} 2.3 \\ 8 \end{Bmatrix}$	$\begin{Bmatrix} 100 \\ 200 \end{Bmatrix}$	$\begin{Bmatrix} 100 \\ 200 \end{Bmatrix}$	$\begin{Bmatrix} 4 \\ 17.5 \end{Bmatrix}$	$\begin{Bmatrix} 1.4 \\ 3.3 \end{Bmatrix}$	$\begin{Bmatrix} 100 \\ 100 \end{Bmatrix}$	$\begin{Bmatrix} 60 \\ PenLF \end{Bmatrix}$	$\begin{Bmatrix} 1.4 \\ 3 \end{Bmatrix}$	$\begin{Bmatrix} B8A \\ B8A \end{Bmatrix}$	TP
63TP	641 237 154		6.3	$\begin{Bmatrix} 2.3 \\ 8 \end{Bmatrix}$	$\begin{Bmatrix} 100 \\ 200 \end{Bmatrix}$	$\begin{Bmatrix} 100 \\ 200 \end{Bmatrix}$	$\begin{Bmatrix} 4 \\ 17 \end{Bmatrix}$	$\begin{Bmatrix} 1.9 \\ 3.3 \end{Bmatrix}$	$\begin{Bmatrix} 100 \\ 100 \end{Bmatrix}$	$\begin{Bmatrix} 60 \\ 150 \end{Bmatrix}$	$\begin{Bmatrix} 1.4 \\ 3 \end{Bmatrix}$	$\begin{Bmatrix} B8A \\ B9A \end{Bmatrix}$	TP
64	265 130 000	G ₁	6	3	175	90	3.1	1.05	100	90	1.05	UX5	P
645PT	141 230 651		6.3	2	175	175	10	7.4	100	100	6	B9A	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
65	265 130 000	G ₁	6	3	175	90	4.5	1	100	90	1	UX5	P
66KU	280 009 130		6				30		REC		15mA	B8A	RR
67	264 130 000		6	9	150		5	1.1	100		1.1	UX5	T
67PT	261 054 130		6	7	250	250	36	10	100	50	9	B8A	P
68	265 130 000	G ₁	6	13.5	150	90	14	1.4	100	75	1.4	UX5	P
68A	265 130 000		6	13.5	125	125	14	1.4	100	100		UX5	P
69	264 413 000		6	3	175		4.5	1.45	150		0.5	UX6	T
70	264 413 000		6	6	175		2.3	0.5	150		0.5	UX6	T
70A7	126 548 310		70	7.5			60		REC		15mA	A08	RP
					125	100	40	5.8	100	90	5.8		
70L7	126 541 380		70	7.5			60		REC		20mA	A08	RP
					125	100	40	7.5	100	90	6.5		
71	264 300 000		5	40	175		20	1.7	100		1.7	UX4	T
71A	264 300 000		5	16.5	90		10	1.4	80		1.4	UX4	T
71B	264 300 000		5	40	175		20	1.7	100		1.7	UX4	T
72	300 200 000	D ₁	2.5				30		REC		15mA	UX4	R
73	*2* 0** 3*0	D ₁	2.5				15		REC		10mA	A08	R
75	269 813 000	G ₁	6	2	250		0.9	1.1	150		1.1	UX6	DDT
76	264 130 000		6	13.5	250		5	1.45	100		1.4	UX5	T
77	265 113 000	G ₁	6	3	250	100	2.3	1.25	100	100	1.2	UX6	P
77E	265 113 000	G ₁	6	3	250	100	2.3	1.25	100	100	1.2	UX6	P
78	265 113 000	G ₁	6	3	250	125	10.5	1.65	100	100	1.6	UX6	P
78E	265 113 000	G ₁	6	3	175	75	4	1.1	100	75	1.1	UX6	P
79	274 163 000	G ₁	6	0	250		5.3	1.8	150		1.8	UX6	TT
80	298 300 000		5				60		REC		20mA	UX4	RR
80M	289 300 000		5				60	REC			20mA	UX4	RR
81	280 300 000		7.5				60		REC		20mA	UX4	R
81M	280 300 000		7.5				60		REC		20mA	UX4	R
82	289 300 000		2.5				60		REC		20mA	UX4	RR
82V	389 200 000		2.5				60		REC		20mA	UX4	RR
83	289 300 000		5			120			REC		30mA	UX4	RR
83V	398 200 000		5				60		REC		60mA	UX4	RR
84	289 130 000		6				30		REC		30mA	UX5	RR
85	269 813 000	G ₁	6	20	250		8	1.1	100		1.1	UX6	DDT
85A5	268 913 000	G ₁	6	20	250		8	1.11	100		1.1	UX6	DDT
85S	268 913 000	G ₁	6	10.5	250		3.7	0.75	125		1.1	UX6	DDT
88	289 300 000		5				60		REC		20mA	UX4	RR
89	265 113 000	G ₁	6	10	100	100	9.5	1.2	100	90	1.2	UX6	P
90	264 413 000		2.5	0	150		3.5	1.4	150		1.4	UX6	T
90AC	642 310 000		4	12.5	200		40	7.5	100		7	B5	T
92	264 413 000		6	0	250		3.5	1.4	100		1.4	UX6	T
95	265 413 000		2.5	20	325	300	42	2.3	100	PenLF	2.3	UX6	P
96	281 300 000		10				120		REC		30mA	UX4	R
98	289 130 000		6				30		REC		15mA	UX5	RR
99V	426 300 000		3.3	4.5	90		2.5	0.42	100		0.42	UX4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
99X	264 300 000		3.3	4.5	90		2.5	0.42	100		0.42	UX4	T
100AC	642 310 000		4	6	200		5	2	100		2	B5	T
104V	642 310 000		4	1	100		15	3.5	100		3.5	B5	T
112A	364 200 000		5	4.5	90		5	1.575	80		1.5	UX4	T
114	020 000 300	A ₁ G ₁	1.4		175		15		100			A08	T
114B	020 000 300	A ₁ G ₁	1.4	4.0	175		12	1.1	100		1.1	A08	T
116/Pen	005 231 600	G ₁	11.5	1	100	100		7	100	100	6	B7	P
117L7	126 458 310		117	{ 5.2	100	100	60		REC		20mA	{ A08	RP
							43	5.3	100	90	5.3		
117M7	126 458 310		117	{ 5.2	100	100	60		REC		20mA	{ A08	RP
							43	5.3	100	90	5.3		
117Z3	*02 381 000		117				60		REC		20mA	B7G	R
117Z4	020 080 310		117				60		REC		20mA	A08	R
117Z6	029 180 310		117				60		REC		20mA	A08	RR
120	642 310 000		2	12	150		12		100			B5	T
121VP	26* *54 130		12.5	3.0	200	126	7.2	2.3	100	150	2.3	B8A	P
124AC	542 310 000	A	4	1.4	200	60	1.6	0.9	100	60	0.9	B5	P
141DDT	264 089 130		14	1.55	170		1.5	1.65	100		1.5	B8A	DDT
141TH	276 454 130		14	{ 2	100		5.0	2.0	100	60	2.8	{ B8A	TH
					250	100	8.0	2.2	100	75	1.5		
142BT	026 540 310		14	8.5	200		29	3.7	100	100	3.7	A08	P
144V	642 310 000		4	8	200		6	1.4	100		1.4	B5	T
154V	642 310 000		4	6	200		9	2	100		2	B5	T
163Pen	041 23* 6*5		16	10.4	175	175	53	9.5	No Data Available			B9A	P
164V	642 310 000		4	9	200		12	3.4	100		3.4	B5	T
171DDP	541 236 891		17	2	200	125	5	2.2	100	100	2	B9A	DDP
181	264 300 000		3	30	175		16	1.05	100		1.05	UX4	T
182A	264 300 000		5	45	200		18	1.5	100		1.5	UX4	T
182B	264 300 000		5	35	250		18	1.5	100		1.5	UX4	T
182B	264 300 000		5	35	250		18	1.5	100		1.5	UX4	T
183	264 300 000		5	60	250		30	1.7	100		1.7	UX4	T
185BT	020 540 310	A	18	18	175	175	100	9.5	100	100	8	A08	P
185BTA	020 540 310	A ₁	18	18	175	175	100	9.5	100	100	8	A08	P
200A	264 300 000		5	0	50		1.5	0.67	No Data Available			UX4	T
202DDT	809 231 600	G ₁	20	3	200		3	2.4	150		2.4	B7	DDT
202MPG	545 231 600	G ₁	20	1.5	200	100	3.0		100	100		B7	H
202SPB	061 231 500	G ₁	20	1.5	250	100	4.8	2.8	100	100	2.8	B7	P
202STH	645 231 700	G ₁	20	{ 1.5	100		2		100	60		{ B7	TH
					200	60	1		100	60			
202VP	041 231 500	A	20	1.5	250	100	4.3	2.2	100	100	2.2	B7	P
202VPB	061 231 500	G ₁	20	1.5	250	100	4.3	2.2	100	100	2.2	B7	P
203THA	545 231 600	G ₁	20	2	250	100	3.5		100	100		B7	H
205D	264 300 000		4.5	29	400		30		100		1.8	UX4	T
205E	264 300 000		4.5	22.5	350		29	1.94	No Data Available			UX4	T
205F	264 300 000		4.5	18	300		31	1.75	No Data Available			UX4	T

VALVE	SELECTOR SWITCH No.	T.C.	VI	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
210DDT	682 390 000	G ₁	2	1	100		2.3	1.1	100		1.1	B5	DDT
210DET	642 300 000		2	4.5	150		3	1.1	100		1.1	B4	T
210HF	642 300 000		2	3	150		1.6	1.5	100		1.5	B4	T
210HL	642 300 000		2	3	150		1.6	1.1	100		1.1	B4	T
210HPT	642 350 000		2	4.5	150	150	7.5	2.5	100	100	2.5	B5	P
210LF	642 300 000		2	4.5	150		4.8	1.4	100		1.4	B4	T
210PG	645 230 700	G ₁	2	{ 0	150	40	1.1		150	60	0.4	{ B7	H
210RC	642 300 000		2		150		0.4		150	75	1.5		
210SPG	645 230 700	G ₁	2	{ 0	150	40	0.85	0.8	150		0.8	{ B4	T
210SPT	041 230 500	A	2		150		0.4		150	75	0.5		
210T	264 300 000		7.5	32	350		16	1.55	100		1.55	UX4	T
210VPA	041 230 500	A	2	1	150	60	2.9	1.11	150	60	1.1	B7	P
210VPT	041 230 500	A	2	1	150	60	1.9	1.1	150	60	1.1	B7	P
213	289 300 000		5				30		REC		15mA	UX4	RR
213Pen	*41 23* *51	A ₁	21	22	175	175	45	6.2	100	100	6	B9A	P
215P	642 300 000		2	7.5	150		10	2.25	100		2.2	B4	T
215SG	542 300 000	A	2	1	150	60	1.4	1.1	150	60	1.1	B4	P
217A	228 300 000		10			120			REC		30mA	UX4	R
220B	446 230 700		2	0	100		1.25		100			B7	TT
220DD	892 310 000		2						D			B5	DD
220HPT	642 350 000		2	4.5	150	150	8	2.5	100	100	2.5	B5	P
220IPT	040 230 500	A	2	1.5	125	60	2.2	1	100	60	1	B7	P
2200T	642 350 000		2	4.5	150	150	9.5	2.5	100	100	2.5	B5	P
220P	642 300 000		2	7.5	150		11	2.25	100		2.2	B4	T
220PA	642 300 000		2	4.5	150		10	4	100		4	B4	T
220PT	642 350 000		2	9	150	150	19	2.5	100	100	2.5	B5	P
220SG	542 300 000	A	2	1	150	60	1.5	1.6	100	60	1.6	B4	P
220TH	645 230 700	G ₁	2	{ 3	100	60	1.7	1.2	100	60	1.2	{ B7	TH
220VS	542 300 000	A	2		125		0.6	0.6	125	60	0.6		
220VSG	542 300 000	A	2	1.5	100	60	2.0	1.6	100	60	1.6	B4	P
225DU	082 323 900		2				15		REC		10mA	B7	RR
230	642 300 000		2	20	150		18	3	100		3	B4	T
230	200 300 000	D ₁	5				30		REC		15mA	UX4	R
230PT	642 350 000		2	15	150	150	14	2	100	100	2	B5	P
230XP	642 300 000		2	18	150		22	3	100		2	B4	T
231D	264 300 000		3	3	90		2.1	8.4	100		0.51	UX4	T
240B	446 230 700		2	1	125		8.5		100			B7	TT
240QP	446 235 700		2	12	150	150	6		100	100	2.5	B7	PP
244	264 130 000		2	6	150		5.5	1	100		1	UX5	T
244V	642 310 000		4	5.5	200		5.5	2.8	100		2.8	B5	T
245A	265 130 000	G ₁	2	1.5	150	50	4.8	0.65	No Data Available			UX5	P
247A	206 040 030		2	4.5	150		3.2	0.94	100		0.94	A08	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
249B	223 300 000	D ₁	2.5				120		REC		30mA	UX4	R
252A	264 300 000		5	50	400		60	3.4	100		3.4	UX4	T
255	268 943 000		2	3	150		0.8	0.57	100		0.5	UX6	DDT
257	264 530 000	A ₁	5	21.5	125	100	20	1.35	100	90	1.3	UX5	P
257A	240 300 000		3	3	90		2.1	0.51	100		0.51	UX4	T
259A	265 130 000	G ₁	2	1.5	175	75	5.5	1.38	100	75	1.3	UX5	P
259B	265 130 000	G ₁	2	1.5	175	75	5.5	1.38	100	75	1.3	UX5	P
262B	261 300 000	G ₁	10	4.5	150		2.8	0.9	100		0.9	UX4	T
264	264 300 000		1.1	9	150		2.5	0.64	100		0.64	UX4	T
264E	264 300 000		1.5	8	100		2.1	0.58	100		0.58	UX4	T
264C	264 300 000		1.5	8	100		2.1	0.58	100		0.58	UX4	T
271A	264 130 000		5	30	400		37.5	2.9	100		100	UX5	T
272A	264 130 000		10	15	150		5.4	0.76	100		0.76	UX5	T
274A	289 300 000		5				60		REC		20mA	UX4	RR
274B	289 300 000		5				60		REC		20mA	UX4	RR
275A	264 300 000		5	4.5	200		47	2.7	100		2.7	UX4	T
281A	264 530 000		5	60	150	75	35	1.47	No Data Available			UX5	P
283A	265 130 000	G ₁	2	1.5	175	75	5.9	1.36	100	75	1.36	UX5	P
285	265 130 000	G ₁	2	12	175	150	8.8	0.88	100	100	0.88	UX5	P
286A	265 113 000	G ₁	2	1.5	175	75	6.2	1.2	100	75	1.2	UX6	P
290A	265 113 000	G ₁	10	1.5	175		5.4	1.22	150		1.2	UX6	P
291A	275 641 300	G ₁	10	{ 3 7.5	175 175	75	4.5 3.1		100 100	60 75		B7	H
292A	268 913 000	G ₁	10	6	150		2.1	0.66	100		0.66	UX6	DDT
293A	265 413 000		10	18	175	175	14.5	1.05	100	100	1.05	UX6	P
302THA	645 231 700	G ₁	30	{ 2 250	100 250	100	1.5 3.5		100 250	60 100		B7	TH
303A	268 943 000		2	6	150		2	0.64	100		0.64	UX6	DDT
304AC	542 310 000	A	4	2	200	100	3	1.9	100	100	1.9	B5	P
309A	265 413 000		10	1.5	175	75	4.8	1.1	100	60	1.1	UX6	P
310A	265 113 000	G ₁	10	3	150	150	5.5	1.8	100	100	1.8	UX6	P
310B	265 113 000	G ₁	10	3	150	150	5.5	1.8	100	100	1.8	UX6	P
311A	265 130 000	G ₁	10	15	150	150	30	2.8	100	100	2.8	UX5	P
311SU	28* *** 130		31				60		REC		20mA	B8A	R
324A	200 300 000	D ₁	5				5		D			UX4	R
328A	265 113 000	G ₁	7.5	3	150	150	5.5	1.8	100	100	1.8	UX6	P
329A	265 130 000	G ₁	7.5	15	150	150	37.5	3.3	100	100	3	UX5	P
329L	265 130 000	G ₁	7.5	15	150	150	37	3.3	100	100	3	UX5	P
332Pen	026 540 310		33	8.5	200	200	45	8	100	100	7	A08	P
336A	265 413 000		10	14	250	250	30	4.2	100	100		UX6	P
337A	265 113 000	G ₁	10	3	150	150	6.3	1.6	100	100	1.6	UX6	P
345A	289 130 000		6				60		REC		20mA	UX5	RR
347A	020 600 310	G ₁	6	4.5	150		2.8	0.9	100		0.9	A08	T
348A	026 510 310	G ₁	6.3		125	125	5.5	1.8	100	100		A08	P
349A	026 540 310		6	14	250	250	30	4.2	100	PenLF	4.2	A08	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
350B	026 540 310	G ₁	6	20	400	250	85	6.25	No Data Available			A08	P
351A	028 090 310		1				120		REC	20mA		A08	RR
352A	268 913 000		10	6	150		2.1	0.65	100		0.65	UX6	DDT
354V	642 310 000		4	4.5	250		6.5	3.5	100		3	B5	T
361A	243 560 000		1.4		50	40	0.4	0.57	No Data Available			UX5	P
362A	243 560 000		1.4		50	50	1.26	0.57	No Data Available			UX5	P
367A	060 524 310		6	20	400	250	85	6.2	No Data Available			A08	P
373A	021 455 310		2		150		2	1.32	100		1.3	A08	P
374A	021 405 310		3		125		18	3	125		3	A08	P
375A	026 540 310		20		40		12	4.7	No Data Available			A08	
383A	120 406 030		6		125		7.5	2.8	100		2.8	A08	T
385A	125 040 130		6		125		7.5	2.5	100		2.5	A08	P
387A	125 040 130		6		125		5.6	4	100		3.8	A08	P
401A	264 300 000		5	9	50		1.5	0.8	No Data Available			UX4	T
402	264 300 000		3	40	175		40	1	100		1	UX4	T
402-OT	005 231 600	G ₁	40	12	250	250	32	7	100	PenLF	7	B7	P
402P	000 231 600	G ₁	4	15	200		27	5.5	100		7.5	B7	T
402Pen	005 231 600	G ₁	40	6.7	200	200	40	7	100	100	7	B7	P
402PenA	005 231 600	G ₁	40	9	150	150	56	8	100	100	8	B7	P
403A	413 265 100		6	2.3	150	150	7	4.4	100	100	4	B7G	P
405BU	892 300 000		4				15		REC		10mA	B4	RR
406	642 300 000		4		150		5.5	0.5	100		0.5	B4	T
407A	214 637 412		20	2	150		8.2	5.5	100		5.5	B9A	TT
408BU	892 300 000		4				15		REC		10mA	B4	RR
410HF	642 300 000		4	2.5	200		0.2	0.22	100		0.2	B4	T
410P	642 300 000	A	4	16	250		12	1.8	100		1.8	B4	T
410RC	642 300 000		4	2.5	200		0.2	0.2	100		0.2	B4	T
410SG	542 300 000		4	1	200	100	4.5	0.9	100	100	0.9	B4	P
412BU	892 300 000		4				30		REC		17mA	B4	RR
412SU	802 300 000		4				60		REC		22mA	B4	R
415PT	642 350 000		4	25	300	200	20	1.7	100	PenLF	1.7	B5	P
415QT	642 350 000		4	25	300	200	20	1.8	100	PenLF	1.8	B5	P
415SP	642 300 000		4	18	150		11	1.6	100		1.6	B4	T
420T	045 231 600		4	4.4	250	250	40	10.5	100	PenLF	9	B7	P
425PT	642 350 000		4	17	250	150	12	1.3	100	100	1.3	B5	P
435A	402 106 053	A ₁ G ₁	6	10	175	150	13	16.5	No Data Available			B9A	P
437A	304 002 116		6	10	150		40		No Data Available			B9A	T
441U	892 300 000		4				60		REC		20mA	B4	RR
442BU	892 300 000		4				60		REC		20mA	B4	RR
446A/B	021 000 310		6	3	250		15	4.5	100			A08	T
450	642 300 000	A	4	55	250		50	3.5	100		3.5	B4	T
450	264 300 000		7.5		400		55	2.1	100		2.0	UX4	T
450AC	542 310 000		4		200	100	3.5	3	100	100	3	B5	P
451PT	26* *54 130		45	9	175	175	54.5	9.5	100	100	7	B8A	P
451U	823 900 000		4				120		REC		30mA	B4	RR

VALVE	SELECTOR SWITCH No.	T.C.	Vi	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE	
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V			
460BU	892 300 000		4				60		REC		20mA	B4	RR	
482A	264 300 000		5	45	200		18	1.5	100		1.5	UX4	T	
482B	264 300 000		5	35	250		18	1.5	100		1.5	UX4	T	
483	264 300 000		5	60	250		30	1.7	100		1.7	UX4	T	
484V	642 310 000		4	2.5	200		0.25	1.2	100		1.2	B5	T	
485	264 130 000		3	9	175		5.8	1.4	100		1.4	UX5	T	
486	026 040 300		3	3	90		3	0.61	80		0.6	A08	T	
500	892 300 000		4				30		REC		15mA	B4	RR	
506	892 300 000		4				30		REC		15mA	B4	RR	
506BU	892 300 000		4				30		REC		15mA	B4	RR	
506K	892 300 000		2				30		REC		15mA	B4	RR	
509	892 300 000		2				60		REC		20mA	B4	RR	
511D	892 300 000		4				60		REC		20mA	B4	RR	
538A	741 226 413		6	2	250		10	5.5	200		5	B9A	TT	
542A	602 304 100		6	2	250		10	5.5	200		5.5	B7G	T	
543A	402 013 060		6	2.5	200		9.5	3.8	100		3	B8D	T	
543B	402 013 060		6	2.5	200		9.5	3.8	100		3	B8D	T	
544A	602 364 100		6	8.5	250		10.5	2.2	100		3	B7G	T	
546A	802 309 100		6				30		REC		15mA	B7G	RR	
547A	120 415 360		6	3	300	150	30	11	100	100	10	A08	P	
§ 548A	762 344 100		6	{	85	100	8.5	5.3				}	B7G	TT
549A	192 310 800		6		3	150	5	4.5	100		5.3		B7G	RR
550A	471 461 230		6	2	250		2.3	1.6	150		1.6	A08	TT	
559	021 010 030	D ₁					5		D			A08	R	
605	642 300 000		4	6	150		10	1.4	100		1.4	B4	T	
612BU	892 300 000		6				30		REC		15mA	B4	RR	
615	642 300 000		4	41	150		4	1.4	100		1.4	B4	T	
620T	642 300 000		6	95	400		62.5	2.3	100		2.3	B4	T	
635GTX	026 040 310		6	20	350		20		No Data Available			A08	T	
660	642 300 000		6	100	400		120	2.3	100		2.3	B4	T	
680XP	642 300 000		6	100	400		3.5	1.1	100		1.1	B4	T	
713A	021 415 360		6	2	125	125	7.5	3.95	100	100	3.9	A08	P	
717A	021 415 360		6	2	125	125	7.5	4	100	100	4	A08	P	
731A	412 365 100		6	2.3	150	150	7	4.3	100	100	4	B7G	P	
802	205 411 300	A	6	18	400	250	30	2.2	100	PenLF	2.0	UX7	P	
805	642 300 000		6	6	150		10	1.4	100		1.4	B4	T	
807	254 130 000	A	6	12.5	400	250	83	6.5	100	PenLF	6	UX5	P	
816	200 300 000	D ₁	2.5				120		REC		30mA	UX4	R	
825	642 300 000		6	0	150		6	1.4	150		1.4	B4	T	
825BU	892 300 000		7.5				60		REC		20mA	B4	RR	
836	2** 00* 300	D ₁	2.5				120		REC		30mA	B7G	R	
840	254 130 000	A	2	3	175	75	1	0.4	100	60	0.4	UX5	P	

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
842	264 130 000		7.5	100	400		25	1.25	100		1.25	UX5	T
843	264 130 000		2.5	25	350		25	1.7	100		1.7	UX5	T
864	364 200 000		1.1	4.5	90		2.9	0.61	80		0.61	UX4	T
871	200 300 000	D ₁	2.5				120		REC		30mA	UX4	R
879	300 200 000	D ₁	2.5				5		D			UX4	R
884	026 040 310		6		300		55	4KΩ	No Data Available			A08	Thyratron
885	264 130 000		2.5		300		55	4KΩ	No Data Available			UX5	Thyratron
904V	642 310 000		4	2	200		2	2	150		2	B5	T
950	041 230 500	A	2	16.5	175	150	7	0.95	100	100	0.95	B7	P
951	265 300 000	G ₁	2	3	175	60	1.7	0.65	100	60		UX4	P
985	289 130 000		5				30		REC		15mA	UX5	RR
986	289 300 000		5				60		REC		20mA	UX4	RR
994V	642 310 000		4	0	100			3.6	100		3.6	B5	T
1002	802 300 000		1.8				60		REC		25mA	B4	R
1005	008 092 030		6				30		REC		15mA	A08	RR
1007	008 090 230		1.0				60		REC		20mA	A08	RR
1012	289 300 000		1.7				120		REC		30mA	UX4	RR
1028	202 322 200	D ₁	6				60		REC		23mA	B7G	R
1103	809 231 600	G ₁	13	2	225		1.5	1.5	100		1.2	B7	DDT
1130	892 300 000		1.8						D			B4	DD
1201	426 141 630		6	3	175		5.5	3	150		3	B8B	T
1201	892 300 000		25						D			B4	DD
1203	200 800 130		6						D			B8B	D
1203A	200 800 130		6						D			B8B	D
1204	526 141 310		6	2	250	100	1.75	1.2	100	100	1.2	B8B	P
1206	265 441 730		6	2.5	250	100	4.5	2.1	100	100	2.1	B8B	PP
1221	265 113 000	G ₁	6	3	250	100	2	1.22	100	100	1.2	UX6	P
1223	026 510 310	G ₁	6	3	250	100	2	1.22	100	100	1.2	A08	P
1229	265 300 000	G ₁	2	3	150	75	1.7	0.64	100	75	0.64	UX4	P
1230	264 300 000		2	9	150		3		100			UX4	T
1231	265 104 130		6	30	300	300	13	6.3	100	100	6.3	B8B	P
1232	265 114 130		6	2	250	100	6	4.5	100	100	4.5	B8B	P
1247	000 230 000	D ₁	0.625						D			B8A	D
1273	265 104 130		6	3	250	100	2.2	1.5	100	100	1.5	B8B	P
1274	028 090 310		6				30		REC		15mA	A08	RR
1275	289 300 000		5				120		REC		30mA	UX4	RR
1276	264 300 000		4.5	45	250		60	5.25	No Data Available			UX4	T
1280	265 104 130		12.5	3	250	100	2.2	1.5	100	100	1.5	B8B	P
1282	265 114 130		6	2	300	150	10	5.8	100	150	5.8	B8B	P
1284	265 104 130		12.5	3	250	100	9	2	100	100	2	B8B	P
1288	364 204 730		1.4	0	90		5.2	1.85	80		1.85	A08	TT
1291	274 304 620		1.4		90		5.2	1.85	80		1.85	A08	TT
1292	364 204 730		1.4	0	90		5.2	1.85	80		1.85	A08	TT
1293	260 064 030		1.4	0	90		4.7	1.3	80		1.3	B8B	T
1294	200 800 130		1.4						D			A08	D

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
1299	365 004 230		1.4	4.5	150	90	10.2	2.4	100	90	2.4	B8B	P
1560	289 300 000		5				60		REC		20mA	UX4	RR
1560	892 300 000		5				60		REC		20mA	B4	RR
1561	892 300 000		4				60		REC		20mA	B4	RR
1562	280 300 000		7.5				120		REC		30mA	UX4	R
1602	264 300 000		7.5	23.5	250		10	1.33	100		1.33	UX4	T
1603	265 113 000	G ₁	6	3	250	100	2	1.225	100	100	1.2	UX6	P
1608	264 300 000		2.5	90	400		95		No Data Available			UX4	T
1609	364 520 000		1.1	1.5	125	75	2.5	0.725	100	75	0.72	UX5	P
1610	264 530 000		2.5	16.5	250	250	31	2.5	100	PenLF	3.8	UX5	P
1611	026 540 310		6	16.5	250	250	34	2.5	100	PenLF	2.5	A08	P
1612	026 540 310	G ₁	6	3	250	100	5.3	1.1	100	100	1.1	A08	H
1613	026 540 310		6	16.5	250	250	34	2.5	100	PenLF	2.5	A08	P
1614	026 540 310		6	18	350	250	54	5.2	100	PenLF	5.2	A08	P
1616	200 300 000	D ₁	2.5				120		REC		30mA	UX4	R
1619	026 540 310		2.5	10	300	250	45	4.5	100	PenLF	4.5	A08	P
1620	026 510 310	G ₁	6	3	250	100	2	1.225	100	100	1.2	A08	P
1621	026 540 310		6	16.5	250	250	34	2.5	100	PenLF	2.5	A08	P
1622	026 540 310		6	18	350	250	54	5.2	100	100	5.2	A08	P
1624	026 540 310		2.5	10	300	250	45	4.5	100	PenLF		A08	P
1625	254 130 000	A ₁	12	12.5	400	250	83	6.5	100	PenLF	6	UX5	P
1626	026 040 310		12.5	32	250		20	2.1	100		2.1	A08	T
1631	026 540 310		12.5	18	350	250	54	5.2	100	PenLF	5.2	A08	P
1632	026 540 310		12.5	8	200	100	50	9.5	100	90	9	A08	P
1633	471 461 230		25	8	250		11.5	2.6	100		2.6	A08	TT
1634	074 461 230		12.5	2	250		2	1.325	150		1.3	A08	TT
1635	027 446 310		6	0	300		3.5	0.9	100		0.9	A08	TT
1637	026 500 310	G ₁	6	18	250	250	32	3.8	100	PenLF	3.8	A08	P
1638	029 180 310		6						D			A08	DD
1639	026 890 310	G ₁	6	5.5	250		5	2	100		2	A08	DDT
1641	200 300 000	D ₁ D ₂	5				120		REC		30mA	UX4	RR
1641/RK60	200 300 000	D ₁ D ₂	5				15		REC		12mA	UX4	RR
6142	216 471 300	G ₁	6	16.5	250		8.3	1.3	110			UX7	TT
1644	414 752 360		12.5	9	175	175	13	2.15	100	100	2.1	A08	PP
1649	021 415 360		6	2	300	150	10	9	100	100	8	A08	P
1654	2** 00* 300	D ₁	1.4						D			B7G	D
1655	074 461 230		6	2	250		2	1.325	200		1.3	A08	TT
1659	268 913 000	G ₁	2.5	2	250		0.9	1.1	150		1.1	UX6	DDT
1662	364 526 300		1.4	8.4	150	90	13.3	1.9	100	75	1.9	B7G	P
1664	026 985 310	G ₁	2.5	3	250	125	10	1.325	100	100	1.3	A08	DDP
1701	892 300 000		1.8				120		REC		30mA	B4	RR
1801	892 300 000		4				15		REC		10mA	B4	RR
1805	892 300 000		4				30		REC		15mA	B4	RR
1807	892 300 000		4				30		REC		15mA	B4	RR
1810	003 200 000	D ₁	4				30		REC		15mA	B4	R

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
1815	892 300 000		4				60		REC		20mA	B4	RR
1817	892 300 000		4				120		REC		30mA	B4	RR
1821	892 300 000		4				30		REC		15mA	B4	RR
1823	892 300 000		4				30		REC		15mA	B4	RR
1831	892 300 000		4				30		REC		12mA	B4	RR
1832	082 300 000		4				120		REC		30mA	B4	R
1851	026 510 310	G ₁	6	2	300	150	10	9	100	100	8	A08	P
1852	021 415 360		6	2	300	150	10	9	100	100	8	A08	P
1853	021 415 360		6	3	300	200	12.5	5	100	150	5	A08	P
1861	892 300 000		4				60		REC		20mA	B4	RR
1867	389 200 000		4				60		REC		20mA	UX4	RR
1875	023 000 000	D ₁	4				5		D			8SC	R
1876	123 000 080		4				5		D			8SC	R
1877	002 300 000	D ₁	4				3		D			B4	R
1882	023 080 090		5				60		REC		20mA	8SC	RR
1883	023 080 090		5				60		REC		20mA	8SC	RR
2051	026 041 310		6		250		75	2.5kΩ	No Data Available			A08	Thyratron
2101	264 530 000		2	4.5	150	150	8	1.7	100	100	1.7	UX5	P
2102	268 953 000		2	1	100		2.5	1.3	100		1.3	UX6	DDT
2103	274 546 300		2	7.5	150	150	4	1.6	100	100	1.6	UX7	PP
2151	265 413 000		14	31	250	250	47	2.4	100	PenLF	2.4	UX6	P
2318	892 300 000		4				30		REC		15mA	B4	RR
2506	892 300 000		4				15		REC		10mA	B4	RR
3006	802 300 000		4						D			B4	D
3074A	204 140 300	A ₁ A ₂	6		300		50	3.0	No Data Available			UX7	TT
3075A	002 300 000	D ₁	2						DI			B4	D
3329A	265 113 000	G ₁	7.5		175	125	31	2.9	100	100		UX6	P
3481	026 510 310	G ₁	6	13.5	150	150	5.5	1.8	100	100	1.8	A08	P
3720	364 200 000		5	1.5	175		0.2	0.2	150		0.2	UX4	T
3871	264 300 000		30	19	100	100	52	3.8	100	90	3.8	UX6	P
3872	364 200 000		2	9	150		3		100			UX4	T
3873	365 200 000	G ₁	2	3	150	75	1.5	0.64	100	75	0.6	UX4	P
3921	264 300 000		2.5	50	250		34	2.17	100		2.1	UX4	T
3924	265 130 000	G ₁	2.5	3	175	90	4	1	100	90	1	UX5	P
4019A	264 300 000		4		200		9.7	1.3	100		1.2	UX4	T
4019B	642 300 000		4	4	100		7.5	1.27	100		1.2	B4	T
4020A	264 300 000		2	2	150		1.2	0.6	100		0.6	UX4	T
4020B	264 300 000		2	2	150		1.2	0.6	100		0.6	UX4	T
4021A	264 300 000		4	10	150		32.5	3	100		0.6	UX4	T
4021B	642 300 000		4	8	125		23	3	100		3	B4	T
4022AR	264 300 000		4	6	200		16.2	2.2	100		2.0	UX4	T
4033	264 130 000		6	20	400		50	9	100		8	UX5	T
4033A	642 310 000		6	20	400		50	9	100		8	B5	T
4033L	642 310 000		6	20	400		60	10	100		8	B5	T
4037A	802 300 000		4				120		REC		30mA	B4	R

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
4061A	205 411 300	A	6	10	400	200	50	2.5	100	150	2.5	B7	P
4074A	204 140 300	A ₁ A ₂	6	13	300		15	3	100		3	UX7	TT
4077A	003 200 000	D ₁	5				120		REC		30mA	B4	R
4274A	289 300 000		5				120		REC		30mA	UX4	RR
4300A	364 200 000		5	90	400		50		No Data Available			UX4	T
4310A	265 113 000	G ₁	10	5.5	250	150	5.2	2	100	100	2	UX6	P
4328A	265 113 000	G ₁	7.5	5.5	250	175		2	100	150	2	UX6	P
4328D	026 510 310	G ₁	7.5	5.5	250	150	5.2	2	100	100	2	A08	P
4608	642 310 000		4	6	150		11	2.5	100		2.5	B5	T
4610	542 310 000	A	4	1.3	200	100	1.5	0.9	100	100	0.9	B5	P
4613	642 300 000		4	22	250		48	3.5	No Data Available			B4	T
4614	642 310 000		4	16	200		12	1.3	No Data Available			B5	T
4618	542 310 000	A	4	2	200	100	3	2.2	100	100	2.2	B5	P
4619	892 300 000		4				30		REC		15mA	B4	RR
4631	264 300 000		2	1.5	150		0.7		150			UX4	T
4636	542 310 000		4	2	200	100	3	2.3	100	100		B5	P
4650	642 350 000		4	63	300	300	30		No Data Available			B5	P
4652	892 300 000		4				60		REC		20mA	B4	RR
4654	411 230 050	A	6	14	250	275	72.0	8.5	No Data Available			S8	P
4654K	023 114 500	A ₁	6	12.6	250	275	72	8.5	125	125		85C	P
4655	462 300 000		4.5				60		REC		15mA	B4	RR
4657	642 310 000		4	1.5	200		1	2.2	200		2.2	B5	T
4670	432 564 570		2	8.5	90	90	1		80	75		85C	PP
4673	642 310 000	G ₁	4	2.5	250	200	8	5	100	PenLF	5	B5	P
4673	023 110 560	G ₁	4	4	250	200	8	5	100	150	5	85C	P
4679	026 447 300		6	2.5	250		8	5	100		4.6	A08	P
4682	023 100 560	G ₁	4		375	250	24		100	PenLF		85C	P
4683	023 004 060		4		350		43		100			85C	T
4684	023 104 560		4		375	250	24		100	PenLF		85C	P
4688	023 104 560		4		375	275	48		100	PenLF		85C	P
4689	023 104 560		6		375	275	48		100	PenLF		85C	P
4694	023 104 560		6	7.5	375	250	24	8	100	PenLF		85C	P
4699	023 104 560		6	12.5	300	300	55	13	100	PenLF	9	85C	P
5516	235 242 300	A	3	14	400	250	75	4	100	PenLF	4	A08	P
5556	264 300 000		4.5	30	350		9	0.98	No Data Available			UX4	T
5590	412 365 100		6	4.5	90	90	3.9	2	80	90	2	B7G	P
5591	412 365 100		6	1.9	175	125	7.7	5.0	125	100	5.0	B7G	P
5603	021 415 360		6	12.5	150	150	50	5.4	100	100	5.4	A08	P
5608	412 365 100		6	12	125	125	7.5	5	100	90	5.0	B7G	P
5610	612 364 000		6	1.5	90		17	4	80		4.0	B7G	T
5618	265 134 200		3	8	275	75	19	3.5	100	60	3.5	B7G	P
5635	442 *63 710		6	.5	100		4.8		100		3.8	B8B	T
5636	412 163 510		6	3	100	100	4	1.9	100	100	1.9	B8D	P
5637	402 013 060		6		100		1.4	2.7	100		2.7	B8B	T
5639	412 163 510		6	2.6	150	100	21	9	100	100	9	B8D	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
5640	412 163 510		6	9	100	100	31	5	100	100	5	B8B	P
5641	082 813 080		6				30		REC		15mA	B8D	R
5647	381 280 000		6				5.0		D			B5A	D
5654	412 365 100		6	2	125	125	7.5	5	100	100	5	B7G	P
5656	544 231 761		6	2	150	125	15	5.8	100	100		B9A	PP
5659	026 540 310		12.5	12.5	250	250	32		100	PenLF		A08	P
5660	026 895 310	G ₁	12.5	3	250	125	10	1.325	100	100	1.3	A08	DDP
5661	021 415 360		12.5	0.4	250	100	9.2	2	100	100	2	A08	P
5670	214 607 413		6	2	150		8.2	5.5	125		5.5	B9A	TT
5672	653 420 000		1.25	6.5	60	60	3.1	.65	No Data Available			B5A	P
5676	624 300 000		1.25	5	125		4	1.6	125		1.6	B5A	T
5678	652 430 000		1.25	0	60	60	1.8	1	No Data Available			B5A	P
5679	218 309 120		6				5		D			B8B	RR
5686	141 235 615		6	12.5	250	250	27	3.1	100	100		B9A	P
5687	641 221 437		6	12.5	250		16	4.1	100		7	B9A	TT
5690	238 192 310		6				120		REC		30mA	A08	RR
5691	471 461 230		6	2	250		2.3	1.6	150		1.6	A08	TT
5692	471 461 230		6	9	250		6.5	2.2	100		2.2	A08	TT
5693	021 415 360		6	3	250	100	3	1.65	100	100	1.6	A08	P
5694	126 447 310		6	6	300		7	3.2	No Data Available			A08	TT
5718	402 013 060		6	2.0	100		13.0	5.5	100		5.5	B8D	T
5719	402 013 060		6	1.3	150		1.8	2.3	100		1.6	B8B	T
5721	641 227 413		6	2	250		1.3	1.6	100		1.6	B9A	TT
5722	802 208 300		3						D			B7G	D
5725	412 365 100		6	2	125	125	5.2	3.2	100	100	3.5	B7G	P
5726	192 310 800		6						D			B7G	RR
5732	026 510 310	G ₁	6	3	125	100	8	2.2	100	100	2	A08	D
5749	412 365 100		6	1	250	100	11	4.4	100	100	4.3	B7G	P
5750	412 366 400		6	2	100		11	7.0	100		6	B7G	H
5751	741 226 413		6	3.0	250		1.0	1.2	100		1.2	B9A	TT
5755	471 461 230		6	2	250		2.3	1.6	200		1.6	A08	TT
5763	601 235 144		6	7.5	250	250	45	7	100	PenLF	7	B9A	P
5797	411 235 600		26.5	1	30	30	.5	1.0	No Data Available			B8D	P
5812	413 365 200		3	23	250	250	40	4.1	100	PenLF	4.1	B7G	P
5814	741 226 413		6	8.5	250		10.5	2.2	100		3.0	B9A	TT
5824	026 540 310		25	22	125	125	61	5	125	125	5	A08	P
5825	200 300 000	D ₁	1.5						D			UX4	D
5828	028 090 310		12				30		REC		15mA	B8A	RR
5829	028 090 310		26				30		REC		15mA	A08	RR
5840	412 163 510		6	1.4	100	100	7.0	5.0	100	100	5.0	B8D	P
5842	602 441 443		6	1.5	150		26	24.0	100		2.4	B9A	T
5844	672 244 100		6	2.3	100		4.8	3.4	100		3.4	B7G	TT
5845	802 290 300		6						D			B7G	DD
5847	402 106 053		6	2	150	150	13	12.5	150	150	12	B9A	P
5851	206 005 340		2.5	7.5	125	125	5.5	1.6	125	125	1.6	B8B	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
5852	028 090 310		6				30		REC		15mA	A08	RR
5873	264 114 730		6	3	150		9	2.9	100		2.3	B8B	TT
5879	401 230 561		6	3	250	100	1.8	1	100	100	1	B9A	P
5881	026 540 310		6	12.5	300	200	48	5.3	100	150	5	A08	P
5894	245 134 200	A ₁ A ₂	6		400	250	30	3.4	No Data Available			B7A	PP
5896	812 093 100		6				15		REC		15mA	B8B	RR
5897	402 013 060		6	2.3	150		14	6.5	100		5.8	B8A	T
5898	402 013 060		6	2	150		1.8	2.3	100		1.7	B8A	T
5899	412 163 510		6	2.0	100	100	13.0	5.5	100	100	5.0	B8D	P
5900	412 163 510		6		100	100	7.2	4.5	100	100	4.5	B8A	P
5901	412 163 510		6	1.5	100	100	7.5	5.0	100	100	2.4	B8A	P
5902	412 163 510		6	6.5	100	100	30	4.2	No Data Available			B8A	P
5903	812 093 100		26				5		D			B8B	RR
5905	412 163 510		26	0	20	20	2.3	2.8	No Data Available			B8A	P
5906	412 163 510		26	1.5	100	100	7.5	5	100	100	5	A08	P
5907	412 164 510		26	0	20	20	2.7	3.0	No Data Available			B8A	P
5908	412 163 510		26	0	20	20	2.3	1.7	No Data Available			B8A	P
5910	265 *24 300		1.4	0	90	90	1.6	0.9	100	90	0.9	B7G	P
5915	412 365 100		6	0	75	75	6.3	2	80	75	2	B7G	H
5916	412 163 510		26		100	100	4.4	1.28	100	100	1.2	B8A	P
5920	762 344 100		6	2.1	100		8.5	6	100		6	B7G	TT
5930	264 300 000		2.5	45	250		60	5.25	No Data Available			UX4	T
5931	020 809 030		5				120		ERC		30mA	A08	RR
5932	026 540 310		6	14	250	250	72	6	100	PenLF	5.2	A08	P
5933	254 130 000	A	6	14	300	250	83	6.5	100	150	6	UX5	P
5947	222 833 380		4.4						D			A08	D
5961	126 541 340		6		250	100			100	100		A08	H
5963	741 226 413		6	0	75		8	2.8	80		2.8	B9A	TT
5964	762 344 100		6	1	100		9.5	6	100		6	B7G	TT
5965	741 226 413		6	1.8	150		8.2	6.5	150		6.0	B9A	TT
5967	624 334 260		1.25		40		3	2	No Data Available			B8B	TT
5968	240 670 430		1.25	0	40		0.7	1.3	No Data Available			B8B	TT
5969	245 675 430		1.25	3	125	40	6	1.7	No Data Available			B8B	PP
5977	402 013 060		6	2.7	100		10	4.5	100		4.5	B8B	T
5987	462 613 060		6	18	100		9	1.85	100		1.85	B8B	T
5992	026 540 310		6	12.5	250	250	45	4.1	100	PenLF	4	A08	P
5993	802 010 309		6				30		REC		15mA	B9A	RR
5998	461 471 230		6		100		100	15.5	No Data Available			A08	TT
6004	020 000 030	D ₁ D ₂	2.5				60		REC		20mA	A08	RR
6005	412 365 400		6	12.5	250	250	45	4	100	150	4	B7G	P
6006	021 415 360		6	14	250	125	11	4.7	100	100		A08	P
6007	653 420 000		1.25	.2	20	20	.47	.42	No Data Available			B5A	P
6008	653 420 000		.625	1.15	20	20	.05	.1	No Data Available			B5A	P
6021	642 113 470		6	1.0	100		6.5	5.4	100		5	B8D	TT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6030	672 344 100		6	{ 3 0.85	150 100		5 8.5	4.5 5.8	100 100		5.8 5.8	B7G	TT
6026	001 230 460		6	2.6	125		12	5.9	100		5.9		T
6028	412 365 100		20	1.8	125	125	7.5	5.0	100	125	5.0	B7G	P
6042	461 471 230		25	8	250		9	2.6	100		2.6	A08	TT
6045	672 344 100		6	0.5	100		9	6.4	100		6.4	B7G	TT
6046	026 540 310		25	8.2	200	125	46	8	100	125	8	A08	P
6052	812 093 100		6				30		REC			B8B	RR
6053	812 093 100		26				5		D			B8B	DD
6057	741 226 413		6	2	250		1.2	1.6	150		1.6	B9A	TT
6058	192 310 800		6						D			B7G	RR
6059	041 230 651		6	3	250	100	2	1.225	100	100	1.2	B9A	P
6060	741 226 413		6	2	250		10	5.5	200		5	B9A	TT
6061	*41 230 651		6	13	300	225	34	3.75	100	150	3.7	B9A	P
6062	601 235 144		6	7.5	250	250	45	7	100	150	7	B9A	P
6063	802 309 100		6				30		REC		15mA	B7G	RR
‡ 6064	412 361 500		6	{ 2 1.5	250 200	250 150	10 4.0	7.5 6.4	100 100	150 150	5 5	B7G	P
6065	412 361 500		6	2.5	250	250	8	2.5	100	100	2.5		P
6066	412 389 600		6	3	250		1	1.2	150		1.2	B7G	DDT
6067	741 226 413		6	8.5	250		10.5	2.2	100		2.2	B9A	TT
6072	741 226 413		6	4	250		3	1.75	100		1.7	B9A	TT
6080	471 461 230		6	30	100		100	7	No Data Available			A08	TT
6082	471 461 230		26.5	30	100		100	7	No Data Available			A08	TT
6084	501 236 014		6	2.0	250	125	10	9.0	150	100		B9A	P
6085	641 227 413		6	5.5	250		6	2.7	100		2	B9A	TT
6086	541 236 **1		18	1.8	200	100	8.3	8.2	100	100	8	B9A	P
6087	020 809 030		5				60		REC		20mA	A08	RR
6094	452 634 516		6	12.5	250	250	45	6	100	PenLF	6	B9A	P
6095	412 365 400		6	12.5	250	250	45	4.1	100	PenLF	4	B7G	P
6096	412 365 100		6	2	125	125	7.5	5	125	125	5	B7G	P
6097	192 310 800		6						D			B7G	RR
6098	106 052 430		6	22.5	250	250	77	5.4	100	100		A08	P
6099	672 344 100		6	{ 3 .85	150 100		5 8.5	4.5 5.3	100 100		5.8 5.8	B7G	TT
6100	602 364 100		6	8.5	250		10.5	2.2	100		3.0		T
6101	762 344 100		6	2	150		9	5.5	100		6	B7G	TT
6106	020 809 030		5				60		REC		20mA	A08	RR
6110	812 093 100		6				5		D			B8B	RR
6111	642 113 470		6	1.9	100		8.5	5	100		5	B8B	TT
6112	642 113 470		6	1.4	150		1.75	2.5	100		0.8	A08	TT
6113	641 471 230		6	3	250		3	1.7	100		1.6	A08	TT
6118	026 890 310		6	3	250		1.0	1.2	150		1.3	A08	DDT

‡ See note on Page 8

VALVE	SELECTOR SWITCH No.	T.C.	VI	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6125	8*2 384 100		6	8.5	250		10.5	2.2	150		2.2	B7G	T
6132	*41 230 651		6	4.5	250	250	40	11	100	150	9	B9A	P
6134	021 415 360		6	2	300	150	10	9	100	150		A08	P
6135	6*2 364 100		6	8.5	250		10.5	2.2	100		2.2	B7G	T
6136	412 365 100		6	1.0	250	150	10.6	5.2	100	150	5	B7G	P
6137	021 415 360		6	3	250	100	9.2	2	100	100	2	A08	P
6145	265 104 130		5		150	100	34	10	100	100		B7G	P
6146	125 141 310	A	6	30	200	200	100	7	No Data Available			A08	P
6147	206 035 240		1.25	7.5	125	125	5.5	1.6	100	125	1.5	B8B	P
6153T	023 164 570	G ₁	6	$\begin{cases} 2 \\ 2 \end{cases}$	$\begin{cases} 100 \\ 250 \end{cases}$	$\begin{cases} 100 \\ 100 \end{cases}$	$\begin{cases} 16 \\ 12 \end{cases}$	$\begin{cases} 5 \\ 3.5 \end{cases}$	$\begin{cases} 100 \\ 100 \end{cases}$	$\begin{cases} 60 \\ 100 \end{cases}$	$\begin{cases} 5 \\ 3 \end{cases}$	8SC	TH
6156	412 360 500		6	13.5	250	250	16	2.6	100	150	2.6	B7G	P
6157	**1 23* ***	D ₁	6				120		REC		30mA	B9A	R
6158	741 226 413		6	4.6	250		6	2.3	100		2.3	B9A	TT
6159	125 141 130	A	26	30	200	100	100	7	No Data Available			A08	P
6180	461 471 230		6	8	250		9	2.6	100		2.6	A08	TT
6186	412 365 100		6	1.4	250	150	7	5	100	100	5	B7G	P
6187	412 365 100		6	2	125	125	5.2	3.2	100	125	3.0	B7G	P
6188	461 471 230		6	2	250		2.3	1.6	150		1.4	A08	TT
6189	641 227 413		6	8.5	250		10.5	2.2	100		3	B9A	TT
6197	145 236 154		6	3	250	150	30	11	100	150	10	B9A	P
6201	741 226 413		6	2	250		10	5.5	100		5	B9A	TT
6202	802 309 100		6				60		REC		20mA	B7G	RR
6203	800 230 109		6						REC			B9A	RR
6205	412 163 510		6	1.4	100	100	7.5	5	100	100	5	B8D	P
6211	741 226 413		6	2	100		4.6	3.6	100		3.6	B9A	TT
6215	020 000 300	D ₁							D			A08	D
6216	641 236 510		6	6	200	100	47	8.8	100	100		B9A	P
6227	041 230 651		6	5.2	200	200	30	9	100	100		B9A	P
6247	442 613 000	A ₁	6	3	200		4	3	100		2.6	B7G	T
6265	412 365 100		6	1	250	150	9	4	100	125		B7G	P
6267	501 236 014		6	1.0	250	100	3.0	1.85	100	100	1.8	B9A	P
6287	156 236 546		6	12.5	250	250	48	4.1	100	100		B9A	P
6293	125 141 300	A	6		200	200	100	7.3	No Data Available			A08	P
6302	265 113 000	G ₁	6	2.2	300	150	11	9	No Data Available			UX6	P
6305	112 311 100	D ₁	4				5		REC		5mA	B7G	R
6325	108 090 230		6				60		REC		20mA	A08	RR
6327	121 040 350		6	22.5	250	250	120	8	100	100		A08	P
6336	471 461 230		6	41.5	150		100	11	No Data Available			A08	TT
6350	614 227 140		6	2	250		12	5.5	100		5	B9A	TT
6374	**1 23* **8	D ₁	6				120		REC		30mA	B9A	R
6375	400 230 060		1.25	4.5	150		12.0	3.4	150		3.4	B8D	T
6385	214 607 413		6	2.1	150		82	5.5	125		5.5	B9A	TT
6386	214 607 413		6	2	100		9.6	4	100		4	B9A	TT
6394	461 471 230		26.5	45	150		100	11	No Data Available			A08	TT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6397	306 025 240	D ₁	1.25	7.5	125	125	7	1.9	100	100		B8B	P
6417	601 235 144		12.5	7.5	250	250	45	7	100	150	7	B9A	P
6443	**I 23* ***		6				120		REC		36mA	B9A	R
6463	614 227 143		6	2	250		12	5.5	100			B9A	TT
6485	412 365 100		6	1.6	300	150	10	9	100	100		B7G	P
6488	412 653 160	A ₁ A ₂	6	2.0	100	100	7.5	5.0	100	100	5.0	B8D	P
6489	261 360 000		6		100		8		100			SM5	T
6516	412 360 500		6	13.5	250	250	16.0	2.6	100	150	2.6	B7G	P
6520	461 471 230		6	60	150		50	7	No Data Available			A08	TT
6524	542 134 500		6	2	200	200	50	4.5	100	100		B7A	PP
6550	026 540 310		6	16.5	400	225	87	9	No Data Available			A08	P
6660	412 365 100		6	1.1	250	100	11	4.4	100	100	4.3	B7G	P
6661	412 365 100		6	1.0	250	150	7.4	4.6	100	100		B7G	P
6662	412 365 100		6	1.0	250	100	9.2	3.6	100	100	3.6	B7G	P
6663	182 310 900		6						D			B7G	RR
6669	412 365 400		6	12.5	250	250	47	4.1	100	PenLF	4	A08	P
6677	145 236 154		6	3	250	150	30	11	100	100		B9A	P
6679	641 227 413		6	2	250		10	5.5	200		5	B9A	TT
6680	641 227 413		6	8.5	250		10.5	2.2	100		2.2	B9A	TT
6681	641 227 413		6	2	250		1.2	1.6	150		1.6	B9A	TT
6686	041 230 651		6	2.5	200	200	20	11	100	100		B9A	P
6687	412 365 100		6	5	125	75	.5	.6	125	75	.6	B7G	H
6688	141 23* 615		6	1	200	150	13.1	16.5	No Data Available			B9A	P
6689	541 236 **I		6	1.7	200	125	10	9	100	100		B9A	P
6697	641 227 413		6	8.5	250		10	2.0	150			B9A	TT
6760	641 236 510		18	7.5	125	125	70	12	No Data Available			B9A	P
6761	641 236 510		6	7.5	125	125	70	13	No Data Available			B9A	P
6829	641 227 413		6	2.2	150		10.7	8.1	150		8.1	B9A	TT
6850	542 134 500		12		200	200	50	4.5	100	100		B7A	PP
6870	141 223 651		6	3.5	250	250	25	8.5	100	100	8	B9A	P
6883	125 141 130	A ₁	12	30	200	200	100	7	No Data Available			B9A	P
6893	125 141 130	A ₁	12	30	200	200	100	7	No Data Available			B9A	P
§ 6927	672 344 100		6	3 8.5	150		5	4.5	100		5	B7G	TT
					100		8.5	5.8	100		5		
6928	412 365 400		6	12.5	250	250	45	4.1	100	PenLF	4	B7G	P
6955	641 227 413		6	8.5	250		11.5	2.3	100			B9A	TT
7000	026 510 310	G ₁	6	3	250	100	2	1.225	100	100	1.2	A08	P
7184	026 540 360	A ₁ G ₁	6	15	250	250	70		100	PenLF		A08	P
7193	020 000 310		6	10.5	300		11	3	100		3	A08	T
7700	265 113 000		6	3	250	100	2	1.2	100	100		UX6	P
7752	412 365 100		6	2	125	125	5.5	3.5	100	100	3.5	B7G	P
7755	412 365 100		6		30	30	3	2.75	No Data Available			B7G	P
7756	106 052 430		6	36	300	300	58	4.3	100	PenLF	4.3	A08	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
8013A	200 300 000	D ₁	2.5				15		REC		10mA	B4	R
8016	020 000 030	D ₁	1.25						D			A08	D
8020	200 300 000	D ₁	5				120		REC		30mA	UX4	R
9001	412 365 100		6	3	250	100	2	1.4	100	100	1.4	B7G	P
9002	612 364 100		6	7	250		6.3	2.2	100		2.22	B7G	T
9003	412 365 100		6	3	250	100	6.7	1.8	100	100	1.8	B7G	P
9006	812 380 100		6				5		D			B7G	R
9072	020 000 310	A ₁ G ₁	6		300		15	2.5	No Data Available			A08	T
18013	061 231 500	G ₁	4		200	200	8	5	100	100		B7	P
18014	005 231 600	G ₁	4		200	200	35	8	100	100		B7	P
18015	061 231 500		21		125	125	8	8.3	125	125	8.3	B7	P
18016	005 231 600		21		125	125	48	9	125	125	9	B7	P
18040	265 104 130		18	3.4	200	200	15	10	100	150	10	B8B	P
18042	541 236 **1		18	1.8	200	100	8.3	8.2	100	100	8	B9A	P
18043	541 236 **1		6	1.8	200	100	8.2	8.2	100	100	8	B9A	P
18045	041 230 651		18	3	200	200	20	11	100	150	10	B9A	P
18046	041 230 651		18	3	200	200	20	11	100	150	10	B9A	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
A11A	892 300 000		4				60		REC		20mA	B4	RR
A11B	892 300 000		4				60		REC		20mA	B4	RR
A11C	892 300 000		4				60		REC		20mA	B4	RR
A11D	892 300 000		4				60		REC		20mA	B4	RR
A20B	892 310 000		4						D			B5	DD
A23A	809 231 600	G ₁	4	7	250		4.0	2.0	100		2.9	B7	DDT
A26	264 300 000		15	1.5	90		4.5	1.16	80		1.16	UX4	T
A27D	819 236 500	G ₁	4	6	250	250	36	9.5	100	PenLF	9.5	B7	DDP
A28	264 300 000		15	1.5	90		7.5	1.16	80		1.16	UX4	T
A30	264 300 000		15	27	175		22	1.08	100		1.08	UX4	T
A30B	642 310 000		4	2	250		10	5.5	200		5.5	B5	T
A30D	642 310 000		4	3.5	200		6	2.4	100		2.4	B5	T
A32	264 300 000		15	3	150		1.5	0.94	150		0.94	UX4	T
A36A	645 231 700	G ₁	4	2	150		6	1.2	150	60	1.2	B7	TH
				2	200	100	3.5		200	75			
A36B	645 231 700	G ₁	4	2	100		22	6	100	60	6	B7	TH
				2	250	150	3.5		100	PenLF			
A36C	645 231 700	G ₁	4	3	100	0	9	3.8	100	60	5.0	B7	TH
				2.5	250	100	3.25		100	100	3.0		
A40	264 300 000		15	40.5	175		21	1.5	100		1.5	UX4	T
A40M	254 130 000	A	4	1.5	200	100	3	2	200	100	3	UX5	P
A40M	542 310 000	A	4	1.5	200	100	3	2	200	100	3	B5	P
A48	264 300 000		15	4.5	90		4.5	1.18	80		1.18	UX4	T
A50A	542 310 000	A	4	2	200	100	3	2.3	100	100	2.3	B5	P
A50A	040 231 500	A	4	2	200	100	3	2.3	100	100	2.3	B7	P
A50B	061 231 500	G ₁	4	1.5	250	250	6	3.5	200	200	3.5	B7	P
A50M	041 231 500	A	4	2	200	125	4.5	2.3	100	100	2.3	B7	P
A50M	542 310 000	A	4	2	200	125	4.5	2.3	100	100	2.3	B5	P
A50N	542 310 000	A	4	2	225	100	4.25	2.5	200	100	2.5	B5	P
A50N	041 231 500	A	4	2	225	100	4.25	2.5	200	100	2.5	B7	P
A50P	060 231 500	G ₁	4	3	250	250	11.5	2	100	PenLF	2	B7	P
A70B	642 310 000	S	4	25	250	250	36	2.6	100	PenLF	2.6	B5	P
A70B	045 231 600		4	25	250	250	36	2.6	100	PenLF	2.6	B7	P
A70C	045 231 600		4	3	250	250	36	9	100	PenLF	9	B7	P
A70D	045 231 600		4	3	250	250	36	9	100	PenLF	9	B7	P
A70D	642 350 000		4	5.8	250	250	36	9.5	100	150	8	B5	P
A70E	045 231 600		4	14	250	275	72	8.5	100	PenLF	8.5	B7	P
A70P	045 231 600		4	14.5	250	250	70		100	PenLF		B7	P
A80A	123 174 560	G ₁	4	1.8	90		2		100	90	1.3	85C	O
				8.5	250	75	1.6		200		2.5		
A80A	645 231 700	G ₁	4	1.8	90	75	2		100	90	1.3	B7	O
				8.5	250	75	1.5		100	90	1.5		
A104	642 300 000		1.1	10	100		5	0.35	100		0.35	B4	T
A106	264 300 000		1.4	9	100		2	0.4	100		0.4	UX4	T
A106	642 300 000		1.4	9	100		2	0.4	100		0.4	B4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
A109	264 300 000		1.4	9	150		2	0.45	100		0.4	UX4	T
A110	264 300 000		1.4	4.5	125		3	0.4	125		0.4	UX4	T
A110	642 300 000		1.4	4.5	125		3	0.4	125		0.4	B4	T
A125	642 300 000		1.25	3	150		0.4	0.45	100		0.4	B4	T
A203	642 300 000		2	30	150		12	1.5	100		1.5	B4	T
A205	642 300 000		2	18	150		7	1.2	100		1.2	B4	T
A206	642 300 000		2	8.5	150		3.8		100		1	B4	T
A209	642 300 000		2	9	150		4	1.0	100		1.0	B4	T
A210	642 300 000		2	9	125		3	0.9	100		0.9	B4	T
A211	642 300 000		2	2	150		2	1.2	100		1.2	B4	T
A225	642 300 000		2	3	150		1	1.0	100		1.0	B4	T
A235	042 300 000	A	2	0	150		1.5	0.4	150		0.4	B4	T
A241	642 300 000	S	2	2	20	20	1.2	1.0	No Data Available			B4	P
A242	265 300 000	G ₁	2	3	125	75	1.7	0.6	100	75	0.6	UX4	P
A303	264 300 000		3	27	150		3	0.6	100			UX4	T
A306	264 300 000		3	15	150		1.5	0.4	100			UX4	T
A404	642 300 000		4	10	100		4	0.45	100		0.45	B4	T
A406	642 300 000		4	9	150		6	0.45	100		0.45	B4	T
A408	642 300 000		4	4	150		4	1.5	100		1.5	B4	T
A409	642 300 000		4	9	150		3.5	0.9	100		1.2	B4	T
A410	642 300 000		4	3	150		3.5	0.5	100		1.2	B4	T
A410	264 300 000		4	3	150		3.5	0.5	100		1.2	UX4	T
A410N	642 300 000		4	3	150		3.5	0.5	100		0.5	B4	T
A411	642 300 000		4	3	200		6	2.5	150		2.5	B4	T
A414K	642 300 000		4	4.5	150		4	2	100		2	B4	T
A415	642 300 000		4	4	150		4	1.5	100		2	B4	T
A416	642 300 000		4	4.5	150		4	2	100		2	B4	T
A402	642 300 000		4	4	150		4	1.5	100		1.5	B4	T
A425	642 300 000		4	2.5	200		0.25	1.2	100		1.2	B4	T
A430	642 300 000		4	3	200		6	2.5	150		2.5	B4	T
A430	042 300 000	A	4	0	150		1.5	0.5	150		0.5	B4	T
A430N	642 310 000		4	4.5	250		6.5	3.5	100		3	B5	T
A435	642 300 000		4	1	150		2.1	0.5	150		0.5	B4	T
A440N	642 310 000		4	1.6	200		0.2	2.2	150		2.2	B5	T
A442	542 300 000	A	4	1	200	100	4	0.7	200	100	0.8	B4	P
A442	254 300 000	A	4	1	200	100	1.0	0.4	200	100	0.8	UX4	P
A557	602 310 000	G ₁	4	8	150		28	2	100		2	B5	T
A577	602 310 000	G ₁	4	20	250		40	2	100		2.0	B5	T
A600	642 300 000		6	9	150		4	1.5	100		1.5	UX4	T
A609	642 300 000		6	9	150		4	1.5	100		1.5	B4	T
A615	642 300 000		6	4.5	150		4	2.4	100		2.4	B4	T
A630	642 300 000		6	1.5	150		0.7	1.5	150		1.5	B4	T
A635	642 300 000		6	1	150		1.2	1.5	150		1.5	B4	T
A642	542 300 000	A	6	1	200	100		0.7	200	100	0.7	B4	P
A802	642 310 000		4	3	100		2.5	2.5	100		2.5	B5	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE	
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V			
A819	060 231 500	G ₁	4		250	250	8	7.5	100	100		B7	P	
A863	026 500 310	G ₁	6	3	250	100	2	1.23	100	100	1.2	A08	P	
A901	045 231 600		5		100	100	50	9	No Data Available			B7	P	
A1685	026 510 310	G ₁	6.3	3	125	100	8	3.2	100	100	3.2	A08	P	
A2087	6*2 360 800		4.4				5		D			B7G	R	
A1685M	026 510 310	G ₁	6	3	125	100	8	3.2	100	100	3.2	A08	P	
A1714	412 30* 600		6	2.5	150		10	8.5	100		8	B7G	T	
A1820	265 004 130		6		250	250	40	10.5	100	PenLF	9	B8B	P	
A1834	471 461 230		6	40	100		60	3	No Data Available			A08	TT	
A2118	642 300 000		20	3	200		6	2.3	100		2	B4	T	
A2134	412 36* 500		6	7.8	150	150	55	9.5	100	100	9	B7G	P	
A2272	21* *1* *13	A ₁	6.3						D			B9G	R	
A4090	642 310 000		4	3.5	250		6	2.4	150		2.4	B5	T	
A4110	642 300 000		4	3.5	200		6	2.4	100		2.2	B4	T	
AAB1	023 110 980		4						D			85C	DDD	
AA61	274 164 130		6	5.2	250		6	2.7	100		2.7	B8A	TT	
AB1	902 310 000	D ₁	4						D			B5	DD	
AB2	902 310 000	D ₁	4						D			B5	DD	
ABC1	023 198 060	G ₁	4	7	250		4	2	100		2	85C	DDT	
ABC91	412 389 600		6	2	250		1.2	1.6	100		1.4	B7G	DDT	
AB11	023 198 560	G ₁	4	6	250	250	36	9	100	PenLF	9.0	85C	DDP	
AC/042	642 300 000		2	38	300		50	5	100		5	B4	T	
AC/044	642 300 000		4	38	300		50	5	100		5	B4	T	
AC054	642 300 000		4	22	250		48	3.5	No Data Available			B4	T	
AC/064	642 300 000		4	21	200		20	3	100		3	B4	T	
AC084	642 300 000		4	22	300		17	1.1	100		1.1	B4	T	
AC084N	642 300 000		4	0	100		21	2.5	100		2.5	B4	T	
AC2	023 100 060	G ₁	4	5.5	250		6	2.5	100		2.5	85C	T	
AC2DD	869 231 500	G ₁	4	5.5	250	250	32		100	PenLF		B7	DDP	
AC2/HL	642 310 000		4	1.75	200		4.9	5	100		5	B5	T	
AC2/Pen	045 231 600		4	5.3	250	250	32	7.0	100	PenLF	8	B7	P	
AC2/PenDD	869 231 500	G ₁	4	5.3	250	250	32	7.0	100	PenLF	8	B7	DDP	
AC3Pen	045 231 600		4	3	250	250	36	9	100	PenLF	9	B7	P	
AC4/Pen	045 231 600		4	7	225	225	56	11	100	100	10	B7	P	
AC5/Pen	045 231 600		4	8.5	250	250	40	9.4	100	PenLF	9.4	B7	P	
AC5/PenDD	869 231 500	G ₁	4	8.5	250	250	40	9.4	100	PenLF	9.4	B7	DDP	
AC6/Pen	045 231 000	A	4	6.9	300	225	63	9.5	100	100	8.5	B7	P	
AC104	642 310 000		4	10	150		8.5	3.5	100		3.5	B5	T	
AC701	103 060 020	G ₁	4	1.6	40		0.5	0.7	No Data Available			B8D	T	
ACD	802 310 000		4						D			B5	D	
ACDD														
(HIVAC)	892 310 000		4						D			B5	DD	
AC/DDT	809 231 600	G ₁	4	4	200		5	2.3	100		2.3	B7	DDT	
AC/DX	642 310 000		4	3	200		5	3.5	100		3.5	B5	T	
AC/G	642 310 000		4	7.5	200		8	2.7	100		2.7	B5	T	

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
ACHF	642 310 000		4	3	200		3	2.5	100		2.5	B5	T
ACHL	642 310 000		4	2.5	200		7	2.0	100		3.5	B5	T
AC/HLDD	809 231 600	G ₁	4	3	200		4.9	2.6	100		2.6	B7	DDT
ACHLDD	910 231 680	G ₁	4	3	200		4.9	2.6	100		2.7	B9	DDDT
ACHL4	642 310 000		4	5	250		5	3.3	100		3.3	B5	T
ACHL4DD	809 231 600	G ₁	4	3	250		7	2.5	100		2.5	B7	DDT
ACHM4	542 310 000	A	4		250	100	10	2.5	100	100	2.5	B5	P
AC/HP	041 231 500	A	4	1.5	200	100	4.2	3.2	100	100	3.2	B7	P
AC/HP	543 210 000	A	4	1.5	200	100	4.2	3.2	100	100	3.2	B5	P
ACHVP	542 310 000	A	4	2	200	100	3	2.3	100	100	2.3	B5	P
ACHI	174 652 300	G ₁	4	$\left\{ \begin{array}{l} 2 \\ 2 \end{array} \right.$	$\left\{ \begin{array}{l} 150 \\ 75 \end{array} \right.$	$\left\{ \begin{array}{l} \\ 75 \end{array} \right.$	$\left\{ \begin{array}{l} 11 \\ 2.5 \end{array} \right.$	$\left\{ \begin{array}{l} 2.0 \\ \\ \end{array} \right.$	$\left\{ \begin{array}{l} 100 \\ 80 \end{array} \right.$	$\left\{ \begin{array}{l} 60 \\ 75 \end{array} \right.$	$\left\{ \begin{array}{l} 2 \\ \\ \end{array} \right.$	$\left\{ \begin{array}{l} \\ C7 \end{array} \right.$	TH
ACH4	642 310 000		4	4	200		3	3.3	100		3.3	B5	T
ACH4	642 310 000		4	4	200		3	3.3	100		3.3	B5	T
AC/L	642 310 000		4	13.5	200		17	4.25	100		4.25	B5	T
ACL4	642 310 000		4	15	250		9	4	100		4	B5	T
AC/LP	642 310 000		4	14	200		18	4.25	100		4.25	B5	T
ACME4	642 310 000	S	4	16	250	250	26		100	PenLF		B5	P
ACP	642 300 000		4	21	200		19	3	100		3	B4	T
AC/P	642 310 000		4	13.5	200		17	2.75	100		2.75	B5	T
ACPI	642 310 000		4	28	200		24	2.3	100		2.3	B5	T
ACP4	042 310 000	A	4	1	100		20	7	100		7	B5	T
ACP4	642 310 000		4	20	250		20	4	100		4	B5	T
ACPN	642 350 000		4	12	250	200	22		100	PenLF		B5	P
ACPNDH	642 350 000		4	10	250	200	18		100	PenLF		B5	P
AC/PP	642 300 000		4	25	400		50	5	100		5	B4	T
ACPP	045 231 600		4	5.5	250	250	32		No Data Available			B7	P
AC/Pen.	045 231 600		4	15.5	250	250	32	2.7	100	100	2.5	B7	P
AC/Pen.	642 310 000	S	4	12	200	200	24	2.5	100	100	2.5	B5	P
ACPT	642 310 000	S	4	8	250	200	31		100	PenLF		B5	P
ACPX4	642 310 000		4	18	250		30	4	100		4	B5	T
ACPX4a	642 300 000		4	25	250		50	5	100		5	B4	T
ACQ	045 231 600		4	22	400	250	57	6	100	PenLF	6	B7	P
ACQA	045 231 600		6	23	400	250		6	100	PenLF	6	B7	P
AC/SIVM	542 310 000	A	4	1.5	200	75	5.6	1.1	200	75	1.1	B5	P
AC/S2	542 310 000	A	4	1.5	200	60	7	3.4	200	60	3.4	B5	P
ACS2Pen	041 231 500	A	4	1.5	250	100	8	4.6	200	100	5.5	B7	P
AC/SG	542 310 000	A	4	1.5	200	60	4.5	1.9	200	60	1.9	B5	P
AC/SGVM	542 310 000	A	4	2	200	60	5.8	2.0	200	60	2	B5	P
AC/SH	542 310 000	A	4	1.5	200	75	7.4	2.5	200	75	3.5	B5	P
AC/SL	041 230 500	A	4	1	200	75	3.8	2.0	200	75	2.0	B7	P
AC/SL	061 230 500	G ₁	4	1	200	75	3.8	3.3	200	75	3.3	B7	P
ACSPI	041 231 500	A	4	3	200	200	4.9	2.7	100	PenLF	2.7	B7	P
ACSP3	061 231 500	G ₁	4	1.5	250	100	9	7.5	200	100	7.5	B7	P
ACTHI	645 231 700	G ₁	4	$\left\{ \begin{array}{l} 2.7 \\ 3 \end{array} \right.$	$\left\{ \begin{array}{l} 75 \\ 250 \end{array} \right.$	$\left\{ \begin{array}{l} \\ 100 \end{array} \right.$	$\left\{ \begin{array}{l} 6.0 \\ 3 \end{array} \right.$	$\left\{ \begin{array}{l} 3.0 \\ 3.5 \end{array} \right.$	$\left\{ \begin{array}{l} 100 \\ 250 \end{array} \right.$	$\left\{ \begin{array}{l} 60 \\ 100 \end{array} \right.$	$\left\{ \begin{array}{l} 3.5 \\ 3.8 \end{array} \right.$	$\left\{ \begin{array}{l} \\ B7 \end{array} \right.$	TH

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
ACTHIA	271 640 530	G ₁	4	{ 3 3 3 5	75 250 150 250		6.0 3 1.5 5.5	3.0 3.5 1.4 1.6	80 100 100 250	60 100 60 200	3 3.5 1.4 3.4	MO8	TH
ACTP	571 231 640	G ₁	4			0							
ACVG	542 310 000	A	4	0	200	75	5	3	200	75	3	B5	P
ACVH	542 310 000	A	4	1.5	200	75	9.3	2.7	200	75	3.3	B5	P
AC/VP	041 231 500	A	4	1.5	200	100	5.7	2.5	200	100	3	B7	P
AC/VP	542 310 000	A	4	1.5	200	100	5.7	2.5	200	100	3	B5	P
ACVPB	061 231 500	G ₁	4	1.5	250	150	12	4	250	200	4	B7	P
AC/VP1	041 231 500	A	4	2.8	250	200	7.4	2	100	PenLF	2	B7	P
AC/VP2	061 231 500	G ₁	4	2.8	250	200	7.4	2	100	PenLF	2	B7	P
AC/VP4	041 231 500	A	4		250	100	6	3	100	100	3	B7	P
ACVS	542 310 000	A	4	1.5	200	75	4.4	2.0	200	75	3	B5	P
ACVS4	542 310 000	A	4	2	250	50	6	2	200	60	2	B5	P
AC/Y	045 231 600		4	10	250	250	32	3.5	100	100	3.5	B7	P
AC/Y	642 310 000	S	4	10	250	250	32	3.5	100	100	3.5	B5	P
AC/YC	045 231 600		4	10	250	250	68	7.5	100	PenLF	7.5	B7	P
AC/YY	045 231 600		4	10	250	250	68		100	PenLF		B7	P
AC/Z	642 310 000	S	4	5.5	250	250	32	7.5	100	PenLF	8	B5	P
AC/Z	045 231 600		4	5.5	250	250	32	7.5	100	PenLF	8	B7	P
AC/ZDD	869 231 500	G ₁	4	5.5	250	250	32	8	100	PenLF	8	B7	DDP
AD	281 300 000		6				60		REC		20mA	B4	R
ADI	023 004 060		4	45	250		60	6	100		6	8SC	T
ADI/350	023 004 060		4	66	350		84		100			8SC	T
ADG	642 310 000		20	10	200		10	3.5	100		3.5	B5	T
ADHF	642 310 000		20	3	200		5	3.5	100		3.5	B5	T
ADHP	041 231 500	A	20		200	100	5	2.8	200	100	2.8	B7	P
ADL	642 310 000		20	13	200		20	3	100		3	B5	T
ADPN	642 350 000		20	15	250	200	22		100	PenLF		B5	P
ADVHP	041 231 500	A	20		200	100	5.5	2.5	200	100	2.5	B7	P
AE	265 413 000		13	13.5	100	100	8.5	1.65	100	90	1.65	UX6	P
AF	281 300 000		2.5				120		REC		20mA	UX4	R
AF2	542 310 000	A	4	2	225	100	4.25	2.5	200	100	3.2	B5	P
AF3	023 110 560	G ₁	4	3	250	100	8	1.8	250	100	1.8	8SC	P
AF7	023 110 560	G ₁	4	2	250	100	3	2.1	250	100	2.1	8SC	P
AG	289 300 000		5				120		REC		20mA	UX4	RR
AF8	026 546 310		6	2	200	50	3.5		No Data Available			A08	O
AG495	642 310 000		4	4	200		4	2.5	100		2.5	B5	T
AG4100	642 300 000		4	3	150		5	2	125		2	B4	P
AH1	023 145 560	G ₁	4	2	250	75	3	1.8	200	75	1.8	8SC	P
AH100	023 145 560	G ₁	4	2.5	200	100	5.5	1.5	100	100	1.5	8SC	P
AH4105	542 310 000	A	4	2	200	125	4.5	2.3	100	100	2.3	B5	
AK2	123 164 570	G ₁	4	{ 2 2	100 250	75 75	4.2 4.3	0.9 2.2	80 100	75 75	0.9 2.0	8SC	O

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
AL1	023 004 560		4	15	250	250	36	2.8	100	PenLF	2.8	8SC	P
AL2	023 100 560	G ₁	4	25	250	250	36	2.6	100	PenLF	2.6	8SC	P
AL2/375	023 100 560	G ₁	4	25	250	250	36	2.6	100	PenLF	2.6	8SC	P
AL3	245 231 600		4	3	250	250	36	9	100	PenLF	9	B7	P
AL3	023 104 560		4	6.5	250	250	36	9.5	100	150	8	8SC	P
AL4	145 231 600		4	3	250	250	36	9	100	PenLF	9.5	B7	P
AL4	023 104 560		4	6.5	250	250	36	9.5	100	150	8	8SC	P
AL4/375	145 231 600		4	6	250	250	34	9.5	100	PenLF	8	B7	P
AL4/375	023 104 560		4	6	250	250	34	9.5	100	150	8	8SC	P
AL5	145 231 600		4	14	250	275	72	8.5	100	PenLF	7	B7	P
AL5	023 104 560		4	15	250	250	72	7	100	150	6	8SC	P
AL5/375	023 104 560		4	14	250	275	72	8.5	100	PenLF	6	8SC	P
AL60	041 231 500	A	4	7	250	250	72	14.5	100	PenLF	8.5	B7	P
AL495	642 310 000		4	12	250		20	4	100		4	B5	T
AMOE	045 231 600		4	14	250	250	72	9	100	PenLF	9	B7	P
AN4092	642 310 000	D ₁	4	3.5	200		6	2.0	100		2	B5	DT
AP495	642 310 000		4	1.5	200		2.5	5	150		5	B5	T
APP4A	045 231 600		4	16.5	250	250	36	3.5	100	PenLF	3.5	B7	P
APP4As	023 100 560	G ₁	4	16.5	250	250	36	3.5	100	PenLF	3.5	8SC	P
APP4B	045 231 600		4	5	250	250	32	10	100	PenLF	10	B7	P
APP4Bs	023 104 560		4	5	250	250	32	10	100	PenLF	10	8SC	P
APP4C	145 231 600		4	5	250	250	36	10	100	PenLF	10	B7	P
APP4D	145 231 600		4	16	250	250	72	7	100	PenLF	7	B7	P
APP4E	145 231 600		4	13.5	350	275	72	8.5	100	PenLF	8.5	B7	P
APP4E	023 104 560		4	13.5	350	275	72	8.5	100	PenLF	8.5	8SC	P
APP4G	041 231 500	A	4	6	250	250	36	10	100	PenLF	10	B7	P
APP4G	005 231 600	G ₁	4	6	250	250	36	10	100	PenLF	10	B7	P
APP495	642 350 000		4	23	300	200	25	2	100	100	2	B5	P
APP4100	642 310 000	S	4	15	250	250	24	2.5	100	150	2.5	B5	P
APP4120	642 310 000	S	4	15	350	200	22	3.5	100	100	3.5	B5	P
APV4	892 300 000		4				60		REC		20mA	B4	RR
APV4100	892 300 000		4				60		REC		20mA	B4	RR
APV4200	892 300 000		4				60		REC		20mA	B4	RR
AR495	642 310 000		4	1	100			5	100		5	B5	T
AR4100	642 310 000		4	3	200		3	2	150		2	B5	T
AR4101	642 310 000		4	1	100			3	100		3	B5	T
AS494	542 310 000	A	4		200	100	15	1.5	100	100	1.5	B5	P
AS495	542 310 000	A	4	2	200	100	1	3.4	200	100	3.4	B5	P
AS4100	542 310 000	A	4	6	200	100	4	1.425	100	90	1.4	B5	P
AS4120	542 310 000	A	4	2	250	100	3	3	150	100	3	B5	P
AS4125	542 310 000	A	4	2	250	100	3	3	200	100	3	B4	P
AX	264 300 000		5	9	150		3	0.8	100		0.8	UX4	T
AX1	892 300 000		4				60		REC		20mA	B4	RR
AX50	892 300 000		4				120		REC		30mA	B4	RR
AZ1	023 080 090		4				30		REC		20mA	8SC	RR

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
AZ2	023 080 090		4				60		REC		20mA	8SC	RR
AZ3	023 180 090		4				60		REC		20mA	8SC	RR
AZ4	023 080 090		4				120		REC		30mA	8SC	RR
AZ11	902 300 080		4				60		REC		20mA	F8	RR
AZ12	902 300 080		4				60		REC		20mA	F8	RR
AZ21	288 039 920		2				30		REC		17mA	A08	RR
AZ31	020 809 030		4				30		REC		20mA	A08	RR
AZ32	020 809 030		4				60		REC		20mA	A08	RR
AZ33	028 090 300		4				60		REC		20mA	A08	RR
AZ41	*8* **9 230		4				30		REC		10mA	B8A	RR
AZ50	023 080 090		4				120		REC		30mA	8SC	RR
B2	642 300 000		2	2	125		2	1.2	100		1.2	B4	T
B7	642 300 000		6		125		8	0.67	100		0.67	B4	T
B11	642 300 000		6		200		20	1.4	100		1.4	B4	T
B21	447 230 600		2	6	150		2.2		100		2.1	B7	TT
B22	446 230 700		2		150		5		150			B7	TT
B23	642 300 000		2		125		4	0.75	100		0.75	B4	T
B24	446 230 700		2	0	150		7		100			B7	TT
B30	447 231 600		13	0	175				100			B7	TT
B36	471 461 230		13	8	250		9	2.6	100		2.6	A08	TT
B63	264 147 300		6	5	250		6	3.1	200		3.1	UX7	TT
B65	471 461 230		6	8	250		9	2.6	100		2.6	A08	TT
B105	264 300 000		1.4	18	150		8	1.0	100			UX4	T
B105	642 300 000		1.4	18	150		8	1.0	100			B4	T
B152	741 226 413		6	2	250		10.0	5.5	200		5	B9A	TT
B203	642 300 000		2	26	150		11	1.5	100		1.5	B4	T
B204	264 300 000		2	22.5	125		8	0.9	100		0.9	UX4	T
B205	642 300 000		2	18	150		7	1.2	100		1.2	B4	T
B205	264 300 000		2	18	150		7	1.2	100			UX4	T
B217	642 300 000		2	4.5	150		3	1.3	100		1.3	B4	T
B217	264 300 000		2	4.5	150		3	1.3	100		3	UX4	T
B228	264 300 000		2	2	150		2	1.2	150		1.4	UX4	T
B228	642 300 000		2	2	150		2	1.2	100		1.2	B4	T
B230	446 230 700		2	1	150		5.5		150			B7	TT
B240	470 642 300		2	0	150		15		150			C7	TT
B240	264 473 000		2		150		15		No Data Available			UX6	TT
B242	542 300 000	A	2	0	200	75	4.5	1.1	100	75	1.1	B4	P
B242	254 300 000	A	2	0	200	75	4.5	1.1	100	75	1.1	UX4	P
B255	542 300 000	A	2	1	150	100	1.8	1.2	150	100	1.2	B4	P
B255	254 300 000	A	2	1	150	100	1.8	1.2	150	100	1.2	UX4	P
B262	542 300 000	A	2	1	150	100	1.8	1.3	150	100	1.3	B4	P
B262	265 300 000	G ₁	2	1	150	100	1.8	1.3	150	100	1.3	UX4	P
B309	741 226 413		6	2	250		10	5.5	100		5	B9A	TT
B319	147 234 116		7.5	1.5	90		12	6	100		6	B9A	TT
B329	741 226 413		6	8.5	250		10.5	2.2	100		2.2	B9A	TT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
B339	741 226 413	G ₁	6	2	250		1.2	1.6	150		1.6	B9A	T
B342	265 300 000		2	2.5	150	75	4	1.3	150	75	1.3	UX4	P
B403	642 300 000		4	30	150		15	1.5	100		1.5	B4	T
B403	264 300 000		4	30	150		15	1.5	100		1.2	UX4	T
B405	642 300 000		4	18	150		11	1.6	100		1.6	B4	T
B405	264 300 000		4	18	150		11	1.6	100		1.4	UX4	T
B406	642 300 000		4	15	150		8	1.4	100		1.4	B4	T
B406	264 300 000		4	15	150		8	1.3	100		1.3	UX4	T
B409	642 300 000		4	16	250		12	2	100		2	B4	T
B409	264 300 000		4	16	250		12	2	100		2	UX4	T
B415	642 300 000		4	4.5	150		3	2	100		2	B4	T
B415	264 300 000		4	4.5	150		3	2	100		2	UX4	T
B424	642 300 000		4	2.3	200		6	2.5	150		2.5	B4	T
B424S	642 300 000		4	3	200		6	2.5	100		2.5	B4	T
B424	264 300 000		4	2.3	200		6	2.5	150		2.5	UX4	T
B425	642 300 000		4	4.5	150		3	2	100		2	B4	T
B425	264 300 000		4	4.5	150		3	2	100		2	UX4	T
B438	264 300 000		4	2.5	200		0.2	2	150		2	UX4	T
B438	642 300 000		4	2.5	200		0.2	2	150		2	B4	T
B438S	642 300 000		4	1.5	200		2	2	150		2	B4	T
B442	542 300 000	A	4	1	200	100	4.5	0.9	200	100	0.9	B4	P
B442M	542 300 000	A	4	1	200	100	4.5	0.9	100	100	0.9	B4	P
B442M	254 300 000	A	4	1	200	100	4.5	0.9	100	100	0.9	UX4	P
B442S	542 300 000	A	4	1	200	100	4.5	0.9	100	100	0.9	B4	P
B443	642 350 000		4	17	200	150	12	1.2	100	PenLF	1.2	B5	P
B443S	642 350 000		4	12	250	75	12	1.6	100	60	1.6	B5	P
B443	264 300 000	G ₃	4	17	200	150	12	1.2	100	PenLF	1.2	UX4	P
B443s	642 300 000	G ₂	4	12	250	75	12	1.6	100	60	1.6	B4	P
B443s	264 300 000	G ₂	4	12	250	75	12	1.6	100	60	1.6	UX4	P
B491	642 310 000		4	1.5	200		4	4	150		4	B4	T
B543	642 350 000		5	15	200	150	12	1.3	150	100	1.3	B5	P
B543(s)	642 350 000		5	15	200	150	12	1.3	150	100	1.3	B5	P
B543	264 300 000	G ₃	5	15	200	150	12	1.3	150	100	1.3	UX4	P
B543	642 300 000	G ₃	5	15	200	150	12	1.3	150	100	1.3	B4	P
B605	642 300 000		6	18	150		9	1.8	100		1.8	B4	T
B605	264 300 000		6	18	150		9	1.8	100		1.8	UX4	T
B609	642 300 000		6	18	250		12	1.8	100		1.8	B4	T
B719	741 236 410		6	2	250		10.0	6.0	250		6.0	B9A	TT
B2006	642 310 000		20	18	200		15	1.6	100		1.6	B5	T
B2038	642 310 000		20	3	200		6	2.3	100		2.3	B5	T
B2041	602 300 000	G ₁	20	1	100		2.5	0.1	100		0.1	B4	T
B2042	542 310 000	A	20	2	200	60	4	1	100	60	1	B5	P
B2043	642 310 000	S	20	18	200	200	20	1.7	100	100	1.7	B5	P
B2044S	642 310 000	D ₁	20	3	200		6	1.8	100		1.8	B5	DT
B2045	542 310 000	A	20	2	200	60	4	1	150	60	1	B5	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
B2046	542 310 000	A	20	2	200	100	3	2.2	150	100	2.2	B5	P
B2047	542 310 000	A	20	2	200	100	4	2	150	100	2	B5	P
B2055	542 310 000	A	20	1.5	200	100	3	2	100	100	2	B5	P
B2052T	542 310 000	A	20	2	200	100	3	2	150	100	2	B5	P
B2099	642 310 000		20	1.6	200		0.08	3	150		3	B5	T
BA2	446 230 700		2	0	150		1.5		150			B7	TT
BB1	902 310 000	D ₁	16						D			B5	DD
BBC12	682 390 000	G ₁	2	4.5	150		2.5	1.5	100		1.5	B5	DDT
BB220A	446 230 700		2	3	150		4		100			B7	TT
BB240	446 230 700		2	0	150		5.4		100			B7	TT
BCH1	165 231 700	G ₁	24	{ 2	100		5	1.2	100		1.2	B7	TP
					200	50	1.3	0.75	100	60			
BF1	642 300 000		4	15	150		8	1.3	100		1.3	B4	T
BF61	261 054 130		6	7	250	250	36	10	100	150	8	B8A	P
BF62	261 054 130		6	10	225	225	26	3.2	100	150	3.2	B8A	P
BF451	261 054 130		45	9	175	175	54.5	9.5	100	100	7	B8A	P
BL2	652 310 000	G ₁	30	20	200	100	40	3	100	90	3	B5	P
BL63	027 146 310	G ₁	6	16	250		14	4.2	100		4.2	A08	TT
BHP61	023 010 560	G ₁	2	0.5	125	125	2.5	0.7	125	125	0.7	85C	P
BLP61	023 004 560		2		150	150	7	2.7	100	100		85C	P
BM968	200 300 000	D ₁	2.5				60		REC		35mA	UX4	R
BPM04	412 365 400		6.3	12.5	250	250	45	4.5	100	PenLF	4	B7G	P
BV3	642 350 000		2	4.5	150	125	6	2.2	100	100	2.2	B5	P
BV602	642 300 000		2	12	150		12	3.4	100		3.4	B4	T
BV1304	642 300 000		2	6	150		6	3.2	100		3.2	B4	T
BX2	446 230 700		2	0	175		2.5		100			B7	TT
BX604	642 300 000		2	12	150		8	1.5	100		1.5	B4	T
C3G	261 504 130		6.3	1.8	225	150	13	13.5	100	100		B8B	P
C3G	216 514 130		6.3	1.8	225	150	13	13.5	100	100		B8B	P
C3M	261 504 130		20	4.5	225	150	15.0	6.0	100	100	5.2	B8B	P
C9	642 300 000		4	9	150		3.5	0.9	100		0.9	B4	T
C10B	023 100 080		20				75		REC		23mA	85C	R
C10B	802 310 000		20				60		REC		23mA	B5	R
C20C	982 310 000		13						D			B5	DD
C23B	809 231 600	G ₁	13	5	200		4	2	100		2	B7	DDT
C25	642 300 000		4	2.5	200		2.3	1.2	150		1.2	B4	T
C30	261 504 130		6.3	4.5	225	150	15	6	100	100		B8B	P
C30B	000 231 600	G ₁	13	4	200		4	3.2	150		3.2	B7	T
C36A	645 231 740		21	{ 1.5	100		4	2	125	60	1.2	B9	TH
					225	75	3		100	75			
C36C	645 231 740		29	{ 2.5	100		4	2	100	60		B9	TH
					225	75	3	3.5	250	100			
C36B	645 231 700	G ₁	29	{ 2.5	100				100	60		B7	TH
					250	150	3.4		100	100			
C50B	061 231 500	G ₁	13	2.2	200	200	2.5	2.8	100	PenLF	2.8	B7	P
C50N	061 231 500	G ₁	13	2	200	200	9.5	2	100	150	2	B7	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
C70D	023 110 560	G ₁	33	8.5	200	200	45	8	100	PenLF	7	8SC	P
C70D	045 231 600		35	8.5	200	200	45	8	100	PenLF	7	B7	P
C80B	123 154 560	G ₁	13	1.5	200	90	1.6		150	75		8SC	O
C109	642 300 000		1	9	150		3.5	0.5	100		0.5	B4	T
C125	642 300 000		1	3	150			0.8	125		0.8	B4	T
C135	042 300 000	A	1.4	1	150		1.5	1	150		1	B4	T
C142	542 300 000	A	1	1.5	150	75	1.7	0.8	100		0.8	B4	P
C144	245 134 200	A ₁ A ₂	6.3	15	300	200	40	9	No Data Available			B7A	PP
C180	245 134 200	A ₁ A ₂	6.3	20	300	250	55	3.5	No Data Available			B7A	PP
C243	642 350 000		2	15	150	150	17	1.5	100	100	1.5	B5	P
C243N	642 350 000		2	4.5	150	125	6	2.2	150	100	2.2	B5	P
C243N	264 530 000		2	4.5	150	125	6	2.2	150	100	2.2	UX5	P
C405	642 300 000		4	32	250		20	1.9	100		1.9	B4	T
C405	264 300 000		4	32	250		20	1.9	100		1.9	UX4	T
C408	642 300 000		4	7	150		14	2.9	100		2.9	B4	T
C443	642 350 000		4	25	300	200	20	1.7	100	PenLF	1.7	B5	P
C443N	642 350 000		4	42	300	200	20	1.5	100	PenLF	1.5	B5	P
C443N/S	642 350 000		4	20	300	150	20	1.5	100	100	1.5	B5	P
C453	642 350 000		4	25	300	200	20	1.7	100	PenLF	1.7	B5	P
C508	264 300 000		5	9	150		6.2	1.7	100		1.7	UX4	T
C509A	642 300 000		4	10	150		10	1	100		1	B4	T
C603	642 300 000		6	40	175		20	1.7	100		1.7	B4	T
C606	642 300 000		6	27	250		20	3.3	100		3.5	B4	T
C643	642 350 000		6	21	300	200	20	1.5	100	PenLF	1.5	B5	P
CBC1	023 198 060	G ₁	13	7	250		4	2	100		2	8SC	DDT
CBL1	023 189 560	G ₁	44	8.5	200	200	45	8	100	PenLF	7	8SC	DDP
CBL6	023 198 560	G ₁	44	8	100	100	45	6	100	75	6	8SC	DDP
CBL31	026 985 310	G ₁	44	8.5	200	200	45	8	100	PenLF	7	A08	DDP
CB215	446 230 700		2	1	150		15	1.7	100		1.7	B7	TT
CB215S	023 064 470		2	1	150		12	1.7	100		1.7	8SC	TT
CB220	446 230 700		2	3	150		15		100			B7	TT
CC1	023 100 060	G ₁	13	3.7	200		2.6	2	150		2	8SC	T
CC2	023 100 060	G ₁	13	5.5	250		6	2.5	200		2.5	8SC	T
CCHI	023 164 570	G ₁	20	10 2	200 200		2.5 2	2.3	100 100	60 60	2.3	8SC	TH
CCH2	023 164 570	G ₁	29	10 2	200 200	75	2.5 2	2.3	100 100	60 75	2.3		
CCH35	027 546 310	G ₁	7.5	2 2	100 250	100	5.4 5	2.2 2.4	100 200	60 100	2.8 4	A08	TH
CE230	320 200 000	D ₁	2.5				30		REC		15mA		
CF1	023 110 560	G ₁	13	2	200	100	3	2.3	100	100	2.3	8SC	P
CF2	023 110 560	G ₁	13	2	200	100	4.5	2.2	100	100	2.2	8SC	P
CF3	023 110 560	G ₁	13	2	100	75	7.5	2.1	100	75	2.1	8SC	P
CF7	023 110 560	G ₁	13	2	100	100	3	2.1	100	100	2.1	8SC	P
CF50	123 100 560	G ₁	30	2	100	100	1.5	3.3	100	100	3.3	8SC	P
CF51	123 100 560	G ₁	30	2	250	100	1.7	3.3	100	100		8SC	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
CF61	276 454 130		6	$\begin{Bmatrix} 2 \\ 2 \end{Bmatrix}$	100 250		5 3	2.2 2	100 100		2.8 2.4	B8A	TH
CF141	276 454 130		14	$\begin{Bmatrix} 2 \\ 2 \end{Bmatrix}$	100 200		6.4 2.7	2.2 1.5	100 100	100 75	2.8 1.5	B8A	TH
CHI	023 145 560	G ₁	13	2	250	75	3	1.8	200	75	1.8	8SC	P
CK1	023 154 560	G ₁	13	1.5	200	90	8	3	200	75	1.6	8SC	P
CK3	461 230 650	G ₁	19	15	200	100	2.5		No Data Available			S8	O
CK546	653 420 000		1.25	0	20	20	0.4	0.45	No Data Available			B5A	P
CK1002	008 090 010		6				30	3K Ω	No Data Available			A08	CCR
CK1005	008 092 030		6.3				30		REC		15mA	A08	RR
CK1006	289 300 000		2				60		REC		20mA	UX4	RR
CK1007	008 092 030		1				60		REC		20mA	A08	RR
CK1012	289 300 000		2				120		REC		30mA	UX4	RR
CK1024	008 090 010		6				60	3K Ω	No Data Available			A08	CCR
CK1028	202 322 200	D ₁	6				60		REC		20mA	B7G	R
CK1091	200 900 300		1.4						D			B7G	D
CK5814	741 226 413		6	8.5	250		10.5	2.2	100		2.2	B9A	TT
CL1	023 100 560	G ₁	13	14	200	200	25	2.5	100	PenLF	2.5	8SC	P
CL2	023 100 560	G ₁	24	15	100	100	50	3.8	200	75	3.8	9SC	P
CL3	160 452 300		35	9.5	200	200	40	5.5	150	100	5	C7	P
CL4	023 100 560	G ₁	33	8.5	200	200	45	8	100	PenLF	7	8SC	P
CL6	023 100 560	G ₁	35	9.5	200	100	45	8	100	90	7	8SC	P
CL33	026 540 310		33	8.5	200	200	45	8	100	100	7	A08	P
CV135	812 380 000		6				60		REC		23mA	B7G	R
CV137	812 314 600		6	3	200		7.5	2.5	100		2.5	B7G	DT
CV139	412 314 600		6	1.5	250		10	9	100		6	B7G	T
CV1510	265 501 403		6		400	250	30	3	100	150	3	B9G	P
CY1	023 100 080		20				120		REC		60mA	8SC	R
CY1c	803 210 000		20				60		REC		20mA	B5	R
CY2	123 190 080		30				60		REC		20mA	8SC	RR
CY21	208 001 003		25				120		REC		23mA	B9G	R
CY31	020 080 310		20				120		REC		60mA	A08	R
CY32	029 180 310		30				60		REC		23mA	A08	RR
CZ30	028 193 210		80				60		REC		20mA	A08	RR
CZ501d	265 113 000		3.5	2.5	250	125	6.5	3.5				UX6	P
CZ504D	265 113 000		5.5	13.5	250	200	40	3.5				UX6	P
D _{1/2}	280 300 000		7.5				60		REC		20mA	UX4	R
DI	123 000 000	D ₁	4				5		D			B3G	R
DI	642 300 000		4	1	40		1	0.8	No Data Available			B4	T
DI	289 300 000		5				60		REC		20mA	UX4	RR
D2	642 300 000		4	6	100		2.2	0.25	100		0.25	B4	T
D2M9	182 310 900		6.3				5		D			B7G	DD
D4	642 310 000		4	3	200		4	3.3	150		3.3	B5	T
DI3U	023 100 060	G ₁	13	5	225		6	2.5	100			8SC	T
D020	642 300 000		7.5	50	400		55	2.1	100		2.1	B4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
D024	642 300 000		4	40	400		63	7.5	100		6.0	B4	T
D025	642 300 000		6	75	300		60	3.75	100		3.75	B4	T
D026	642 300 000		4	92	400		63	3.8	100		3.8	B4	T
D030	642 300 000		4	100	400		60	6.9	100		6.0	B4	T
DO42	918 236 500	G ₁	4	6	250	250	36	9.5	100	150	8.0	B7	DDP
D41	892 310 000		4						D			B5	DD
D42	812 300 000		4						D			B4	D
D43	012 300 000	A	4				15		D			B5	DD
D61	268 154 130		6.3	2	250	125	5	1.8	100	100		B8A	P
D63	028 190 310		6						D			A08	DD
D77	192 310 800		6						D			B7G	DD
DI05	264 300 000		1	18	150		8	2	150		2	UX4	T
DI05	642 300 000		1	18	150		8	2	150		2	B4	T
DI10	264 300 000		4	40	250		40	2.7	100		2.7	UX4	T
DI10	642 300 000		4	40	250		40	2.7	100		2.7	B4	T
DI21	268 154 130		12.5	2	200	90	5	2	100	100	2	B8A	DP
DI52	192 310 800		6						D			B7G	RR
D210	642 300 000		2	3	150		3.5	1.25	100		1.25	B4	T
D210SW	603 200 000	G ₁	2	4.5	150		2.4	1.35	100		1.35	B4	T
D243	642 350 000		2.5	27	300	200	20	2	100	PenLF	2	B5	T
D400	892 310 000		4						D			B5	D
D404	642 300 000		4	10	100		4	0.45	100		0.45	B4	T
D410	642 300 000		4	3	150		3.5	0.5	150		0.5	B4	T
D418	102 300 000	D ₁	4						D			B4	D
D604	023 181 910		6						D			85C	DD
DA	000 231 600	G ₁	13	2.6	200		3.7	2.2	150		2.2	B7	T
DA1	642 300 000		2	1	40		0.25	0.4	No Data Available			Sm4	T
DA2	642 300 000		2	2.15	40		1.25	0.5	No Data Available			Sm4	T
DA3	642 300 000		2	2.8	40		1.8	0.62	No Data Available			Sm4	T
DA30	642 300 000		4	70	300		60	3.5	100		6.0	B5	T
DA42	214 300 000	A ₁	7.5		400			3.0	No Data Available				T
DA90	281 0*8 300		1.4				5		D			B7G	R
DA101	200 800 300		1.2						D			B7G	D
DA406	542 300 000	A	4	2.5	150	75	3	0.8	100	75	0.8	B4	P
DAC1	023 008 060	G ₁	1.4	1	90		0.14	0.27	80		0.27	85C	DT
DAC21	206 008 030	G ₁	1.4	0	125		0.75	0.4	80		0.3	A08	DT
DAC22	264 008 030		1.25		90		0.35	0.3	90		0.3	B8G	DT
DAC25	264 228 230		1.4	1	125		0.6	0.35	125		0.35	A08	DT
DAC31	036 080 200	G ₁	1.4	1	90		0.45	0.27	80		0.27	A08	DT
DAC32	036 080 200	G ₁	1.4		90		0.15	0.275	90		0.275	A08	DT
DAFI	082 362 450		1.2		125	60	1.4		125	60		F8	P
DAFI1	802 362 450		1.4	0	90	50	0.22	2	80	60	2	F8	DP
DAF40	268 354 230		1.4	1.0	75	75	0.85	0.7	80	75	0.8	B8A	DP
DAF41	268 354 230		1.4	1.0	75	75	0.85	0.7	80	75	0.8	B8A	DP
DAF70	604 238 050		1.25	0	60	60	0.8	0.45	80	75		B8D	DP

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE		
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V				
DAF91	208 564 300		1.4	1	90	90	2	0.72	80	90	0.72	B7G	DP		
DAF92	265 804 300		1.4	1	90	90	2	0.72	90	90	0.72	B7G	DP		
DAF96	208 564 300		1.4	1.5	60	60	0.17	0.17	80	75	0.17	B7G	DP		
DAF191	2*8 564 300		1.4		60	60	2.2	0.75	No Data Available			B7G	DP		
DASI	542 300 000	A	2	2.7	125	125	1.5	0.58	100	100	0.58	Sm4	P		
DB	446 230 700		25	0	250		40		250			B7	TT		
DBC21	206 098 030	G ₁	1.4	1.5	125		1.6	0.9	100		0.9	A08	DDT		
DBC25	208 904 630		1.4	1.5	125		1.6	0.9	125		0.9	B8B	DDT		
DBC31	026 980 300	G ₁	1.4	1.5	125		1.6	0.9	100		0.9	A08	DDT		
DC2/HLDD	809 231 600	G ₁	25	1	200			2	100		2	B7	DDT		
DC2P	642 310 000		35	13.5	200		17	3.75	100		3.75	B5	T		
DC2/Pen	045 231 600		35	10	250	200	30	2.5	100	100	2.5	B7	P		
DC2/Pen	642 310 000	S	35	10	250	200	30	2.5	100	100	2.5	B5	P		
DC2SG	542 310 000	A	20	1	200	75	5.5	1.8	200	75	1.8	B5	P		
DC2SGVM	542 310 000	A	20	2	200	60	5.8	1.5	200	60	1.5	B5	P		
DC3HL	642 310 000		25	1	80		0.34	0.38	100		0.38	B5	T		
DC11	602 302 400		1.4	2.5	90		2.0	1.0	80		1.0	F8	T		
DC25	260 024 030		1.4	3.5	100		1.8	0.85	100		0.85	B8B	T		
DC70	400 230 060		1.25	4.5	150		14.5	3.7	100		3.4	B8D	T		
DC80	402 320 060		1.2	0	150		20	3.5	100			B9A	T		
DC90	266 044 300		1.4	3.0	90		3.0	1.1	9.0		1.1	B7G	T		
DC93	204 036 200		1.4	5	100		10	2.4	100		2.3	B7G	T		
DC96	266 044 300		1.4	2.5	90		2.1	1.0	90		0.95	B7G	T		
DC193	2*4 *36 200		1.4	5	100		10	2.4	100		2.4	B7G	T		
DCC90	274 346 200		1.4	2.5	90		3.7	1.8	80		1.8	B7G	TT		
DCHI	207 540 630		1.4	{	60		2.1	1.4	60	60	1.4	{	A08		
					125	125	1.0		100	100					
DCHI1	723 465 430		1.25		90		0.85		100	60					
					125	60			100	60					
DCH21	207 540 630	G ₁	1.4	{	60		2.1	1.4	No Data Available			{	A08		
					90	60	1		80	60					
DCH22	276 454 030		1.4		60		1.4		No Data Available						
					90	50	0.75		No Data Available						
DCH25	276 454 030		1.4	{	60		2	1.3	No Data Available			{	A08		
					90	60	1		80	60					
DCH31	027 546 300		1.4	{	60		2.1	1.4	No Data Available			{	A08		
					90	60	1	1.4	80	60					
DC/HL	642 310 000		6	1	100			3	100		3	B5	T		
DC/P	642 310 000		8	1	200			4.5	200		4.5	B5	T		
DC/SG	542 310 000	A	6	0	125	75		2.75	200	75	2.75	B5	P		
DD4	892 310 000		4						D			B5	DD		
DD4D	091 231 800		4						D			B7	DD		
DD6	892 310 000		6						D			B5	DD		
DD6	192 310 800		6						D			B7G	DD		
DD6Ds	023 180 910		6						D			8SC	DD		
DD6G	192 310 800		6						D			B7G	DD		

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
DDI3	892 310 000		13						D			B5	DD
DD4I	219 080 130		4						D			M08	DD
DDI0I	219 080 130		10						D			M08	DD
DD207	892 300 000		2						D			B4	DD
DD465	902 310 000	D ₁	4						D			B5	DD
DD620	892 310 000		6						D			B5	DD
DD818	892 310 000		8						D			B5	DD
DD960	204 036 200		1.4	3	60		9	2.45	No Data Available			B7G	T
DDA1	892 310 000		4						D			B5	DD
DDD11	742 302 460		1.2	4.5	125		1.5	1.0	125		1.5	A08	TT
DDD25	206 447 030		1.4	1.5	100		3.5	1.2	100		1.2	A08	TT
DDL4	892 310 000		4				5		D			B5	RR
DDP4B	968 231 500	G ₁	4	5	250	250	36	8	100	PenLF	7	B7	DDP
DDP4M	918 236 500	G ₁	4	5	250	250	36	8	100	PenLF	7	B7	DDP
DD/Pen	849 231 500	A	4	2.5	200	100	5	2.7	100	100	2.7	B7	DDP
DDPP4B	869 231 500	G ₁	4	5	250	250	36	10	100	PenLF	9	B7	DDP
DDPP4BS	023 189 560	G ₁	4	5	250	250	36	10	100	PenLF	9	8SC	DDP
DDPP4M	869 231 500	G ₁	4	5	250	250	36	10	100	PenLF	9	B7	DDP
DDPP6B	968 231 500	G ₁	6	6	250	250	36	9.5	100	PenLF	9	B7	DDP
DDPP6BS	023 189 560	G ₁	6	5	250	250	36	10	100	PenLF	9	8SC	DDP
DDPP39	968 231 500	G ₁	35	8	200	200	45	8.5	100	PenLF	8	B7	DDP
DDPP39M	918 236 500	G ₁	35	8	200	200	45	8.5	100	PenLF	8	B7	DDP
DDPP39S	023 198 560	G ₁	35	8	200	200	45	8.5	100	PenLF	8	8SC	DDP
DDR2	256 101 030		6	5	250	250	40	12	No Data Available			A08	P
DDR3	812 380 000		6				60		REC		20mA	B7G	R
DDR7	412 236 500		6	12.5	250	250	16	2.6	100	PenLF	2.6	B8A	P
DDT	908 231 600	G ₁	4	3	200		3.4	2.1	100		2.4	B7	DDT
DDT2	682 390 000	G ₁	2	3	150		1	1.4	100		1.4	B5	DDT
DDT2B	682 390 000	G ₁	2	4.5	150		2.5	1	100		1.0	B5	DDT
DDT2BS	023 089 060	G ₁	2	4.5	150		2.5	1	100		1.0	8SC	DDT
DDT4	809 231 600	G ₁	4	3	200		3	2.5	150		2.5	B7	DDT
DDT4(S)	908 231 600	G ₁	4	5	250		4	3.6	150		3.6	B7	DDT
DDT4(S)	023 198 060	G ₁	4	5	250		4	3.6	150		3.6	8SC	DDT
DDT6	809 231 600	G ₁	6	5.5	250		5	2	150		2	B7	DDT
DDT6S	023 189 060	G ₁	6	5.5	250		5	2	150		2	8SC	DDT
DDTI3	908 231 600	G ₁	13	4	200		5	2.0	150		2.3	B7	DDT
DDTI3S	023 189 060	G ₁	13	5	200		4	3.6	100		3.6	8SC	DDT
DDTI6	809 231 600	G ₁	16	3	200		5	1.9	100		2.5	B7	DDT
DDT213	809 231 600	G ₁	13	4	200		5	2.25	150		2.2	B7	DDT
DDT215	682 390 000	G ₁	2	3	150		3	1.6	100		1.6	B5	DDT
DDT220	682 390 000	G ₁	2.5	4.5	150		2.5	1	100		1.0	B5	DDT
DEI	264 130 000		2.5	21	250		5.2	0.975	100		0.975	UX5	T
DE5	280 300 000		2.5				120		REC		30mA	UX4	R
DET19	204 140 300	A ₁ A ₂	6		300		25	2.1	No Data Available			UX7	TT
DET20	020 000 310	A ₁ G ₁	6	5.5	250		12	3	100		3	A08	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
DF1	032 000 560	G ₁	1.4	1	90	90	1.2	0.75	80	90	0.75	8SC	P
DF11	602 302 450		1.4	0	90	50	0.9	0.65	80	60	0.6	F8	P
DF21	206 501 030	G ₁	1.4	1	90	90	1.2	0.7	80	90	0.7	A08	P
DF22	206 501 030	G ₁	1.4	1.5	90	90	1.4	1.1	80	90	1.1	A08	P
DF23	265 114 130		1.4	1.5	90	60	0.65	0.58	80	60	0.58	A08	P
DF25	265 114 130		1.4	1	125	60	1	0.65	125	60	0.65	A08	P
DF26	265 114 130		1.4	1.1	125	90	1.2	0.3	125	90	0.3	A08	P
DF31	026 510 300	G ₁	1.4	1	90	90	1.2	0.65	80	90	0.65	A08	P
DF32	026 510 300	G ₁	1.4	1.5	90	90	1.4	1.1	80	90	1.1	A08	P
DF33	036 500 200	G ₁	1.4	0.5	90	90	0.82	0.75	80	90	0	A08	P
DF60	652 430 000		1.25	2.0	60	60	0.5	0.8	No Data Available			B5A	P
DF61	652 430 000		1.25	1.0	60	60	0.9	0.8	No Data Available			B5A	P
DF62	652 430 000		1.25	1.0	90	90	7.4	2.0	80	75		B5A	P
DF64	652 430 000		0.625	0.62	20	20	0.65	0.1	No Data Available			B5A	P
DF65	265 430 000		0.625	1.15	20	20	0.05	0.1	No Data Available			B5A	P
DF66	653 420 000		0.625	1.05	20	20	0.05	0.1	No Data Available			B5A	P
DF67	653 420 000		0.625	1.15	20	20	0.05	0.1	No Data Available			B5A	P
DF70	*4* 23* 650		0.625	0	40	40	0.37	0.22	No Data Available			B8D	P
DF72	*40 230 650		1.25	0	60	60	1.7	1.0	No Data Available			B8D	P
DF73	*40 230 650		1.25	0	80	75	1.7	0.8	80	75	0.8	B8D	P
DF91	265 024 300		1.4	1	90	75	3.5	0.9	80	60	0.9	B7G	P
DF92	265 024 300		1.4	2.0	90	60	1.9	0.7	80	60	0.7	B7G	P
DF96	265 024 300		1.4	1	90	75	3.7	1	80	60	1	B7G	P
DF96	265 *24 300		1.4	0.8	75	75	1.4	0.65	80	75	0.75	B7G	P
DF97	265 224 300		1.4	0	60	60	1.68	0.84	80	75	0.8	B7G	P
DF167	653 420 000		0.625	0	20	20	0.01		No Data Available			B5A	P
DF191	265 *24 300		1.4		60	60	4.2	1	No Data Available			B7G	P
DF904	265 *24 300		1.4	0	90	90	1.6	0.9	90	90	0.9	B7G	P
DF906	265 3*4 300		1.4	0	40	40	3	1.7	No Data Available			B7G	P
DFF50	246 557 430		1.4	11	20	20	22.5	1.2	No Data Available			A08	PP
DFF51	246 557 430		1.4	1	20	20	2.1	0.7	No Data Available			A08	PP
DFF101	634 572 400		1.4	0	40	40	1	0.22	No Data Available			B7G	PP
DG210	642 350 000		2	1.5	100	20	1	1	No Data Available			B5	P
DH	642 310 000		16	3	200		6	3.7	100		3.7	B5	T
DH30	908 231 600	G ₁	13	2	200		2.8	4.5	150		4.5	B7	DDT
DH42	908 231 600	G ₁	4	3	250		1.1	1.2	150		1.2	B7	DDT
DH63	026 890 310	G ₁	6	3	250		1.1	1.2	150		1.2	A08	DDT
DH73	026 890 310	G ₁	6	1	250			2	250		2	A08	DDT
DH74	026 890 310	G ₁	13	3	250		1.1	1.2	100		1.2	A08	DDT
DH76	026 980 310	G ₁	13	3	250		1.1	1.2	150		1.2	A08	DDT
DH77	412 389 600		6	3	250		1	1.2	150		1.2	B7G	DDT
DH81	264 *98 130		6	3	250		1	1.2	150		1.2	B8B	DDT
DH101	264 *98 130		19	3	250		1	1.2	150		1.2	B8B	DDT
DH107	412 389 600		19	3	250		1	1.2	150		1.2	B7G	DDT
DH142	264 089 130		14	1.6	175		1.5	1.65	100		1.4	B8A	DDT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
DH147	026 890 310	G ₁	6	5.5	250		5	2	100		2	A08	DDT
DH149	264 198 130		6	1.0	250		1.3	1.0	250		1.0	B8A	DDT
DH150	264 098 130		6	3	250		1.0	1.3	150		1.3	B8A	DDT
DH719	981 23† 146		6	3	250		1.0	1.3	100		1.3	B9A	DDDT
DHD	908 231 600	G ₁	16	1	200			2.2	200		2.2	B7	DDT
DHL	642 310 000		16	1.5	150		3.8	4.5	100		4.5	B5	T
DK1	023 064 560	G ₁	1.4	0	90	50	1.8	0.55	80	60	0.55	85C	H
DK21	206 540 630	G ₁	1.4	2	60	60	4.5	1.4	80	60	1.4	A08	H
DK32	036 546 200	G ₁	1.4	0	90	50	1.8	0.55	80	60	0.55	A08	H
DK40	265 454 030		1.4	2	75	75	0.9	0.7	80	75		B8A	O
DK91	266 424 300		1.4	4	75		4.5	1.2	80		1.4	B7G	H
DK92	266 464 300		1.4	4	60		4.0	1.2	80		1.2	B7G	H
DK96	265 461 300		1.4	1.5	75	50	1.0	0.4	80	60	0.4	B7G	H
DK192	265 450 000		1.4		60	60			No Data Available			B7G	H
DL	642 310 000		16	8	200		25	4.5	100		4.5	B5	T
DL1	023 004 560		1.4	3	90	90	4	1.25	80	75	1.25	85C	P
DL2	032 004 560		1.4	7.5	90	90	7.5	1.55	80	75	1.55	85C	P
DL11	602 302 450		1.4	4.4	90	90	3.7	1.0	80	90	1	F8	P
DL21	206 540 030		1.4	3	90	90	4	1.3	80	90	1.3	A08	P
DL22	265 024 330		1.4	4	125	125	5	1.6	100	100	1.6	A08	P
DL25	265 204 330		1.4	4.7	125	125	4.5	2.1	100	100	2.1	A08	P
DL31	036 540 200		1.4	3	90	90	4	1.25	80	75	1.25	A08	P
DL33	036 540 320		1.4	4.5	90	90	9.5	2.2	80	75	2.2	A08	P
DL35	036 540 200		1.4	7.5	90	90	7.5	1.55	80	75	1.55	A08	P
DL36	036 540 200		1.4	4.5	90	90	9.5	2.2	90	90	2.2	A08	P
DL41	362 054 220		1.4	5.8	125	125	5	1.3	80	90	1.3	B8A	P
DL63	026 890 310	G ₁	6	3	250		4.2	1.6	100		1.6	A08	DDT
DL64	652 430 000		1.25	1.5	20	20	0.16	0.18	No Data Available			B5A	P
DL65	365 420 000		1.25	0.2	20	20	0.47	0.42	No Data Available			B5A	P
DL66	653 420 000		1.25	1.4	20	20	.3	.35	No Data Available			B5A	P
DL67	653 420 000		1.25	0.2	20	20	0.47	0.42	No Data Available			B5A	P
DL68	653 420 000		1.25	2.2	20	20	0.6	0.43	No Data Available			B5A	P
DL69	652 430 000		1.25	2.5	90	90	1.75	.85	80	75	.85	B5A	P
DL70	*4* 23* 650		1.25	7.5	150	90	7.5	1.9	150	90	1.0	B8D	P
DL71	*4* 23* 650		1.25	1.25	40	40	0.6	0.55	No Data Available			B8D	P
DL72	*4* 23* 650		1.25	4.5	40	40	1.25	0.5	No Data Available			B8D	P
DL73	*40 230 650		1.25	9	100	100	15	2.5	100	100	3.8	B8D	P
DL74	026 890 310	G ₁	13	3	250		5.1	1.65	100		1.65	A08	DDT
DL75	*40 230 650		1.25	2.5	90	90	1.7	0.85	90	90	0.9	B8D	P
DL82	264 *98 130		6.0	3	250		5.0	1.4	150		1.4	B8B	DDT
DL91	264 536 200		1.4	7	90	75	7.4	1.58	80	60	1.5	B7G	P
DL92	264 536 200		1.4	7	90	75	7.4	1.58	80	75	1.58	B7G	P
DL93	365 426 300		1.4	8.4	150	90	13.3	1.9	100	75	1.9	B7G	P
DL94	365 024 300		1.4	4.5	90	90	9.5	2.15	80	75	2.15	B7G	P
DL95	264 536 200		1.4	4.5	90	90	9.5	2.15	80	75	2.1	B7G	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
DL96	265 034 200		1.4	3.0	90	90	5.0	1.4	80	60	1.4	B7G	P
DL98	504 230 600		2.5	38	150	125	25		No Data Available			B7G	P
DL167	653 420 000		1.25		20	20	.5	1.5	No Data Available			B5A	P
DL145	264 098 130		15	5.9	250		5	2.3	150		2.3	B8A	DDT
DL192	264 536 200		1.4	7	60	60	7	1.5	No Data Available			B7G	P
DL193	265 436 200		1.4	7.5	150	60	9.5	2.9	150	60	2.9	B7G	P
DL620	653 420 000		1.25	6.5	60	60	3.1	.65	80	75	0.65	B5A	P
DL651	653 420 000		1.25	0	20	20	.4	.45	No Data Available			B5A	P
DL907	365 004 200		1.4	5.5	125	125	15	3.1	125	125	3.1	B7G	P
DLL21	246 547 330		1.4	8.7	125	125	1		100	100		A08	PP
DLL25	046 547 230		1.4	9.4	125	125	17		125	125		B8G	PP
DLL31	326 447 250		1.4	5	90	90	3		80	75		A08	PP
DLL101	264 574 300		1.4	7	90	60	8.2	1.1	80	60	1.2	B7G	PP
DLL102	264 574 300		1.4	{ 0 0	40	40	1.3	0.55	No Data Available			}B7G	PP
					40	40	2.0	0.55	No Data Available				
DLP51	023 004 560	C	4	17	250	250	36	2.5	No Data Available			85C	P
DN41	968 231 500	G ₁	4	3.3	250	200	32	10	100	PenLF	9	B7	DDP
DN143	264 598 130		6	6.2	250	275	44	9.5	100	PenLF	9	B8B	DDP
DO24	642 300 000		4	40	400		63	7.5	100		6.5	B4	T
DO26	642 300 000		4	92	400		63	3.8	100		6.3	B4	T
DO30	642 300 000		4	100	400		60	4	100		4	B4	T
DP	264 008 030		16	7.5	200		25	6	100		6	M08	DT
DP5	642 350 000		4	5	250	250	10	4	100	PenLF	4	B5	P
DP7	023 004 560		4	20	250	250	20	2.5	100	PenLF	2.5	85C	P
DP61	412 365 100		6	2.3	150	150	7	4.3	150	150	4	B7G	P
DP495/6	869 231 500	G ₁	4	6.5	250	250	35	9.5	100	PenLF		B7	DDP
DP4480	819 236 500	G ₁	44	8.4	200	200	46	8	100	PenLF	7	B7	DDP
DP/Pen	045 231 600		16	10	200	200	31	3.5	100	100	3.5	B7	P
DPT	045 231 600		16	10	200	200	40	3.1	100	PenLF	3.1	B7	P
DPT	642 310 000	G ₂	16	10	200	200	40	3	100	PenLF	3	B5	P
DS	000 231 600	G ₁	13	3	200		4	2.5	150		2.5	B7	T
DS	542 310 000	A	16	1.5	200	75	2.8	1.1	200	75	1.1	B5	P
DSB	542 310 000	A	16	1	150	90	3.4	3.2	150	90	3.2	B5	P
DSPen	061 231 500	G ₁	16	1.5	200	100	4.0	2.3	200	100	2.3	B7	P
DT7	642 300 000		4	16	200		14	2	100		2	B4	T
DT436	023 198 060	G ₁	4	7	250		4	2	100		2	85C	DDT
DT1366	023 198 060	G ₁	13	5	200		4	2	100		2	85C	DDT
DUI	802 300 000		4				30		REC		15mA	B4	R
DU2	892 300 000		4				30		REC		17mA	B4	RR
DU3	892 300 000		4				15		REC		10mA	B4	RR
DU4	892 300 000		4				30		REC		15mA	B4	RR
DU5	892 300 000		4				30		REC		17mA	B4	RR
DUI0	802 300 000		4				60		REC		25mA	B4	R
DVSG	542 310 000	A	16	1	200	75	7.5	2.5	100	75	2.5	B5	P
DVS Pen	542 310 000	A	16	1.5	200	100	6.5	1.0	200	100	3	B5	P

VALVE	SELECTOR SWITCH No.	T.C.	V _f	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	I _a mA	mA/V	Anode Volts	Screen Volts	mA/V		
DW1	892 300 000		4				15		REC		10mA	B4	RR
DW2	892 300 000		4				30		REC		20mA	B4	RR
DW2X	892 300 000		4				30		REC		20mA	B4	RR
DW3	892 300 000		4				30		REC		20mA	B4	RR
DW4	892 300 000		4				60		REC		20mA	B4	RR
DW4/350	892 300 000		4				60		REC		20mA	B4	RR
DW4/500	892 300 000		4				60		REC		20mA	B4	RR
DW5	802 300 000		4				120		REC		30mA	B4	R
DW7X	892 300 000		4				30		REC		15mA	B4	RR
DW8	892 300 000		5				30		REC		15mA	B4	RR
DW30	892 300 000		7.5				60		REC		20mA	B4	RR
DW802	642 300 000		4	25	250		26	4	100		4	B5	T
DW1508	642 310 000		4	7.5	150		4	1.5	100		1.5	B5	T
DW4011	642 310 000		4	5.0	200		5.0	3.6	150		3.6	B5	T
DW4023	642 310 000		4	3.0	150		2.5	1.75	100		1.7	B5	T
DX2	642 300 000		2	3	150		3.5	1.4	100		1.4	B4	T
DY30	*2* 0*0 3*0	D ₁	1.25						D			A08	D
DY80	23* 232 *32	D ₁	1.25						D			B9A	D
DY86	32* 323 *23	D ₁	1.4						D			B9A	D
DY87	23* 232 *32	D ₁	2.4						D			B9A	D
DY604	642 300 000		4	15	150		8	1.3	100		1.3	B4	T
DZ2	542 300 000	A	4	1	200	100	4	0.7	100	100	4	B4	P
E	642 300 000		4	9	200		1.7	0.4	100		0.4	B4	T
E	264 300 000		3	22.5	125		6.5		125			UX4	T
E4	642 300 000		4	16	200		12	1.8	100			B4	T
E4D	892 300 000		4				30		REC		15mA	B4	RR
E4F	892 300 000		4				60		REC		20mA	B4	RR
E4H	802 300 000		4				125		REC		30mA	B4	R
E4K	003 200 000	D ₁	4				60		REC		20mA	B5	R
E4L	003 200 000	D ₁	4				120		REC		30mA	B5	R
E20V	023 100 080		20				60		REC		20mA	8SC	R
E80CC	641 337 412		6.3	5.5	250		6	2.7	100		2	B9A	TT
E80F	501 236 014		6.3	1.65	250	100	3	1.85	150	100	1.8	B9A	P
E80L	041 230 651		6.3	5.2	200	200	30	9	100	100		B9A	P
E81L	041 230 651		6.3	2.5	200	200	20	11	100	100		B9A	P
E83F	541 236 **1		6.3	1.7	200	125	10	9	100	100		B9A	P
E87L	041 230 651		6	6	250	150	36	10	100	100		B9A	P
E88CC	641 237 410		6.3	4	200		24	13.0	No Data Available			B9A	TT
E90CC	672 344 100		6.3	2.1	100		8.5	6	100		8.5	B9A	TT
E91H	412 365 100		6.3	5	125	75	0.5	0.6	125	75	0.6	B7G	H
E92CC	672 344 100		6.3	1.7	150		8.5	6	100		5.6	B7G	TT
E180CC	641 227 413		6.3	1.9	150		8.5	6.3	100		7.8	B9A	TT
E180F	141 23* 615		6	1.0	200	150	13.1	16.5	No Data Available			B9A	P
E181CC	641 227 413		6.3	3	150		8.5	4.7	100		5.6	B9A	TT
E235	642 300 000		2	7.5	150		13	3	100		3	B4	T

VALVE	SELECTOR SWITCH No.	T.C.	V _f	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	I _a mA	mA/V	Anode Volts	Screen Volts	mA/V		
E405	642 300 000		4	32	250		20	2	100		2	B4	T
E406	642 300 000		4	34	250		8	2.3	100		2.3	B4	T
E406N	642 300 000		4	34	250		8	2.3	100		2.3	B4	T
E408	642 300 000		4	30	400		26	2	100		2	B4	T
E408N	642 300 000		4	36	400		30	2.7	100		2	B4	T
E409	642 310 000		4	16	200		12	1.3	100		1.3	B5	T
E409N	642 310 000		4	16	200		12	1.3	100		1.3	B5	T
E410	642 300 000		4	28	400		30	6	100		6	B4	T
E414	642 310 000		4	6	150		6.5	2	100		2	B5	T
E414	642 300 000		4	15	150		8	1.3	100		1.3	B4	T
E415	642 310 000		4	8	200		6	1.4	100		1.4	B5	T
E415	264 130 000		4	8	200		6	1.4	100		1.4	UX5	T
E420	642 300 000		4	18	150		11	1.6	100		1.6	B4	T
E422	642 300 000		4	16	250		12	5	100		5	B4	T
E424	642 310 000		4	2.5	200		6	2.4	100		2.4	B5	T
E424R	612 300 000	G ₁	4	5	200		6	1.6	100		1.6	B4	T
E424N	642 310 000		4	3.5	200		6	2.4	100		2.4	B4	T
E425	642 310 000		4	4.5	150		3	1	100		1	B5	T
E428	642 310 000		4	3.5	200			2.4	100		2.4	B5	T
E430	642 310 000		4	3	150		4	2	100		2	B5	T
E430N	642 310 000		4	15	200		15	3	100		3	B5	T
E435	642 310 000		4	1.5	200		3	3	100		3	B5	T
E438	642 310 000		4	2.5	200		0.3	1.5	100		1.5	B5	T
E441N	652 300 000	G ₁	4	0	100	0	1.7	1	100		1	B4	T
E442	542 310 000	A	4	1.3	200	60	1.5	0.9	200	60	0.9	B5	P
E442S	542 310 000	A	4	2	200	60	4	1	100	60	1	B5	P
E443H	642 350 000		4	15	250	250	36	2.8	100	PenLF	2.8	B5	P
E443N	642 350 000		4	40	400	200	30	1.9	100	100	1.9	B5	P
E444	258 413 000	A	4	3	200	90	4	3	100	90		UX6	DP
E444N	258 413 000	A	4	3	100	90	4	3	100	90	3	UX6	DP
E444S	642 310 000	D ₁	4	3.5	200		6	2	100		2	B5	DT
E445	542 310 000	A	4	2	200	100	6	1	100	100	1	B5	P
E446	542 310 000	A	4	2	200	100	3	2.3	100	100	2.3	B5	P
E447	542 310 000	A	4	2	200	125	4.5	2.3	100	100	2.3	B5	P
D448	164 552 300	G ₁	4	1.5	200	100	3		100	100		C7	P
E449	165 452 300	G ₁	4	2	200	75	3	1.8	100	75	1.8	C7	P
E451	642 350 000		4		400	250	17		100	150	2.4	B4	P
E452T	542 310 000	A	4	2	200	100	3	2	100	100	2	B5	P
E452T	254 130 000	A	4	2	200	100	3	2	100	100	2	UX5	P
E453	045 231 600		4	15	250	250	24	2.5	100	PenLF	2.5	B7	P
E454	216 809 300	G ₁	4	3.5	200		3.5	1.6	100		1.6	UX7	DDT
E455	542 310 000	A	4	1.5	200	100	3	2	100	100	2	B5	P
E455	254 130 000	A	4	1.5	200	100	3	2	100	100	2	UX5	P
E462	542 310 000	A	4	2	200	100	3	2	100	100	2	B5	P
E463	045 231 600		4	22	250	250	36	2.7	100	PenLF	2.7	B7	P

VALVE	SELECTOR SWITCH No.	T.C.	VI	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
E499	642 310 000		4	1.6	200		0.2	4	150		4	B5	T
E501D	265 113 000	G	3	2.5	250	125	6.5	3.5	100	100		UX6	T
E501R	265 113 000	G	6.3	2.5	250	125	6.5	3.5	100	100		UX6	T
E504D	265 413 000		5	13.5	250	200	40	3.5	100	100		UX6	P
E504P	265 413 000		6.3	13.3	250	200	40	3.5	100	100		UX6	P
E543	045 231 600		4	15	250	250	24	2.5	100	PenLF	2.5	B7	P
E646	020 080 310		26				120		REC		30mA	A08	R
E703	642 300 000		7.5	100	400		30	1	100		1	B5	T
E851	030 908 020		5				120		REC		30mA	A08	RR
E1137	366 446 622		6	2.3	250		32	16	No Data Available			B9G	T
E1148	020 000 310	G ₁ A	6	5.5	250		14	3.0	100		3.0	A08	T
E1192	021 450 310	A	6	11	250	150	30	3.5	100	100	3.5	A08	P
E1242	265 101 403		6		400	250	30	3	100	150	3	B9G	P
E1323	020 000 310	A G ₁	6	3	100		25	6.7	100		6	A08	T
E1413	265 024 300		1.4	1	90	75	3.5	0.9	80	75	0.9	B7G	P
E1478	642 300 000		4	1	100			6.9	100		6.0	B5	T
E1484	208 564 300		1.4	1	90	90	2.7	0.63	80	90	0.6	B7G	DP
E1489	241 657 143		6		350	250	21	3.9	100	100	3.9	B9G	PP
E1517	412 361 500		6	2.5	200	200	8	2.5	100	100	2.5	B7G	P
E1518	412 361 500		6	2	250	250	10	7.5	100	150	5	B7G	P
E1606	461 471 230		6	8	250		9	2.6	100		2.6	A08	TT
E1624	6*2 364 100		6	8.5	250		10.5	2.2	100		2.2	B7G	T
E1654	026 510 310	G ₁	6	1.5	200	200	10.9	8.5	100	150	8	A08	P
E1662	412 360 500		6	12	250	250	20	2.6	100	PenLF	2.6	B7G	P
E1677	002 300 000	D ₁	2				15		REC		10mA	B4	R
E1678	026 510 310	G ₁	13	3	250	100	7.6	1.5	100	100	1.5	B7G	P
E1681	026 540 310		15	13	175	175	35	2.5	100	100	2.5	A08	P
E1682	020 800 310		30				120		REC		30mA	A08	R
E1706	256 051 463		6	8	250	175	80	13	100	100	10	B9G	P
E1709	064 471 230		6	2	250		2	1.35	150		1.3	A08	TT
E1733	009 **8 230		6				60		REC		20mA	B8B	RR
E1736	265 004 130		6	4.4	250	250	40	10.5	100	PenLF	10.0	B8B	P
E1740	209 008 130		6				30		REC		15mA	B8B	RR
E1751	192 310 800		6				5		D			B7G	RR
E1780	009 **8 230		4				30		REC		15mA	B8B	RR
E1787C	316 541 120		6	9	250	175	50	8	100	100	8	B9G	P
E1794	265 104 130		19	3	250	75	2.5	2.8	100	60	2.8	B8B	P
E1795	280 008 130		50				120		REC		30mA	B8B	R
E1796	265 004 130		80	9.5	175	175	70	10	100	100	9	B8B	P
E1809	265 104 136		6	3	250	100	8	2.8	100	100	2.8	B8B	P
E1813	264 198 130		19	3	250		1	1.2	100		1.2	B8B	DDT
E1816	364 526 300		1.4	7	90	75	7.4	1.575	80	60	1.5	B7G	P
E1835	005 231 600	G ₁	13	4.4	250	250	40	10.5	100	PenLF	9	B7	P
E1838	264 198 130		6	3	250		1	1.2	100		1.2	B8B	DDT
E1848	264 *98 130		6	2	200		10	1.4	200		1.4	B8B	DDT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
E1884	002 300 000	D ₁	2				5		D			B4	R
E1912	412 389 600		6	3	250		1	1.2	100		1.2	B7G	DDT
E1935	241 657 143		6	26	250	200	30	3.9	100	100	3.9	B9G	PP
E1938	802 309 100		6				30		REC		15mA	B7G	RR
E1969	542 376 400		6	{ 2 1	100 250		5 75	2.2 2.2	100 250	60 75	2.8	B7G	TH
E1976	412 361 500		19	2.5	200	200	8	2.5	100	150	2.5	B7G	P
E1984	412 36* 500		6	5.5	250	250	35	10	100	PenLF	9	B7G	P
E1985	281 008 300		40				60		REC		20mA	B7G	R
E1987	412 36* 500		40	8	175	150	50	10	100	100	9	B7G	P
E1994	471 461 230		13	8	250			2.6	100		2.6	A08	TT
E2004	*2* 0*0 3*0	D ₁	1.25				5		D			A08	R
E2020N	642 310 000		20	18	200		15	1.6	100		1.6	B5	T
E2047	412 361 500		12.5	2.5	200	200	8	2.5	200	200	2.5	B7G	P
E2122	902 308 100		6				30		REC		15mA	B7G	RR
E2128	241 657 143		19	16.5	250	150	30	3.9	100	100	3.9	B9G	PP
E2134	412 36* 500		6		175	175	55	9.5	100	100	7	B7G	P
E2153	412 36* 500		13	8	175	150	50	10	100	100	9	B7G	P
E2178	**1 23* **8		20				120		REC		38mA	B9A	R
E2179	*41 23* *51	A	20	12	150	150	50	8.5	100	100	7	B9A	P
E2185	026 040 310		6	8	250		9	2.6	100		2.6	A08	T
E2223	*** 23* **8		25				120		REC		30mA	B9A	R
E2256	**1 23* **8		20				120		REC		40mA	B9A	R
E2382	021 *4* 350	A	52		150	150	100	16	No Data Available			A08	P
EA40	200 800 130		6						D			B8A	D
EA50	123 000 000	D ₁	6						D		6.3mA	B3G	D
EA76	281 380 000		6				5		D			B5B	R
EAI11	023 010 000	D ₁	6.3				60		REC		20mA	F8	R
EAAl1	023 189 100		6.3				5		D			F8	DD
EAAl91	182 311 900		6.3				5		D			B7G	DD
EAAl901	182 310 900		6.3						D			B7G	DD
EAB1	023 140 890		6						D			8SC	DDD
EABC80	491 238 146		6	3	250		1.0	1.2	100		1.3	B9A	DDDT
EAC91	812 314 600		6	3.2	200		7.5	2.8	100		2.8	B7G	DT
EAF21	265 814 130		6.3	2	250	100	6	2.8	100	100		B8G	P
EAF41	268 154 130		6	2	250	100	5.0	1.8	100	100	1.8	B8A	DP
EAF42	268 154 130		6	2	250	100	5	1.8	100	100	1.8	B8A	DP
EB4	023 180 910		6						D			8SC	DD
EB11	802 301 190		6						D			F8	DD
EB34	029 180 310		6				5.0		D			A08	DD
EB40	208 090 130		6						D			B8A	DD
EB41	201 908 130		6				5		D			B8A	RR
EB91	192 310 800		6						D			B7G	RR
EBC1	023 198 060	G ₁	6	7	250		4	2	100		2	8SC	DDT
EBC3	023 189 060	G ₁	6	5.5	250		5	2	100		2	8SC	DDT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
EBC11	892 301 460	G ₁	6	6.3	200		4	2	100		2	F8	DDT
EBC21	264 *89 130		6	5.5	250		5	2	100		2	B8B	DDT
EBC30	023 189 060		6	4.3	200		4	2	150		2	8SC	DDT
EBC33	026 890 310		6	5.5	250		5	2	100		2	A08	DDT
EBC41	264 098 130		6	3	250		1	1.3	100		1.2	B8A	DDT
EBC51	389 060 420		6.3	7.5	250		10	4.0	100		4.0	A08	DDT
EBC80	641 238 090		6.3	3.0	250		1.0	1.2	100		1.2	B9A	DDT
EBC81	641 238 09*		6	3	250		1.0	1.2	250		1.2	B9A	DDT
EBC90	412 389 600		6	3	250		1	1.2	150		1.2	B7G	DDT
EBC91	412 389 600		6	2	250		1.2	1.6	200		1.6	B7G	DDT
EBF1	023 198 560	G ₁	6	3	250	125	9	1.1	100	100	1.1	8SC	DDP
EBF2	032 198 560	G ₁	6	2	250	100	5	1.8	100	PenLF	1.8	8SC	DDP
EBF11	982 361 450		6	2	250	100	5	1.8	100	100	1.8	F8	DDP
EBF15	982 361 450		6	2	250	100	12	5	100	100	5	F8	DDP
EBF21	268 954 130		6	3.2	250	100	7.5	2.2	100	100		B8G	DDP
EBF32	026 895 310	G ₁	6	2	250	100	5	1.8	100	100	1.8	A08	DDP
EBF35	216 589 130	G ₁	6	2	250	100	5	1.8	100	100	1.8	A08	DDP
EBF80	541 236 891		6	2	250	90	5	2.2	100	90	2.2	B9A	DDP
EBF81	541 236 891		6.3	2	250	75	6.7	1.1	100	100		B9A	DDP
EBF89	541 236 891		6.3	2	250	100	9	3.8	100	100		B9A	DDP
EBF171	892 541 360	G ₁	6.3	3.2	250	80	6	1.8	100	80		B8B	DDP
EBL1	023 189 560		6	6	250	250	36	9.5	100	PenLF	9.0	8SC	DDP
EBL21	264 598 130		6	6.2	250	275	44	9.5	100	PenLF	9.0	B8B	DDP
EBL31	026 895 310		6	6	250	250	36	9.5	100	PenLF	9.0	A08	DDP
EBL71	264 589 130		6	5	250	250	44	9.5	250	200	9.5	A08	DDP
EC2	023 100 060	G ₁	6	5.5	250		6	2.5	100		1.5	8SC	T
EC21	206 401 003		6	4	250		5	2.7	100		2.5	B9G	T
EC31	026 040 310		6	16	250		20	3.2	100		3.2	A08	T
EC40	244 644 130		6	1.5	275		15	12	100		9	B8A	T
EC41	206 040 130		6	5.5	175		20	4.5	125		4.5	B8A	T
ECS2	241 600 003	A G ₁	6	2.6	250		10	6.5	100		6.5	B9G	T
EC53	123 000 000		6	3.3	200		7.5	2.9	100		2.9	B3G	T
EC54	244 664 413		6	1.5	250		10	9	100		7	B9G	T
EC70	462 603 160		6	2	100		13	5.5	100		5.5	B8D	T
EC80	441 230 446		6	1.5	250		15	12	150		10	B9A	T
EC81	401 230 060		6	2	150		30	5.5	100		4	B9A	T
EC84	414 464 234		6.3	1.1	125		16	10	100		10	B9A	T
EC90	6*2 364 100		6	8.5	250		10.5	2.2	100		3.1	B7G	T
EC91	412 314 600		6	2	250		6	8.5	200		8.0	B7G	T
EC92	602 304 100		6	2.0	250		10.0	5.0	100		5.0	B7G	T
EC93	642 314 600		6	4	100		16.0	8.0	100		8	B7G	T
EC94	642 314 600		6.3	2.5	100		16	6.6	100		6.6	B7G	T
ECC31	027 446 310		6	4.6	250		6	2.3	100		2.3	A08	TT
ECC32	461 471 230		6	4.6	250		6	2.3	100		2.3	A08	TT
ECC33	461 471 230		6	4	250		9	3.6	100		3.6	A08	TT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
ECC34	461 471 230		6	16	250		10	2.2	100		2.2	A08	TT
ECC35	461 471 230		6	2.3	250		2.3	2	100		2	A08	TT
ECC40	274 164 130		6	5.2	250		6	2.7	100		2.7	B8A	TT
ECC81	741 226 413		6	1.5	200		8.5	6.5	150		5	B9A	TT
ECC82	741 226 413		6	8.5	250		10.5	2.2	100		2	B9A	TT
ECC83	741 226 413		6	2.0	250		1.2	1.6	150		1.6	B9A	TT
ECC84	147 234 116		6	1.5	90		12	6.0	100		6.0	B9A	TT
ECC85	741 236 410		6	2.3	250		10	5.9	100		5	B9A	TT
ECC91	672 344 100		6	0.85	100		8.5	5.3	100		5.3	B7G	TT
ECC180	641 237 410		6.3	2.0	150		9	6.4	100		6.3	B9A	TT
ECC801	641 227 413		6.3		250		10	5.5	100			B9A	TT
ECC802S	641 227 413		6.3	8.5	250		10.5	2.2	100		2.0	B9A	TT
ECF1	023 164 570	G ₁	6	{ 3.0 2.0	150 250	0 100	8.0 5.0	2.2 2.5	150 100	60 100	2.6 2.5	{ 8SC	TP
ECF12	642 371 450		6	{ 0 2	100 250	0 100	11.0 5.0	3.0 2.0	100 100	60 100	3.0 2.0	{ F8	TP
ECF80	645 237 114		6	{ 2 3	100 250	0 200	14 7	5 5.5	100 100	60 150	5 6	{ B9A	TP
ECF82	645 237 114		6	{ 1.0 1.0	100 250		18.0 10.0	8.5 5.2	100 100	60 100	7.0 5.0	{ B9A	TP
ECH2	023 164 570	G ₁	6	{ 1 2.5	100 250		9.5 3.25	5.5	100 200	60 100	5.0 3.0	{ 8SC	TH
ECH3	023 164 570	G ₁	6	{ 2 2	100 250		5 4.8	2.4 2.5	100 200	60 100	2.8 2.5	{ 8SC	TH
ECH4	123 614 570	G ₁	6	{ 2 2	100 250		6.3 6.5	2.7 2.6	100 100	60 PenLF	2.2 2.6	{ 8SC	TH
ECH4G	127 546 310		6.3	{ 2 2	100 250		6.3 6.5	2.7 2.6	100 100	60 PenLF	2.2 2.6	{ A08	TH
ECH11	264 371 450		6	{ 2.0 2.0	100 250	0 100	5.0 4.7	2.4 2.5	100 200	60 100	2.8 2.5	{ F8	TH
ECH21	276 454 131		6	{ 2 2	100 250		6.25 5.3	2.4 2.2	100 100	60 90	3.2 2.2	{ B8B	TH
ECH33	027 546 310	G ₁	6	{ 2 2	100 200		5 3	2.4 2.8	100 100	60 100	2.8	{ A08	TH
ECH35	027 546 310	G ₁	6	{ 2 2	100 250		5.4 5	2.2 2.4	100 100	60 100	2.8 1.2	{ A08	TH
ECH41	276 454 130		6	{ 2 2	100 250		5 3	2.2 2	100 100	60 100	2.2 2.4	{ B8A	TH
ECH42	276 454 130		6	{ 2 2	100 250		5 8	2.2 2	100 100	60 100	2.8 3.2	{ B8A	TH
ECH43	276 454 130		6	{ 2 2	100 250		5 8	2.2 2	100 100	60 100	2.2 1.9	{ B8A	TH
ECH71	276 454 430		6	{ 2 2	250 250		2 3		100 100	60 100		{ B8B	TH
ECH80	541 23* 674		6.3	2	250	75	3	0.75	100	80	0.75	B9A	TH
ECH81	541 237 164		6	{ 3 2	100 250		5 6.5	2.3 2.4	100 150	60 100	2.3 2.4	{ B9A	TH

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
ECL11	452 371 460		6	{ 2.5 6.0	250 250	0 250	2.0 36	2.0 9.0	100 100	60 150	2.0 7.0	F8	TP
ECL80	641 237 154		6	{ 2.3 8.0	100 200	0 200	4 17.5	1.4 3.3	100 100	60 PenLF	1.4 3.0	B9A	TP
ECL81	451 237 614		6.3	{ 1.5 5.5	200 250		0.5 36	1.2 8.7	100 100	60 100	1.2	B9A	TH
ECL82	414 237 516		6.3	{ 0 16	100 200		3.5 35	2.5 6.4	100 100	60 100	2.5 6	B9A	TP
ECL83	641 237 154		6.3	{ 1.5 9.5	200 175		2.4 30	2.5 5.5	100 100	60 100	2	B9A	TP
ECL113	267 454 130		6	{ 1.0 3.5	150 250	0 250	2 25	1.6 8.5	100 100	60 150	1.6 8.5	B8A	TP
ED111	266 104 430		6.3	5	200		40	8	No Data Available			B8A	T
EDD11	742 301 460		6	8.0	200		3.5		200		3.5	F8	TT
EDD111	742 311 460		6	8.0	250		9.0	2.3	100		2.3	F8	TT
EE50	256 501 403		6.3	3.0	250	250	10	14	250	150	10.0	B9G	P
EEL71	274 554 630		6.3	6.5	250	250	24	6.5	100	100		B8G	PP
EEPI	023 150 560		6.3	2.5	250	150	8	17	No Data Available			85C	P
EEP71	023 110 560	G ₁	6	3	225	100	8	2.2	100	100		85C	P
EF1	023 110 560	G ₁	6	2	250	100	3	2.3	100	100	2.3	85C	P
EF2	023 110 560	G ₁	6	2	250	100	4.5	2.2	100	100	2.2	885C	P
EF3	023 110 560	G ₁	6	2.5	250	100	8	1.8	100	100	1.8	85C	P
EF5	023 110 560	G ₁	6	3	250	100	8	1.7	100	100	1.7	85C	P
EF6	023 110 560	G ₁	6	2	250	100	3	2	100	100	2	85C	P
EF7	023 110 560	G ₁	6	1.5	250	100	3	2.1	100	100	2.1	85C	P
EF8	023 111 560	G ₁	6	2.5	250	250	8	1.8	100	PenLF	1.8	85C	P
EF9	023 110 560	G ₁	6	2.5	250	100	6	2.2	100	100	2.2	85C	P
EF11	602 301 450		6	2	250	100	6	2.2	100	100	2	F8	P
EF12	602 301 450		6	2	250	100	3	2.1	100	100	2	F8	P
EF12 spec.	602 301 450		6.3	2	250	100	3	1.7	100	100	1.5	F8	P
EF13	612 301 450		6	2	250	100	4.5	2.3	100	100	2	F8	P
EF14	612 350 140		6	4.5	200	200	12	7	100	150	6	F8	P
EF15	612 301 450		6	2	250	100	12	5.5	100	100	5	F8	P
EF22	265 104 130		6	2.5	250	100	6	2.2	100	100	2.2	B8B	P
EF25	023 110 560	G ₁	6	2	250	100	5	1.8	100	100	1.8	85C	P
EF36	026 510 310	G ₁	6	2	250	100	3	1.8	100	100	1.8	A08	P
EF37	026 510 310	G ₁	6	2	250	100	3	1.8	100	100	1.8	A08	P
EF37A	026 510 310	G ₁	6	2	250	100	3	1.8	100	100	1.8	A08	P
EF38	126 510 310	G ₁	6	2.5	250	250	8	1.8	100	PenLF	1.8	A08	P
EF39	026 510 310	G ₁	6	2.5	250	100	6	2.2	100	100	2.2	A08	P
EF40	26* 145 130		6	2	250	150	3	1.8	100	150	1.8	B8A	P
EF41	261 154 130		6	2.5	250	100	6	2.2	100	100	2.2	B8A	P
EF42	260 154 130		6	2	250	250	10	9.5	100	PenLF	8.0	B8A	P
EF43	260 154 130		6	2	250	150	15	6.4	100	150	6	B8A	P
EF44	260 145 130		6.3	2	250	150	3	1.8	100	150	1.8	B8A	P
EF50	256 101 403		6	1.55	250	250	10	6.5	100	PenLF	6.0	B9G	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
EF51	261 154 130		6	2	250	250	14	9.5	100	PenLF	9.0	B8B	P
EF52	261 154 130		6	2	250	250	10	10	100	150	8	B8G	P
EF53	256 101 403		6	2	250	250	10	6.5	100	150	6.5	B9G	P
EF54	265 114 113		6	1.7	250	250	10	7.7	100	PenLF	7.0	B9G	P
EF55	256 101 403		6	4	250	150	10	7	100	100	6	B9G	P
EF70	412 163 510		6	2	100	100	3	2.5	100	100	2.5	B8D	P
EF71	412 163 510		6	2	100	100	13	5.5	100	100	4.5	B8D	P
EF72	412 163 510		6	1.4	100	100	7	5	100	100	5	B8D	P
EF73	412 653 160		6	2	100	100	7.5	5.5	100	100	5	B8D	P
EF74	412 653 160		6.3	1.4	100	100	7	3.1	100	100	3	B8D	P
EF80	141 230 651		6	2	175	175	10	7.2	100	100	6	B9A	P
EF81	541 236 000		6.3	2.5	250	125	6	2.2	100	100		B9A	P
EF82	*41 230 651		6	4.5	250	250	40	11	100	150	9	B9A	P
EF83	501 236 014		6.3	1.6	250	50	4	1.6	100	100	2.0	B9A	P
EF85	141 230 651		6	2	250	100	10	6	150	100	5	B9A	P
EF86	501 236 014		6	1	250	100	3	1.85	100	100	1.8	B9A	P
EF87	501 236 014		6.3	2.0	250	100	3.3	1.9	100	100		B9A	P
EF88	501 236 014		6.3	2.0	250	100	7	2.1	100	100		B9A	P
EF89	041 230 651		6	2.0	250	100	9.0	3.6	250	100	3.6	B9A	P
† EF91	412 361 500		6	{ 2 1.5	{ 250 200	{ 250 150	{ 10 4	{ 7.65 6.4	{ 100 100	{ PenLF PenLF	{ 5 5	{ B7G B7G	P
EF92	412 361 500		6	2.5	250	200	8	2.5	100	PenLF	2.5	B7G	P
EF93	412 365 100		6	1	250	100	11.6	4.5	150	100	4	B7G	P
EF94	412 365 100		6	1.0	250	100	10.6	5.2	100	150	5.2	B7G	P
EF95	412 365 100		6	2.3	150	150	7	4.3	100	100	4	B7G	P
EF96	412 365 100		6	1.5	250	150	6.5	5.0	100	100	5.0	B7G	P
EF111	612 350 140		6.3	2	250	75	6	2.2	No Data Available			F8	P
EF112	612 350 140		6.3	2	250	100	3	2.1	100	100		F8	P
EF172	112 540 360		6.3	2	250	100	5	3	100	100		B8A	P
EF174	112 540 360		6.3	3.5	200	200	12	9	100	100		B8A	P
EF175	112 540 360		6.3	2.1	250	100	12	4.5	100	100		B8A	P
EF190	412 365 100		6.3	2.0	200	150	9.5	6.2	100	100		B7G	P
EF410	26* *54 130		6.3	2	250	100	6	2.7	100	100		B8A	P
EF800	141 230 651		6.3	2	175	175	10	7.2	100	100		B9A	P
EF802	141 23* 651		6.3	1.2	175	175	12	8	100	100		B9A	P
EF804	101 230 654		6.3	2	250	150	3	2	100	100		B9A	P
EF804S	101 230 654		6.3	2	250	150	3	2	100	100		B9A	P
EF805S	141 230 651		6.3	1.8	250	75	8	5.7	100	80		B9A	P
EFF50	265 414 573		6	2	250	200	6	8	100	PenLF	7	B9G	PP
EFF51	265 414 573		6	2	250	200	6	8	100	PenLF	7	B9G	PP
EFM1	023 114 560		6	2	250	100	1.3		No Data Available			85C	IP (p. 174)
EFP20	256 145 130		6.3	2	250	200	5	12	100	100		B8G	P
EG420	802 300 000		4				120		REC		30mA	B4	R

† See note on Page 8

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
EH1	023 145 560	G ₁	6	2	250	80	3	1.8	200	75	1.8	8SC	P
EH2	023 115 560	G ₁	6	3	250	100	4.2	1.4	100	100	1.4	8SC	P
EH90	412 365 100		6.3	1	100	30	1	1.1	No Data Available			B7G	H
EH900	412 365 100		6.3	0	150	80	1.0	1.1	100	90		B7G	H
EK1	123 174 560	G ₁	6	1.5 8.5	90 250		2 1.6		80 100			8SC	O
EK2	023 154 560	G ₁	6	2	250	75	2.8	1.8	100	60	2.1	8SC	O
EK3	023 164 560	G ₁	6	2	100	60	11	3.8	100	60	3.8	8SC	O
EK32	026 545 310	G ₁	6	2.0	250	75	2.8	1.5	100	60	2.1	A08	O
EK90	412 366 100		6	2	100		11	7	100		5	B7G	H
EL1	023 100 560	G ₁	6	18.5	250	250	32	2.6	100	PenLF	2.6	8SC	P
EL2	023 100 560	G ₁	6	18	250	250	32	2.8	100	PenLF	2.8	8SC	P
EL3	023 104 560		6	6	250	250	36	9	100	PenLF	9	8SC	P
EL3N	023 104 560		6.3	6	250	250	36	9	100	PenLF	8	8SC	P
EL3/375	023 104 560		6.3	6	250	250	36	9	100	PenLF	8	8SC	P
EL5/375	023 104 560		6.3	14	250	275	72	8.5	No Data Available			8SC	P
EL5	023 104 560		6	14	250	275	72	8.5	100	PenLF	8.5	8SC	P
EL6	023 104 560		6	7	250	250	72	14.5	100	PenLF	10	8SC	P
EL6 spec.	023 104 560		6.3	7	250	250	72	14.5	100	PenLF	10	8SC	P
EL8	023 104 560		6.3	7.5	250	250	20	5.5	100	PenLF		8SC	P
EL11	602 301 450		6	6	250	250	36	9	100	150	7	F8	P
EL11N	602 301 450		6.3	6	250	250	36	9	100	150	7	F8	P
EL12	602 301 450		6	7	250	250	72	15	No Data Available			F8	P
EL12 Spec.	502 301 400	A ₁	6.3	19	400	350	42	10	No Data Available			F8	P
EL12/325	602 301 450		6.3	7	250	250	72	15	No Data Available			F8	P
EL12/375	602 301 450		6.3	7	375	250	72	15	No Data Available			F8	P
EL13	602 301 450		6.3	7.5	250	250	20	5.5	100	150	5	F8	P
EL20	265 104 130		6	34	300	300	12.5	3.7	100	100		B8B	P
EL22	265 004 130		6	7	250	250	44	9.5	100	PenLF	9	B8B	P
EL31	120 540 310	A	6	9	300	275	91	14	100	PenLF	10	A08	P
EL32	026 500 310	G ₁	6	18	250	250	32	2.8	100	PenLF	2.8	A08	P
EL33	026 540 310		6	6	250	250	36	9	100	PenLF	8	A08	P
EL34	126 540 310		6	14.5	250	250	57	8.5	100	100	8	A08	P
EL35	026 540 310		6	15.5	250	250	72	5	100	PenLF	5	A08	P
EL36	*2* 54* 310	A ₁	6	7	250	250	72	14.5	100	PenLF	10	A08	P
EL37	026 540 310		6	13.5	250	250	100	11	100	PenLF	10	A08	P
EL38	120 540 310	A	6	7	250	250	100	14.3	100	PenLF	10	A08	P
EL38N	120 540 310	A ₁	6	7	250	250	100	14.3	100	PenLF	10	A08	P
EL39	020 541 310	A ₁	6	23	175	125	45	6.5	100	100		A08	P
EL41	26* 54 130		6	7.0	250	250	36	10.0	100	PenLF	8	B8A	P
EL42	261 054 130		6	10	225	225	26	3.2	100	PenLF	3.2	B8A	P
EL43	260 154 130		6	3	250	250	36	10	100	PenLF	8	B8A	P
EL44	200 154 130	A	6	22.5	250	250	20	5	100	PenLF	5	B8A	P
EL50	023 114 500	A	6	14	250	275	72	8.5	100	PenLF	8	8SC	P
EL51	023 104 500	A	6		400	300	44	7	100	150	7	8SC	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
EL53	023 104 560		6	7.7	400	250	24	8	100	150	7	85C	P
EL54	023 104 560		6	12.2	300	300	55	13	No Data Available			85C	P
EL60	216 005 413		6	14.5	250	250	67	9	100	100	8	B9G	P
EL70	412 163 510		6	9	100	100	31	2.2	100	90	2.2	B8D	P
EL80	541 230 600		6.3	6.5	250	250	36	10	100	150	9	B9A	P
EL81	*41 23* *51	A	6	38.5	250	250	32.0	4.6	100	100	2.2	B9A	P
EL81F	*41 23* *51	A ₁	6.3	38.5	250	250	32	4.6	100	100	2.2	B9A	P
EL82	*41 23* 6*5		6.3	10.4	175	175	54	9	100	100		B9A	P
EL83	541 23* 600		6	5.5	250	250	36	10	100	150	9	B9A	P
EL84	*41 23* 6*5		6	7.3	250	250	48	11.3	100	150	10.0	B9A	P
EL85	441 231 615		6	10.8	225	225	26	3.2	100	150	3.2	B9A	P
EL86	*41 23* 6*5		6.3	12.5	175	175	70	10	100	100	9	B9A	P
EL88	041 230 651		6.3	4.5	200	200	33	9.7	100	100		B9A	P
EL89	041 230 651		6.3	6	250	250	38	10.5	100	100		B9A	P
EL90	412 365 400		6	12.5	250	250	45	4.1	100	150	4	B7G	P
EL91	412 360 500		6	13.8	250	250	16	2.6	100	PenLF	2.6	B7G	P
EL95	412 365 400		6.3	9	250	250	24	5.0	100	100		B7G	P
EL150	602 301 450		6.3	17	350	250	95	6.5	No Data Available			F8	P
EL171	102 541 360		6.3	12	250	250	40	9	No Data Available			B8A	P
EL172	102 541 360		6.3	7	250	250	72	15	No Data Available			B8A	P
EL180	141 223 651		6.3	2.0	250	150	25	12	100	100		B9A	P
EL803	541 231 600		6.3	3.5	200	200	36	10	100	100		B9A	P
EL804	041 230 005	A ₁	6.3	12	175	175	70	10	100	100		B9A	P
EL820	*41 23* *51	A	6	38.5	250	250	32.0	4.6	100	150	4.0	B9A	P
EL821	*41 23* 651		6	4.5	250	250	40	11	100	150	10	B9A	P
EL822	*41 23* 651		6	2.5	250	150	40	13	100	100	10	B9A	P
ELL1	423 174 560		6	20	250	250	15	1.7	100	PenLF	1.8	85C	PP
ELP71	023 104 560		6	7	250	250	36	9	100	PenLF		85C	P
ELP72	023 100 560	G ₁	6	17	250	250	36	2.5	100	PenLF		85C	P
ELP73	023 100 560	G ₁	6	17	250	250	36	2.5	100	PenLF		85C	P
EQ80	541 236 114		6	1	250	20	0.95	0.7	No Data Available			B9A	N
ER4	002 300 000	D ₁	4				3		D			B4	D
EW60	280 000 103		6			120			REC		30mA	B9G	R
EY51	023 000 000	D ₁	6						D			B3G	D
EY70	082 813 080		6			30			REC		17mA	M8	R
EY80	**1 23* **8		6			120			REC		40mA	B9A	R
EY81	*** 23* **8	C	6.3			120			REC		40mA	B9A	R
EY82	**1 23* **8		6.3			180			REC		50mA	B9A	R
EY83	*** 23* **8	C	6.3						D			B9A	D
EY84	**1 23* ***	D ₁	6			120			REC		30mA	B9A	R
EY86	230 232 032	D ₁	6						D			B9A	R
EY87	23* 232 *32	D ₁	6.3						D			B9A	D
EY91	812 380 000		6			60			REC		20mA	B7G	R
EY92	002 360 100		6.3			60			REC		15mA	B7G	R
	390		82			120			REC		30mA	F8	RR

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
EZ1	023 180 090		6				30		REC		15mA	85C	RR
EZ2	023 180 090		6				30		REC		15mA	85C	RR
EZ3	023 180 090		6				60		REC		20mA	85C	RR
EZ4	023 180 090		6				60		REC		20mA	85C	RR
EZ11	902 300 180		6				30-0		REC		15mA	F8	RR
EZ12	902 300 180		6				60-0		REC		20mA	F8	RR
EZ22	208 009 130		6				60		REC		20mA	B8B	RR
EZ33	028 090 310		6				60		REC		20mA	A08	RR
EZ35	028 090 310		6				30		REC		45mA	A08	RR
EZ40	280 *09 130		6				30		REC		25mA	B8A	RR
EZ41	280 009 130		6				30-0		REC		30mA	B8A	RR
EZ80	801 230 900		6				30-0		REC		35mA	B9A	RR
EZ81	8*1 23* 9**		6				60-0		REC		25mA	B9A	RR
EZ82	8*1 23* 8**		6-3				30		REC		15mA	B9A	RR
EZ90	802 309 100		6-3				30		REC		15mA	B7G	RR
EZ91	802 309 100		6-3				30		REC		15mA	B7G	RR
F5	642 300 000		4	40	300		40	6	100		6	B4	T
F10	642 300 000		4	15	300		30	5-5	100		5-5	B4	T
F100	642 350 000		4	16	250	250	42	2-5	100	PenLF	2-5	B5	P
F109	264 300 000		1-5	14-5	175		6-2	11-5	100		11	UX4	T
F109	642 300 000		1-5	14-5	175		6-2	11-5	100		11	B4	T
F203	264 300 000		2-5	56	275		36	2	100			UX4	T
F203	642 300 000		2-5	56	275		36	2	150		2	B4	T
F209(A)	642 310 000		2-5	21	250		5	1	100		1	B5	T
F209	642 300 000		2-5	21	250		5-2	0-97	100			B4	T
F209	264 300 000		2-5	21	250		5-2	0-97	100			UX4	T
F215	264 130 000		2-5	6	150		6-5	2	100		2	UX5	T
F215	642 310 000		2-5	6	150		6-5	2	100		2	B5	T
F242	265 130 000	G ₁	2-5	1-3	200	100	1-5	0-9	200	100	0-9	UX5	P
F410	642 300 000		4	15	275		13-5	2-8	100		2-8	B4	T
F443	642 350 000		4	30	400	200	45	3-2	100	100	3-2	B5	P
F443N	642 350 000		4	30	400	200	45	3-2	100	100	3-2	B5	P
F460	642 310 000		4	2	250		10	5-5	200		5-5	B5	T
F704	642 300 000		7-5	84	400		55	2-1	100		2-1	B5	T
F707	642 300 000		7-5	84	400		55	2-1	100		2-1	B4	T
F707	264 300 000		7-5	84	400		55	2-1	100		2-1	UX4	T
F708	264 300 000		7-5		400		30	1-6	100		1-6	UX4	T
FC2	645 230 700	G ₁	2	$\begin{Bmatrix} 0 \\ 0 \\ 0 \end{Bmatrix}$	150	50	2-0		80		0-4	B7	O
FC2A	645 230 700	G ₁	2	$\begin{Bmatrix} 0 \\ 0 \\ 0 \end{Bmatrix}$	150	75	0-95	0-2	125	75	0-8		
					150	50	1-2		100		0-5		
FC4	645 231 700	G ₁	4	$\begin{Bmatrix} 0 \\ 4 \\ 4 \end{Bmatrix}$	150	50	0-7	0-27	100	75	1-0	B7	O
					90	90	2-0	1	100	90	1-3		
					250	90	1-6	1	250	90	1-5		
FC13	023 164 570	G ₁	13	$\begin{Bmatrix} 3 \\ 2 \end{Bmatrix}$	90	75	2	1-3	100		1-5	85C	O
					200	75	2-6	0-6	200	75	2-5		

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
FC13c	645 231 700	G ₁	13	3 2	90 200	75 75	2.0 2.6	1.3	80 200	75 75	1.2 2.5	B7	O
FC14I	207 640 530	G ₁	1.4		90	90	0.55		80	90		M08	H
FH2118	165 452 300	G ₁	20	2	200	80	3		100	75		C7	P
FWI	893 200 000		4				30		REC		15mA	B4	RR
FW3	892 300 000		4				60		REC		30mA	B4	RR
FW4/500	982 300 000		4				120		REC		30mA	B5	RR
FW4/800	982 300 000		4			60			REC		30mA	B5	RR
FY	642 350 000		4	10	250	250	32	5	100	PenLF	5	B5	P
FZ1	023 180 090		13				30		REC		15mA	8SC	RR
G	264 300 000		5	3	175		0.2		100		0.2	UX4	T
G/25L6	026 540 310		25	8.25	200	125	46	8	100	90	8	A08	P
G/50C5	142 345 600		50	7.5	125	100	49	7.5	100	90	6	B7G	P
G84	280 300 000		2.5				60		REC		20mA	UX4	RR
G407	642 300 000		4	4	125		4	1.3	100		4	B4	T
G409	642 300 000		4	4	125		4	1.3	100		4	B4	T
G431	892 300 000		4				30		REC		15mA	B5	RR
G459	023 080 090		4				60		REC		20mA	8SC	RR
G460	892 300 000		4				60		REC		20mA	B4	RR
G470	892 300 000		4				30		REC		15mA	B4	RR
G504	892 300 000		4				30		REC		15mA	B4	RR
G660	023 190 080		6.3				30		REC		15mA	8SC	RR
G715	802 300 000		7.5				120		REC		30mA	B4	R
G1054	892 300 000		4				30		REC		15mA	B4	RR
G1064	892 300 000		4				60		REC		20mA	B4	RR
G1380	023 180 090		12				30		REC		15mA	8SC	RR
G1404	802 300 000		4				120		REC		30	B4	R
G1503	892 300 000		2.5				30		REC		15mA	B4	RR
G2004	892 300 000		4				60		REC		20mA	B4	RR
G2005	892 300 000		5				60		REC		20	B4	RR
G2080	802 310 000		20				60		REC		20mA	B5	R
G2504	892 300 000		4				60		REC		20mA	B4	RR
G4004	892 300 000		4				120		REC		30mA	B48	RR
G4100	802 300 000		4				120		REC		30mA	B4	R
G4120	892 300 000		4				60		REC		20mA	B5	RR
G4150	892 300 000		4				60		REC		20mA	B4	RR
G4180	892 300 000		4				120		REC		30mA	B4	RR
G4300	892 300 000		4				120		REC		30mA	B4	RR
G/5749	412 365 100		6	1.0	250	100	11	4.4	100	100	4.4	B7G	P
G/5750	412 366 400		6	2.0	100		11	7.0	100		6	B7G	H
G/6042	461 471 230		25	8	250		9	2.6	100		2.6	A08	TT
G/6059	041 230 651		6	3	250	100	2	1.22	100	100	1.2	B7G	P
G/6060	741 226 413		6	2.0	250		10	5.5	200		5.0	B9A	TT
G/6061	*41 230 651		6	13.0	300	225	35	3.75	100	150	3.7	B9A	P
G/6069	601 235 144		6	7.5	250	250	45	7.0	100	150	7.0	B9A	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T.A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
G/6066	412 389 600		6	3.0	250		1.0	1.2	150		1.2	B7G	DDT
G/6100	602 364 100		6	8.5	250		10.5	2.2	100		3.0	B7G	T
G/6132	*41 230 651		6	4.5	250	250	40	11.0	100	150	9	B9A	P
G/6157	**1 23* ***	D ₁	6				120		REC		30mA	B9A	R
G/6158	744 226 413		6	4.6	250		6.0	2.3	100		2.3	B9A	TT
G/6180	461 471 230		6	8	250		9	2.6	100		2.6	A08	TT
G/6443	**1 23* ***	D ₁	6				120		REC		33mA	B9A	R
G/6516	412 360 500		6	12.5	250	250	16	2.6	100	PenLF	2.6	B7G	P
GG1	288 009 930		4				30		REC		15mA	B8B	RR
GN24	892 300 000		4				30		REC		15mA	B4	RR
GR4	892 300 000		4				120		REC		30mA	B4	RR
GTIC	642 310 000		4		200		48	3K Ω	No Data Available			B5	Thyratron
GY11	333 022 200	D ₁	2.5				30		REC		15mA	F8	R
GZ30	020 908 030		5				60		REC		20mA	A08	RR
GZ31	620 908 030		5				120		REC		30mA	A08	RR
GZ32	030 809 020		5				60		REC		50mA	A08	RR
GZ33	030 809 020		5				120		REC		30mA	A08	RR
GZ34	*30 809 020		5				120		REC		30mA	A08	RR
GZ40	28* **9 130		5				30		REC		17mA	B8A	RR
GZ41	28* **9 130		5				60		REC		26mA	B8A	RR
H2	642 300 000		2	1	150		2.5	0.8	150		0.8	B4	T
H4	642 300 000		4	4	125		4	1.3	125		1.3	B4	T
H4D	809 231 600	G ₁	4	2.5	200		5.5	2.7	150		2.7	B7	DDT
H12	642 300 000		2	1.3	100		0.6	1.0	100		1.2	Sm4	T
H13	023 100 060	G ₁	13	4	200		6	2.5	100		2.5	A08	T
H20	642 310 000		20	1.6	200		0.2	1.0	100		1.0	B5	T
H30	000 231 600	G ₁	13	1.5	250		7.5	6.0	100		6	B7	T
H42	000 231 600	G ₁	4	2	250		1	1.5	200		1.7	B7	T
H63	020 600 310	G ₁	6	2	250		1	1.5	100		1.5	A08	T
H141D	206 080 030	G ₁	1.4	1	90		0.1	0.25	80		0.25	M08	DT
H210	642 300 000		2	3	150		1.1	1.15	100		1.15	B4	T
H406D	542 300 000	A	4	1.5	175	75	4	0.8	100	80		B4	P
H407 Spec.	642 300 000		4	9	150		3.5	0.9	100		0.9	B4	T
H410D	342 300 000	A	4	1.5	175	75	4	0.8	100	75		B4	P
H412	642 300 000		4	9	125		5	1.2	125		1.2	B4	T
H607	642 300 000		6	1	100			0.45	100		0.45	B4	T
H1818D	542 310 000		20	2	200	100	3	2	100	100		B5	P
H1918D	542 310 000		20	2	200	60	4	1	100	60		B5	P
H2018D	542 310 000		20	2	200	60	4	1	100	60		B5	P
H2518D	542 310 000	A	20	2.5	225	100	3.5	2	100	100		B5	P
H2618D	542 310 000	A	20	2.5	250	100	5	2	100	100		B5	P
H4080D	542 310 000	A	4	1.5	200	75	4	2.5	100	100		B5	P
H4111D	542 310 000	A	4	2.5	225	100	3.5	2	100	100		B5	P
H4115D	542 310 000	A	4	2.5	225	100	3.5	2	100	100		B5	P
H4125D	542 310 000	A	4	2	200	100	6	1	100	100		B5	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
H4128D	542 310 000	A	4	2.5	225	100	3.5	2	100	100		B5	P
H4129D	542 310 000	A	4	2.5	250	100	5	2	100	100		B5	P
HAA91	182 310 900		12						D			B7G	DD
HABC80	811 239 146		19	3	250		1	1.2	100		1.3	B9A	DDDT
HAD	908 231 600	G ₁	13	2.5	200		3.3	2	150		2	B7	DDT
HBC90	412 389 600		12.5	3	250		1.0	1.2	100		1.2	B7G	DDT
HBC91	412 398 600		12.5	2	250		1.2	1.6	100		1.6	B7G	DDT
HCH81	541 237 464		12.6	2.5	100	90	4	2	100	60	2	B9A	TH
					225		3	0.65	100		0.65		
HD2	642 300 000		2	5	200		5	1	150		1	B4	T
HD2	682 390 000	G ₁	2	2.5	150		3.5	1.3	100			B5	DDT
HD14	036 080 200	G ₁	1.4	0	90		0.13	0.22	100		0.28	A08	DT
HD21	682 390 000	G ₁	2	1.5	150		1.8	1.5	150		1.5	B4	DDT
HD22	682 390 000	G ₁	2	3	150		1.8	1.5	100		1.5	B5	DDT
HD23	682 390 000	G ₁	2	1	125		1	1.0	125		1.0	B5	DDT
HD24	682 390 000	G ₁	2	1.5	150		0.8	1.0	100		1.4	B5	DDT
HF61	26* *54 130		6.3	2.6	250	100	6	2.2	100	100	2.2	B8A	P
HF62	260 154 130		6.3	2	250	250	10	9	100	PenLf	8	B8A	P
HF85	141 230 651		12.5	2.3	200	125	11.4	6.1	100	90		B9A	P
HF93	412 365 100		12.5	1	250	100	11	4.4	100	100	4	B7G	P
HF94	412 365 100		12.5	1	250	150	10.6	5.2	100	100	3.9	B7G	P
HF121	26* 054 103		12.5	3	200	125	7.2	2.3	100	100	2	B8A	P
HK90	412 366 100		12.5	2	100		11	7	100		5	B7G	H
HL2	642 300 000		2	1.5	150		2.2	1.5	150		1.5	B4	T
HL2	023 004 060		2	1.5	150		2.2	1.5	150		1.5	8SC	T
HL2K	642 300 000		2	1.5	150		2.2	1.5	150		1.5	B4	T
HL2S	023 004 060		2	1.5	150		2.2	1.5	150		1.5	8SC	T
HL3	206 040 030		2	1.5	125		0.5	1.5	125		1.5	M08	T
HL4	642 310 000		4	4.5	250		5	3.5	150		3.5	B5	T
HL4g	000 231 600	G ₁	4	4.5	250		5	3.5	150		3.5	B7	T
HL4gs	023 100 060	G ₁	4	4.5	250		5	3.5	150		3.5	8SC	T
HL13	023 100 060	G ₁	13	3.7	200		5	3.3	150		3	8SC	T
HL13	000 231 600	G ₁	13	2.75	200		6	3.5	150		4	B7	T
HL13c	000 231 600	G ₁	13	2.7	200		5	3.3	150		4	B7	T
HL13g	023 004 060	G ₁	13	5.5	250		6	2.5	150		2.5	8SC	T
HL13s	023 100 060	G ₁	13	3	200		6	3.5	150		3.5	8SC	T
HL21	642 300 000		2	3	150		1.75	1.5	125		1.5	B4	T
HL21DD	682 390 000	G ₁	2	2	150		2	1.3	125		1.3	B5	DDT
HL22 (MAZDA)	020 604 030		2	2	150		2	1.3	125		1.3	M08	T
HL22DD	206 080 930	G ₁	2	2	150		2	1.3	125		1.3	M08	DDT
HL23	206 040 030		2	2.4	150		1.5	1.2	125		1.2	M08	T
HL23DD	206 080 930	G ₁	2	2.8	150		1.5	1.05	125		1.2	M08	DDT
HL41	216 040 030		4	4.5	250		7	3.1	150		3.1	M08	T
HL41DD	216 090 830	G ₁	4	5.2	250		6	2.2	250		2.2	M08	DDT
HL42DD	216 090 830	G ₁	4	5	200		7.5	2.5	100		2.5	M08	DDT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
HL84	*41 23* 6*5		30	12.5	175	175	70	10	100	100		B9A	P
HL90	412 365 400		19	12.5	250	250	45	4.1	100	150	4	B7G	P
HL92	142 345 600		50	7.5	125	125	49	7.5	100	100	7	B7G	P
HL94	142 345 600		30	6.7	100	100	43	9.2	100	100	9.2	B7G	P
HL133	216 000 030	G ₁	13	3.3	200		6	2.9	200		2.9	M08	T
HL133DD	216 090 830	G ₁	13	5.4	250		6	2.3	150		2.3	M08	DDT
HL134DD	216 080 930	G ₁	13	5	250		7	2.5	100		2.5	M08	DDT
HL135	023 100 060	G ₁	13	3	200		6	3.5	150		3.5	8SC	T
HL210	642 300 000		2	1	100		1.1	0.7	100		1.0	B4	T
HL410	642 300 000		4	6	150		1.2	0.83	150		0.83	B4	T
HL607	642 300 000		6	1	100			1	100		1	B4	T
HL1320	000 231 600	G ₁	13	3.3	200		6	3	150		3	B7	T
HLA1	642 310 000		4	1	200		5	8	200		7	B5	T
HLA2	642 310 000		4	2.5	200		6	5.5	150		5.5	B5	T
HLBI	642 300 000		2	3	150		2	1.5	100		1.5	B5	T
HL/DDI320	809 231 600	G ₁	13	3	200		4.3	1.9	100		1.9	B7	DDT
HM20	642 310 000		20	3.3	225		6	2.5	100		2.3	B5	T
HN309	641 237 154		12.6	{ 2	250		2.8	2.2	100	60	2.0	B9A	TP
				{ 9	150	150	24	5.6	150	150	5.6		
HP2	446 230 700		2	1	125		8.5		125			B7	TT
† HP6	412 361 500		6	{ 2	250	250	10	7.5	100	PenLF	5	B7G	P
				{ 1.5	200	150	4	6.4	100	PenLF	5		
HP13	061 231 500	G ₁	13	1	250	100	8	3.5	250	100	3.5	B7	P
HP13s	023 110 560	G ₁	13	1	250	100	8	3.5	250	100	3.5	8SC	P
HP210	542 300 000	A	2	1.5	150	150	1.9	1.9	150	150	1.9	B4	P
HP210	041 230 500	A	2	1.5	150	150	1.9	1.9	150	150	1.9	B7	P
HP210C	041 230 500	A	2	1	150	150	1.9	1.9	150	150	1.9	B7	P
HP210nc	542 300 000	A	2	1	150	150	1.9	1.9	150	150	1.9	B4	P
HP210nc	041 230 500	A	2	1	150	150	1.9	1.9	150	150	1.9	B7	P
HP211C	041 230 500	A	2	1	150	150	2.6	1.7	150	150	1.7	B7	P
HP211c	542 300 000	A	2	1	150	150	2.6	1.7	150	150	1.7	B4	P
HP211	041 230 500	A	2	1	150	150	2.6	1.7	150	150	1.7	B7	P
HP215	542 300 000	A	2	1.5	150	80	1.5	1.2	150	75	1.2	B4	P
HP215	041 230 500	A	2	1.5	150	80	1.5	1.2	150	75	1.2	B7	P
HP415	041 231 500	A	4	2	250	100	8	2.7	100	100	2.7	B7	P
HP1018	160 152 300	G ₁	10		250	150	2.3	1.25	100	PenLF	1.25	C7	P
HP1118	160 152 300	G ₁	10	3	250	150	10.5	1.65	100	100	1.65	C7	P
HP2018	041 231 500	A	20	2	200	100	4	3.5	200	100	2.5	B7	P
HP2018	542 310 000	A	20	2	200	100	4	3.5	100	100	3.5	B5	P
HP2118	041 230 500	A	20	2	200	100	5	3.5	100	100	3.5	B7	P
HP2118	542 310 000	A	20	2	200	100	5	3.5	100	100	2.5	B5	P
HP4100	542 310 000	A	4	2	200	100	3	3.5	100	100	3.5	B5	P
HP4101	041 231 500	A	4	2	200	100	3.5	3.5	100	100	3.5	B7	P

† See note on Page 8

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
HP4101	542 310 000	A	4	2	200	100	3.5	3.5	100	100	3.5	B5	P
HP4101c	542 310 000	A	4	2	200	100	3.5	2.8	100	100	2.8	B5	P
HP4101c	041 231 500	A	4	2	200	100	3.5	2.8	100	100	2.8	B7	P
HP4105	542 310 000	A	4	2	250	100	4.5	3	100	100	3	B5	P
HP4105	041 231 500	A	4	2	250	100	4.5	3	100	100	3	B7	P
HP4106	041 231 500	A	4	2	200	100	5	3.5	100	100	3.5	B7	P
HP4106	542 310 000	A	4	2	200	100	5	3.5	100	100	3.5	B5	P
HP4106C	041 231 500	A	4	2	200	100	5	3.5	100	100	3.5	B7	P
HP4106C	542 310 000	A	4	2	200	100	5	3.5	100	100	3.5	B5	P
HP4115	041 231 500	A	4	2	200	100	4.3	3.2	100	100	3.2	B7	P
HP4115	542 310 000	A	4	2	200	100	4.3	3.2	100	100	3.2	B5	P
HP4115c	542 310 000	A	4	2	250	100	4.5	3.2	100	100	3.2	B5	P
HP4115c	041 231 500	A	4	2	250	100	4.5	3.2	100	100	3.2	B7	P
HR1	2** 3** *00	A	6						D			B7G	R
HR2	112 311 100	D ₁	4				5		D			B7G	R
HR2	642 300 000		2	2	150		12	0.6	125		0.6	B4	T
HR2S	023 004 060		2	2	150		1.2	0.6	125		0.6	8SC	T
HR3	112 311 100	D ₁	4				15		REC		10mA	B7G	R
HR4	112 311 100	D ₁	4				30		REC		15mA	B7G	R
HR5	112 311 100	D ₁	4				30		REC		15mA	B7G	R
HR6	112 311 100	D ₁	4				60		REC		20mA	B7G	R
HR7	020 000 030	D ₁	4				30		REC		15mA	A08	R
HR8	030 000 020	D ₁	4				30		REC		15mA	A08	R
HR9	0** 080 230	D ₁	4						D			A08	D
HR11	020 000 030	D ₁	4						D			A08	D
HR210	642 300 000		2	1.5	200		1	1.3	150		1.3	B4	T
HR406	642 300 000		4	3	200		1	1.5	150		1.5	B4	T
HR410	642 300 000		4	3	200		1	1.5	150		1.5	B4	T
HSD	809 231 600	G ₁	13	3	200		4.6	2.3	150		2.3	B7	DDT
HVR1	002 300 000	D ₁	2				5		REC		1.3mA	B4	R
HVR2	003 200 000	D ₁	4				3		REC		2.0mA	B4	R
HVR2A	003 200 000	D ₁	2				3		REC		2.0mA	B4	R
HVU1	002 300 000	D ₁	4				3		D			B4	R
HY24	264 300 000		2	45	175		20		100			UX4	T
HY61	254 130 000	A ₁	6	14	300	250	83	6.5	No Data Available			UX5	P
HY65	030 540 210	A ₁	6	45	350	200	63		100	100		A08	P
HY90	002 383 100		35				60		REC		25mA	B7G	R
HY113	264 030 000		1.4	4.5	50		0.4	0.25	No Data Available			UX5	T
HY115	364 520 000		1.4	1.5	50	20	0.03	0.06	No Data Available			UX5	P
HY125	364 520 000		1.4	3	50	50	0.9	0.3	No Data Available			UX5	P
HY615	020 000 310	A ₁ G ₁	6	35	300		20		100			A08	T
HY866	280 300 000		2.5				120		REC		30mA	UX4	R
HZ50	280 300 000		13				60		REC		20mA	UX4	R
IRV120/350s	023 180 090		4				60		REC		20mA	8SC	RR
IW2	893 200 000		4				30		REC		40mA	B4	RR

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
IW3	892 300 000		4				60		REC		50mA	B4	RR
IW4/350	892 300 000		4				60		REC		40mA	B4	RR
IW4/500	893 200 000		4				60		REC		20mA	B4	RR
K4	892 300 000		4				120		REC		30mA	B4	RR
K23A	682 390 000	G ₁	2	5.5	150		2.5	1.4	100		1.4	B5	DDT
K23B	682 390 000	G ₁	2	1.5	150		1.4	1.2	150		1.2	B5	DDT
K24	265 130 000	G ₁	2.5	1.5	175	75	2	0.8	100	75	0.8	UX5	P
K27	264 130 000		2.5	4.5	90		3	1	80		1	UX5	T
K30A	642 300 000		2	3	150		1.5	0.8	150		0.8	B4	T
K30B	642 300 000		2	7.5	150		4	0.9	100		0.9	B4	T
K30C	642 300 000		2	1.5	150		2	1.4	100		1.4	B4	T
K30D	642 300 000		2	3	150		4	1.5	100		1.5	B4	T
K30E	642 300 000		2	4.5	150		2	1.5	100		1.5	B4	T
K30g	642 300 000		2	7	150		6	3.5	100		3.5	B4	T
K30K	642 300 000		2	1.5	150		2.2	1.4	100		1.4	B4	T
K33A	064 234 700		2	0	150		3		150			B7	TT
K33B	446 230 700		2	1.5	125		3	2.1	125		2.1	B7	TT
K40B	542 300 000	A	2	0	150	75	2	1.5	100	75	1.5	B4	P
K40N	542 300 000	A	2	0	150	90	2.5	1.4	100	90	1.4	B4	P
K40N	041 230 500	A	2	0	150	90	2.5	1.4	100	90	1.4	B7	P
K50M	041 231 500	A	2	5	125	125	3	1.5	100	100	1.5	B7	P
K50N	064 235 500	G ₁	2	1.5	125	60	2	1.4	125	60	1.4	B7	P
K70B	642 350 000		2	4.5	150	150	9.5	2.5	100	100	2.5	B5	P
K70D	642 350 000		2	2.4	125	150	5	4	100	100	4	B5	P
K77A	465 230 574		2	10.5	125	150	2.5	4	100	100	4	B9	PP
K77B	446 235 700		2	11.7	150	150	3.8		100	100		B7	PP
K80A	645 230 700	G ₁	2	0	150	50	2		80	60	0.4	B7	O
				0	150	75	0.95		125	75	0.8		
K80B	645 230 700	G ₁	2	0	150	150	2.1		100	60	0.1		
				0	150	150	0.7		100	75	1.0	B7	O
K435-10	642 300 000		4	3.0	300		50	5.0	100		5.0	B4	T
K450/50	642 300 000		4	50	400		120	5	100		5	B4	T
K1658	542 310 000	A ₁	7	25	400	225	50	3.2	No Data Available			B5	P
K1668	542 310 000	A ₁	7	25	400	225	50	3.2	No Data Available			B5	P
K1678	542 310 000	A ₁	7	25	400	225	50	3.2	No Data Available			B5	P
K1694	642 300 000		4	3.5	200		6	2.6	100		2.4	B4	T
KB2	289 130 000		2						D			S5	DD
KBC1	023 098 060	G ₁	2	4.5	150		2.5	1.0	100		1	8SC	DDT
KBC32	036 980 200	G ₁	2	1	100		2.4	1.2	100		1.2	A08	DDT
KCI	023 004 060		2	1.5	150		1.2	0.6	125		0.6	8SC	T
KC3	023 004 060		2	2.8	150		3	2.5	100		2.5	8SC	T
KC4	023 004 060		2	1.5	150		2.2	1.4	125		1.4	8SC	T
KC50	642 300 000		2	1	40		0.25	0.4	No Data Available			Sm4	T
KC51	642 300 000		2	2	40		1.25	0.5	No Data Available			Sm4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
KCF30	037 546 200	G ₁	2	{ 1.0 2.5	100 125	0 80	3.7 1.5	1.6 0.9	100 100	60 75	1.7 0.9	A08	TP
KCHI	023 064 570	G ₁	2	{ 0.5 5	90 90		3 1	1.5 0.9	80 100	60 60	1.5 0.9		TH
KDDI	023 074 460		2	0	90		0.8		80			85C	TT
KD50	642 300 000		2	2.8	40		1.8	0.56	No Data Available			Sm4	T
KE50	542 300 000	A	2	2	125	50	0.8	0.56	100	60	0.56	Sm4	P
KF1	050 412 300	A	2	1	125	150	3	1.8	125	150	1.8	C7	P
KF2	050 412 300	A	2	1	125	150	3	1.3	125	150	1.3	C7	P
KF3	023 010 560	G ₁	2	1	90	90	1	0.5	80	90	0.5	85C	P
KF4	023 010 560	G ₁	2	1	90	90	1.2	0.7	80	90	0.7	85C	P
KF7	023 004 500	A	2	1.5	90	90	1.8	0.7	80	90	0.7	85C	P
KF8	023 004 500	A	2	1	90	90	1.5	0.6	80	90	0.6	85C	P
KF35	026 510 300	G ₁	2	1.5	125	60	1.45	1.08	125	60	1.08	A08	P
KH1	023 051 560	G ₁	2	1.5	90	60	2.1	1.4	80	60	1.4	85C	P
KK2	023 064 560	G ₁	2	1	90	50	2		80	60		85C	O
KK2G	026 546 300	G ₁	2	1.0	90	50	2.0		80	60		A08	O
KK32	037 546 200	G ₁	2.0	{ 0 0	150 150	50 50	2.1 0.7		150 150	60 60	2.1 0.7	A08	O
KL1	642 350 000		2	4.5	90	90	8	1.7	80	75	1.7	B5	P
KL1	032 004 560		2	4.5	90	90	8	1.7	80	75	1.7	85C	P
KL2	023 004 560		2	7.5	90	90	11	1.8	80	75	1.8	85C	P
KL4	023 004 560		2	2.5	90	90	4.7	1.8	80	75	2.8	85C	P
KL5	032 004 560		2	4	90	90	4.8	1.4	80	75	1.4	85C	P
KL35	036 540 200		2	4.5	125	150	5.6	2.2	100	100	2.2	A08	P
KLL3	423 564 570		2	12	150	150	8		100	100		85C	PP
KLL32	026 447 350		2	11.3	125	150	3.8	2.6	100	100	2.6	A08	PP
KR5	264 530 000		6	9	150	150	14	1.9	100	100	1.9	UX5	P
KR20	264 413 000		2.5	0	250		3.5	1.4	250		1.4	UX6	T
KR22	264 413 000		6	0	250		3.5	1.4	250		1.4	UX6	T
KR25	265 413 000		2.5	16.5	250	250	34	2.2	100	PenLF	2.2	UX6	P
KR28	289 130 000		6				30		REC		15mA	UX5	RR
KR31	281 300 000		10				120		REC		30mA	UX4	R
KT2	642 350 000		2	4.5	150	150	7.5	2.5	100	100	2.5	B5	P
KT8	542 310 000	A	6	16	250	250	72	6	100	100	6	B5	P
KT8C	542 310 000	A	6	16	250	250	72	6	100	PenLF	6	B5	P
KT16	026 540 230		1.4	4.5	90	90	8.8	1.9	No Data Available			A08	P
KT21	642 350 000		2	2.5	150	125	5.3	5.3	100	100	5.3	B5	P
KT24	642 350 000		2	3.5	150	125	5.0	3.2	100	100	3.2	B5	P
KT30	045 231 600		13	12	250	250	40	3.9	100	PenLF	3.9	B7	P
KT31	305 221 600	G ₁	13	4	200	175	40	10	100	150	9	B7	P
KT32	026 540 310		26	7.6	125	150	75	9	100	100	8	A08	P
KT33	326 540 210		13	13.2	200	200	60	10	100	100	9	A08	P
KT33c	326 540 210		13	7	175	175	92	10	100	100	9	A08	P
KT35	326 540 210		13	11.5	200	200	50	10	100	100	9	A08	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
KT36	020 540 310	A	26	10.0	150	150	60	11.0	100	100	10.0	A08	P
KT41	045 231 600		4	4.4	250	250	40	10.5	100	PenLF	9	B7	P
KT42	045 231 600		4	16.5	250	250	34	2.5	100	PenLF	2.5	B7	P
KT44	041 231 500	A	4	15	250	250	85	6.25	100	PenLF	6.2	B7	P
KT45	041 231 500	A	4	15	250	250	85	6.3	100	PenLF	6.0	B7	P
KT55	*26 540 310		52	15	150	150	88.0	16	No Data Available			A08	P
KT61	026 540 310		6	4.4	250	250	40	10.5	100	PenLF	9	A08	P
KT63	026 540 310		6	16.5	250	250	34	2.5	100	PenLF	2.5	A08	P
KT66	026 540 310		6	15	250	250	85	6.3	100	PenLF	6.0	A08	P
KT67	256 001 403		6	9	250	175	80	13	100	100	10	B9G	P
KT71	026 540 310		48	9.8	175	175	70	10	100	100	9	A08	P
KT72	026 540 310		16	12.5	175	175	30	2.5	100	100	2.5	A08	P
KT73	026 540 310		6	12.5	175	175	35	2.5	100	100	2.5	A08	P
KT74	026 540 310		16	12.5	175	175	30	2.5	100	100	2.5	A08	P
KT76	026 540 310		15	13	175	175	35	2.5	100	100	2.5	A08	P
KT81	265 004 130		6	4.4	250	250	40	10.5	100	PenLF	9	B8B	P
KT88	026 540 310		6	30	250	250	57	10	No Data Available			A08	P
KT101	265 004 130		80	9.5	175	175	70	10	100	100	9	B8B	P
KTW61	026 510 310	G ₁	6	3	250	100	10	2.9	100	90	2.9	A08	P
KTW62	026 500 310	G ₁	6	3	250	100	8	2.85	100	100	2.8	A08	P
KTW63	026 510 310	G ₁	6	3	250	100	7.6	1.5	100	90	1.5	A08	P
KTW73	026 510 310	G ₁	6	3	250	100	6.5	1.7	100	90	1.7	A08	P
KTW74	026 500 310	G ₁	13	3	250	100	6.5	1.7	100	90	1.7	A08	P
KTZ41	061 231 500	G ₁	4	1.5	250	250	18	12	200	200	10	B7	P
KTZ63	026 500 310	G ₁	6	2	250	100	1	1.23	100	100	1.2	A08	P
KTZ73	026 500 310	G ₁	6	3	250	100	2	1.5	100	90	1.5	A08	P
KZ	802 310 000		20				60		REC		20mA	B5	R
L2	642 300 000		2	3.8	150		4	1.5	125		1.5	B4	T
L2/B	642 300 000		2	3.8	150		4	1.5	125		1.5	B4	T
L2D	642 310 000		2	4.5	150		2	1.5	100		1.5	B5	T
L2/DD	682 390 000	G ₁	2	3.8	150		4	1.6	100		1.6	B5	DDT
L4	642 300 000		4	16	250		20	3.2	100		3.2	B4	T
L11	642 300 000		1	12	100		2.8	0.57	100		0.57	B4	T
L12	642 300 000		2	3	40		2.2	0.8	No Data Available			5m4	T
L21	642 300 000		2	6	150		2.2	1.8	100		1.8	B4	T
L21DD	682 390 000	G ₁	2	3	150		5.2	1.8	100		1.8	B5	DDT
L22DD	206 080 930	G ₁	2	4.2	150		4	1.55	100		1.55	A08	DDT
L30	040 231 600		13	8	200		25	3.0	100		4.2	B7	T
L42MD	642 350 000		4	20	250	250	22	2.5	100	100		B5	P
L63	026 040 310		6	8	250		9	2.6	100		2.6	A08	T
L77	6*2 364 100		6	8.5	250		10.5	2.2	100		2.2	B7G	T
L210	642 300 000		2	6	150		4.2	1.6	100		1.6	B4	T
L408	642 300 000		4	3	150		5	1.5	125		1.5	B4	T
L410	642 300 000		4	4	150		4.3	1.5	100			B4	P
L412	642 300 000		4	1.5	200		3	1.2	200		1.2	B4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
L413	642 300 000	G ₂	4	16	200		12	1.8	100		1.6	B4	T
L414	642 300 000		4	8	150		12	2.8	100		2.8	B4	T
L415	642 300 000		4	10	200		8	2	100		2	B4	T
L416D	643 200 000		4		250	80	12	1.4	100	75		B4	P
L427D	642 350 000		4		300	200	20	1.5	100	100		B5	P
L486D	642 350 000	G ₂	4	15	250	250	35	2.7	100	PenLF	2.7	B5	P
L491D	642 350 000		4	40	400	200	30	1.8	No Data Available			B5	P
L495	642 350 000		4	30				5				B5	P
L496D	642 350 000		4	17	250	250	36	2.5	100	100		B5	P
L497	642 350 000		4		400	200	45	3.2	No Data Available			B5	P
L510D	642 350 000	G ₂	5	17	200	150	12	1.3	100	100		B5	P
L2318	642 350 000		20		200	200	20	1.7	100	100		B5	P
L4150D	642 310 000		4		250	250	24	2.5	100	100		B5	P
LA	364 520 000		6	12	175	175	22	2.2	100	100	2.2	UX5	P
LD210	642 300 000		2	4.5	150		3	1.3	125		1.3	B4	T
LD410	642 300 000	D ₁	4	6	200		4	1.8	100		1.8	B4	T
LG5	218 090 130		6				120		REC		30mA	A08	RR
LG6	218 090 130		12				30		REC		15mA	B8B	RR
LG14	123 000 000		6				5		D			B3G	RR
LK430	642 300 000		4		250		20	1.9	100			B4	T
LK460	642 300 000		4	40	225		30	2.2	No Data Available			B4	T
LK4110	642 300 000		4	36	400		30	2.7	No Data Available			B4	T
LK4112	642 300 000		4	21.6	250		48	3.5	No Data Available			B4	T
LK4200	642 300 000		4	36	400		45	4	No Data Available			B4	T
LL2	642 300 000		2	2.5	150		3	2.6	125		2.6	B4	T
LL2s	023 004 060		2	2.5	150		3	2.6	125		2.6	8SC	T
LL4	642 310 000		4	10	350		18	3.5	125		3.5	B5	T
LL610	642 350 000		5	17	200	150	12	1.3	No Data Available			B5	P
LN152	641 237 154		6	{ 2.3 6.7	{ 100 175	{ 175	{ 4.0 15.0	{ 1.4 3.2	{ 100 100	{ 60 100	{ 1.4 3.0	{ B9A	TP
LN309	641 237 154		12.5	{ 8.5 8.0	{ 250 175	{ 175	{ 10.5 30	{ 2.2 4.5	{ 100 100	{ 60 100	{ 2.0 4.0	{ B9A	TP
LP2 (FERRANTI)	642 300 000		2	4.5	150		10	3.6	100		3.6	B4	T
LP4	642 300 000		4	36	250		48	5.5	100		5.5	B4	T
LP25	642 300 000		4	31	400		50	7.5	100		6.9	B4	T
LP220	642 300 000		2	4.5	150		5	3.5	100		3.5	B4	T
LS6A	642 300 000		6	91	400		64	2.3	No Data Available			B5	T
LS7	642 300 000		4	4	150		21	2.4	100		2.4	B5	T
LS8	642 300 000		4	8	125			1.3	No Data Available			B4	T
LS8A	642 300 000		4	8	125		26	3	No Data Available			B4	T
LS9B	642 300 000		2	1.5			8	0.6	100		0.6	B4	T
LS826	246 310 000		6.3	1.1	100		7.5	5.0	100		5.0	B5B	T
LU4A	642 300 000		4	16	200		12	1.8	100		1.6	B4	T

VALVE	SELECTOR SWITCH No.	T.C.	VI	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
LZ319	645 237 114		9	{ 2-0 2-0	100		14	5	100	60	5-0	B9A	TP
M8079	192 310 800		6		175	175	10	6	100	100	6-0		B7G
M8081	672 344 100		6	0-85	100		8-5	5-3	100		5-3	B7G	TT
M8082	412 360 500		6	12-4	250	250	16	2-6	No Data Available			B7G	P
§ M8083	412 361 500		6	{ 2 1-5	250	250	10	7-65	100	150	5-0	B7G	P
		200			150	4	6-4	100	150	5-0			
M8096	601 235 144		6	7-5	250	250	45-0	7-0	100	150	7-0	B9A	P
M8097	812 314 600		6	2-8	200		7-5	2-8	100		2-8	B7G	DT
M8099	412 314 600		6	2	250		6-0	8-5	200		8-0	B7G	T
M8100	412 365 100		6	2-3	150	150	7	4-3	No Data Available			B7G	P
M8101	412 365 100		6	1-0	250	100	11-0	4-4	250	100	4-4	B7G	P
M8121	412 163 510		6	1-4	100	100	7-0	5-0	100	100	5-0	B8D	P
M8122	412 653 160		6	2-0	100	100	7-5	5-0	100	100	5-0	B8D	P
M8123	281 380 000		6				5-0		D			B8D	R
M8125	412 163 510		6	2-0	100	100	3-0	2-5	100	100	2-3	M8	P
M8135	412 3** 651		6	4-5	250	250	40-0	11-0	100	150	10-0	B9A	P
M8136	741 226 413		6-3	8-5	250		8-5	2-2	100		2-0	B9A	TT
M8137	741 226 413		6	2-0	250		1-2	1-6	100		1-6	B9A	TT
M8138	802 309 100		6				30-0		REC		15mA	B7G	RR
M8156	462 603 160		6	2-0	100		13-0	5-5	100		5-5	B8D	T
M8157	265 511 413		6	30-0	300	250	25-0	1-9	100	100	1-9	B9G	P
M8161	412 361 500		6	2-5	250	200	8-0	2-5	100	PenLF	2-5	B7G	P
M8162	741 226 413		6	1-5	200		8-5	6-5	200		8-5	B9A	TT
M8195	501 236 014		6-3	1-0	250	100	3	1-85	100	100	1-8	B9A	P
MAZ41	*8* **9 230		4				30		REC		15mA	A08	RR
MCI	423 060 000		1-9	1-5	100		4	0-8	100		0-8	8SC	T
ME2	642 350 000		2	12	200	200	13		100	100		B5	P
ME25	642 350 000		4	30	400	300	60		100	100		B5	P
MH4	642 310 000		4	2	200		8	3-0	100		3-6	B5	T
MH40	642 310 000		4	3	200		2-7	2-0	100		2-4	B5	T
MH41	642 310 000		4	1-5	200		5-2	6	200		6	B5	T
MH206	645 230 600	G ₁	2	3	150	75	3-2		100	75		B7	H
MH1118	426 510 310	G ₁	10	3	200	100	3-5		100	90	0-6	A08	P
MH4105	645 231 700	G ₁	4	3	200	100	7-5		100	100		B7	H
MHD4	908 231 600	G ₁	4	4	200		2	1-9	100		1-9	B7	DDT
MHL4	642 310 000		4	8	250		8	2-5	100		2-5	B5	T
MHLD6	026 890 310	G ₁	6	5	200		11-5	3	100		3	A08	DDT
MKT4	045 231 600		4	11	250	200	32	3	100	100	3	B7	P
MKT4	642 310 000	S	4	11	250	200	32	3	100	100	3	B5	P
ML4	642 310 000		4	16	250		14	3-2	100		3-2	B5	T
ML6	642 310 000		6	8	200		24	3-8	100		3-8	B5	T
ML40	642 310 000		4	3	200			3	100		3	B5	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
MM4V	542 310 000	A	4	1.5	200	125	6	2.5	100	100	2.5	B5	P
MM20	542 310 000	A	20	0	200	100	6	3.5	100	100	3.5	B5	P
MO465	645 231 700	G ₁	4	{ 1.5 1.5 8.5	75		2		80			B7	O
					250	75	1.6		100	75			
MO495	123 174 560	G ₁	4		90		2		80			8SC	O
					250	75	1.6		100	75			
MP2	642 300 000		2	12	150		12.5	3	100		3	B4	T
MP4	067 231 500	G ₁	4		250	150	8	2.5	100	100	2.5	B7	PP
MP Pen	045 231 600		4	16	250	250	30	2.5	100	100	3.5	B7	P
MP Pen	642 310 000	S	4	16	250	250	30	2.5	100	100	3.5	B5	P
MPT4	045 231 600		4	9	250	200	32	3	100	100	3	B7	P
MPT4	642 310 000	S	4	9	250	200	32	3	100	100	3	B5	P
MR1	802 300 000		4				120		REC		30mA	B4	R
MR4	642 300 000		4	3	200		6	2.5	150		2.5	B4	T
MS4	542 310 000	A	4	1.5	250	75	2.4	1.1	250	75	1.1	B5	P
MS4B	542 310 000	A	4	1	200	75	3.4	3.2	200	75	3.2	B5	P
MS4c	542 310 000	A	4	1	200	75	3.4	3.2	200	75	3.2	B5	P
MSG/HA	542 310 000	A	4	1.5	200	80	2.1	2	100	75	2	B5	P
MSG/LA	542 310 000	A	4	1.5	200	75	5.2	3.75	100	75	3.75	B5	P
MSP4	041 231 500	A	4	1.8	200	100	3.4	2.4	100	75	1.1	B7	P
MSP4	542 310 000	A	4	1.8	200	100	3.4	2.4	100	75	1.1	B5	P
MSP4I	542 310 000	A	4	4	250	250	8.5	3.2	100	PenLF	3.2	B5	P
MSP4I	041 231 500	A	4	4	250	250	8.5	3.2	100	PenLF	3.2	B7	P
MS/Pen	041 231 500	A	4	1.5	200	100	4.8	2.8	100	100	2.8	B7	P
MS/Pen	542 310 000	A	4	1.5	200	100	4.8	2.8	100	100	2.8	B5	P
MS/PenA	542 310 000	A	4	2.5	200	150	9.0	4.0	100	150	4.0	B5	P
MS/PenA	041 231 500	A	4	2.5	200	150	9	4	100	150	4	B7	P
MS/PenB	061 231 500	G ₁	4	1.5	200	100	4.8	2.8	100	100	2.8	B7	P
MS/PenT	041 231 500	A	4	1.5	200	100	4.8	2.8	100	100	2.8	B7	P
MS/PenT	542 310 000	A	4	1.5	200	100	4.8	2.8	100	100	2.8	B5	P
MU1	002 300 000	D ₁	4				60		REC		20mA	B4	R
MU2	002 300 000	D ₁	2				5		D			B4	R
MU12	892 300 000		4				60		REC		25mA	B4	RR
MU12/14	892 300 000		4				60		REC		40mA	B4	RR
MU14	892 300 000		4				60		REC		40mA	B4	RR
MU4250	232 300 000	D ₁	4				120		REC		30mA	B4	R
MVSG	542 310 000	A	4	1.5	200	75	7.5	2.5	100	75	2.5	B5	P
MVSPen	542 310 000	A	4	2	250	125	5.1	2.3	200	100	2.3	B5	P
MVSPen	041 231 500	A	4	1.5	200	100	4.3	2.2	100	100	2.2	B7	P
MVSPenB	061 231 500	G ₁	4	1.5	200	100	4.3	2.2	200	100	2.2	B7	P
MX40	645 231 700	G ₁	4	{ 1 3	150	75		0.6	150	75	0.6	B7	TH
					250	75			250	75	1.4		
MZ05-20	642 300 000		6	12	350		45	4.2	100		4	B4	T
NI4	036 540 200		1.4	7.5	90	90	7	1.55	80	75	1.55	A08	P
NI5	026 540 230		1.4	7	90	90	7	1.55	80	75	1.55	A08	P
NI6	026 540 230		1.4	4.5	90	90	9.5	2.1	80	90	2.1	A08	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
N17	264 536 200		1.4	7	90	75	7.4	1.58	80	60	1.58	B7G	P
N18	264 526 300		1.4	4.5	90	90	9.5	2.1	80	75	2	B7G	P
N19	365 024 300		1.4	4.5	90	90	7.7	2.0	80	75	2.0	B7G	P
N30	045 231 600		13	12	250	250	40	3.9	100	PenLF	3.9	B7	P
N31	205 331 600	G ₁	13	4.4	200	175	40	10	100	100	9	B7	P
N37	412 360 500		13	8.0	175	150	50	10.0	100	100	9.0	B7G	P
N40	045 231 600		4	3.5	250	250	32	2.9	100	150	2.9	B7	P
N41	045 231 600		4	3.5	250	250	32	10.0	100	PenLF	9	B7	P
N42	045 231 600		4	16.5	250	250	34	2.5	100	PenLF	2.5	B7	P
N43	005 231 600	G ₁	4	4.4	250	250	40	10	100	PenLF	9	B7	P
N63	026 540 310		6	16.5	250	250	34	2.5	100	150	2.5	A08	P
N66	026 540 310		6	15	250	250	85	6.3	100	150	6	A08	P
N77	412 360 500		6	12	250	250	20	2.6	100	PenLF	2.6	B7G	P
N78	412 360 500		6	5.5	250	250	35	10.0	100	150	9.0	B7G	P
N108	412 36* 500		40	8	175	150	50	10	100	100	9.0	B7G	P
N142	261 054 130		45	9.5	175	175	54.5	9.5	100	100	9.0	B8A	P
N144	412 360 500		6	12	250	250	20.0	2.6	100	PenLF	2.6	B7G	P
N145	261 054 130		40	6.3	175	150	29	7.5	100	100	7.0	B8A	P
N147	026 540 310		6	6	250	250	36	9	100	PenLF	8	A08	P
N148	265 004 130		6	12.5	250	250	45	4.1	100	100	4	B8A	P
N150	261 054 130		6	7	250	250	36	10	100	100	9	B8A	P
N151	261 054 130		6	13.5	250	250	22.5	2.9	100	100	2.9	B8A	P
N152	041 231 551	A	21.5	28	200	200	40.0	6.0	100	100	6.0	B9A	P
N153	541 231 600		15	2.3	175	175	36.0	10.0	100	100	9.0	B9A	P
N154	*41 23* 6*5		16	14.2	200	200	45	8.2	100	100	7	B9A	P
N155	441 231 615		6	10.8	225	225	26	3.2	150	100	3.2	B9A	P
N309	541 231 600		15	2.3	175	175	36.0	10.0	100	100	9.0	B9A	P
N329	*41 23* 6*5		16	14.2	200	200	45	8.2	100	100	7.0	B9A	P
N339	*41 23* *51	A	21.5	13	150	150	50.0	8.5	100	100	7.0	B9A	P
N349	*41 23* *51	A	20	12.0	150	150	5.0	8.5	100	100	7.0	B9A	P
N359	041 231 551	A	21.5	28	200	200	40	6	100	100	6	B9A	P
N709	*41 23* 6*5		6	7.3	250	250	48	11.3	100	150	10	B9A	P
N727	412 365 400		6	12.5	250	250	45.0	4.1	100	PenLF	4.0	B7G	P
NDD40	802 310 000		4						D			B4	D
NEPSI	023 110 560		4	3	225	100	8	2.2	100	100		8SC	P
NF2	023 110 560	G ₁	12.5	2	200	250	3	2.1	100	150	2.1	8SC	P
NF3	023 110 560	G ₁	12.5	2	200	100	4.5	2.3	100	100	2.3	8SC	P
NG320	002 300 000	D ₁	2						D			B5	D
NG3020	002 300 000	A	2				5		D			B4	R
NHP51	023 110 560	G	4	2.5	225	100	3.5	2	100	100		8SC	P
NIX2	*41 23* *51	A	21.5	28	200	200	40	6	100	100	6	B9A	P
NLP61	023 104 560		4	7	250	250	4	9	100	100		8SC	P
NLP62	020 314 560		4	14	250	250	72	9	No Data Available			8SC	P
NSS42	542 310 000	A	4	2.5	225	100	3.5	2	100	100		B5	P
NSS43	542 310 000	A	4	2.5	225	100	3.5	2	100	100		B5	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
NSSI83	542 310 000	A	20	2.5	225	100	3.5	2	100	100		B5	P
NT51	023 100 060	G	4	5	220		6	2.5	100		2.2	8SC	T
NVS4	542 310 000	A	4	2	200	100	6	1	100	100		B5	P
NW4	642 310 000		4	2.5	200		2.5	1	100		2.2	B5	T
OO	364 200 000		5	0	40		1	0.66	No Data Available			UX4	T
OOA	364 200 000		5	0	40		1.5	.66	No Data Available			UX4	T
OI	364 200 000		5	4.5	90		2.5		80			UX4	T
OIA	364 200 000		5	4.5	90		2.5	.72	80		.72	UX4	T
OIAA	364 200 000		5	4.5	90		3.2	.9	90		.85	UX4	T
OIB	364 200 000		5	4.5	90		2.5	.72	90		0.72	UX4	T
O15/400	642 300 000		4	35	400		40	4.5	100		4.5	B4	T
084	642 300 000		4	4	125		4	1.3	100		1.2	B4	T
OBC3	041 896 230		12.5	2	250		1	1.1	150		1.1	A08	DDT
OBF2	206 581 930		9	2	200	100	6	1.8	100	100	1.7	A08	P
OCH4	217 544 630		15	{	100		3.5		100	60	3.5	} A08	TH
					200	100	3	0.75	100	100	0.75		
OF1	026 510 310	G	6.3	3	250	100	8.5	1.75	100	100	1.7	A08	P
OF5	026 510 310	G	12.6		250	100	7	1.45	100	100	1.4	A08	P
OF9	206 501 130	G ₁	8.5		200	100	6	2.2	100	100	2	A08	P
OM1	020 080 310		30				120		REC		30mA	A08	R
OM3	028 190 310		6						D			A08	DD
OM4	026 980 310	G ₁	6	5	250		5.5	2.2	100		2.2	A08	DDT
OMS	026 510 310	G ₁	6	2	250	100	3	1.8	100	100	1.8	A08	P
OMSC	026 510 310		6	2	250	100	3	1.8	100	100	6	A08	P
OM6	026 510 310	G ₁	6	2.5	250	100	6	2	100	100	2	A08	P
OM7	026 510 310	G ₁	6	2.5	250	100	6	2	100	100	2	A08	P
OM9	026 500 310	G ₁	6	18	250	250	32	2.8	100	150	2.8	A08	P
OM10	027 546 310	G ₁	6	{	2.0	100	5.4	2.2	100	60	2.8	} A08	TH
					2.0	250	2.7	0.7	100	100	0.7		
OP41	045 231 600		4	12.5	250	250		9.1	100	100	8	B7	P
OP42	045 231 600		4	6.2	250	250		10.5	100	100	9	B7	P
OS18/600	023 114 500	A ₁	6	14	250	275	72	8.5	100	PenLF	8	8SC	P
OSW3105	041 896 230		6.3	2	250		0.9	1.1	100		1	A08	DDT
OSW3106	026 540 310		6.3	12.5	250	250	45	4.1	100	150	4	A08	P
OSW3107	020 809 030		5				60		REC		20mA	A08	RR
OSW3108	026 540 310		6.3	14	250	250	72	6	100	150	5	A08	P
OSW3109	028 190 300		6.3						D			A08	DD
OSW3111	021 415 360		6.3		250	100	9.2	2	100	100	2	A08	P
OSW3112	026 040 310		6.3	8	250		9	2.6	100		3	A08	T
OS6/300	642 350 000		4	20	300	150	22	2	100	100		B5	P
P2	642 300 000		2	10	150		19	3.5	100		3.5	B4	T
P4	642 300 000		4	21	250		30	2.8	100		2.8	B4	T
P6MO	023 104 560		6.3	14	250	250	72	9	100	100		8SC	P
PI2/250	642 300 000		4	44	250		60	6	100		6	B4	T
PI5/250	642 300 000		4	44	250		60	6	100		6	B4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
P15/250(S)	023 004 060		4	44	250		60	6	100		6	8SC	T
P24/450	642 300 000		7.5	70	400		55	2.1	100		2.1	B4	T
P25/400	642 300 000		6	100	350		70	3.7	100		3.7	B4	T
P25/500	642 300 000		6	90	400		65	3	100		3	B4	T
P26/500	642 300 000		4	100	400		62.5	4.2	100		4.2	B4	T
P27/500	642 300 000		4	27	400		62.5	8.5	100		8	B4	T
P30/500	642 300 000		4	100	400		60	4	100		4	B4	T
P41	216 040 030		4	11.8	250		16	4.5	100		4.5	M08	T
P43M	642 350 000		4	17	250	250	36	2.5	100	100		B5	P
P61	216 040 030		6	11.8	250		16	4.5	100		4.5	M08	T
P215	642 300 000		2	12	150		8	2.2	100		2.2	B4	T
P220	642 300 000		2	7.5	150		6	3.0	100		3	B4	T
P220A	642 300 000		2	14	150		15	2.7	100		2.7	B4	T
P222	642 300 000		2	7.5	150		6	3	100		3	B4	T
P225	642 350 000		2	4.5	150	150	5.6	2.2	100	100	2.2	B5	P
P240	642 300 000		2	24	150		18	1.1	100		3.7	B4	T
P240A	642 300 000		2	21	150		25	5	100		5	B4	T
P410	642 300 000		4	12	150		7	1.25	100		1.5	B4	T
P414	642 300 000		4	16	100		14	2.8	80		2.8	B4	T
P415	642 300 000		4	25	150		14	1.5	100		1.5	B4	T
P420	642 300 000		4	85	400		50	6	100		6	B4	T
P422	642 350 000		4	20	250	250	22	2.5	100	100		B5	P
P425	642 300 000		4	16.5	150		17	1.9	100			B4	T
P430	264 300 000		4	30	200		25	2.2	100		2.2	UX4	T
P434	032 004 560		4	17	250	250	36	2.5	100	100		8SC	P
P435	642 350 000		4	17	250	250	30	3	100	PenLF	3	B5	P
P440	642 350 000		4	30	400	200	45	5	No Data Available			B5	P
P440N	045 231 600		4	22.0	250	250	36	2.8	100	PenLF	2.8	B7	P
P441n	045 231 600		4	22	250	250	36	2.8	100	PenLF	2.8	B7	P
P455	264 300 000		4	15	250		30	5.5	100		5.5	UX4	T
P460	642 300 000		4	40	200		50	3.5	100		3.5	B4	T
P469	045 231 600		4	14	250	275	72	8.5	100	PenLF	7	B7	P
P495	045 231 600		4	6	200	200	32		100	100		B7	P
P496	045 231 600		4	6	200	200	32	9.5	100	100	8	B7	P
P520	642 350 000		5	17	200	150	12	1.3	100	100		B5	P
P625B	642 300 000		6	1	200			2.8	200		2.8	B4	T
P626	023 100 560		6.3	22	250	250	36	2.5	100	100		8SC	P
P628	023 100 560		6.3	17	250	250	36	2.5	100	100		8SC	P
P650	642 300 000		6	1	200			3.5	200		3.5	B4	T
P861	289 130 000		6				30		REC		15mA	UX5	RR
P1320	023 100 560		13	20	250	250	22	1.9	100	100		8SC	P
P2018	642 310 000		20	15	200		20	4	100		4	B5	T
P2060	023 104 560		24	19	200	100	40	3.15	100	90	3	8SC	P
P2460	642 310 000	S	24	19	200	100	40		100	90		B5	P
P3580	045 231 600		33	8.5	200	200	45	8	100	150	7	B7	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
P4100	642 300 000		4	40	400		30		100			B4	T
PA1	642 310 000		4	10	200		40	5	100		5	B5	T
PA20	642 300 000		2	36	300		49	5.2	100		5	B4	T
PA40	642 300 000		4	90	400		200	10	100		9	B4	T
PABC80	†91 238 146		9.5	2.3	200		1.0	1.4	100		1.4	B9A	DDDT
PAB1	023 1†0 980		6						D			8SC	DDD
PBI	234 600 000		2	4.0	150		11.5	3.85	150		3.85	B4	T
PB49S	892 300 000		4				30		REC		15mA	B4	RR
PBF2	026 89S 310	G ₁	6	3	250	100	5.8	1.2	100	100	1.2	A08	DDP
PCOS-1S	023 014 500	A ₁	4		400	250	40	1.25	No Data Available			8SC	P
PCC84	147 234 116		7.5	1.5	90		12.0	6.0	100		6.0	B9A	TT
PCC85	641 237 410		9	2.1	200		10	5.8	150		5.8	B9A	TT
PCC88	641 237 410		7	1.2	90		15	12.5	No Data Available			B9A	TT
PCF80	645 237 114		9	{ 2.0 2.0 1.0	100		14.0	5.0	100	60	5.0	B9A	TP
					175	175	10.0	6.2	150	150	10.0		
					150	0	18	8.5	100	60	7.0		
PCF82	645 237 114		9.5	{ 1.0 1.0	250	100	10	5.2	100	100	5.0	B9A	TP
PCL81	451 237 614		12.6	{ 1.5 6.5 0	200		0.5	1.2	100	60	1.2	B9A	TP
					200	200	30	8.7	100	100			
					100		3	2.2	100	60	3		
PCL82	414 237 516		16	{ 11 8.5 9.0	175	175	41	7.5	100	100	6	B9A	TP
					250	0	10.5	2.2	100	60	2.0		
					175	175	30	4.7	100	100	4.0		
PCL83	641 237 154		12.5	{ 1.7 2.9 1.15	200		3	4	100	60	4	B9A	TP
					200	200	18	10	100	100			
PCL84	461 237 145		15	{ 1.7 2.9	200	200	18	10	100	100		B9A	TP
					200								
PD220	446 230 700		2	1.15	150		0.8	0.9	150		0.9	B7	TT
PD220A	446 230 700		2	6	150		32	1.5	100		1.5	B7	TT
PDD2	264 589 130		6.3	6	250	250	36	9	100	100	8.5	A08	DDP
PEO4-10	023 114 500	A ₁	12	300			27	7.5	No Data Available			8SC	P
PEO5-15	023 114 500	A ₁	12				40	1.5	No Data Available			8SC	P
PEO6-4OP	123 114 500	A ₁	6	40	400	300	40	4	No Data Available			8SC	P
PEI-80	023 114 500	A ₁	12				40	2.5	No Data Available			8SC	P
PEI-100	245 611 300		12	33	400	250	40	6	No Data Available			B7A	P
Pen4DD	918 236 500	G ₁	4	6	250	250	36	9.5	100	PenLF	8	B7	DDP
Pen4V	642 310 000	G ₂	4	10	250	200	35	3.0	100	PenLF	2.8	B5	P
Pen4VA	642 310 000	S	4	22	250	250	36	2.8	100	PenLF	2.8	B5	P
Pen4VA	045 231 600		4	22	250	250	36	2.8	100	PenLF	2.8	B7	P
Pen4VB	045 231 600		4	5.8	250	250	36	9.5	100	PenLF	8	B7	P
Pen4VX	642 310 000	S	4	15	350	200	22	3.5	100	150	3.5	B5	P
Pen13	023 100 560	G ₁	13	14	200	200	25	2.5	100	100	2.5	8SC	P
Pen13A	023 110 560	G ₁	33	8.5	200	200	45	8	100	100	6	8SC	P
Pen13C	045 231 600		13	11	250	250	32	6.5	100	PenLF	6	B7	P
Pen20	642 310 000	S	20	18	200	200	20	1.7	100	150	1.7	B5	P
Pen24	206 540 030		2	3.3	125	125	5	4	100	100	4	M08	P
Pen25	206 540 030		2	3.6	125	125	5	3	100	100	3	M08	P
Pen26	023 100 560	G ₁	24	19	200	100	40	3.1	100	60	3	8SC	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
Pen36A	145 231 600		35	8.5	200	200	45	8	100	150	7	B7	P
Pen36C	045 231 600		33	8.5	200	200	45	8	100	100	7	B7	P
Pen40DD	918 236 500	G ₁	44	8.5	200	200	45	8	100	100	7	B7	DDP
Pen44	216 540 030		4	11	300	275	70	10.6	100	PenLF	9	M08	P
Pen45	216 540 030		4	8.5	250	250	40	8.8	100	PenLF	8	M08	P
Pen45DD	216 590 830	G ₁	4	8.5	250	250	40	8.8	100	PenLF	8	M08	DDP
Pen46	210 540 030	A	4	8.5	300	225	63	8.5	100	PenLF	8	M08	P
Pen141	206 540 030		1.4	9	90	90	5.5	1.4	80	75	1.4	M08	P
Pen200	642 350 000		2	4.9	150	150	9	2.2	100	100	2.2	B5	P
Pen220A	642 350 000		2	9	150	150	18	2.2	100	100	2.2	B5	P
Pen230	642 350 000		2	4.5	150	125	6.0	2.2	150	125	2.2	B5	P
Pen231	642 350 000		2	2.5	125	125	5	4.4	100	100	5	B5	P
Pen383	216 540 030		38	10	175	175	64	10.5	100	100	9	M08	P
Pen384	216 540 030		38	7	125	125	40	7.8	100	100	7	M08	P
Pen425	642 350 000		4	25	300	200	20	1.7	100	100	1.7	B5	P
Pen428	045 231 600		4	12.0	250	250	7.2	8.5	250	200	7.0	B7	P
Pen453DD	216 590 830	G ₁	45	10	175	175	64	10.5	100	100	9	M08	DDP
Pen650	023 114 500	A	6	24	400	300	30	5	100	150	5	8SC	P
Pen1340	045 231 600		13	8.6	250	250	41	6.4	100	PenLF	6	B7	P
Pen2020	023 100 560	G ₁	20	19	200	100	40	3.1	100	60	3.1	8SC	P
Pen3520	045 231 600		35	8.0	200	200	40.0	7.3	100	100	7.0	B7	P
Pen3820	045 231 600		38	10	150	175	64	10.5	100	100	9	B7	P
PenA1	642 350 000		4	16.5	250	250	32	3	100	PenLF	3	B5	P
PenA4	045 231 600		4	5.8	250	250	36	9.5	100	PenLF	9	B7	P
PenA4	005 231 600	G ₁	4	5	250	250	40	9.1	100	100	8	B7	P
PenB1	642 350 000		2	4.5	150	150	8.5	2.5	100	100	2.5	B5	P
PenB4	045 231 600		4	14	250	275	72	8.5	100	PenLF	7	B7	P
PenDD61	869 231 500	G ₁	6	5.3	250	250	32.0	8.5	250	200	8.0	B7	DDP
PenDD1360	968 231 500	G ₁	13	5.3	250	250	32	8.2	100	100	8	B7	DDP
PenDD2530	869 231 500	G ₁	25	7.75	250	250	43	7.8	100	150	7.8	B7	DDP
PenDD4020	968 231 500	G ₁	40	7.75	250	250	43	7.8	100	100	7	B7	DDP
PenDD4021	968 231 500	G ₁	45	10	175	175	64	10.5	100	100	12	B7	DDP
PF9	026 510 310	G ₁	6	3.5	250	100	7.5	1.65	100	100	1.6	A08	P
PF462	041 230 500	A	2	1	150	150	3	1.85	150	150	1.85	B7	P
PF472	041 230 500	A	2	0.5	150	150	2.5	1.7	150	150	1.7	B7	P
PL33	026 540 310		19	6	250	250	36	9.0	100	PenLF	8	A08	P
PL36	*2* 540 310	A ₁	25	21.0	170	170	100	11.0	No Data Available			A08	P
PL38	120 540 310	A	30	5.5	200	200	75	13.5	100	PenLF	10	A08	P
PL81	041 231 551	A	21.5	28	200	200	40	6.0	100	100	6.0	B9A	P
PL81F	*41 23* *51	A ₁	21.5	28	200	200	40	6	100	100	6	B9A	P
PL82	041 230 605		16	14.2	200	200	45.0	8.2	100	100	7.0	B9A	P
PL83	541 231 600		15	2.3	175	175	36	10	100	100	9	B9A	P
PL84	*41 23* 6*5		15	12.5	175	175	70	10	100	100	9	B9A	P
PL820	041 231 551	A	21.5	22.0	175	175	45.0	6.2	100	100	6.0	B9A	P
PMO4	412 365 100		6.3	1.2	250	100	11	4.4	100	100	4	B7G	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
PMO5	412 365 100		6.3	2.3	150	150	7	4.3	100	100	4	B7G	P
PMO7	412 361 500		6.3	2	250	250	10	7.5	100	150	5	B7G	P
PM1A	642 300 000		2	0	100		1	1.2	100		1.2	B4	T
PM1HF	642 300 000		2	3	150		1.5	0.8	100		0.8	B4	T
PM1HL	642 300 000		2	1.5	150		2.3	1.2	150		1.2	B4	T
PM1LF	642 300 000		2	6	125		3	0.9	100		0.9	B4	T
PM2	642 300 000		2	7	100		4	0.9	100		0.9	B4	T
PM2A	642 300 000		2	6	150		5	2	100		2	B4	T
PM2B	446 230 700		2	1	125		3	2.5	100		2.5	B7	TT
PM2BA	446 230 700		2	1	100			2.1	100		2.1	B7	TT
PM2DL	642 300 000		2	4.5	150		2	1.5	100		1.5	B4	T
PM2DX	642 300 000		2	5	150		2.3	1.05	100		1	B4	T
PM2HL	642 300 000		2	1.5	150		2.2	1.4	150		1.4	B4	T
PM3	642 300 000		4	0	100		2	1.05	100		1.0	B4	T
PM4DX	642 300 000		4	0	100		1.5	2	100		2	B4	T
PM12	542 300 000	A	2	0	150	75	4.0	1.1	100	75	1.1	B4	P
PM12A	542 300 000	A	2	1	150	75	2	1.5	100	75	1.5	B4	P
PM12M	542 300 000	A	2	1	150	90	1.4	1.4	150	90	1.4	B4	P
PM12V	542 300 000	A	2	0	150	90		0.75	100	90	0.7	B4	P
PM14	542 300 000	A	4	0	150	75	2.75	0.87	100	75	0.8	B4	P
PM22	642 350 000		2	10	150	150	15	1.3	100	100	1.3	B5	P
PM22A	642 350 000		2	4.5	150	150	5.6	2.2	100	100	2.2	B5	P
PM22C	642 350 000		2	16	150	150	23	3	100	100	3	B5	P
PM22D	642 350 000		2	3	150	150	5	3	100	100	3	B5	P
PM24	642 350 000		4	11	150	150	20	1.75	100	100	1.7	B5	P
PM24	642 310 000	S	4	11	150	150	20	1.75	100	100	1.7	B5	P
PM24A	642 350 000		4	22.5	300	200	20	2	100	100	2	B5	P
PM24B	642 350 000		4	40	400	300	30	2.1	100	100	2.1	B5	P
PM24C	642 350 000		4	20	400	200		3.0	100	100		B5	P
PM24D	642 350 000		4	35	400	200	50	4	100	100	4	B5	P
PM24DC	642 350 000		4	42	300	200	20	1.5	100	100	2	B5	P
PM24E	642 350 000		4	40	300	300	83	3.9	100	150	3.9	B5	P
PM24M	642 350 000		4	17	250	250	30	3	100	PenLF	3	B5	P
PM202	642 300 000		2	12	150		14	2.5	100		2.5	B4	T
PM252	642 300 000		2	0	100		32	3.7	100			B4	T
PM254	642 300 000		4	21	200		15		100			B4	T
PM256	642 300 000		6	27	250		20		100		2.4	B4	T
PN2	642 350 000		2	7.5	150	150	6		100	100		B5	P
PP2	642 300 000	S	2	5	150	150	7	2.1	100	100	2.1	B4	P
PP2	642 350 000		2	5	150	150	7	2.1	100	100	2.1	B5	P
PP2s	023 004 560		2	5	150	150	7	2.1	100	100	2.1	8SC	P
PP3/250	642 300 000		4	37	300		48	5.2	100		6.5	B4	T
PP4	642 350 000		4	15	250	250	36	3.0	100	PenLF		B4	P
PP4s	032 004 560		4	15	250	250	36	3.0	100	PenLF		8SC	P
PP4s	642 350 000		4	15	250	250	36	3.0	100	PenLF		B5	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
PPS/400	642 300 000		4	32	400		62	7	100		6	B4	T
PP6As	023 104 560		6	18	250	250	32	2.8S	100	PenLF	2.8	8SC	P
PP6B	265 413 000		6		250	250	36	10	100	PenLF	9	UX6	P
PP6BG	026 540 310		6	6	250	250	36	10	100	PenLF	9	A08	P
PP6BS	026 540 310		6	6.0	250	250	36.0	9.0	100	PenLF	9	A08	P
PP6C	026 540 310		6	12	250	200	36	10	100	PenLF	9	A08	P
PP6E	045 231 600		6	17	400	275	72	8.5	100	PenLF	8	B7	P
PP13A	045 231 600		13	12	200	200	40	2.6S	100	100	2.5	B7	P
PP13s	023 100 560	G ₁	13	14	200	200	25	3.5	100	100	3.5	8SC	P
PP24	005 231 600	G ₁	24	19	200	100	40	3	100	75	3	B7	P
PP24S	023 100 560	G ₁	24	19	200	100	40	3	100	75	3	8SC	P
PP34	005 231 600	G ₁	35	6.5	200	200	45	8.5	100	100	8	B7	P
PP34S	023 100 560	G ₁	35	6.5	200	200	45	8.5	100	100	8	8SC	P
PP3S	045 231 600		35	6.5	200	200	45	8.5	100	100	8	B7	P
PP36	145 231 600		35	6.5	200	200	45	8.5	100	100	8	B7	P
PP37	005 231 600	G ₁	35	9.5	200	100	45	8.5	100	75	8	B7	P
PP60	026 540 310		6	15	250	250	85	6.3	100	150	6.3	A08	P
PP21S	642 350 000		2	4.5	90	90	8	1.7	100	90	1.7	B5	P
PP21SS	032 004 560		2	4.5	90	90	8	1.7	100	90	1.7	8SC	P
PP220	642 300 000		2	12	150		12.5	3	100		3	B4	T
PP222	642 350 000		2	6	150	150	12	2.5	100	100	2.5	B5	P
PP222	642 300 000	S	2	6	150	150	12	2.5	100	100	2.5	B4	P
PP22S	642 350 000		2	12	150	150	18	2	100	100	2	B5	P
PP22Ss	023 004 560		2	12	150	125	18	2	100	100	2	8SC	P
PP41S	642 350 000		4	12	200	200	12	1.8	100	150	1.8	B5	P
PP416	642 350 000		4	12	200	75	10	2	100	60	2	B5	P
PP430	642 350 000		4	25	200	200	20	2	100	100	2	B5	P
PP431	642 350 000		4	20	250	250	22	1.9	100	150	1.9	B5	P
PP2018	642 310 000	S	20	18	200	200	20	2.5	100	100	2.5	B5	P
PP2018	045 231 600		20	18	200	200	20	2.5	100	100	2.5	B7	P
PP2101	364 520 000		2	3	150	150	7	2.1	100	100	2.1	UX5	P
PP3S21	040 231 600		35	25	200		70	6.3	100		6	B7	T
PP4100	642 350 000		4	40	400	300	30	3	100	PenLF	3	B5	P
PP4101	642 350 000		4	14	250	250	36	3.5	100	PenLF	3.5	B5	P
PP4118	160 452 300		40	10	175	175	35	6.5	100	100	6	C7	P
PT	045 231 600		4	6	250	250	32.5	7.5	100	PenLF	7	B7	P
PT2	642 350 000		2	4.5	125	125	5.3	2.6	100	100	2.6	B5	P
PT2	642 300 000	G ₂	2	4.5	150	150	6.5	2.5	100	100	2	B4	P
PT2A	642 350 000		2	10.5	150	150	18		100	100		B5	P
PT2-K	642 350 000		2	4.5	150	150	9.5	2.5	100	100	2.5	B5	P
PT4(M-O)	642 350 000		4	17	250	250	30	3.0	100	PenLF	2.8S	B5	P
PT4/D	968 231 500	G ₁	4	6	250	250	32.5	7.5	100	PenLF	7	B7	DDP
PT4(Ferranti)	045 231 600		4	6	250	250	36	9.5	100	PenLF	7	B7	P
PTS	045 231 600		26	7	250	250	36	9	No Data Available			B7	P
PT10	045 231 600		4	7.5	250	250	40	9	100	PenLF	8	B7	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
PT12	204 531 102	A	10	15	250	250	62	6	100	PenLF	6	B9	P
PT15	542 310 000	A	6	25.0	300	300	2.8		100	100	1.2	B5	P
PT16	642 350 000		4	15	300	300	55	4.8	100	PenLF	4.8	B5	P
PT25	642 350 000		4	22	400	200	62	4	100	100	4	B5	P
PT25H	642 350 000		4	16	400	300	62.5	6.5	100	PenLF	5	B5	P
PT41	642 350 000		4	12.5	250	200	30	3	100	100	3	B5	P
PT41B	642 350 000		4	40	400	300	30	2.25	100	100	2.2	B5	P
PT22S	642 350 000		2	6	150	150	8		100	100		B5	P
PT22S	642 300 000	S	2	6	150	150	8		100	100		B4	P
PT240	642 350 000		2	9	150	150	16	2.5	100	100		B5	P
PT250	642 350 000		2	15	250	250	40		100	PenLF		B5	P
PT42S	642 350 000		4	7.5	150	150	15	2	100	100	2	B5	P
PTAD	968 231 500	G ₁	4	6	250	250	7	7	100	PenLF	7	B7	DDP
PTA	045 231 600		13	10	250	250	32	4	100	PenLF	4	B7	P
PTS	005 231 600	G ₁	26	5.5	250	250	40	6	100	PenLF	6	B7	P
PTS	045 231 600		26	8.2	250	250	32	6	100	PenLF	5	B7	P
PTSA	869 231 500	G ₁	26	5.5	200	200	40		100	PenLF		B7	DDP
PTSD	968 231 500	G ₁	26	5	250	200	40	6	100	PenLF	6	B7	DDP
PTZ	005 231 600	G ₁	40	5.5	250	200	40	7.5	100	PenLF	7	B7	P
PVO6-20	400 235 100	A	6	40	200	300	40	4	100	100	4	B7	P
PVO6-25	401 235 100	A	6	40	200	300	40	4	100	100	4	B7	P
PVI-35	401 235 100	A	12	25	250	200	40	2	100	100	2	B7	P
PV4	892 300 000		4				60		REC		20mA	B4	RR
PV25	091 231 800		25				60		REC		20mA	B7	RR
PV29	091 231 800		30				60		REC		20mA	B7	RR
PV29s	123 180 090		30				60		REC		20mA	8SC	RR
PV30	091 231 800		30				30		REC		15mA	B7	RR
PV30a	123 180 090		30				30		REC		15mA	8SC	RR
PV30S	123 190 080		30				60		REC		20 mA	8SC	RR
PV75/1000	892 300 000		4				30		REC		17mA	B4	RR
PV100/2000	892 300 000		4				60		REC		18mA	B4	RR
PV200/600	892 300 000		4				120		REC		28mA	B4	RR
PV400	802 300 000		4				30		REC		15mA	B4	R
PV430	892 300 000		4				15		REC		9mA	B4	RR
PV475	892 300 000		4				15		REC		11mA	B4	RR
PV480	802 300 000		4				30		REC		16mA	B4	R
PV495	892 300 000		4				30		REC		17mA	B4	RR
PV3018	190 812 300		30				60		REC		20mA	C7	RR
PV4100	892 300 000		4				30		REC		15mA	B4	RR
PV4200	892 300 000		4				60		REC		27mA	B4	RR
PV4201	892 300 000		4				60		REC		27mA	B4	RR
PV4300	892 300 000		4				60		REC		20mA	B4	RR
PVB6	892 310 000		6				60		REC		20mA	B5	RR
PX2	642 300 000		2	22	150		22	1.5	100		1.5	B4	T
PX4	642 300 000		4	43	300		43	6	100		6	B4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
PXS	642 300 000		4	34	400		62.5	6.5	100		6.5	B4	T
PX2S	642 300 000		4	31	400		40	7.5	100		7	B4	T
PX2SA	642 300 000		4	100	400		62.5	3.7	100		6.9	B4	T
PX4I	642 300 000		4	40	250		49	6	100		6	B4	T
PX230	642 300 000		2	15	150		17.5	3.5	100		3.5	B4	T
PX230SV	602 300 000	G ₁	2	15	150		18	3.5	100		3.5	B4	T
PX240	642 300 000		2	32	200		25	3	100		3	B4	T
PX2100	642 300 000		7.5	30	400		18	1.6	100		1.6	5m4	T
PY3I	020 080 310		17				120		REC		70mA	A08	R
PY32	028 08* 310		29				180		REC			A08	R
PY7I	200 800 030	C	21				120		REC		30mA	B8B	R
PY80	001 230 008		19				120		REC		70mA	B9A	R
PY8I	*** 23* **8	C	17				120		REC		60mA	B9A	R
PY82	**1 23* **8		19				120		REC		70mA	B9A	R
PY83	*** 23* **8	C	20				120		REC		70mA	B9A	R
PZ	264 530 000		2.5	16.5	250	250	31	2.5	100	PenLF	2.5	UX5	P
PZ03-3	401 235 000	A	4	25	300	125	25	1.4	100	100	1.4	B7	P
PZ05-15	401 235 000	A	4		400	150	40	1.25	100	100	1.2	B7	P
PZ30	029 183 210		26				120		REC		60mA	A08	RR
PZH	265 413 000		2.5	16.5	250	250	34	2.2	100	PenLF	2.2	UX6	P
QA2400	412 361 500		6	2.5	200	200	8.0	2.5	100	150	2.5	B7G	P
QA2401	6*2 364 100		6	8.5	250		10.5	2.2	100		2.22	B7G	T
QA2402	412 36* 500		6	13.5	250	250	16.0	2.6	100	150	2.6	B7G	P
‡ QA2403	412 361 500		6	{ 2.0 1.6	250	250	10.0	7.5	100	150	5.0	B7G	P
QA2404	192 310 800		6		200	150	4.0	6.4	100	150	5.0		
							3.0		D			B7G	DD
QA2405	241 657 143		6	14	250	150	30	3.9	100	100	3.9	B9G	PP
QA2406	471 226 413		6	2.0	250		10.0	5.5	100		5.0	B9A	TT
QA2407	802 309 100		6				30		REC		15mA	B7G	RR
QA2408	481 461 230		6	8.0	250		9.0	2.6	100		2.6	A08	TT
QB65	461 471 230		6	8	250		9	2.6	100		2.6	A08	TT
QB309	641 227 413		6	2	250		10	5.5	100		5	B9A	TT
QD77	182 310 900		6						D			B7G	DD
QE04-10	265 511 413		6.3	12	300	150	25	1.9	No Data Available			B9G	P
QE05-40	125 141 300	A ₁	6		200	200	100	7	No Data Available			A08	P
QE06-50	254 130 000	A ₁	6	14	300	250	83	6.5	100	100		UX5	P
QL77	6*2 364 100		6	8.5	250		10.5	2.2	100		2	B7G	T
QN77	412 360 500		6	12.5	250	250	16	2.6	100	PenLF	2.6	B7G	P
QPT2	476 235 700		2	9	150	150	3.3		100	100		B7	PP
QP2I	446 235 700		2	9.8	150	150	3.5	2.3	100	100	2.3	B7	PP
QP22A	465 230 574		2	12	150	150	3	4	150	150	4	B9	PP
QP22B	446 235 700		2	11.7	150	150	3.8		100	150	3.1	B7	PP
QP25	207 544 630		2	6	125	125	10	3	100	100	3	M08	PP

‡ See note on Page 8

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
QP230	446 235 700		2	9.6	125	125	4.65	3	100	100	3	B7	PP
QP240	465 230 574		2	5.0	150	150	25	4	100	100	4	B9	PP
QQ03-12	601 235 144		6		300	250	45	7	No Data Available			B9A	P
QQCO4-15	263 724 540		6	14	300	200	20	2.0	No Data Available			B8B	P
QQE03-20	245 134 200		6	17	400	200	20	2.5	No Data Available			B7A	PP
QQE04-20	245 134 200	A ₁ A ₂	6	26	400	250	30	3.0	No Data Available			B7A	PP
QQE06-40	245 134 200	A ₁ A ₂	6		400	250	30	3.4	No Data Available			B7A	PP
QQV03-10	414 226 573		6	60	200	150	30.0	3.3	No Data Available			B9A	PP
QQV04-20	241 531 420	A ₁ A ₂	6	23	400	200	25	4	No Data Available			B7A	PP
QQV06-40	245 134 200	A ₁ A ₂	6		400	250	30	3.4	No Data Available			B7A	PP
QQZ04-15	273 624 540		3	10	300	200	20	2	100	100	2	B8B	PP
QV03-12	601 235 144		6	7.5	250	250	45.0	7.0	100	150	7.0	B9A	P
QV04-7	265 511 413		6	30	300	250	25	1.9	100	100	1.9	B9G	P
QV04-12	601 235 144		6	7.5	250	250	45	7	100	150	7	B9A	P
QV04-20	241 531 420	A ₁ A ₂	6	22	400	200	25	4	100	100	4	A08	PP
QV05-25	254 130 000	A	6	12.5	300	250	83	6.5	100	150	6	UX5	P
QV06-20	125 141 130	A	6	30	200	200	100	7	No Data Available			A08	P
QW77	412 361 500		6	2.5	200	200	8	2.5	100	100	2.5	B7G	P
QZ77	412 361 500		6	2	250	250	10	7.6	100	100	5	B7G	P
R1	892 300 000		4				30		REC		15mA	B4	RR
R2	892 300 000		4				60		REC		30mA	B4	RR
R3	892 300 000		4				60		REC		50mA	B4	RR
R4	892 300 000		4				60		REC		40mA	B4	RR
R4a	892 300 000		4				60		REC		40mA	B4	RR
R4B	802 300 000		4				60		REC		40mA	B4	R
R10	112 311 100	D ₁	4				5		D			B7G	R
R11	002 300 000	D ₁	4				60		REC		20mA	B4	R
R12	023 000 000	D ₁	6						D			B3G	D
R13A	028 090 310		13				30		REC		15mA	A08	RR
R14	028 193 210		26				120		REC		60mA	A08	RR
R16	123 000 000		1.4						D			B3G	D
R17	**I 23* ***	D ₁	6				120		REC		30mA	B9A	R
R18	**I 23* ***	D ₁	6				120		REC		36mA	B9A	R
R19	230 232 032	D ₁	1.25						D			B9A	D
R41	892 300 000		4				60		REC		20mA	B4	RR
R42	892 300 000		4				60		REC		20mA	B4	RR
R43	892 300 000		4				180		REC		40mA	B4	RR
R52	030 809 020		5				60		REC		20mA	A08	RR
R80	264 300 000		4	24	250		20	4	100		4	UX4	T
R236	026 510 300	G ₁	1.4	2	100	100	1	0.55	100	100	0.5	A08	P
R2018	642 310 000		20	2.5	200		2.5	3	100		3	B5	T
RA	892 310 000		13				30		REC			B5	RR
RA1	364 200 000		15	4.5	90		4.5	1.185	80		1.1	UX4	T
RB350/80	892 300 000		4				30		REC		15mA	B4	RR
RB500/120	892 300 000		4				60		REC		20mA	B4	RR

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
RB650/250	892 300 000		4				120		REC		30mA	B4	RR
RE034	642 300 000		4	3	200		2	1.2	100		1	B4	T
RE074	642 300 000		4	9	150		3.5	0.9	100		0.9	B4	T
RE074N	642 300 000		4	9	150		3.5	0.9	100		0.9	B4	T
RE084	642 300 000		4	4	150		4	1.5	100		1.5	B4	T
RE114	642 300 000		4	15	150		13	1.3	100		1.3	B4	T
RE134	642 300 000		4	17	250		12	2.0	100		1.9	B4	T
RE144	642 300 000		4	9	125		2	0.65	125		0.65	B4	T
RE304	642 300 000		4	32	250		20	1.9	100		1.6	B4	T
RE404	642 300 000		3.5		200			0.6	100		0.6	B4	T
RE604	642 300 000		4	45	250		40	2.5	No Data Available			B4	T
REN704	652 310 000	G ₁	4		100		2	1.1	100		1.1	B5	P
REN904	642 310 000		4	3.5	200		6	2.4	100		2.4	B5	T
REN914	642 310 000		4	1.5	200		0.2		100			B5	T
REN924	642 310 000	D ₁	4	3	200		6	2	100		2	B5	DT
REN1004	642 310 000		4		200			1.5	100		1.4	B5	T
REN1814	642 310 000		20	1.6	200		0.2	1.0	100		1.0	B5	T
REN1817D	652 310 000	G ₁	20		100	100		1.1	100	90	1.1	B5	P
REN1821	642 310 000		20	3	200		6	2.3	100		2.3	B5	T
REN1826	642 310 000	D ₁	20	3	200		6	1.8	100		1.8	B5	DT
RENS1204	542 310 000	A	4	2	200	60	4	1.0	100	60		B5	P
RENS1214	542 310 000	A	4	2.2	200	100	6	1.0	100	100		B5	P
RENS1264	542 310 000	A	4	2	200	100	3	2	100	100		B5	P
RENS1264B1	542 300 000	A	4	2	200	100	3	2	100	100		B4	P
RENS1274	542 310 000	A	4		200	100	3	2	100	100		B5	P
RENS1284	542 310 000	A	4	2	200	100	3	2.5	100	100		B5	P
RENS1294	542 310 000	A	4	2	200	100	4.5	2	100	100		B5	P
RENS1374D	642 310 000	G ₂	4	18	250	250	24	2.5	100	100		B5	P
RENS1818	542 310 000	A	20	2	200	100	3	2	100	100		B5	P
RENS1819	542 310 000	A	20		200	60	4	1	100	60		B5	P
RENS1820	542 310 000	A	20	2	200	60	4	1	100	60		B5	P
RENS1823D	642 310 000	G ₂	20	18	200	200	20	1.7	100	100		B5	P
RENS1884	642 310 000	G ₂	20	2	200	100	3	2.4	100	100		B5	P
RENS1894	642 310 000	G ₂	20	2.2	200	100	4	1.8	100	100		B5	P
RES094	542 300 000	A	4	2	200	75	4	7	100	75		B5	P
RES164	642 350 000		4	11.5	250	75	12	1.4	100	75		B5	P
RES174D	642 300 000	G ₂	4	19	250	150	12	1.3	100	100		B4	P
RES364	642 350 000		4	2.5	300	200	20	1.7	100	100		B5	P
RES374	642 350 000		4	42	300	200	20	1.5	No Data Available			B5	P
RES964	642 350 000		4	15	250	250	36	2.8	No Data Available			B5	P
RFGS	003 200 000	D ₁	6						D			F8	R
RFP8/14	041 231 500	A ₁	4	20	400	250	35	4	100	PenLF	4	B7	P
RFP8/14	542 310 000	A ₁	4	20	400	250	35	4	100	PenLF	4	B5	P
RG250/1000	002 300 000	D ₁	4				120		REC		30mA	B4	R
RG250/3000	280 300 000		2.5				120		REC		30mA	UX4	R

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
RGN354	802 300 000		4				15		D			B4	R
RGN504	892 300 000		4				15		D			B4	RR
RGN564	802 300 000		4				30		REC		15mA	B4	RR
RGN1054	892 300 000		4				30		REC		15mA	B4	RR
RGN1064	892 300 000		4				30		REC		15mA	B4	RR
RGN1074	892 300 000		4				60		REC		20mA	B4	RR
RGN1304	802 300 000		4				60		REC		20mA	B4	R
RGN1503	892 300 000		2.5				30		REC		15mA	B4	RR
RGN2004	892 300 000		4				60		REC		20mA	B4	RR
RGN2504	892 300 000		4				60		REC		20mA	B4	RR
RH	061 231 500	G ₁	4	1.7	250	100	7.9	7	200	100	7.4	B7	P
RK10	264 300 000		7.5	100	350		50		100			UX4	T
RK15	264 300 000		2.5	33	250		22	2.35	100		2.3	UX4	T
RK16	264 130 000		2.5	28	250		26	2.6	100		2.6	UX5	T
RK19	200 300 000	D ₁ D ₂	7.5				120		REC		30mA	UX4	RR
RK21	200 300 000	D ₁	2.5				120		REC		30mA	UX4	R
RK24	364 200 000		2	13.5	175		8	1.6	100		1.6	UX4	T
RK39	254 130 000	A ₁	6	14	300	250	83	6.5	100	PenLF		UX5	P
RK60	200 300 000	D ₁ D ₂	5				120		REC		30mA	UX4	RR
RL7	265 114 113		6	1.7	250	250	10.0	7.7	100	150	7.0	B9G	P
RL16	241 600 003		6	2.5	250		10	6.5	100		5	B9G	T
RL18	241 600 003		6	2.6	250		10.0	6.5	100		6.4	B9G	T
RL37	244 664 413		6	1.5	250		10	9	100		7	B9G	T
RO337	892 300 000		2.5				30		REC		15mA	B4	RR
RO423	892 300 000		2.5				30		REC		15mA	B4	RR
RO431	892 300 000		4				60		REC		20mA	B4	RR
RO443	892 300 000		4				60		REC		20mA	B4	RR
RO446	892 300 000		4				30		REC		15mA	B4	RR
RO452	892 300 000		4				60		REC		20mA	B4	RR
RO457	892 300 000		4				60		REC		20mA	B4	RR
RO481	802 300 000		4				120		REC		30mA	B4	R
RO534	892 300 000		5				60		REC		20mA	B4	RR
RO771	802 300 000		7.5				120		REC		30mA	B4	R
RS	802 310 000		3				60		REC		20mA	B5	R
RS1009	245 134 200	A ₁ A ₂	6	25	400	250	30	3.4	No Data Available			B7A	PP
RS1019	245 134 200	A ₁ A ₂	6	20	40	250	20	2.5	No Data Available			B7A	PP
RRAF	642 300 000		4	2	125		4	1.45	100		1.4	B4	T
RRBF	642 300 000		4	2.5	125		10	1.25	100		1.2	B4	T
RSAF	542 300 000	A	4	1	150	75	4.5	1.25	150	75	1.25	B4	T
RT1-2	642 300 000		4	2.6	125		26	2.5	100		2.5	B4	T
RT2	642 300 000		4	4	200		18	1.75	150		1.75	B4	T
RT3	642 300 000		4	2.3	300		15	2.85	100		2.8	B4	T
RTR4341	061 231 500	G ₁	21	2.2	125	125	8	8	100	125	8	B4	P
RTR4342	005 231 600	G ₁	21	5.8	125	125	48	9	100	125	8	B7	P
RV120/250	892 300 000		4				60		REC		20mA	B4	RR

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
RV120/350	892 300 000		4				60		REC		20mA	B4	RR
RV120/350S	023 080 090		4				60		REC		30mA	8SC	RR
RV120/500	892 300 000		4				60		REC		20mA	B4	RR
RV120/500S	023 080 090		4				60		REC		20mA	8SC	RR
RV200/600	892 300 000		4				120		REC		30mA	B4	RR
RV210	042 310 000	A ₁	4	S3	400		70	5.8	No Data Available			B5	T
RX21	200 030 000	D ₁	2.5				120		REC		30mA	UX5	R
RX21S	389 200 000		2.5				5		D			UX4	RR
RZ	023 100 080		20				60		REC		20mA	8SC	R
SO1	264 300 000		15	40.5	175		21	1.5	100		1.5	UX4	T
SO2	264 300 000		7.4	88	400		55	2.1	100		2.1	UX4	T
S2	542 300 000	A	2	1	125	60	2.25	1.1	125	60	1.1	B4	P
S4V	542 310 000	A	4	1	200	75	1.5	1.15	100	75	1.1	B5	P
S4VA	542 310 000	A	4	1.5	200	100	2.75	2	100	100	2	B5	P
S4VB	542 310 000	A	4	1.5	200	125	4.6	2.5	100	100	2.5	B5	P
SI1A	892 300 000		4				30		REC		15mA	B4	RR
SI1D	892 300 000		4				60		REC		20mA	B4	RR
SI2	542 300 000	A	2	1	100	30	2.5	0.7	No Data Available			Sm4	P
S21	542 300 000	A	2	0	125	75	3.6	1.1	100	75	1.1	B4	P
S22	542 300 000	A	2	0	125	75	4	1.75	125	75	1.75	B4	P
S23	542 300 000	A	2	1	150	75	2.8	1.1	150	75	1.1	B4	P
S24	542 300 000	A	2	1	150	75	3.2	1.4	150	75	1.4	B4	P
S30C	642 300 000		4	38	300		50	5	100		5	B4	T
S30D	642 300 000		2	38	300		50	5	100		5	B4	T
S207	542 300 000	A	2	1.5	200	100	3	0.7	100	100	0.7	B4	P
S208	542 300 000	A	2	0	200	100	2	0.8	100	100	0.8	B4	P
S209	023 010 S60	G ₁	2	0.5	125	125	2.4	0.7	125	125	0.7	8SC	P
S210	642 300 000	G _a	2	1.5	150	90	3	1.2	100	90	1.0	B4	P
S213	542 300 000	A	2	0.5	150	90	3	1.3	100	90	1.3	B4	P
S215	542 300 000	A	1	1.5	150	90	2.75	1.5	100	90	1.5	B4	P
S215A	542 300 000	A	2	1	150	60	2	1.1	150	60	1.1	B4	P
S215B	542 300 000	A	2	1	150	60	1.5	1.2	150	60	1.2	B4	P
S215VM	542 300 000	A	2	1.4	150	60	1.0	0.8	150	60	1.4	B4	P
S217	542 300 000	A	2	0.5	150	150	2.3	1.7	100	150	1.7	B4	P
S218	041 230 500	A	2	0.5	150	150	3	1.85	100	150	1.8	B7	P
S220	542 300 000	A	2		150	75	4	1.1	150	75	1.1	B4	P
S310A	265 113 000	G ₁	10	3	125	150	5.5	1.9	100	100	1.9	UX6	P
S311A	265 130 000	G ₁	10	15	125	150	30	2.8	100	100	2.8	UX5	P
S328A	265 113 000	G ₁	7.5	3	125	150	5.5	1.9	100	100	1.9	UX6	P
S329A	265 130 000	G ₁	7.5	15	125	150	30	2.8	100	100	2.8	UX5	P
S329L	265 113 000	G ₁	7.5	15	125	125	30	2.8	No Data Available			UX6	P
S406/7	542 300 000	A	4	2	200	100	1.5	1	100	100	1	B4	P
S408	542 300 000	A	4	1.5	175	75	4	0.8	100	75		B4	P
S409	542 300 000	A	4	1.5	175	75	4	0.8	100	75		B4	P
S410	542 300 000	A	4	1.5	175	75	4	1.0	100	75		B4	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
S415N	542 310 000	A	4	2	200	100	6	1	100	100	1	B5	P
S420	061 231 500	G ₁	4	3	250	250	11.5		100	200		B7	P
S430N	542 300 000	A	4	1.3	200	100	1.5	0.9	100	100	3	B5	P
S431N	542 310 000	A	4	2.5	225	100	3.5	2.0	100	100		B5	P
S432N	023 110 560	G ₁	4	3	225	100	2.5	2.2	100	100		8SC	P
S435N	542 310 000	A	4	2	200	100	3.0	2.3	100	100	2.3	B5	P
S440	061 231 500	G ₁	4	2.35	250	250	4.1	3.45	100	200	3.4	B7	P
S493	542 310 000	A	4	2	200	100	4		100	100		B5	P
S495	542 310 000	A	4	2	200	100	6	2.5	100	100	2.5	B5	P
S617	023 110 560	G ₁	6.3	3	225	100	2.5	2.2	100	100		8SC	P
S620	023 110 560	G ₁	6.3	2.5	225	100	3.5	2.0	100	100		8SC	P
S629	023 110 560	G ₁	6.3	2.5	225	100	3.5	2.0	100	100		8SC	P
S1323	061 231 500	G ₁	13	3	200	100	8	1.85	100	100	1.85	B7	P
S1323	023 110 560	G ₁	13	3	200	100	8	1.85	100	100	1.85	8SC	P
S1324	061 231 500	G ₁	13	2	200	100	3	2.37	100	100	2.3	B7	P
S1327	023 110 560	G ₁	13	2.5	250	100	3.5	2.0	100	100		8SC	P
S1328	023 110 560	G ₁	13	2	200	100	3	2.37	100	100	2.3	8SC	P
S2018	041 231 500	A	20	3	200	60	4	1.2	100	60	1.2	B7	P
S2018	542 310 000	A	20	3	200	60	4	1.2	100	60	1.2	B5	P
S2035N	542 310 000	A	20	2.5	225	100	3.5	2.0	100	100		B5	P
S2043	542 310 000	A	20	2.5	250	100	5	2.0	100	100		B5	P
S4020A	254 300 000		2	1	125		1.3	0.6	100		0.6	UX4	T
S4020B	642 300 000		2	1	125		1.3	0.6	100		0.6	UX4	T
S4021A	264 300 000		4	8	125		20	3	100		3	UX4	T
S4021B	642 300 000		4	8	125		20	3	100		3	B4	T
S4022AR	236 400 000		4	4.5	125		5	2.2	100		2.2	UX4	T
S4022B	642 300 000		4	4.5	125		5	2.2	100		2.2	B4	T
S4045A	642 350 000		5	70	250	75	45	1.45	100	60	1.45	B5	P
SD	892 310 000		5						D			B5	DD
SD2	642 300 000		2	1.5	150		2.2	1.4	150		1.4	B4	T
SD6	*82 310 *00		6				5		D		6mA	B7G	R
SD61	123 000 000	D ₁	6						D			B3G	D
SD917A	402 013 060		6.3	3.6	100		1.4	2.7	100		2.7	B8A	T
SE211	542 300 000	A	2	1	150	75	1	1.5	150	75	1.5	B4	P
SE211C	542 300 000	A	2	1.0	150	75	1	1.5	150	75	1.5	B4	P
SE2018	542 310 000	A	20	3	200	60	4	1.2	100	60	1.2	B5	P
SE2118	542 310 000	A	20	24	200	100	3	3	100	60	3	B5	P
SG2	542 300 000	A	2		150	75	2.5	1	100	75	1	B4	P
SG21S	542 300 000	A	2	1.5	150	75	2.7	1	100	75	1	B4	P
SG21SA	542 300 000	A ₁	2	0	125	75		1.1	125	80	1.1	B4	P
SG21SVM	542 300 000		2	0	125	75		1.4	125	80	1.4	B4	P
SG220	542 300 000	A	2	1.5	150	75	2.4	1.5	100	75	1.5	B4	P
SG220SW	652 300 000	G ₁	2	1.5	150	75	2.4	1.5	150	75	1.5	B4	P
SGA1	542 310 000	A	4		200	100	6	3	100	100	3	B5	P
SN954	082 813 080		6.3				30		REC		15mA	B8A	R

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
SN1039A	412 365 100		6.3	1.4	100	100	7.0	5.1	100	100	5	B7G	P
SP2	041 230 500	A	2	1	150	150	3	1.8	150	150	1.8	B7	P
SP2B	061 230 500	G ₁	2	1	150	150	2.6	0.8	150	150	0.8	B7	P
SP2B(S)	032 004 560		2	1	150	150	2.6	0.8	150	150	0.8	85C	P
SP2D	061 230 500	G ₁	2	1	150	150	1.4	1.7	150	150	1.7	B7	P
SP2D	542 300 000	A	2	1	125	125	1.45	1.7	125	100	1.7	B4	P
SP2V	041 230 500	A	2	0	150	75	2.9	1.1	100	75	1	B7	P
SP4(TUNG)	061 231 500	G ₁	4	2	200	100	3	2.3	100	100	2.3	B7	P
SP4	542 310 000	A	4	2	200	100	3	2.3	100	100	2.3	B5	P
SP4A	041 231 500	A	4	2	250	100	3	2.4	100	100	2.4	B7	P
SP4(MUL)	041 231 500	A	4	2	200	100	3	2.3	100	100	2	B7	P
SP4B	061 231 500	G ₁	4	2.4	250	250	4	3.4	100	100	3.4	B7	P
SP4C	023 110 560	G ₁	4	2.4	250	250	4	3.4	100	100	3.4	B7	P
SP4S	023 110 560	G ₁	4	2	250	100	3	3.5	100	PenLF	3.5	85C	P
SP6	412 361 500		6	2	250	250	10	7.5	100	PenLF	7	B7G	P
SP6S	023 110 560	G ₁	6	2	250	100	3	2	100	100	2	85C	P
SPI3	061 231 500	A	13	2	200	100	3.3	2.2	100	100	2.2	B7	P
SPI3	023 110 560	G ₁	13	2	200	100	3.3	2.2	100	100	2.2	85C	P
SPI3B	061 231 500	G ₁	13	1.5	200	200	2	4	100	150	4	B7	P
SPI3C	061 231 500	G ₁	13	2.2	200	200	2.5	2.8	100	150	2.8	B7	P
SPI3S	023 110 560	G ₁	13	2	150	100	3	2.4	100	100	2.4	85C	P
SP20	542 310 000	A	20		200	100	4.5	3.5	100	100	3.5	B5	P
SP22	206 510 030	G ₁	2	1	125	125	1.1	1.2	125	100	1.2	M08	P
SP35	023 110 560	G ₁	35	8	200	200	41	7	100	PenLF	7	85C	P
SP41	216 510 030	G ₁	4	1.5	200	200	10.9	8.5	100	150	8	M08	P
SP42	216 510 030	G ₁	4	1.3	200	125	20	8.4	100	100	8	M08	P
SP61	216 510 030	G ₁	6	1.5	200	200	10.9	8.5	100	150	8	M08	P
SP62	216 510 030	G ₁	6	1.25	200	100	16	9	200	100	8	M08	P
SP6S	023 110 560	G ₁	6	2	250	100	3	2.1	100	100	2.1	85C	P
SPI41	206 500 030	G ₁	1.4	1	90	90	1.3	0.75	80	90	0.75	M08	P
SPI81	216 510 030	G ₁	18	1.5	200	200	10.9	8.5	100	PenLF	8	M08	P
SP210	041 230 500	A	2	1	125	125	1.1	1.2	125	100	1.2	B7	P
SP21S	041 230 500	A	2	1.5	150	80	2.1	1.6	100	75	1.6	B7	P
SP220	642 300 000		2	12	150		14	3	100		3	B4	T
SPI320	041 231 500	A	13	1.5	250	100	4.4	2.0	100	100	2	B7	P
SP2220	041 231 500	A	22	3	250	200	4.9	2.65	100	150	2.6	B7	P
SPT2	041 230 500	A	2	1	125	125	2.8	1.5	125	100	1.5	B7	P
SPT4A	041 231 500	A	4	1.5	250	100	2	2.3	200	100	2.3	B7	P
SPTA	061 231 500		13	2.5	200	100	2.2	1.4	100	100		B7	P
SPTS	041 231 500	A	13	1.5	250	100	2	3	100	100	3	B7	P
SR2	642 300 000		2	16	200		10	3	100		3	B4	T
SR4	642 310 000		4	20	250		20	4	100		4	B5	T
SRS445I	245 134 200	A ₁ A ₂	6	25	400	250	30	3.4	No Data Available			B7A	PP
SS210	542 300 000	A	2	1	150	75	0.6	1.4	150	75	1.4	B4	P
SS210C	542 300 000	A	2	1	150	75		1.4	150	75	1.4	B5	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
SS210DDT	682 390 000	G ₁	2	5.5	150		2.4	1.4	100		1.4	B5	DDT
SS210D	642 300 000		2	4.5	150		2	1.6	100		1.6	B4	T
SS210HF	642 300 000		2	4	150		1	0.75	100		0.75	B4	T
SS210HL	642 300 000		2	1.5	150		2	1.4	125		1.4	B4	T
SS220PA	642 300 000		2	6	150		8	3.5	100		3.5	B4	T
SS220P	642 300 000		2	12	150		6	1.5	100		1.5	B4	T
SS220SP	642 300 000		2	12	150		14	3.5	100		3.5	B4	T
SS240SP	642 300 000		2	12	150		15	3.5	100		3.5	B4	T
SS2018	542 310 000	A	20	3	200	100	3	3	100	90	3	B5	P
SU2S	*2* 0** 3*0	D ₁	2						D			A08	D
SU45	112 311 100	D ₁	4				30		REC		15mA	B7G	R
SU61	023 000 000	D ₁	6						D			B3G	D
SU2130	002 300 000	D ₁	2				2		D			B4	R
SU2150	002 300 000	D ₁	2				2		D			B4	R
SU2150A	002 300 000	D ₁	2				5		D		2mA	B4	R
SU3130	002 300 000	D ₁	2						D			B4	D
SWG2	652 300 000	G ₁	2		150	75		1.5	100	75	1.5	B4	P
SWI	802 300 000		4				30		REC		15mA	B4	R
T2M0S	672 344 100		6	{ 0.8S 3	100		8.5	5.3	100		5.3	B7G	TT
T4D	123 000 000	D ₁	4		150		5	4.5	100		5.3		D
T6D	123 000 000	D ₁	6						D			B3G	D
T13U	023 100 060	G ₁	13	4	200		5.9	2.6	100		2.6	8SC	T
T41(MAZDA)	216 040 030		4		100		30	2KΩ	No Data Available			M08	Thyratron
T134	542 300 000	A	4	1	150	75	5	1.3	100	75		B4	P
T136	642 300 000		4	8	200		6	1.6	100		1.6	B4	T
T1S1	642 300 000	G ₂	4	15	200	150	12	1.8	100	100		B4	P
T204	023 004 060		2	1	125		1.8	0.6	125		0.6	8SC	T
T435	023 100 060	G ₁	4	5	225		6	2.5	100		2.4	8SC	T
T635	023 100 060	G ₁	6.3	16	250		20	3.2	100		3	8SC	T
T1335	023 100 060	G ₁	13	5	225		6	2.5	100		2.4	8SC	T
TB13	802 310 000		13						D			B5	D
TB032	642 300 000		2	30	150		12	1.5	100		1.5	B4	T
TB052	642 300 000		2	15	150		7	1.2	100		1.2	B4	T
TB062	642 300 000		2	10.5	150		13	2	100		2	B4	T
TB102	642 300 000		2	4	150		5	1.25	100		1.2	B4	T
TB122	642 300 000		2	4.5	150		6	3.5	100		3.5	B4	T
TB172	642 300 000		2	4.5	150		4	1.4	100		1.4	B4	T
TB282	642 300 000		2	1.5	150		2	1.3	125		1.3	B4	T
TB402	446 230 700		2	0	150		6		150			B7	TT
TB452	542 300 000	A	2	0	150	75	2	1.5	150	75	1.5	B4	P
TB552	542 300 000	A	2	0	150	75	4	1.5	150	75	1.5	B4	P
TB622	542 300 000	A	2		150	90	2	1.4	100	90	1.4	B4	P
TB9920	642 310 000		20	1.5	200		0.2	4	150		4	B5	T
TBC14	809 231 600	G ₁	4	7	250		4	2	100		2	B7	DDT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
TBC113	809 231 600	G ₁	13	5	200		4	3.6	100		3.6	B7	DDT
TC05-25	642 300 000		4		400		65	2.2	No Data Available			B4	T
TC432	642 300 000	S	2	4.5	150	150	9.5		100	100		B4	P
TC432	642 350 000		2	4.5	150	150	9.5		100	100		B5	P
TD044	642 300 000		4	40	250		40	3	100		3	B4	T
TDD1C	023 189 060		13	5.0	200		4.0	2.0	100		2.0	B7	DDT
TDD2	682 390 000	G ₁	2	5.5	150		2.5	1.4	100		1.4	B5	DDT
TDD2A	682 390 000	G ₁	2	1.5	150		1.95	1.2	125		1.2	B5	DDT
TDD4	908 231 600	G ₁	4	7	250		4	2	100		2	B7	DDT
TDD13C	809 231 600	G ₁	13	5	200		4	2	100		2	B7	DDT
TDD25	809 231 600	G ₁	25	1	100		4	2	100		2	B7	DDT
TE2	028 090 310		26				30		REC		15mA	A08	RR
TE3	028 090 310		12				30		REC		15mA	A08	RR
TE5	028 090 310		6.3				30		REC		15mA	A08	RR
TE094	642 310 000		4	16	200		12	1.3	100		1.3	B5	T
TE104	642 300 000		4	36	400		61	4	100		4	B4	T
TE244	642 310 000		4	3.5	200		6	2.4	150		2.4	B5	T
TE384	642 310 000		4	2	200		3	1.5	150		1.5	B5	T
TE424	542 310 000	A	4		200	100	3	2	100	100	2	B5	P
TE434	642 350 000		4	14	250	250	36		100	PenLF		B5	P
TE464	041 231 500	A	4		200	100	3	2.5	100	100	2.5	B7	P
TE474	041 231 500	A	4	1.5	200	100	4.5	2	100	100	2	B7	P
TE534	642 310 000	S	4	15	250	250	24		100	PenLF		B5	P
TE564	041 231 500	A	4	1.5	200	100	4.5	3.2	100	100	3.2	B7	P
TE634	045 231 600		4	22	250	250	36		100	100		B7	P
TE994	642 310 000		4	1.6	250		4	4	200		4	B5	T
TF64	061 231 500	G ₁	4	2.75	250	250	11	2	200	150	2	B7	P
TF104	642 300 000		4	36	400		61	4	100		4	B4	T
TH1	276 454 300		6.3	{	250				100	60		}B8B	TH
					250				100	100			
					150		0.95	1.2	100	60	1.2		
TH2	645 230 700	G ₁	2	{	250	75	4		125	60	0.7	}B7	TH
				1.5									
TH4	645 231 700	G ₁	4	{	150		6	1.2	150	60	1.2	}B7	TH
				2	200	100	3.5		200	75	3.0		
				4.6	100		5	2.0	125	60	6		
TH4A	645 231 700	G ₁	4	{	250	100	3.5		200	100	3.0	}B7	TH
				2	100		9	3.8	100	60	5.5		
				3	250	100	3.25		200	100	3.5		
TH4B	645 231 700	G ₁	4	{	250	100	3.25		200	100	3.5	}B7	TH
				2.5	100		6	1.2	100	60	1.2		
				2	150		6	1.8	200	75	3.6		
TH13C	645 231 700	G ₁	13	{	250	75	4.0	1.8	200	75	3.6	}B7	TH
				1.5	125		6	1.2	100	60	1.2		
				2	250	75	4	1.8	200	75	3.0		
TH21C	645 231 700	G ₁	21	{	250	75	4	1.8	200	75	3.0	}B7	TH
				1.5	125		6	1.2	100	60	1.2		
				2	250	75	4	1.8	200	75	3.0		
TH22C	645 231 700	G ₁	29	{	125		5	6	100	60	5	}B7	TH
				2	250	100	3.5		200	75	3.0		
				2	100		12.0	4.5	100	60	5		
TH29	645 231 700	G ₁	29	{	250	100	3.5		200	75	3.0	}B7	TH
				2	100		12.0	4.5	100	60	5		
				2	250	100	3.5		200	75	3.0		

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
TH30	645 231 700	G ₁	30	{ 2	100		9.5	5.5	100	60	5.5	B7	TH
TH30C	645 231 700	G ₁	29	{ 2.5	250	100	3.5		100	100		B7	TH
TH31	217 640 530	G ₁	4	{ 3	100		10.2	4	100	60	5.3	M08	TH
TH41	217 640 530	G ₁	4	{ 3	250	100	3	3	100	90	3	M08	TH
TH41	217 640 530	G ₁	4	{ 3	100		10.2	4	100	60	5.3	M08	TH
TH41	217 640 530	G ₁	4	{ 3	250	100	3	3.1	100	100	3.1	M08	TH
TH62	027 546 310	G ₁	6	{ 2	100		4.4	2.4	100	60	2.2	A08	TH
TH62	027 546 310	G ₁	6	{ 2	250	100	3		200	100	1.2	A08	TH
TH233	217 640 530	G ₁	23	{ 2	100		14.0	2.1	100	60	2.1	M08	TH
TH233	217 640 530	G ₁	23	{ 2	150	100	2.6	3	100	90	3	M08	TH
TH2320	645 231 700	G ₁	23	{ 0	100		4.5	5.3	100	60	5.3	B7	TH
TH2320	645 231 700	G ₁	23	{ 3	150	100	3		100	100	3.8	B7	TH
TH2321	645 231 700	G ₁	23	{ 0	100		4.0	5.3	100	60	5.3	B7	TH
TH2321	645 231 700	G ₁	23	{ 2	150	100	2.6	3.0	100	100	3.0	B7	TH
TL54	045 231 600		4	{ 12.5	250	250	70		100	PenLF		B7	P
§ TMO5	672 344 100		6	{ .85	100		8.5	5.3	100		5.3	B7G	TT
§ TMO5	672 344 100		6	{ 3	150		5	4.5	100		5.3	B7G	TT
TM12	412 344 600		6.3	{ 1.5	150		15	12	100		12	B7A	T
TP4	571 231 640	G ₁	4	{ 3	125		1.5	1.4	100	60	1.4	B7	TP
TP4	571 231 640	G ₁	4	{ 5	250	200	5.5	1.6	200	PenLF	1.5	B7	TP
TP22	571 230 640	G ₁	2	{ 1	100		0.8	1.2	100	60	1.4	B9	TP
TP22	571 230 640	G ₁	2	{ 1	125	60	1.2	1.0	150	60	1.3	B9	TP
TP23	645 230 700	G ₁	2	{ 1.0	100		4.5	2.1	100	60	2.1	B7	TP
TP23	645 230 700	G ₁	2	{ 1.5	125	60	1.0	1.0	125	60	1.2	B7	TP
TP25	207 640 530	G ₁	2	{ 1.0	100	0	3.7	1.6	100	60	1.7	M08	TP
TP25	207 640 530	G ₁	2	{ 1.5	125	60	1.0	1.0	125	60	1.0	M08	TP
TP26	207 640 530	G ₁	2	{ 1.0	125		2.2	1.5	125	60	1.3	M08	TP
TP26	207 640 530	G ₁	2	{ 1.0	125	75	1.5	1.5	125	75	1.5	M08	TP
TP230	561 230 740	G ₁	2	{ 0	100		20.0	1.1	100	60	1.1	B9	TP
TP230	561 230 740	G ₁	2	{ 0	150	75	4.3	1.3	150	75	1.3	B9	TP
TP443	642 350 000		4	{ 22	250	250	36	5	100	PenLF	5	B5	P
TP1340	571 231 640	G ₁	13	{ 200	200		2.0	1.4	150	60	0.14	B9	TP
TP1340	571 231 640	G ₁	13	{ 6.0	250	250	6.5	2.1	100	100		B9	TP
TP2620	571 231 640	G ₁	26	{ 2.5	250		1.5	1.4	100	60	1.4	B9	TP
TP2620	571 231 640	G ₁	26	{ 4.0	250	200	6.5	3.4	100	150	3.4	B9	TP
TS49	261 504 130		20	{ 4.5	225	150	15	6	100	100	5.2	B8B	P
TSS1	412 365 100		6	{ 2.3	150	150	7	4.3	100	100	4	B7G	P
§ TS52	672 344 100		6	{ .85	100		8.5	5.3	100		5.3	G7G	TT
§ TS52	672 344 100		6	{ 3	150		5	4.5	100		5.3	G7G	TT
TS53	541 236 **1		18	{ 1.8	200	100	15	10	100	100	8	B9A	P
TS54	541 236 **1		6.3	{ 1.7	200	125	10	9	100	100	8	B9A	P
TSE4	061 231 500		4	{ 2.5	250	150	8	14.5	100	100		B7	P
TSP4	061 231 500	G ₁	4	{ 2.5	200	200	8.0	4.7	100	150	4.7	B7	P
TT4	642 310 000		4	{ 16	250		20	3.2	100		3.2	BS	T

§ See note on Page 8

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
TT4A	642 310 000		4	9	250		20	4.1	100		4.1	B5	T
TT11	020 450 310	A	6	11	250	150	30	3.5	100	100	3.5	A08	P
TT12	204 531 102	A	19	13	250	250	72	6	100	100	6	B9G	P
TT14	204 051 103	A	6	13	250	250	72	6	100	100	6	B9G	P
TT15	241 657 143		6	14	250	150	30	3.9	100	100	3.9	B9G	PP
TT19	241 657 143		19	16.5	250	150	30	3.9	100	100	3.9	B9G	PP
TT20	245 134 200	A ₁ A ₂	6	17	400	200	20	2.5	No Data Available			B7A	PP
TV03-10	442 310 000	A ₁ A ₂	6	17	300		17	3.2	100		3	B5	TT
TW1	802 310 000		20				60		REC		20mA	B5	R
TW2	892 310 000		30				60		REC		20mA	B5	RR
TX4	645 231 700	G ₁	4	{ 5.0 1.5	150 300	90	9.0 5.5	1.5	150 200	60 90		B7	TH
TX21	645 231 700	G ₁	21	{ 2.0 1.5	150 250	90	15 5.5	2.5	100 200	60 75	1.5 3.0		
TX41	645 231 700	G ₁	4	{ 3 2.5	100 250	100	9 3.25	3.8	100 250	60 100	5	B7	TH
U4C	642 300 000		4	12	200		35	3.2	100		3.2	B4	T
U4E	642 300 000		4	40	400		45	4	No Data Available			B4	T
U4F	642 300 000		4	40	400		45	4	No Data Available			B4	T
U5	892 300 000		5				15		REC		15mA	B4	RR
U8	892 300 000		7.5				60		REC		20mA	B4	RR
U9	892 300 000		4				30		REC		15mA	B4	RR
U10	892 300 000		4				30		REC		15mA	B4	RR
U12	892 300 000		4				60		REC		20mA	B4	RR
U12/14	892 300 000		4				60		REC		30mA	B4	RR
U14	892 300 000		4				60		REC		20mA	B4	RR
U15	802 300 000		6				120		REC		30mA	B4	R
U16	002 300 000	D ₁	2				5		REC		5mA	B4	R
U17	002 300 000	D ₁	4				30		REC		15mA	B4	R
U18	892 300 000		4				120		REC		30mA	B4	RR
U18/20	892 300 000		4				120		REC		30mA	B4	RR
U19	002 300 000	D ₁	4				120		REC		40mA	B4	R
U19/23	002 300 000	D ₁	4				120		REC		30mA	B4	R
U20	892 300 000		4				60		REC		20mA	B4	RR
U21	002 300 000	D ₁	2				5		REC		5mA	B4	R
U22	200 000 030	D ₁	2				5		D			M08	D
U22FH	200 000 030	D ₁	2						D			M08	D
U23	002 300 000	D ₁	4				120		REC		30mA	B4	R
U24	020 000 300	D ₁	2				1.0		REC		2mA	A08	R
U25	023 000 000	D ₁	2						D			B3G	D
U26	391 221 800		13				60		REC		20mA	B7	RR
U29	002 300 000	D ₁	2				15		REC		30mA	B5	R
U30	391 221 800		13				60		REC		30mA	B7	RR
U30/250	802 300 000		4				30		REC		15mA	B4	R
U31	020 080 310		26				120		REC		50mA	A08	R

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
U33	002 300 000	D ₁	2				3		D			B4	R
U35	020 000 030	D ₁	1.4				2		D			A08	R
U37	023 000 000	D ₁	1.4				0.5		D			B2G	D
U41	*2* 0*0 3*0	D ₁	1.25				1		D			A08	D
U43	023 000 000		6				0.5		D			B2G	D
U50	020 908 030		5				60		REC		30mA	A08	RR
U51	030 908 020		5				120		REC		30mA	A08	RR
U52	030 908 020		5				120		REC		30mA	A08	RR
U52lt	008 090 230		5				120		REC		30mA	A08	RR
U54	030 908 020		5				120		REC		30mA	A08	RR
U60/500	892 300 000		4				60		REC		20mA	B4	R
U65/550	802 300 000		7.5				60		REC		20mA	B4	R
U70	028 090 310		6				30		REC		30mA	A08	RR
U71	020 080 310		30				60		REC		50mA	A08	R
U74	020 080 310		30				120		REC		30mA	A08	R
U76	020 080 310		30				120		REC		60mA	A08	R
U78	802 309 100		6				30		REC		30mA	B7G	RR
U81	009 008 230		6				60		REC		20mA	B8B	RR
U82	209 008 130		6				30		REC		30mA	B8B	RR
U84	009 **8 230		4				30		REC		15mA	B8B	RR
U101	280 008 130		50				120		REC		30mA	B8B	R
U107	281 008 300		40				60		REC		20mA	B7G	R
U134	028 190 310		13				60		REC		20mA	A08	RR
U120/500	892 300 000		2				120		REC		30mA	B4	R
U142	280 000 130		31				60		REC		20mA	B8A	R
U143	020 908 030		4				30		REC		15mA	A08	RR
U145	280 000 130		40				60		REC		60mA	B8A	R
U147	028 090 310		6				30		REC		30mA	A08	RR
U149	209 008 130		6				30		REC		15mA	B8B	RR
U150	280 009 130		6				30		REC		40mA	B8A	RR
U151	023 000 000	D ₁	6						D			B8G	D
U152	001 230 008		19				120		REC		70mA	B9A	R
U153	*** 23* **8	C	17				120		REC		60mA	B9A	R
U154	**1 23* **8		19				120		REC		70mA	B9A	R
U191	0** 080 230	D ₁	19						D			A08	R
U201	020 080 310		20				60		REC		60mA	A08	R
U251	*** 23* **8	C	25				120		REC		30mA	B9A	R
U281	020 080 310		28				120		REC		80mA	A08	R
U282	001 000 230	D ₁	28				120		REC		36mA	A08	R
U301	0** 080 230	C	30				120		REC		35mA	A08	R
U309	**1 23* **8		20				120		REC		70mA	B9A	R
U319	001 230 008		20				120		REC		70mA	B9A	R
U329	*** 23* **8	C	25				120		REC		60mA	B9A	R
U403	201 080 030		40				120		REC		70mA	M08	R
U404	280 *** 130		40				60		REC		60mA	B8A	R

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
U415	642 300 000		4	10.5	150		5	1.4	100		1.4	B4	T
U418	642 300 000		4	13	150		10	1.6	100		1.6	B4	T
U650	802 300 000		6				30		REC		15mA	B4	R
U709	8*1 23* 9**		6				60		REC		20mA	B9A	RR
U801	128 899 310		80				120		REC		30mA	A08	RR
U2140P	391 221 800		13				60		REC		20mA	B7	RR
U4020	802 310 000		40				120		REC		70mA	B5	R
UAA11	023 189 100		22				5		D			85C	DD
UAA91	192 310 900		19				5		D			B7G	DD
UAA171	120 813 090		25				5		D			B8B	DD
UABC80	†81 239 146		28	1.0	100		0.8	1.45	100		1.45	B9A	DDDT
UAF21	265 814 130		20	2	250	100	6	2.8	100	100		B8A	P
UAF41	268 154 130		13	2	200	90	5	2	100	100	1.9	B8A	DP
UAF42	268 154 130		13	2	200	90	5	2	100	100	1.9	B8A	DP
UB41	201 908 130		19				5		D		6mA	B8A	RR
UB91	182 310 900		19						D			B7G	DD
UBC1	206 081 930	G ₁	13	1.7	200		3	2	150		2	A08	DDT
UBC41	264 098 130		14	1.6	175		1.5	1.65	150		1.65	B8A	DDT
UBC81	641 238 09*		14	1.5	175		1.5	1.6	100		1.4	B9A	DDT
UBF2	206 581 930	G ₁	12.5	2	250	100	5	1.8	100	150	1.8	A08	DDP
UBF11	892 361 450		20	2	200	75	5	1.8	200	75	1.8	F8	DDP
UBF15	892 361 450		27	2	250	100	12	5	200	100	5	F8	DDP
UBF80	541 236 891		17	2	200	125	5	2.2	100	100	2.0	B9A	DDP
UBF89	541 236 891		19	2	200	100	9	3.8	100	100	3.5	B9A	DDP
UBF171	892 541 360		20	3.2	250	75	6	1.8	100	75		B8B	DDP
UBL1	206 581 930	G ₁	55	11.5	200	200	55	8.5	100	100	8	A08	DDP
UBL3	023 189 560	G ₁	55	6	100	100	29	7.5	100	90	7	85C	DDP
UBL21	264 598 130		55	13	200	200	55	8	100	100	7	B8B	DDP
UBL71	264 589 130		55	5.2	250	250	44	9.5	100	100	0.7	B8B	DDP
UC92	602 304 100		9.5	1.0	200		11.5	6.4	200		6.4	B7G	T
UCC84	147 234 116		22	1.5	90		12.0	6.0	100		6.0	B9A	TT
UCC85	641 237 410		26	2.1	200		10.0	5.8	100		5	B9A	TT
UCF12	642 371 450		20	{ 1.0 2.0 2.0	100 200 100		5.0 14.0	3.0 2.0 5.0	100 200 100	60 100 60	3.0 2.0 5.0	F8	TP
UCF80	645 237 114		19	{ 2.0 2.0	100 175	175	10.0	6.2	100	150	6.0	B9A	TP
UCH4	217 544 630	G ₁	20	{ 2 2	100 200		6 5.2	3 2.2	80 100	60 100	3.2 2.2	A08	TH
UCH5	123 614 570		20	{ 2 2	100 250	100	6.3 6.5	2.7 2.6	100 100	60 150	2.2 2.6	85C	TH
UCH11	642 371 450		20	{ 2 2	100 250	100	5 4.7	2.4 2.5	100 200	60 100	1.8 2.5	F8	TH
UCH21	276 454 131		20	{ 2 2	100 200		6.4 5.2	2.2 2.2	100 100	60 90	3.2 2.2	B8B	TH
UCH41	276 454 130		14	{ 2 2	100 200	90	6.4 2.7	2.2 1.5	100 100	60 75	2.8 1.5	B8A	TH

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
UCH42	276 454 130		14	{ 2.0 2.0	100 175	75	5 8	2.0 2.2	100 100	60 75	2.0 2.0	B8A	TH
UCH43	276 454 130		14	{ 2.0 2.0 2.0	100 175	75	5 8	2.0 2.2	100 100	60 75	2.0 2.0	B8A	TH
UCH71	276 454 131		20	{ 2.0 2.0	100 200	90	16.4 5.2	2.2 2.2	100 100	60 90	3.2 2.2	B8B	TH
UCH81	541 237 464		19	{ 0 2.6	100 200	125	13.5 7.6	3.7 2.4	100 100	60 100	3.7 2.4	B9A	TH
UCH171	642 544 370		20	{ 2.5	200	100	3 2	0.7	100	60 100		B8B	TH
UCL11	452 371 460		60	{ 2.0 8.5	200 200	200	2.0 45.0	2.1 9.0	150 100	60 100	2.0 7.0	F8	TP
UCL81	451 237 614		39	{ 1.5 7	200 200	200	0.5 30	1.2 8.7	100 100	60 100	1.2	B9A	TP
UCL82	414 237 516		50	{ 0 16	100 200	200	3.5 35	2.5 6.4	100 100	60 100	2.5 6.8	B9A	TP
UCL83	641 237 154		40	{ 1.5 9.5	200 175	175	2.4 30	2.5 5.5	150 100	60 100	2.0 5	B9A	TP
UD2	642 300 000		2	12.0	150		14.0	2.5	100		2.5	B4	T
UDDL71	023 189 560	G ₁	44	10	200	200	60	9	100	100		8SC	DDP
UDH	802 310 000		20				60		REC		20mA	B5	R
UDP12	023 180 560	G ₁	40	10	200	200	60	9	No Data Available			8SC	DDP
UDP13	026 580 310	G ₁	40	10	200	200	60	9	No Data Available			A08	DP
UDT1	023 189 060	G ₁	15	3	200		10.3	3	150		3	8SC	DDT
UE1	023 100 080		25				60		REC		20mA	S8C	R
UE2	123 180 090		50				60		REC		20mA	S8C	RR
UE13	020 080 310		25				60		REC		20mA	A08	R
UE100	208 0*0 130		50						REC			A08	R
UEL11	452 371 540		48	{ 0 6	100 200	30 200	2.4 22	1.6 5	100 100	60 100	1.6	F8	PP
UF5	023 110 560	G ₁	12.5	2.5	100	100	3.2	2.2	100	100	2.2	8SC	P
UF6	023 110 560	G ₁	12.5	20	100	100	3	1.8	100	100	1.8	8SC	P
UF8	206 511 130	G ₁	12	2	200	200		1.6	100	100		B8B	P
UF9	206 501 130	G ₁	12.5	2.5	200	100	6	2.2	100	100	2.2	A08	P
UF10	023 110 560	G ₁	12.5	2.4	200	100	5.5	2.35	100	100	2.3	8SC	P
UF11	602 301 450		15	2	200	75	6	2.2	100	100	2	F8	P
UF14	612 350 140		25	5	200	200	12	7	100	100	7	F8	P
UF15	612 301 450		25	2	200	100	12	5.5	100	100	5.5	F8	P
UF21	265 104 130		12.5	2.5	200	100	6	2.2	100	100	2.2	B8B	P
UF41	26* *54 130		12.5	3	200	125	7.2	2.3	100	150	2.3	B8A	P
UF42	260 154 130		21	2	175	175	10	8.5	100	150	8	B8A	P
UF43	260 154 130		21	2	170	125	15	6.3	100	100		B8A	P
UF80	141 230 651		19	2.0	170	170	10.0	7.4	100	100	7.0	B9A	P
UF85	141 231 651		19	2.0	170	100	9.7	5.9	200	100	6.0	B9A	P
UF89	041 230 651		12.6	2.0	200	200	11.1	3.8	175	100	4.4	B9A	P
UF172	112 540 360		20	2	200	100	4.5	3	100	100		B8B	P

VALVE	SELECTOR SWITCH No.	T.C.	V _f	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	I _a mA	mA/V	Anode Volts	Screen Volts	mA/V		
UF174	112 540 360		30	3	200	150	12	8	100	100		B8B	P
UF175	112 540 360		30	2	200	75	10	5-7	100	75		B8B	P
UH3	023 110 560		13	3	225	100	8	2-2	100	100		8SC	P
UH4	893 200 000		4				5		D			B5	RR
UHP51	023 110 560		13	2-5	225	100	3-5	2	100	100		8SC	P
UHP52	023 110 560		13	2-5	225	100	3-5	2	100	100		8SC	P
UL1	206 540 130		60	11-5	200	200	55	8-5	100	PenLF	8	A08	P
UL2	023 104 560		35	5	200	200	20	7	100	PenLF	6	8SC	P
UL11	602 301 450		45	14	200	75	6	2-2	100	75		F8	P
UL11	501 623 140		45	14	200	200	45	9	100	100		F8	P
UL12	602 301 450		60	8	200	125	75	12	No Data Available			F8	P
UL21	265 004 130		45	13	200	200	55	8	100	PenLF	7	B8B	P
UL22	265 004 130		46	10-0	175	175	61-0	9-0	100	100	8-0	B8B	P
UL41	26* *54 130		45	9	175	175	54-5	9-5	100	100	7	B8A	P
UL43	260 154 130		50	2-6	250	250	36	10	100	100		B8A	P
UL44	200 154 130	A	45	13-5	175	175	28-5	7-0	100	100	6-5	B8A	P
UL46	261 054 130		45	9	175	175	54-5	9-5	100	100	7	B8A	P
UL71	264 500 130		45	5-2	200	200	22	6-5	100	100		B8B	P
UL84	*41 23* 6*5		45	12-5	175	175	70	10	100	100	9	B9A	P
UL171	102 541 360		55	8-5	200	200	45	9	100	100		B8B	P
ULP	642 310 000		13	20	250		27	4	100		4	B5	T
ULP51	623 145 000		40	17	250	250	36	2-5	No Data Available			8SC	P
ULP61	023 100 560	G ₁	33	8	200	200	55	9	No Data Available			8SC	P
UP6	023 100 560	G ₁	35	8	200	200	55	9	100	100		8SC	P
UPI3	026 540 310		35	8	200	200	55	9	No Data Available			A08	P
UP35U	023 100 560	G ₁	35	8	200	200	55	9	No Data Available			8SC	P
UPX	642 310 000		25	34	250		38	7	100		7	B5	T
UP2	023 140 560		25	19	200	100	40	3	100	75	3	8SC	P
UQ80	541 236 114		12	1-0	250	20	0-95	7-0	No Data Available			B9A	N
URI	023 100 080		20				120		REC		60mA	8SC	R
UR1C	802 310 000		20				60		REC		60mA	B5	R
UR2	123 180 090		30				60		REC		70mA	8SC	RR
UR3	123 180 090		30				60		REC		65mA		RR
UR3C	091 231 800		30				60		REC		65mA	B7	RR
UT2	023 100 060	G ₁	15	5	100		6	3	100		3	8SC	T
UTH4	423 164 570	G ₁	17	{ 2-5	100		4	2-0	100	60	2-0	} 8SC	TH
					200	90	3	0-75	100	90			
UTH12	423 164 570	G ₁	17	{ 2-5	100		4	2	100	60	2-0	} 8SC	TH
					225	30	3	0-65	No Data Available				
UU2	892 300 000		4				30		REC		15mA	B4	RR
UU3	892 300 000		4				30		REC		30mA	B4	RR
UU4	892 300 000		4				60		REC		35mA	B4	RR
UU5	892 300 000		4				60		REC		20mA	B4	RR
UU6	208 090 030		4				60		REC		40mA	M08	RR
UU7	208 090 030		4				60		REC		20mA	M08	RR

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
UU8	208 090 030		4				120		REC		50mA	M08	RR
UU9	290 008 130		6				30·0		REC		15mA	B8A	RR
UU10	892 300 000		4				60		REC		20mA	B4	RR
UU12	8*1 23* 9**		6				60		REC		25mA	B9A	RR
UU30/250	892 300 000		4				15		REC		10mA	B4	RR
UU60/250	892 300 000		4				30		REC		15mA	B4	RR
UU120/250	892 300 000		4				60		REC		20mA	B4	RR
UU120/350	892 300 000		4				60		REC		20mA	B4	RR
UU120/500	892 300 000		4				60		REC		20mA	B4	RR
UVG51	123 190 080		30				60		REC		20mA	85C	RR
UY1	388 028 120		50				120		REC		30mA	A08	R
UY1(N)	388 028 120		50				120		REC		30mA	A08	R
UY2	023 180 000		26				30		REC		15mA	F8	R
UY3	023 100 080		26				120		REC		30mA	85C	R
UY4	023 100 080		35				30		REC		15mA	85C	R
UY11	802 300 100		50				120		REC		50mA	F8	R
UY21	280 80* 130		50				120		REC		70mA	B8B	R
UY22	280 808 130		26				60		REC		20mA	B8B	R
UY31	020 080 310		50				120		REC		30mA	A08	R
UY41	280 000 130		31				60		REC		60mA	B8A	R
UY42	280 *0* 130		31				60		REC		50mA	B8A	R
UY82	**1 23* **8		55				180		REC		35mA	B9A	R
UY85	001 230 008		38				120		REC		25mA	B9A	R
UY91	812 380 800		26				60		REC		20mA	B7G	R
UY92	**2 38* 100		26				60		REC		20mA	B7G	R
V2M70	802 309 100		6·3				30		REC		15mA	B7G	RR
V20s	023 100 080		20				60		REC		20mA	85C	R
V20	802 310 000		20				60		REC		20mA	B5	R
V20/7000	002 300 000	D ₁	4				15		REC		10mA	B4	R
V22/7000	000 010 100	D ₁	6·3				5		D			B8B	D
V25	081 231 900		25				60		REC		20mA	B7	RR
V30	802 310 000		30				120		REC		50mA	B5	R
V30/1	002 300 000	D ₁	2						D			B4	D
V41	*8* **9 230		4				30		REC		15mA	B8B	RR
V51	280 009 130		5				30		REC		15mA	B8A	RR
V61	28* **9 130		6·3				30		REC		15mA	B8A	RR
V99	263 400 000		3	4·5	90		2·5	0·42	580		0·4	UX4	T
V226	041 230 500	A	6	5	400	250	14	3	100	150	3	B7	P
V245	041 230 500	A	3		250	250	16	5	100	PenLF	5	B7	P
V248A	200 540 030	A	2	10	150	150	32	5·2	100	100	5	M08	P
V311	28* *** 130		31				60		REC		20mA	B8A	RR
V312	602 310 000	G ₁	4	4·8	250		6	2·3	100		2·3	B5	T
V339	000 231 600	G ₁	4		250			1·7	100		1·7	B7	T
V453	206 510 030	G ₁	4	1·75	250	100	4·5	2·0	100	100	2	M08	P
V503	642 300 000		4	85	400		100	4·5	100		4·5	B4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
V872	216 510 030	G ₁	6	4	200	200	6-7	3-35	100	150	3-3	M08	P
V884	412 361 500		6-3	2-5	250	200	8	2-5	100	PenLF	2-5	B7G	P
V914	892 310 000	D ₁	4						D			B5	DD
V960	002 300 000		4						D			B5	DD
V960	002 300 000		4				60		REC		20mA	B4	R
V1120	045 231 000	A	6	9-75	200	200	40	8-7	100	100	7	B7	P
V1120B	040 231 500	A	4	9-75	200	200	40	8-7	100	100	7	B7	P
V1906	002 300 000	D ₁	4				60		REC		20mA	B4	R
V1907	002 300 000	D ₁	4				60		REC		20mA	B4	R
V1928	112 311 100	D ₁	4				5		D			B7G	R
V2018	002 300 000	D ₁	20				30		REC		15mA	B4	R
V2118	802 310 000		20				60		REC		20mA	B5	R
V4200	802 300 000		4				120		REC		30mA	B4	R
VBFI1	892 361 450	G ₁	35	2	200	75	5	1-9	100	80	1-9	F8	DDP
VC1	023 100 060		55	2	200		6	3	200		3	8SC	T
VCHI1	642 371 450	A	40	{ 2-5 0-5 4-5	100		4	2-0	100	60	2-0	}F8	TH
VCL11	452 371 460		90		225	90	3	0-65	100	90			
VDSB	542 310 000		16		100		2	2-4	100	60	2-4		
VDS	542 310 000	A	16	1-0	200	75	5	3	100	75	3	B5	P
VEG51	026 100 080	A	16	2	200	5		1-6	100	75	1-6	B5	P
			20			30	60		REC		20mA	8SC	R
VEL11	452 371 560	G ₁	90	{ 0 6 2-5	100	30	2-4	1-6	100	100		}F8	PP
VF3	023 110 560		55		200	200	22	5	100	100			
VF7	023 110 560		55		250	100	5	2	100	100			
VF14	612 350 140	G ₁	60	4-5	250	100	3-5	2	100	150	6	8SC	P
VG406	892 300 000		4		250	250	12	7	100	100		F8	P
							30		REC		15mA	B4	RR
VG410	892 300 000		4				30		REC		15mA	B4	RR
VG411	892 300 000		4				60		REC		20mA	B4	RR
VG420	892 300 000		4				60		REC		20mA	B4	RR
VG421	892 300 000		4				60		REC		20mA	B4	RR
VG2503	892 300 000		4				30		REC		15mA	B4	RR
VG2908	892 300 000		2-5				30		REC		15mA	B4	RR
VG3008	892 300 000		4				30		REC		15mA	B4	RR
VG3016	892 300 000		4				60		REC		420mA	B4	RR
VG3630	892 300 000		4				120		REC		28mA	B4	RR
VG5006	892 300 000		4				60		REC		20mA	B4	RR
VG5007	023 080 090		4				60		REC		20mA	8SC	RR
VG5107	802 300 090		4				60		REC		20mA	F8	RR
VH2	812 380 100		6				5		D			B7G	D
VH3	142 364 100		6	4-5	125		13	5	100		5	B7G	T
VH5	412 365 100		6	2	175	125	7-7	5-1	100	100		B7G	P
VHP13	041 231 500	A	13	1-5	200	100	4	2	100	100	4	B7	P
VHT2	645 230 600	G ₁	2		125	75			100	75		B7	H

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
VHT2A	645 230 600	G ₁	2	0	125	50			100	60		B7	H
VHT4	545 231 600	G ₁	4	3	200	100	3.6		100	100		B7	H
VHTA	123 164 550	G ₁	13	1.5	250	100	3.2		100	100		85C	H
VHTA	545 231 600	G ₁	13	1.5	200	100	3.2		100	100		B7	H
VHTS	645 231 500	G ₁	13	3	200	100	2.6		100	100		B7	H
VHTS	545 231 600	G ₁	13	3	200	100			100	100		B7	H
VLI	023 100 560	G ₁	55	14	200	200	25	2.2	100	100		85C	P
VL4	023 100 560	G ₁	110	8.5	200	200	45	8	100	100		85C	P
VLS6I	002 300 000	D ₁	2				3		D			B4	R
VMI	2** 00* 300	D ₁	1.4						D			B7G	D
VM4V	542 310 000	A	4	1	200	80	14	2.4	200	75	2.4	B5	P
VMP4	041 231 500	A	4	2	250	100	3	3.5	150	100	3.5	B7	P
VMP4	542 310 000	A	4	1	250	100	5.0	3.5	200	100	3.5	B5	P
VMP4G	041 231 500	A	4	2	250	100	8	2.7	100	100	2.7	B7	P
VMS4	542 310 000	A	4	1	200	80	11	2.1	200	75	2.4	B5	P
VMS4B	542 310 000	A	4	1	200	80	5.2	2.4	200	75	2.9	B5	P
V02	645 320 600	G ₁	2	0	150	90	1.8		150	90		B7	O
V02S	023 064 560	G ₁	2	0	150	50	2.0		No Data Available			85C	O
V04	645 231 500	G ₁	4	1.5	250	75	1.6		100	75		B7	O
V04S	023 154 560	G ₁	4	1.5	250	75	1.6		100	75		85C	O
V06	123 164 560	G ₁	6	3	100	100	4.6		100	100		85C	O
V013	645 231 500	G ₁	13	1.5	250	75	1.6		100	75		B7	O
V013(S)	123 154 560	G ₁	13	1.5	250	75	1.6		100	75		85C	O
VP2	041 230 500	A	2	1	150	150	3	1.5	150	150	1.5	B7	P
VP2B	061 230 500	G ₁	2	1.0	150	150	2.5	0.65	150	150	0.6	B7	P
(MUL)VP2B	065 231 500	G ₁	2	1.5	150	60	2	1.4	100	60	1.4	B7	H
VP2B	032 004 560		2	15	150	150	2.5	0.65	150	150	0.6	85C	P
VP2BS	032 010 560	G ₁	2	1	150	150	2.5	0.65	150	150	0.6	85C	P
VP2D	061 230 500	G ₁	2	1.5	150	75	1.3	2.0	150	75	2	B7	P
VP3	542 310 000	A	4	2	200	100	4.5	2.3	100	100	2.3	B5	P
VP4	041 231 500	A	4	2	200	100	4.5	2.3	100	100	2.3	B7	P
VP4A	542 310 000	A	4	2	200	100	4.25	2.5	100	100	2.5	B5	P
VP4A	041 231 500	A	4	2	200	100	4.25	2.5	100	100	2.5	B7	P
VP4B	061 231 500	G ₁	4	3	250	250	11.5	2	100	100	1.8	B7	P
VP4C	041 231 500	A	4	2	250	250	11.5	4	100	150	4	B7	P
VP4S	023 110 560	G ₁	4	2	250	100	8	1.8	100	90	1.8	85C	P
VP4S	061 231 500	G ₁	4	3	250	100	8	1.8	100	90	1.8	B7	P
VP6	412 361 500		6	2.5	250	200	8	2.1	100	150	2.1	B7G	P
VP6	061 231 500	G ₁	6	3	250	100	7.5	1.7	200	100	1.7	B7	P
VP6S	023 110 560	G ₁	6	3	250	100	7.5	1.75	200	100	1.7	85C	P
VPI2D	026 985 310	G ₁	13	3	250	125	9	1.1	100	100	1.1	A08	DDP
VPI3	041 231 500	A	13	1.5	200	100	6.3	3	100	100	3	B7	P
VPI3	061 231 500	G ₁	13	3	200	100	8	2.8	100	100	2.8	B7	P
VPI3A	023 110 560	G ₁	13	2	200	100	4	2.2	100	100	2.2	85C	P
VPI3B	061 231 500	G ₁	13	2	200	200	9	2.2	200	200	2.2	B7	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
VPI3C	061 231 500	G ₁	13	2	200	200	9	2.2	200	200	2.2	B7	P
VPI3K	061 231 500	G ₁	13	3	200	100	8	2	100	100	2	B7	P
VPI3S	061 231 500	G ₁	13	3	200	100	8	2.8	100	100	2.8	B7	P
VPI3S	023 110 560	G ₁	13	3	200	100	8	2.8	100	100	2.8	8SC	P
VP20	542 310 000	A	20	2	200	100	4	2.2	200	100	2.2	B5	P
VP21	041 230 500	A	2	1	150	60	1.8	1.1	150	60	1.1	B7	P
VP22	206 510 030	G ₁	2	1.5	125	60	1.2	0.8	100	60	0.8	M08	P
VP23	206 510 030	G ₁	2	1.5	125	60	1.4	1.0	100	60	1.0	M08	P
VP41	216 510 030	G ₁	4	2.7	250	200	7.7	2.0	100	150	2	M08	P
VP41	061 231 500	G ₁	4	3.5	250	250	11	2.0	100	200	3.1	B7	P
VPI33	216 510 030	G ₁	13	2.7	150	150	8	2.1	100	100	2.1	M08	P
VP210	041 230 500	A	2	1.5	125	60	1.1	0.82	100	60	0.8	B7	P
VP210	542 300 000	A	2	1.5	125	60	1.1	0.82	125	60	0.82	B4	P
VP215	542 300 000	A	2	1.5	150	75	2	0.7	150	75	1.25	B4	P
VP215	041 230 500	A	2	1.5	150	75	2	0.7	150	75	1.25	B7	P
VP215B	061 230 500	G ₁	2	1.5	125	125	1.5	1.0	125	100	1.2	B7	P
VP215C	041 230 500	A	2	1.5	125	125	1.5	1.0	125	100	1.2	B7	P
VPI320	041 231 500	A	13	2.7	250	100	5	2	100	100	2	B7	P
VPI321	041 231 500	A	13	2.8	200	200	7.4	2	150	150	2	B7	P
VPI322	061 231 500	G ₁	13	2.8	250	200	7.4	2	100	100	2	B7	P
VPTA	041 231 500	A	13	2	250	100	4.2	2.9	100	100	2.9	B7	P
VPTS	041 231 500	A	13	3	200	100	5.5	2.6	100	90	2.6	B7	P
VPY2	542 300 000	A	2	1.5	125	60	1.5	1.1	125	60	1.1	B4	P
VPT2	041 230 500	A	2	1.5	125	60	1.5	1.1	125	60	1.1	B7	P
VPT4	542 310 000	A	4	3	250	100	5.5	2	100	90	2	B5	P
VPT4	041 231 500	A	4	3	250	100	5.5	2	100	90	2	B7	P
VPT4B	041 231 500	A	4	3	250	100	6	3.2	100	90	3.2	B7	P
VS2	542 300 000	A	2	2.5	125	60	2	1.4	100	60	1.4	B4	P
VS24	542 300 000	A	2	1	150	75	2.8	1.5	150	75	1.5	B4	P
VS24K	542 300 000	A	2	1	150	75	2.8	1.5	150	75	1.5	B4	P
VS210	542 300 000		2	2.5	125	60	2.0	1.4	100	60	1.4	B4	P
VS215	542 300 000	A	2	1	150	75	6	0.75	150	75	1.0	B4	P
VSGAI	542 310 000	A	4	1.5	200	100	7	6.15	100	100	6	B5	P
VT1	642 310 000		4	5	200		5	2	100		2	B5	T
VT2	642 310 000		4	2	200		3	1.9	150		1.9	B5	T
VTP4	542 310 000	A	4	3	200	100	5.5	2	100	100	2	B5	P
VX2	061 235 500	G ₁	2	1	150	60	1		150	60		B7	H
VX2S	023 015 560	G ₁	2	1	150	60	1		150	60		8SC	H
VX4	515 231 600	G ₁	4	2	250	75	1.8		100	75		B7	H
VX4S	023 115 560	G ₁	4	2	250	75	1.8		100	75		8SC	H
VX6S	023 115 560	G ₁	6	3	250	100	1.85	4	100	100	4	8SC	P
VX13	515 231 600	G ₁	13	2	250	75	1.8		100	75		B7	P
VX13S	023 115 560	G ₁	13	2	250	75	1.8		100	75		8SC	H
VY1	023 100 080		55				60		REC		20mA	8SC	R
VY2	023 180 000		30				15		D			8SC	R

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
VY2N	023 100 080		30				15		D			8SC	R
W4	642 300 000		4	7.5	125		3	1.2	100		1.2	B4	T
W4-500	892 300 000		4				60		REC		20mA	B4	RR
W17	265 024 300		1.4	1	90	75	3.5	0.9	80	75	0.9	B7G	P
W21	041 230 500	A	2	1	150	125	2.3	1.0	150	100	1.4	B7	P
W21	542 300 000	A	2	1	150	125	2.3	1.0	150	100	1.4	B4	P
W30	041 231 500	A	13	1	250	250	12	4	250	250	4	B7	P
W31	041 231 500	A	13	3	250	100	8	2.7	100	90	2.7	B7	P
W42	061 231 500	G ₁	4	3	250	100	7.6	1.5	100	100	1.5	B7	P
W61	026 510 310	G ₁	6	3	250	75	8.5	2.9	100	75	2.9	A08	P
W63	026 510 310	G ₁	6	3	250	100	7.6	1.5	100	90	1.5	A08	P
W76	026 510 310	G ₁	13	3	250	100	7.6	1.5	200	100	1.5	A08	P
W77	412 361 500		6	2	200	200	8	2.5	100	150	2.5	B7G	P
W81	265 104 130		6	3.0	250	100	8	2.8	100	90	2.8	B8B	P
W101	265 104 130		19	3	250	100	8	2.8	100	90	2.8	B8B	P
W107	412 361 500		12.5	2.5	200	200	8	2.5	100	150	2.5	B7G	P
W142	261 154 130		12	3.0	250	250	7.2	2.2	100	150	2.2	B8A	P
W143	265 104 130		6	2.5	250	100	6	2.2	100	100	2.2	B8B	P
W145	260 154 130		13	2.5	175	100	7	2.3	100	100	2.3	B8A	P
W147	026 510 310	G ₁	6	2.5	250	100	6	2.2	100	100	2	A08	P
W148	265 104 130		6	2.5	250	150	9.5	3.8	100	150	3.8	B8B	P
W149	265 104 130		6	3	250	100	8.5	1.75	100	90	1.7	B8B	P
W150	261 154 130		6	2.5	250	100	6.0	2.2	100	150	2.2	B8A	P
W213	642 300 000		2	2.5	150		1	1.2	150		1.2	B4	T
W216	040 120 560		2	1.5	150	90	3	1.2	100	90	1.2	B7	P
W318	809 231 600	G ₁	4	2	100		3.5	2.5	100		2.5	B7	DDT
W406	642 300 000		4	7.5	125		3	1.2	100		1.2	B4	T
W411	642 300 000		4	2.5	125		3	2.2	100		2.2	B4	T
W412	642 300 000		4	7.5	125		3	1.2	100		1.2	B4	T
W415N	642 310 000		4	2.5	200		2.5	1.0	100		1.0	B5	T
W420	642 300 000		4	4	125		4	1.3	100		1.2	B4	T
W719	141 230 651		6	2.0	250	100	10.0	6.0	150	100	5.0	B9A	P
W729	141 230 651		6	2	175	175	8	5.7	100	100		B9A	P
W4080	642 310 000		4	2.5	200		2.5	1.0	100		1.0	B5	T
W4110	642 310 000		4	1.5	200		1.0	3	100		2.5	B5	T
W727	412 365 100		6	1.0	250	100	11.0	4.4	100	100	4.4	B7G	P
WD30	560 231 890	G ₁	13	1	250	100	7	2.6	250	100	2.6	B9	DDP
WD40	560 231 890	G ₁	4	1	250	100	7	3.5	100	100	3.5	B9	DDP
WD70	541 236 891		6	2.0	250	90	5.0	2.2	100	90	2.2	B9A	DDP
WD142	268 154 130		13	2	175	90	5	2.1	100	100	1.9	B8A	DP
WD150	268 154 130		6	2	250	100	5	2.1	100	100	2	B8A	DP
WD709	541 236 891		6	2	250	90	5	2.2	100	90	2.2	B9A	DDP
WE23	542 310 000	A ₁	4	2	200	100	3	2.5	100	100		B5	P
WE24	542 310 000	A ₁	4		200	100	3	2.5	100	100		B5	P
WE27	642 310 000		4	3.5	200		6	2.4	100		2.2	B5	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
WE28	642 310 000	D ₁	4	1.5	200		1	2.5	100		2.2	B5	T
WE29	642 310 000		4	3	200		6	2	100		2.0	B5	DT
WE30	642 350 000		4	15	250	250	36	2.8	No Data Available			B5	P
WE51	892 300 000		4				30		REC		15mA	B4	RR
WE52	892 300 000		2				60		REC		20mA	B4	RR
WE350A	254 130 000	A ₁	6	12.5	400	250	83	6.5	100	PenLF	6	UX5	P
WE377	029 180 310		117				60		REC		20mA	A08	RR
WE403A	412 365 100		6	2.3	150	150	7	4.3	100	100	4	B7G	P
WT389	036 540 320		1.4	4.6	90	90	8	2	80	75	2	A08	P
WT390	026 040 310		6	{ 8	250		8	2	100		2	A08	T
					150		5.5		100	60			
WT210-0012 298 300 000			5				60		REC		20mA	UX4	RR
WT210-0013 289 300 000			5				120		REC		30mA	UX4	RR
WT210-0019 289 300 000			5				120		REC		30mA	UX4	RR
WT210-0021 028 090 310			6				30		REC		15mA	A08	RR
WT210-0025 029 180 310			117				60		REC		20mA	A08	RR
WT210-0029 025 040 310			6	{ 8	250		8	2	100		2	A08	T
							60		REC		20mA		
WT210-0037 126 458 310			117	5.2	100	100	43	5.3	100	90	5.3	A08	RP
WT210-0040 802 309 100			6				30		REC		15mA	B7G	RR
WT210-0007 026 540 310			6	18	350	250	54	5.2	100	PenLF	5.2	A08	P
WT210-006 029 180 310			6						D			A08	DD
WT210-0042 030 809 020			5				60		REC		20mA	A08	RR
WT210-0048 020 809 030			5				120		REC		30mA	A08	RR
WT210-0081 021 415 360			6	2	250	100	3	1.65	100	100	1.6	A08	P
WT210-0082 026 540 310			6	12.5	250	250	45	4.1	100	PenLF	4.1	A08	P
WT210-0083 216 498 130			6	2	250		2.3	1.6	200		1.6	B8B	DDT
WT210-0084 027 446 310			6	5	250		3	1.6	100		1.6	A08	TT
WT210-0085 412 365 400			50	7.5	125	100	49	7.5	100	90	6	B7G	P
WT210-0087 027 546 310			6	{ 1	100		8	2.5	100	60	3	A08	TH
					250	100	4	1.2	100	100	1.6		
WT210-0089 026 540 310			6	9	175	175	15	2.3	100	100	2.3	A08	P
WT210-0090 265 113 000			6	3	250	100	2	1.22	100	100	1.2	UX6	P
WT210-0094 461 471 230			6	8	250		9	2.6	100		2.6	A08	TT
WT210-0108 461 471 230			6	31.5	150		125	7	100		7	A08	TT
WT210-0148 029 080 310			6				60		REC		20mA	A08	RR
WT-T102 020 809 030			5				60		REC		20mA	A08	RR
WT-T122 021 415 360			6	3	250	100	3	1.6	100	100	1.6	A08	P
WT-T123 026 540 310			6	12.5	250	250	45	4.1	100	PenLF	4.0	A08	P
WT-T124 216 498 130			6	2	250		2.3	1.6	200		1.6	B8B	DDT
WT-T125 027 446 310			6	5	250		3	1.6	100		1.6	A08	TT
WT-T126 412 365 400			50	7.5	125	100	49	7.5	100	90	6	B7G	P
WT-T128 027 546 310			6	{ 1	100		8	2.5	100	60	3	A08	TH
					250	100	4	1.2	100	100	1.6		
WT-T130 026 540 310			6	9	175	175	15	2.3	100	100	2.3	A08	TH

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
WT-T131	265 113 000	G ₁	6	3	250	100	2	1.22	100	100	1.2	UX6	P
WT-T135	020 809 030		5				120		REC		30mA	A08	RR
X14	026 546 300	G ₁	1.4	0	90	50	1.8	0.5	80	60	0.5	A08	H
X17	266 424 300		1.4	4	75		4.5	1.2	80		1.4	B7G	H
X18	266 464 300		1.4	4	60		4	1.2	80		1.4	B7G	H
X21	645 230 600	G ₁	2	0	150	75			100	75		B7	H
X22	645 320 600	G ₁	2	0	150	75			100	75		B7	H
X23	645 231 700	G ₁	2	{ 1.5	100		2.1		100	60	1.1	{ B7	TH
					150	60	0.7		150	60	1.5		
X24	645 231 700	G ₁	2	{ 1.5	100		2.1		100	60	1.3	{ B7	TH
					150	60	0.7		150	60	1.6		
X30	645 231 600	G ₁	13	3	150	75	7		100	75		B7	H
X31	645 231 700	G ₁	13	{	150		2.2		100	60	2.0	{ B7	TH
					250	75	2.3		250	75	3.0		
X32	645 231 600	G ₁	13	3	150	75	7		100	75		B7	H
X41	645 231 700	G ₁	4	{ 6	150		5	1.4	150	60	1.8	{ B7	TH
					250	75	2.3	1.4	100	75	2.0		
X42	642 231 600	G ₁	4	3	250	100	7.0	2.0	100	100	2.0	B7	H
X61	027 546 310	G ₁	6	{ 2.0	100		5.4	2.2	100		2.2	{ A08	TH
					250	100	3.0	0.65	150	100	0.65		
X62	027 546 310	G ₁	6		250	125	5		100	100		A08	TH
X63	026 545 310	G ₁	6	3	250	100	6	1.6	100	100	1.6	A08	H
X64	026 540 310	G ₁	6	3	250	100	5.3	1.1	100	100	1.1	A08	H
X65	027 546 310	G ₁	6	{ 1	100		8	2.5	100	60	1	{ A08	TH
					250	100	4	1.2	100	100	0.5		
X66	027 546 310	G ₁	6	{ 1	100		8	2.5	100	60	1.3	{ A08	TH
					250	100	4	1.2	100	100	1.0		
X71	027 546 310	G ₁	15	{ 3	100				100	60	1.5	{ A08	TH
					250	100			150	100	3.0		
X73	026 546 310	G ₁	6	3	150	75			100	75		A08	H
X75	026 546 310	G ₁	15		150	75			100	75		A08	H
X76	027 546 310	G ₁	13	{ 1.0	100		8.0	2.5	100	60	0.6	{ A08	TH
					250	100	4.0	1.2	100	100	1.6		
X77	412 366 100		6	2	100		12	6.5	100		6.5	B7G	H
X78	542 376 400		6	{ 2.0	100		5.0	2.2	100	60	2.8	{ B7G	TH
					125	75	5.3	2.2	100	75	2.0		
X79	541 237 46*		6	{ 2	100		5	2.2	100	60	2.8	{ B9A	TH
					250	75	2.9		100	75	2		
X81	276 454 130		6	{ 1.0	100		4.8	1.4	100	60	1.65	{ B8B	TH
					250	100	4.0	2.0	100	100	2.0		
X99	264 300 000		3	4.5	90		2.5	0.42	80		0.4	UX4	T
X101	276 454 130	G ₁	19	{ 2	100		3		100	60		{ B8B	TH
					250	100	3		100	100			
X107	412 365 400		19		100	250	4					B7G	O
X108	542 376 400		19	{ 2	100		5	2.2	100	60	2.2	{ B7G	TH
					250	75	5.3	2.2	100	75	1.6		
X109	541 237 46*		19	{ 2	100		5	2.2	100	60	2.8	{ B9A	TH
					250	75	2.9		100	75			

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
XI42	276 454 130		14	{ 2.0 2.0	100 175	75	5.0 8	2.0 2.2	100 100	60 75	2.2 2.0	B8A	TH
XI43	276 454 131		6	{ 2 2	100 250	90	6.25 5.3	2.4 2.2	100 100	60 100	3.2 2.2	B8B	TH
XI45	276 454 130		28	{ 3.3 2.5	100 175	100	6.0 8.0	3.0 2.5	100 100	60 100	3 2.5	B8A	TH
XI47	027 546 310	G ₁	6	{ 2 2	100 250	100	5.4 5	2.2 2.4	100 100	60 100	2.8 1.2	A08	TH
XI48	276 454 130		6	{ 1 2	100 250	100	4.8 4.0	1.4 2.0	100 100	60 100	1.6 2.0	B8B	TH
XI50	276 454 130		6	{ 2 2	100 250	100	5 8	2.6 2.2	100 100	60 100	2.8 3.5	B8A	TH
X719	541 237 651		6	{ 3.0 2.0	100 250	100	5.0 6.5	2.3 2.4	100 150	60 100	2.3 2.4	B9A	TH
X727	412 366 100		6	2	100		11.0	7	100		5	B7G	H
X6030	020 880 300		3						D			B8B	D
XD	642 300 000		2	1.5	75		0.65	0.75	80		0.7	Sm4	T
XD1-5	642 300 000		1.5	0.5	50		0.6	0.5	No Data Available			Sm4	T
XD2.0V	642 300 000		2	1	50		0.45	0.56	No Data Available			Sm4	T
XFRI	652 430 000		1.25	0	40	40	3	2	No Data Available			B5A	P
XFR2	652 430 000		1.25	0	60	60	1.8	1.1	No Data Available			B5A	P
XFR3	624 300 000		1.25	5	125		4	1.7	125		1.7	B5A	T
XFW10	653 420 000		.625	0	20	20			No Data Available			B5A	P
XFW30	653 420 000		.625	0	20	20			No Data Available			B5A	P
XFW40	653 420 000		.625	0	20	20			No Data Available			B5A	P
XFW50	653 420 000		.625	0	20	20			No Data Available			B5A	P
XFY10	653 420 000		1.25	1.25	20	20	0.5	.35	No Data Available			B5A	P
XFY11	653 420 000		1.25	0	20	20	.4	.42	No Data Available			B5A	P
XFY12	653 420 000		1.25	.5	20	20	.25	.37	No Data Available			B5A	P
XFY14	653 420 000		1.25	6.5	60	60	3.1	1.65	No Data Available			B5A	P
XFY20	653 420 000		.625	0	20	20			No Data Available			B5A	P
XFY21	653 420 000		1.25	0	20	20	.38	.41	No Data Available			B5A	P
XFY22	653 420 000		1.25	1.2	20	20	0.3	0.36	No Data Available			B5A	P
XFY23	653 420 000		1.25	2	20	20	0.4	0.34	No Data Available			B5A	P
XFY31	653 420 000		1.25	0	20	20	0.38	0.41	No Data Available			B5A	P
XFY32	653 420 000		1.25	1.5	20	20	.36	.32	No Data Available			B5A	P
XFY33	653 420 000		1.25	2	20	20	0.4	.34	No Data Available			B5A	P
XFY34	653 420 000		1.25	4	20	20	1.5	0.6	No Data Available			B5A	P
XFY35	653 420 000		1.25	.5	20	20	.19	.32	No Data Available			B5A	P
XFY41	653 420 000		1.25	0	20	20	.38	.41	No Data Available			B5A	P
XFY43	653 420 000		1.25	2	20	20	0.4	.34	No Data Available			B5A	P
XFY51	653 420 000		1.25	0	20	20	.32	.32	No Data Available			B5A	P
XFY53	653 420 000		1.25	2	20	20	.18	.17	No Data Available			B5A	P
XH1.5	642 300 000		1.5	0.5	50		0.6	0.5	No Data Available			Sm4	T
XH2.0V	642 300 000		2	1	50		2.5	0.56	No Data Available			Sm4	T
XL	642 300 000		2	1.5	75		1.5	0.85	80		0.8	Sm4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
XL01.5	642 300 000		1.5	15	50		0.6	0.5	No Data Available			Sm4	T
XL1.5	642 300 000		1.5	1	50		.45	.6	No Data Available			Sm4	T
XL02.0V	642 300 000		2	1	50		1.1	0.92	No Data Available			Sm4	T
XL2.0V	642 300 000		2	1	50		1.0	0.84	No Data Available			Sm4	T
XP	642 300 000		2	4.5	100		9.5	1	80		1	Sm4	T
XP1.5	642 300 000		1.5	4	50		1.8	0.8	No Data Available			Sm4	T
XP2	642 300 000		2	4.5	75		4	1	80		1	Sm4	T
XP2.0V	642 300 000		2	3	50		2	1.0	No Data Available			Sm4	T
XR2	206 035 240		1.25	7.5	125	125	7	1.9	125	100		B8D	P
XSG	542 300 000	A	2	1.0	125	60	1.4	0.7	100	60	0.6	Sm4	P
XSG1.5	542 300 000	A ₁	1.5	0	50	30	0.6	0.3	No Data Available			Sm4	T
XSG2.0V	542 300 000	A	2	0	50	30	0.6	0.4	No Data Available			Sm4	P
XVS2.0V	542 300 000	A	2	1	50	30	0.4	0.33	No Data Available			Sm4	P
XW075A	653 420 000		.75		30	30	.3	.18	No Data Available			B5A	P
XW1.5	251 630 000	G ₁	1.5		50	30	0.6	0.5	No Data Available			Sm5	P
XW2.0V	251 630 000	G ₁	2	1	50	50	0.95	0.6	No Data Available			Sm5	P
XXB	206 447 320		1.4		90		4.5	1.3	90		1.3	B8B	TT
XXD	216 447 130		12.5	10	250		9	2.1	100		2.1	B8B	TT
XXFM	264 189 130		6.3	2	225		1.5	1.5	100		1.4	B8B	DDT
XXL	260 004 130		6	8	250		8	2.3	100		2.3	B8B	T
XY	254 630 000		2	3	75	75	4.0	1.25	80	75	1.2	Sm5	P
XY1.5	246 530 000		1.5	1.5	40	40	1.75	1	No Data Available			Sm5	P
XY2.0V	246 530 000		2	2	50	50	1.75	2.4	No Data Available			Sm5	P
XY14B	653 420 000		1.25	4.5	40	40	.3	.6	No Data Available			B5A	P
XY14CC	653 420 000		1.25	1.5	40	40	.5	.5	No Data Available			B5A	P
Y13	045 231 600		13	20	250	250	40	3.9	100	150		B7	P
Y220	642 300 000	S	2	4.5	150	150	10.5	2.5	100	100	2.5	B4	P
Y220	642 350 000		2	4.5	150	150	10.5	2.5	100	100	2.5	B5	P
Y230	642 350 000		2	3	150	150	7		100	100		B5	P
Z14	036 500 200	G ₁	1.4	1	90	90	0.5	0.6	80	90	0.7	A08	P
Z21	542 300 000	A	2	1	150	125	1.1	1.2	150	100	1.2	B4	P
Z22	041 230 500	A	2	1	150	125	1.1	1.2	150	100	1.2	B7	P
Z26	045 231 600		26	5.5	250	250	32	7.5	100	100	8.0	B7	P
Z62	026 510 310	G ₁	6	2	300	150	10	7.5	100	100	7.5	A08	P
Z63	026 500 310	G ₁	6	2	250	100	1.0	1.23	100	100	1.2	A08	P
Z66	026 510 310	G ₁	6	1.5	200	200	10.9	8.5	100	150	8.0	A08	P
Z73	026 510 310	G ₁	6	3	250	100	6.5	1.7	100	90	1.7	A08	P
‡ Z77	412 361 500		6	{ 2 1.5	250	250	10	7.5	100	PenLF	5.0	} B7G	P
					200	150	4	6.4	100	PenLF	5		
Z90	256 101 403		6	2	250	250	10	6.0	100	150	6.0	B9G	P
Z142	260 154 130		21	2	175	175	10	8.5	100	150	8	B8A	P
Z145	261 514 130		22	1.8	200	200	10	9	100	150	7	B8A	P
Z150	260 154 130		6	2	250	250	10	9.5	100	150	8	B8A	P

‡ See note on Page 8

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
Z152	141 230 651	S	6	2.0	170	170	10.0	7.4	100	100	6.0	B9A	P
Z220	642 300 000		2	7.5	150	150	15	2.0	100	100	2.0	B4	P
Z220	642 350 000		2	7.5	150	150	15	2.0	100	100	2.0	B5	P
Z309	141 223 651		6	2	250	250	20	15	No Data Available			B9A	P
Z719	141 230 651		6	2	175	175	10	7.4	100	150	6	B9A	P
ZD	892 310 000	13	13						D			B5	DD
ZD17	208 564 300		1.4	1	90	90	2.7	0.63	80	90	0.6	B7G	DP
ZD152	541 236 891		6	2	250	90	5	2.2	100	90	2.2	B9A	DDP
Z319	141 321 615		6	10.4	350	250	15.5	1.9	100	100	6	B9A	P
Z359	141 230 651		12	2	250	250	20	15	100	100		B9A	P
Z729	501 236 014	6	6	1	250	100	3	1.8	100	100	1.8	B9A	P
Z759	141 023 651		6	2	250	250	20	15	100	100		B9A	P

TEST DATA FOR TUNING INDICATORS

Tuning indicators are tested with the controls set according to the figures given in the table below ; using the screen switch for obtaining the target voltage and inserting the anode load, as shown in column marked "Ra" by means of the link on the panel of the instrument. At the approximate bias given in the table the triode section should be at cut-off and the "eye" fully closed. On reducing the grid bias to zero the "eye" should open fully and the anode current should be approximately that given in the table. In the case of double sensitivity indicators giving multiple images corresponding to the different sensitivities, two sets of data (wherever possible) are given, the first set relating to the sensitive indication.

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA FOR TUNING INDICATORS					BASE
				Neg. Grid Volts	Anode Volts	Target Volts	Ia mA	Ra MΩ	
1M1	4*02 30 060		1.4	34	250	0	0.09	2.2	B8D
1M3	4*0 230 060		1.4	23	175	0	.1	1	B8D
2E5	264 513 000		2.5	8	250	250	0.24	1	A08
2G5	264 513 000		2.5	22	250	250			UX6
6AB5	264 513 000		6	15.5	150	150	0.13	1	UX6
6AD6	026 540 310		6	{ 3	150				A08
				{ 50	150	150			
6AF6	026 540 310		6	81	125	125			A08
6AF7	026 457 310		6	{ 4.5	200	200	0.16	1	A08
				{ 15	200	200	0.15	1	
6BR5	41* 23* 6*5		6	14	200	200	.4	.5	B9A
6CD7	026 546 310		6	{ 4.2	250	250		1	A08
				{ 12.5	250	250	1.0	1	
6E5	264 513 000		6	7.5	250	250	0.2	1	UX6
6G5	264 513 000		6	22	250	250	0.24	1	UX6
6H5	264 513 000		6	22	250	250	0.24	1	UX6
6M1	026 540 310		6	22.5	250	250	0.23	1	A08
6M2	*25 456 310		6	{	250	250	.1	2	A08
							.2	1	
6N5	264 513 000		6	15.5	150	150	0.13	1	UX6
6T5	264 513 000		6	22	250	250		1	UX6
6U5	264 513 000		6	22	250	250	0.24	1	UX6
6X6	025 540 310		5		250	250			A08
10M1	026 540 310		18	19	175	175	.16	1	A08
10M2	2*6 456 130		12.6	30	200	200			A08
12U5	264 513 000		12.6	22	250	250	.24	1	UX6
41ME	023 104 560		4	5	250	250		1	85C
63ME	026 540 310		6	22	250	250	0.25	1	A08
64ME	026 457 310		6	{ 16	250	250		1	A08
				{ 2.5	250	250		1	
65ME	41* 23* 6*5		6		250	250			B9A
1629	026 540 310		12.5	8	250	250	0.24	1	A08
4678	023 104 560		6	5	250	250	0.095	2	85C
AC/ME	045 231 600		4	22	250	250	0.24	1	B7
AM1	023 104 560		4	5	250	250	0.095	2	85C
DM21	206 540 030		1.4		90	90	0.025	2	A08
DM70	4*0 230 060		1.4	23	175	0	.1	1	B8D

VALVE	SELECTOR SWITCH No.	T.C.	V _f	VALVE CHARACTERISTIC METER DATA FOR TUNING INDICATORS					BASE
				Neg. Grid Volts	Anode Volts	Target Volts	I _a mA	R _a MΩ	
DM7I	4*0 230 060		1.4	23	175	0	.1	1	B8D
EI30	026 540 310		6	15	250	250		1	A08
EI320	026 540 310		6	11	250	250	4	1	A08
EMI	023 104 560		6	5	250	250	0.095	2	8SC
EM3	023 104 560		6	18	200	200	0.176	1	8SC
EM4	023 164 560		6	{ 4.2	200	200		1	8SC
				{ 12.5	200	200		1	
EMI1	026 546 310		6	{ 5	250	250		1	A08
				{ 16	250	250		1	
EM31	026 540 310		6	5	250	250		2	A08
EM34	026 456 310		6	{ 4.2	250	250	1.0	1	A08
				{ 12.5	250	250		1	
EM35	026 540 310		6	22	250	250		1	A08
EM71	251 064 130		6	20	250	250	.5		B8B
EM80	41* 23* 6*5		6	14	250	250	.37	.5	B9A
EM81	41* 23* 6*5		6	10.5	250	250	.37	.5	B9A
EM85	401 235 606		6	14	250	250		.47	B9A
EM840	4*1 235 6*6		6	22	250	250	.54	.47	B9A
FT4	026 540 310		4	6	250	250		1	A08
ME4S	023 104 560		4	5	250	250		2	8SC
ME6S	023 104 560		6	5	250	250		2	8SC
ME41	216 040 530		4	22.5	250	250	0.23	1	M08
ME91	216 040 530		9	17	150	150	0.135	1	M08
ME920	045 231 600		9	19	175	175	0.18	1	B7
PM5	206 546 130		6	{ 15	200	200		1	A08
				{ 5	200	200		1	
TV4	023 104 560		4	5	250	250		1	8SC
UM4	206 546 130		12.6	{ 4.2	200	200		1	A08
				{ 12.5	200	200		1	
UM11	206 546 130		12.6	{ 4.2	200	200		1	A08
				{ 12.5	200	200		1	
UM34	026 456 310		12.5	{ 4.2	250	250	1	1	A08
				{ 12.5	250	250		1	
UM80	41* 23* 6*5		19	14	200	200	.35	.5	B9A
UM81	41* 23* 6*5		19	14	200	200	.4	.5	B9A
VFT4	026 540 310		4	20	250	250		1	A08
VME4	045 231 600		4	22	250	250		1	B7
VTF6	026 540 310		6	22	200	200		1	A08
Y61	026 540 310		6	22	250	250	0.24	1	A08
Y62	026 540 310		6	22	250	250		1	A08
Y63	026 540 310		6	22	250	250	0.24	1	A08
Y64	026 540 310		6	22	250	250		1	A08
Y65	026 540 310		6	11	250	250		1	A08

Test Data for High Voltage Rectifiers.

The following procedure should be adopted when testing high voltage rectifiers.

Make insulation checks with valve cold and hot as stated in paragraphs 1 and 2 of the Abbreviated Working Instructions.

Then set Anode and Screen Voltage switches to their minimum value (i.e. 20) and Anode Current Controls to figure shown in Data column. With Circuit Selector set to TEST and Anode Selector at A₁ increase Anode Volts setting until indicating meter reads in a forward direction.

The setting of the Anode Voltage switch for a good valve should not exceed the figure given in column headed Anode Volts.

When checking full wave or voltage doubler rectifiers, check second Anode with Anode Selector at A₂.

NOTE the valve should be heated to working temperature before setting Circuit Selector to position TEST and only left at this position for sufficient time to take a reading.

VALVE	SELECTOR SWITCH No.	T.C.	Vf.	Anode Volts (Max.)	Ia mA (Min.)	Valve Holder	Type	REMARKS
IB3	020 000 300	AI	1.25	200	6	A08	R	
IZ2	232 232 300	AI	1.4			B7G	R	
2V3	020 000 300	AI	2.5			A08	R	
2V3G	020 000 300	AI	2.5			A08	R	
2X2	200 300 000	AI	2.5	100	10	UX4	R	
2Y2	200 300 000	AI	2.5	100	10	UX4	R	
3B24	320 200 000	AI	2.5	60	10	UX4	R	
6W2	230 000 000	AI	6	100	9	Nil	R	
225DU	072 323 600		2	40	20	B7	RR	Test A ₁ & A ₂
405BU	672 300 000		4	40	20	B4	RR	Test A ₁ & A ₂
732A	320 200 000	AI	2.5	60	10	UX4	R	
879	200 300 000	AI	2.5	100	10	UX4	R	
1876	123 000 700		4			85C	R	
1877	002 300 000	AI	4	100	10	B4	R	
8016	020 000 300	AI	1.25	200	6	A08	R	
CE230	320 200 000	AI	2.5	60	10	UX4	R	
EY51	230 000 000	AI	6	100	9	NIL	R	
HVR2	002 300 000	AI	4	100	10	B4	R	
HVR2A	002 300 000	AI	2	100	10	B4	R	
R12	230 000 000	AI	6.3	100	9	Nil	R	
SU61	230 000 000	AI	6.3	100	9	Nil	R	
SU2150	002 300 000	AI	2	60	4	B4	R	
SU2150A	002 300 000	AI	2	200	50	B4	R	
U17	002 300 000	AI	4	40	35	B4	R	
U19	002 300 000	AI	4	40	70	B4	R	
U21	002 300 000	AI	2	60	4	B4	R	
U22	200 000 030	AI	2	60	4	M08	R	
U23	002 300 000	A ₁	4	40	100	B4	R	
U24	020 000 300	AI	2	20	0.5	A08	R	
U41	020 300 000	AI	1.25	200	6	A08	R	
U43	230 000 000	AI	6.3	100	9	Nil	R	
U151	230 000 000	AI	6.3	100	9	Nil	R	
V21/7000	002 300 000	AI	4	100	10	B4	R	
V960	002 300 000	AI	4	80	90	B4	R	
V1906	002 300 000	AI	4	60	100	B4	R	
V1907	002 300 000	AI	4	150	70	B4	R	
V1913	002 300 000	AI	4	40	100	B4	R	
V1920	002 300 000	AI	4	100	90	B4	R	
VL51	002 300 000	AI	4	100	10	B4	R	

QUICK REFERENCE INDEX

Service/Civilian Equivalents

	Page
AD1 — CV 155 ..	13
CV 158 — CV 465 ..	14
CV 466 — CV 717 ..	15
CV 718 — CV 964 ..	16
CV 966 — CV 1305 ..	17
CV 1306 — CV 1622 ..	18
CV 1623 — CV 1868 ..	19
CV 1869 — CV 2273 ..	20
CV 2274 — CV 2695 ..	21
CV 2696 — CV 2968 ..	22
CV 2969 — CV 3729 ..	23
CV 3720 — CV 3976 ..	24
CV 3977 — NT 65A ..	25
NT 82 — VT 96B ..	26
VT 97 — VT 289 ..	27
B.V.A. Utility Equivalents	27

Commercial/Maker/Service Equivalents

01A — IN47 ..	28
IN 54A — 3B/200-B ..	29
3B/240M — 5R4GY ..	30
5R4WGY — 6D4 ..	31
6D6 — 6R7GT ..	32
6R7GT/G — 7G7/1232 ..	33
7H7 — 14R7 ..	34
14S7 — 42E ..	35
42MP/Pen — 220PT ..	36
220RC — 816 ..	37
822 — 4022B ..	38
4030A — 5814A ..	39
5814WA — AC/VS ..	40
AC/Y — D63 ..	41
D77 — R1429 ..	42
1436 — EL81 ..	43
EL83 — GZ32 ..	44
H2 — M502 ..	45
M503 — Pen 1346 ..	46
Pen A4 — RX235 ..	47
RZ1-150 — UU4 ..	48
UU5 — XW2.0V ..	49
Y61 — ZP590 ..	50

Valve Test Data (Numerical)

OZ4 — IC6 ..	51
IC7 — IL5 ..	52
IL6 — IV ..	53
IV2 — 2D4B ..	54
2D13 — 3A/108A ..	55
3A/108B — 3G130 ..	56
3LE4 — 4G200 ..	57
4HO7 — 5A/102D ..	58
5A/136D — 5BZ7 ..	59
5CG8 — 6A5 ..	60
6A6 — 6AM4 ..	61
6AM5 — 6AW7 ..	62
6AW8 — 6BH6 ..	63

6BH8 — 6BW7 ..	64
6BW8 — 6CJ6 ..	65
6CK5 — 6DE6 ..	66
6DG6 — 6H6 ..	67
6H8G — 6P9 ..	68
6P15 — 6T ..	69
6T4 — 6Z6 ..	70
6Z7 — 7F8 ..	71
7F16 — 8D4 ..	72
8D5 — 11D5 ..	73
11E1 — 12B8 ..	74
12BA6 — 12K8 ..	75
12L6 — 13D2 ..	76
13D3 — 15A2 ..	77
15A6 — 19H4 ..	78
19J6 — 25AC1D ..	79
25AV5ga — 26A6 ..	80
26A7 — 33 ..	81
33A/100A — 41MRC ..	82
41MSG — 50C5 ..	83
50C6 — 64SPT ..	84
65 — 99V ..	85
99X — 205F ..	86
210DDT — 247A ..	87
249B — 349A ..	88
350B — 451U ..	89
460BU — 840 ..	90
842 — 1294 ..	91
1299 — 1810 ..	92
1815 — 4037A ..	93
4061A — 5639 ..	94
5640 — 5851 ..	95
5852 — 6021 ..	96
6030 — 6118 ..	97
6125 — 6394 ..	98
6397 — 7756 ..	99
8013A — 18046 ..	100

Valve Test Data (Alphabetical)

A11A — A106 ..	101
A109 — A802 ..	102
A819 — AC/G ..	103
ACHF — ACTHI ..	104
ACTHIA — AK2 ..	105
ALI — AZI ..	106
AZ2 — B329 ..	107
B339 — B2045 ..	108
B2046 — C50N ..	109
C70D — CF51 ..	110
CF61 — DO20 ..	111
DO24 — DAF70 ..	112
DAF91 — DD6G ..	113
DD13 — DET20 ..	114
DF1 — DH142 ..	115
DHI47 — DL95 ..	116
DL96 — DVS Pen ..	117
DW3 — E235 ..	118
E405 — 463/ ..	119
E499 — E1848 ..	120
E1884 — EBC3 ..	121

EBC11 — ECC33 ..	122
ECC34 — ECH81 ..	123
ECL11 — EF50 ..	124
EF51 — EG420 ..	125
EH1 — EL51 ..	126
EL53 — EYY13 ..	127
EZ1 — FC13 ..	128
FC13c — G/6062 ..	129
G/6066 — H4125D ..	130
H4128D — HL42DD ..	131
HL84 — HP4101 ..	132
HP4101 — IW2 ..	133
IW3 — KC51 ..	134
KCF30 — KT35 ..	135
KT36 — L412 ..	136
L413 — LU4A ..	137
LZ319 — ML40 ..	138
MM4V — N16 ..	139
N17 — NSS43 ..	140
NSS183 — P15/250 ..	141
P15/250(S) — P3580 ..	142
P1400 — Pen 26 ..	143
Pen 36A — PMO4 ..	144
PMO5 — PP4s ..	145
PP5/400 — PT10 ..	146
PT12 — PX4 ..	147
PX5 — QP25 ..	148
QP230 — RB500/120 ..	149
RB650/250 — RG250 ..	150
RGN354 — RV120/250 ..	151
RV120/350 — S410 ..	152
S415N — SN954 ..	153
SN1039A — SS210C ..	154
S210DDT — TBC14 ..	155
TBC113 — TH29 ..	156
TT4A — U31 ..	158
U33 — U404 ..	159
U415 — UCH41 ..	160
UCH 42 — UF172 ..	161
UF174 — UU7 ..	162
UU8 — V503 ..	163
V872 — VHT2 ..	164
VHT2A — VPI3B ..	165
VPI3C — VY2 ..	166
VY2N — WE27 ..	167
WE28 — WT-T130 ..	168
WT-T131 — X109 ..	169
X142 — XL ..	170
XLO1.5 — Z150 ..	171
Z152 — Z759 ..	172

Test Data for Tuning

IM1 — DM70 ..	173
DM71 — Y65 ..	174

Test Data for High Voltage Rectifiers

B3 — VL51 ..	175
--------------	-----

