




VALVE DATA MANUAL



THE AUTOMATIC COIL WINDER & ELECTRICAL EQUIPMENT CO. LTD.
"AVOCET HOUSE," 92-96 VAUXHALL BRIDGE ROAD, LONDON, S.W.1

Telephone: Victoria 3404 (9 Lines).

Telegrams: AUTOWINDA SOWEST, LONDON

THE
AVO
VALVE DATA
MANUAL

NINTH EDITION 1957
(SECOND IMPRESSION)



PUBLISHED BY
THE AUTOMATIC COIL WINDER & ELECTRICAL EQUIPMENT CO. LTD.
"AVOCET HOUSE," 92-96 VAUXHALL BRIDGE ROAD, LONDON, S.W.1
Telephone : VICtoria 3404-9



THE AVO VALVE CHARACTERISTIC METER Mk. III

FOREWORD

This data manual is primarily intended for use with the “AVO ” Valve Characteristic Meter and “AVO ” Valve Tester, but once the Selector Switch code is known, the manual also forms a quick and convenient guide for general use.

The Instruction Book which accompanies the Valve Characteristic Meter should be thoroughly studied before the data contained in this manual is used in conjunction with the instrument, but as a convenient guide to the user who is already familiar with the full instruction book, abbreviated working instructions for the instrument are given in this publication. Abbreviated working instructions are also given for the “AVO ” Valve Tester.

It is our intention to issue revised copies of this manual from time to time and dates of publication will be given in our advertisements in the Trade Press.

The return of the enclosed postcard will enable us to inform you when new issues become available.

WATCH OUR ADVERTISEMENTS FOR FURTHER ANNOUNCEMENTS.

Contents

Foreword	3
Abbreviated Working Instructions for the “ AVO ” Valve Characteristic Meter, Mks. I & II	5
Abbreviated Working Instructions for the “ AVO ” Valve Characteristic Meter, Mk. III	7
Abbreviated Working Instructions for the “ AVO ” Valve Tester	9
Diagram of Standard Pin Connections	12
Civilian Equivalents of Service Types	13
B.V.A. Utility Equivalents	25
Test Data for Receiving and Small Transmitting Valves	26
Data for Tuning Indicators (Magic Eyes)	135
Test Data for High Voltage Rectifiers	137
Stop Press Data	138

Whilst every care has been taken in the preparation of this manual to ensure that the data given is correct, the Company cannot accept any responsibility for damage caused to a valve under test, or the instrument, due to the inclusion of incorrect information.

ABBREVIATED WORKING INSTRUCTIONS FOR THE "AVO" VALVE
CHARACTERISTIC METER Mks. I & II.

The brief notes which follow are intended to act as a guide to the operator who has already studied, and is familiar with, the contents of the Instruction Manual issued with the instrument.

1. Check mains adjustment tap and connect mains lead to the supply, red and black leads are line and neutral, green or yellow, the Earth connection.
2. Set " CIRCUIT SELECTOR " to " CHECK (C) ".
3. Set " METER SELECTOR " to 100 on outer scale.
4. Turn " SET ZERO " Control fully clockwise.
5. Set " FILAMENT VOLTAGE " switches to value indicated in Valve Data.
6. Set "ANODE VOLTS", " SCREEN VOLTS ", and " GRID VOLTS " to values indicated in Valve Data.
7. Set " ROLLER SELECTOR " switch as indicated in Valve Data.
8. Switch " ON ", press " RESET " button, release, and with " ELECTRODE LEAKAGE " switch at " ~ " adjust movement pointer to position " ~ " by means of " SET ~ " switch.

ALL VALVES.

1. Insert Valve.
2. Fully rotate " ELECTRODE LEAKAGE " switch, check heater continuity at " H " and insulation on all other positions.
3. Set " CIRCUIT SELECTOR " at " CHECK (H) " to measure leakage from Heater/Cathode to all other electrodes strapped, with valve hot.
4. Turn " CIRCUIT SELECTOR " to " C/H ins. " to measure leakage between heater and cathode with valve hot (if valve is indirectly heated).

TRIODES, DOUBLE TRIODES, DIODE TRIODES, PENTODES, DOUBLE PENTODES, DIODE PENTODES AND TETRODES IN SIMILAR COMBINATION.

ANODE CURRENT. Turn " ANODE SELECTOR " to " A₁ ". " CIRCUIT SELECTOR " to " TEST ". Meter should then indicate " ANODE CURRENT ". Reduce " METER SELECTOR " switch setting if required. If the meter lamps go out, do not press " RESET " button until you have checked for faulty settings on " ROLLER SELECTOR " switch. If these are in order, the valve is probably " soft " and the test should proceed no further.

MUTUAL CONDUCTANCE. Reduce Meter reading to " ZERO " by means of the " SET ZERO " control. Press " mA/V " Button. Meter reading in milli-amps represents " MUTUAL CONDUCTANCE " in " mA/V ". To test on " GOOD/BAD " scale, reduce meter readings to " ZERO " as before, turn " METER SELECTOR " switch to " mA/V " position. Adjust " SET mA/V " control to figure given in the Valve Data. Press " mA/V " Button. A good valve should read within the green band on the meter.

For double valves, check data for difference in electrode voltages and repeat above operation at A₂.

GAS TEST. To measure Grid current, proceed as for mutual conductance, using "GOOD/BAD" scale. Reduce meter reading to "ZERO" by means of the "SET ZERO" control, press "mA/V" button, adjust meter reading to full scale by means of "SET mA/V" control. Release "mA/V" button, press "GAS" button. Full scale deflection will now represent $10\mu\text{A}$ Grid Current. For currents over $10\mu\text{A}$ use method given in full instruction book.

DIODES. To measure "DIODES" set the "METER SELECTOR" switch to 1 on inner ring of figures and "ANODE SELECTOR" switch to " A_1 ", turn "CIRCUIT SELECTOR" switch to "DIODE". Check double diodes at " A_1 " and " A_2 ".

RECTIFIERS. Proceed as above to test for electrode leakage, heater/cathode leakage, etc. Using inner ring of figures, set "METER SELECTOR" switch to load shown in Valve Data, turn "CIRCUIT SELECTOR" switch to "REC" Good valves will read in green band on meter scale. Load reading is per anode.

NOTE. When using a recently produced instrument to check valves having a cathode top cap connection, the flying lead cathode socket will be found in the base of the "P" Type Valveholder (8SC, see page 12).

This socket is not fitted to earlier instruments and the following procedure should therefore be observed. Locate an unconnected pin (not internally connected to an element within the valve) upon the valve to be tested, set the appropriate roller to $\frac{1}{c}$, connect flying lead to valve top cap and insert plug in any valve holder pin corresponding to the roller set to $\frac{1}{c}$.

TUNING INDICATORS (MAGIC EYES). For testing data see page 135.

Abbreviations used in this Manual.

For detailed information, refer to the working instructions for the Valve Characteristic Meter.

D, DD, DDD, - Diodes.

DT, DDT, DP, DDP, - Valve with another electrode assembly in addition to the diode.

H, - Heptode or Hexode.

N, - Nonode.

O, - Octode.

P, - Pentode. PP, - Double pentode.

T, - Triode. TT, - Double triode. TH, - Triode Heptode, or Triode Hexode.

TP, - Triode pentode.

R, - Rectifier. RR, - Full wave rectifier.

, - Denotes internally connected pin. For Valve Characteristic Meter Mk. I see procedure at top of page 11. For Valve Characteristic Meter Mk. II read "0" in place of "" in selector switch number.

†, - Third diode in triple diode.

ABBREVIATED WORKING INSTRUCTIONS FOR THE "AVO" VALVE

CHARACTERISTIC METER MARK III.

Before switching "ON" the full Instruction Book should be read and always used for reference when testing unusual types of valves.

1. Check mains adjustment tap and connect mains lead to the supply, red and black leads are line and neutral, green or yellow being the earth connection.
2. Set "CIRCUIT SELECTOR" or "CHECK C" and "ELECTRODE SELECTOR" to "A₁".
3. Set "METER SWITCH" to 100 on the Ia scale.
4. Turn "BACKING OFF" controls fully anti-clockwise.
5. Set "HEATER VOLTS" switches to value indicated in Valve Data.
6. Set "ANODE VOLTS", "SCREEN VOLTS" and "GRID VOLTS" to values indicated in Valve Data.
7. Rotate the "SET Ma/V" control to figure given in Valve Data using (where possible) the inner scale and appropriate setting of associated switch.
8. Set "ROLLER SELECTOR" switch as indicated in Valve Data and ensure that A₁ and A₂ links are tight. (For "*" in data read "0").
9. With leakage switch at "∼", switch on, and allow instrument to warm up. Adjust pointer to position "∼" by means of "SET∼" switch.

ALL VALVES.

1. Insert valve, and make any top cap connections if required.
2. Fully rotate "LEAKAGE" switch, check heater continuity at "H" and insulation on all other positions.
3. Set "CIRCUIT SELECTOR" to "CHECK H" to measure leakage from Heater/Cathode to all other electrodes strapped together with valve hot.
4. Turn "CIRCUIT SELECTOR" to "C/H" to measure leakage between heater and cathode with valve hot (if valve is indirectly heated).

TRIODES, DOUBLE TRIODES, DIODE TRIODES PENTODES, DOUBLE PENTODES, DIODE PENTODES AND TETRODES IN SIMILAR COMBINATION.

ANODE CURRENT. With "ELECTRODE SELECTOR" at "A₁" set "CIRCUIT SELECTOR" to "TEST". Meter should then indicate anode current. Reduce METER SWITCH setting if required. *If protective relay operates, switch off and check for incorrect setting of "ROLLER SELECTOR" switch or panel controls. If all controls are correct and relay continues to operate when instrument is switched on again, the valve is probably soft and the test should be discontinued.*

MUTUAL CONDUCTANCE. Reduce meter reading to zero by means of "BACKING OFF" controls. Set "METER SWITCH" to "2.5" position and readjust zero if necessary. Turn "METER SWITCH" to "mA/V" position, when a good valve will give an indication in the green band on the meter scale. To obtain actual mA/V reading, adjust "SET mA/V" control until needle reads on calibration point marked 1mA/V, in centre of green band. The "SET mA/V" control will now indicate the mutual conductance of the valve under test. To obtain a reading for valves with mutual conductance below 3mA/V, use outer scale setting on "SET mA/V" control and follow the procedure outlined above. See the Instruction Manual for more detailed information on the use of the "SET mA/V" control, the testing of valves with "slope" less than 1 mA/V.

For double valves, check data for difference in electrode voltages and repeat above operations with the "ELECTRODE SELECTOR" set to "A₂".

GAS TEST. To measure grid current set "CIRCUIT SELECTOR" to position "GAS" and the "METER SWITCH" to its 100mA position. Meter will now indicate gas current, full-scale indication being 100μA.

DIODES. To check diodes turn "ELECTRODE SELECTOR" to "D₁" and "METER SWITCH" to "1mA" or D/R scale (unless otherwise indicated in Valve Data). Turn "CIRCUIT SELECTOR" to "TEST". The condition of the valve will now be given on the "REPLACE/GOOD" scale. Check double diodes at D₁ and D₂ position of the "ELECTRODE SELECTOR".

RECTIFIERS. To check rectifiers, set "ELECTRODE SELECTOR" to "D₁" and set anode loading given in Valve Data, on D/R scale of "METER SWITCH". Turn "CIRCUIT SELECTOR" to "TEST". The condition of the valve will now be indicated on "REPLACE/GOOD" scale. Load reading is per anode. Check full-wave rectifiers at positions "D₁" and "D₂" of "ELECTRODE SELECTOR" switch.

On completion of tests return controls to their fully anti-clockwise position.

TESTING WIRE ENDED (FLYING LEAD) VALVES. Wire-ended (flying lead) valves may be tested by inserting individual wires into appropriate electrode connections of a suitable valve holder in correct sequence.

When using the AVO V.C.M. Mk 111, the setting of the selector switch may be ignored, the leads being inserted into appropriate sockets of the top cap connector panel.

ABBREVIATED WORKING INSTRUCTIONS FOR THE "AVO" VALVE TESTER.

Although the "Avo" Valve Tester has been out of production for some years, the following operational notes will be of assistance to the user not entirely familiar with the instrument, and its employment in conjunction with this new data manual.

The data in the following pages for the "AVO" VALVE CHARACTERISTIC METER also gives sufficient information for the checking of the valves with the "AVO" VALVE TESTER, referred to as the "A.V.T."

The data is presented in the following form :—

VALVE	SELECTOR SWITCH No.	T.C.	VF	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		

By taking no account of the data shown in the columns specifically marked Valve Characteristic Meter, the data applicable to the "A.V.T.", is obvious.

1. The voltage selector panel associated with the internal transformer in the meter unit should be set to match the voltage of the A.C. mains supply.
2. Before switching on, locate in this manual the line of data applicable to the valve to be tested and set the ANODE, SCREEN and HEATER switches to the voltages indicated. The SELECT ANODE switch should be set to "NORMAL", "A2", "D₁" or "D₂" according to the test to be undertaken, the SET ZERO control turned fully clockwise, the SET mA/V control set at 100, and the ROLLER SELECTOR SWITCH set up in accordance with the code number appearing in the data.
3. Switch on, noting that the neon indicator lights up indicating that the mains switch is on, and insert test lead plugs into the sockets in Meter Unit Panel. The neon lamp will now have been extinguished. If the Crocodile Clips at the remote ends of the leads are now connected to the valve pins in turn, shorts between the valve electrodes will be indicated by the neon lamp glowing. The test should not proceed further if shorts between electrodes (other than heater pins) are indicated.
4. Insert valve in correct socket upon valve panel and observe test procedure outlined below.

P. & T. (Pentodes and Triodes).

As the valve warms up the initial anode current will be registered upon the meter and should be backed off to zero by means of the SET ZERO control. The SET mA/V control should now be set to "mA/V" and any adjustment required to return the needle to zero, made upon the SET ZERO control.

The toggle key is now depressed in the direction marked mA/V thus indicating the slope of the valve upon the "mA/V" scale. This reading should compare favourably with the figure given in the data.

The toggle key is now depressed in the direction marked C. INS. (for indirectly heated valves only) thus indicating cathode/heater insulation which should, for a good valve, be of the order of 5—10M Ω (in the case of pentodes, for this test the SCREEN switch should be set at 60 or damage to the instrument and valve may result).

DT, DDT, DP, DDP (Valves with another electrode assembly in addition to diode).

The mutual conductance of the triode or pentode section is checked with anode selector at "Normal". Emission figures for each diode are then obtained as below.

"†" See information given under the heading "Diodes" below.

TT and PP (Double Electrode Assemblies)

The mutual conductance of each half of such a valve is obtained with the anode selector at "Normal" and A₂.

Where no mutual conductance figure is given, each half of valve should be checked for matching of mutual conductance.

R (Rectifiers).

To test rectifying valves for emission, set mA/V control at 100 and anode volts switch at "Rec". Emission of each anode (in case of full wave) will be obtained by setting anode selector at "D₁" and "D₂" respectively. The two emissions should match within small limits and can be compared with the figures given in the mA/V column which indicates the order of emission to be expected.

D, DD and DDD (Diodes).

These are tested for emission for each diode with anode volts switch at "D" and anode selector at "D₁" and "D₂". Set "mA/V" control at "mA/V" when reading should be greater than 0.5 for a good diode. Readings will generally be between 2 and 5. Where the symbol "†" occurs amongst the selector switch set up figures, set to A₂⁷ and test for emission of third diode with Anode Selector at A₂.

Where D₁ or D₂ appears under the heading "Top Cap" these should be connected to top cap "A" and tested with the anode selector at "Normal".

		<i>Selector</i>			<i>Anode</i>		
		<i>Switch</i>	<i>T.C.</i>	<i>Vf</i>	<i>Volts</i>	<i>Base</i>	<i>Type</i>
E.g.	EA50	123 000 000	D ₁	6	D	B3G	D

Connect to Anode Top Cap (A) and check for emission of Diode with Anode Selector at "Normal".

TH, TP, O (Frequency Changers).

To test frequency changers two sets of figures are given, first check the triode (Oscillator) section with the anode selector at "Normal" and then the pentode (mixer) section with the selector at A₂.

SPECIAL NOTES.

Due to the vast improvements in valve technique, the A.V.T. has limitations to its use. Notably the tendency to parasitic oscillations has greatly increased, and this should be borne in mind when high slope, short grid base valves of the all-glass base construction are under test.

INTERNAL CONNECTION (*).

When the symbol * appears among the Selector Switch set up figures, it indicates that an unknown electrode may be connected to this pin internally. To obtain the complete Selector Switch coding, test with an ohmmeter between pin marked * and all others. (The ohmmeter should be on a sufficiently low range to discriminate between a dead short and filament resistance.) Dependent upon the electrode to which this pin is internally connected the correct code can be set up and normal test procedure followed.

Where the pin marked * is O.C. to all others Set Roller to 0.

„ „ „ „ „ „	connected to Cathode Set Roller to	..	1.
„ „ „ „ „ „	„ Heater — „ „ „	..	2.
„ „ „ „ „ „	„ Heater + „ „ „	..	3.
„ „ „ „ „ „	„ Grid „ „ „	..	4.
„ „ „ „ „ „	„ Screen „ „ „	..	5.
„ „ „ „ „ „	„ Anode „ „ „	..	6.
„ „ „ „ „ „	„ Anode 2 „ „ „	..	7.
„ „ „ „ „ „	„ Diode Anode 1 Set Roller to		8.
„ „ „ „ „ „	„ Diode Anode 2 „ „ „		9.

1.4 Volt Dry Dattery Valves.

To obtain the filament supply for the 1.4V series, set the filament voltage switch to 10 volts and the toggle switch on the valve holder panel to $\div 7$ position. The toggle switch must always be returned to "Normal" after such tests. Where the Filament Voltage Extension Unit is used, 1.4 volts can be obtained direct by setting to 1.4V, but in these circumstances the $\div 7$ toggle switch must be left at "Normal".

Accessories for A.V.T.

If the valve base required does not appear on the Valve Holder Panel it is necessary to use an adaptor which plugs into an existing valve holder . These are supplied as follows:



No. 1. B7G and B8A.	No. 5. Blank.
No. 2. B9G.	No. 6. Sm7 (6A7 Base).
No. 3. B8B.	No. 7. B9A.
No. 4. B3G. Hivac D.A.4 and 5 pin.	No. 8. Continental 8 pin (F8).
	No. 9. B7A.

Special Note re Use of Valve Base Adaptor No. 2.

When using this data in conjunction with the B9G base, Pin 1 must be connected to H_{3+} , and Pin 8 connected to H_2 . In these circumstances most types will give heater/cathode short which can be ignored. Apart from the filament connections referred to all other set up figures will remain as printed, but pin 9 should be connected to $\frac{O}{B}$ Eg. EF50. Using Valve Base Adaptor No. 2, Selector Switch Number will read 356 101 420.

Old Type Panels.

Note that the foregoing information does not apply to the now obsolete English and American panels without roller switch.

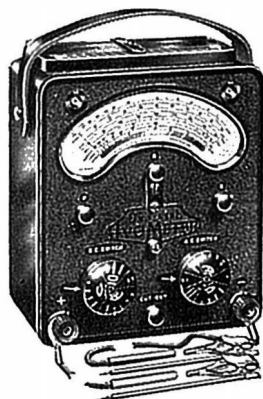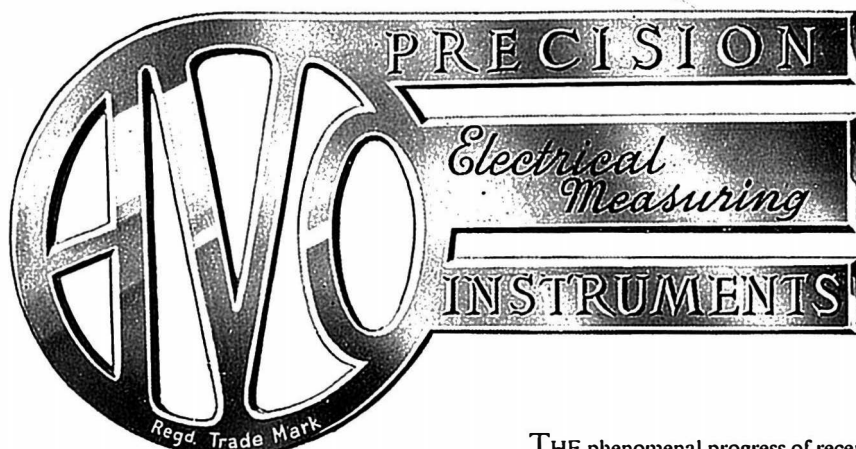

Model 7 Universal AVOMETER MK. II

A multi-range A.C./D.C. instrument providing 50 ranges of readings on a 5-in. hand calibrated scale. Range selection is by means of two rotary switches, for A.C. and D.C. respectively. A press button provides an additional range for each value of current and voltage shown on the switch knobs. Current consumption at full scale deflection is 1mA. or 2mA. according to whether press button is used or not. Total resistance is 500,000 ohms. By means of an external accessory (the Universal AvoMeter Power Factor and Wattage Unit) power factor and power can be measured in A.C. circuits. An automatic cut-out provides protection against damage through overload.

Current : A.C. and D.C. 0 to 10A.
Voltage : A.C. and D.C. 0 to 1,000V.
Resistance : Up to 40 megohms.
Capacity : .01 to 20 mFds.
Audio-Frequency Power Output : 0-2W.
Decibels : -25db to +16db.
Size : 8x7½x4½ ins. **Weight :** 6½ lb.

Model 40 Universal AVOMETER MK. II

A similar instrument to the Model 7 AvoMeter described above, but providing 40 ranges of current, voltage and resistance. Total resistance is 200,000 ohms.

Current : A.C. and D.C. 0 to 12 amps.
Voltage : A.C. and D.C. 0 to 1,200 volts.
Resistance : Up to 1 megohm.
Size : 8x7½x4½ ins. **Weight :** 6½ lb.

THE phenomenal progress of recent years in electrical engineering owes much to the contemporary advances in the design of electrical measuring instruments.

The equipment of a laboratory for making electrical measurements and tests can involve an expenditure of hundreds of pounds. Likewise the test gear essential to the work of the radio service engineer can also be a source of considerable expense.

This difficulty is largely surmounted, and other advantages are conferred, by the use of modern multi-range testing instruments, which afford maximum usefulness with a reasonable initial outlay.

"AVO" Instruments are scientifically designed on sound principles, being the outcome of many years of successful experience by the pioneers and leading manufacturers of multi-range instruments. Before leaving our factory, every "Avo" Instrument is tested and adjusted to give a high degree of accuracy and constancy of performance.

All AvoMeters and AvoMinors conform with the limits of accuracy laid down in Section 6 of the British Standard Specification 89/1954, for Industrial Portable Instruments.


Model 8 Universal AVOMETER

A recent version of the Universal AvoMeter having a sensitivity of 20,000 ohms per volt on all D.C. ranges, and 1,000 ohms per volt on A.C. ranges from 100V. upwards. In addition to the many well-known AvoMeter features, such as the automatic overload protection device, dual knob range selection, etc., it has a push button for reversing the polarity of the movement to obviate the inconvenience of changing over the leads when encountering opposite potentials in respect to a common reference point.

ACCURACY


A.C. Ranges and D.C. Current ranges to Section 6 BS 89/1954.
 D.C. Volts 2% of indication full to half scale: 1% full scale value below half scale.

Voltage : A.C. and D.C. 0 to 2,500 volts.
Current : A.C. and D.C. 0 to 10 amps.
Resistance : 0-20 megohms with internal batteries.
 0-200 megohms with external D.C. supply.
Decibels : -15db to +15db.
Size : 8½x7½x4½ ins. **Weight :** 6½ lb.

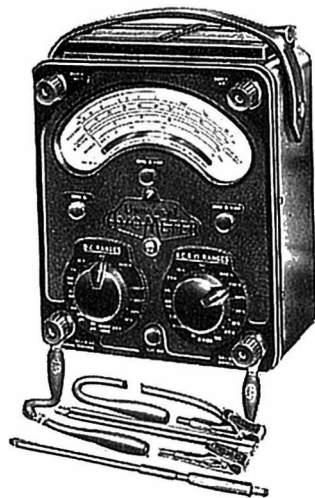



Electrical TESTING INSTRUMENTS

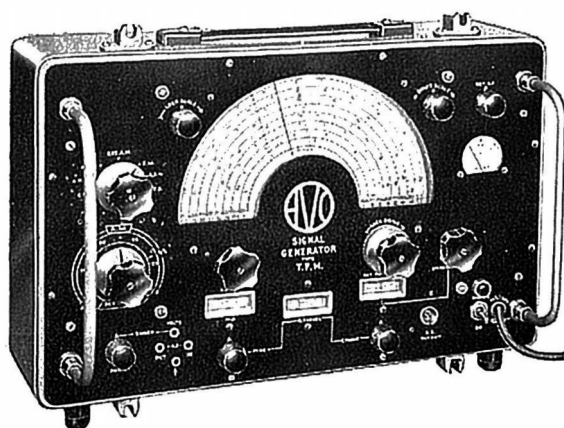

'AVO' Wide Band A.M./F.M. SIGNAL GENERATOR
(Type T.F.M.)

Operating on Fundamentals and designed primarily for the television and F.M. Engineer, this instrument incorporates a number of additional refinements to enable it to deal satisfactorily with the very stringent requirements of the new bands.

A.M. Coverage : 5-220 Mc/s in 8 ranges, CW or 400 c/s sine/square wave modulation. Accuracy $\pm 1\%$. Provision for R.F. spot frequency calibration.

F.M. Coverage : 65-120 Mc/s. Accuracy $\pm 1\%$. Maximum deviation ± 150 kc/s.

Output : Minimum (about $2\mu\text{V.}$) to 100 mV. continuously variable with decade multiplier. Force output 250mV.

Output Impedance : 80 Ω , 200 Ω , balanced 80 Ω and 300 Ω .

L.F. signal is available for test purposes, and the instrument can be modulated from an external source (A.M. only). A double-ratio slow-motion mechanism, together with interpolation dial, enables the instrument to be set with a high degree of accuracy. On the F.M. range an internal phasing control enables the modulation signal to be applied to the X-plates of an oscillograph to produce a picture of a discriminator response curve.

Size : $15\frac{1}{4} \times 10\frac{1}{2} \times 10$ ins., approx. **Weight :** 16 lb. approx.



HEAVY DUTY AVO METER

An A.C./D.C. moving coil meter specially designed for use under conditions where an exceptionally robust and portable instrument is required; 18 ranges of direct readings on a 3 $\frac{1}{2}$ -in. scale.

Current : A.C. and D.C. 10mA., 100mA., 1A., 10A.

Voltage : A.C. and D.C. 10, 25, 250, 1,000V.

Resistance : 0-500 ohms. (Midscale 12.5 ohms).
0-50,000 ohms. (Midscale 1,250 ohms.)

Sensitivity : D.C. voltage ranges, 1,000 ohms per volt.
A.C. voltage ranges except 10-volt range, 500 ohms per volt.
10-volt A.C. range, 200 ohms per volt.

Size : $7\frac{3}{8} \times 5\frac{3}{8} \times 4$ ins. **Weight :** 5 $\frac{1}{2}$ lb.



'AVO' SIGNAL GENERATOR
Type III

An inexpensive A.M. Signal Generator of entirely new design for the Service Engineer. Operates on Fundamentals and provides six frequency bands covering 150 kc/s - 220 Mc/s. Accuracy $\pm 1\%$.

150 kc/s—500 kc/s	Continuous wave or modulated at 1,000c/s. L.F. signal available for test purposes.
500 kc/s—1.6 Mc/s	
1.6 Mc/s—5.5 Mc/s	
5.5 Mc/s—18 Mc/s	
18 Mc/s—70 Mc/s	
70 Mc/s—220 Mc/s	

A new type of attenuator ensures close adherence of the output to the attenuator calibration. The instrument provides a force output of 250 mV., whilst the following outputs are available via the attenuator:—

Minimum to 100 μ V., $\times 1$, $\times 10$, $\times 100$, $\times 1000$.
Output impedances—80 Ω , 200 Ω and 400 Ω .

Size : $12 \times 8\frac{1}{2} \times 5\frac{1}{2}$ ins. approx.

Weight : 7 $\frac{1}{2}$ lb. approx.

Both Signal Generators operate on 100-120, 200-260V., 50-60 c/s. A.C. Mains. They are light and compact, and employ double screening to ensure minimum radiation.



Electrical TESTING INSTRUMENTS



'Avo' ELECTRONIC TESTMETER

A highly stable thermionic D.C. Millivoltmeter with subsidiary circuit switching giving 56 ranges of readings as follows:—

D.C. Volts : 5·0mV. to 10,000V. Max. Input Resistance 110 megohms.

D.C. Current : 0·5 μ A. to 1A. (250mV. drop on all ranges).

A.C. Volts : 0·1V. to 2,500V. R.M.S. up to 2 Mc/s. With diode probe external 0·1V. to 250V. R.M.S. usable to 200 Mc/s.

A.C. Output Power : 5mW. to 5 watts in 6 different load resistances from 5 to 5,000 ohms.

Decibels : -10db to +20db Zero level 50mW.

Capacity : ·0001 μ F to 50 μ F.

Resistance : 0·2 ohm to 10 megohms.

Insulation : 0·1 megohm to 1,000 megohms.

Power Supply : 100-130V. and 200-260V., 50-60 c/s. A.C.

Size : 12½ × 9 × 5½ ins. Weight : 12½ lb.



'Avo' ELECTRONIC TEST UNIT

An instrument designed to provide, at reasonable cost, electronic amplification facilities for the measurement of small values of A.C. Voltages, Inductance, Capacity and "Q" at radio frequencies. May be used with any Valve Voltmeter and Signal Generator of good wave form, but the ranges have been selected specially to suit those of the "Avo" Electronic Testmeter and "Avo" Signal Generators. The instrument operates on A.C. mains, 100-130V. and 200-260V., 50-60 c/s.

Size : 12½ × 9 × 5½ ins. Weight : 9 lb.

PANCLIMATIC AVOMETERS

The standard Avometers can be relied upon to give excellent service in any climate. However, where extremes of climatic conditions are experienced, special protection is desirable for certain components.


In affording this protection, advantage has been taken of the latest developments in panclimatic techniques—for example, the use of new moulding powders in the manufacture of the cases and the "potting" of certain components to render them completely impervious to extremes of humidity and resistant to fungus growth.

These special instruments are now available at a small additional charge and are known as:—

The Model 7X Avometer

The Model 8X Avometer

The Model 8(S)X Avometer

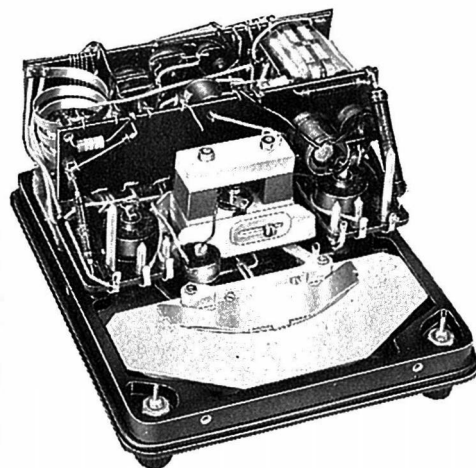

This shows the internal construction of a typical Panclimatic Avometer.



Electrical TESTING INSTRUMENTS



Universal AVOMINOR—Model 1

A small but highly accurate moving-coil instrument for measuring A.C. and D.C. current and resistance. Total resistance is 200,000 ohms on 500V. range; 22 ranges of readings on a 3-in. scale. (400 Ω/v).

Universal AVOMINOR—Model 2

A similar instrument to Universal AvoMinor Model 1, but measuring up to 1,000 volts with increased sensitivity. (4,000 Ω/v).

Size : $4\frac{3}{4} \times 3\frac{7}{8} \times 1\frac{7}{8}$ ins. Weight : 18 ozs.

Supplied complete with leads, interchangeable crocodile clips and testing prods, and instruction book.

Power, Power Factor and kVAR can now be measured on the AvoMeter by means of the AVO Power Factor and Wattage Unit. Send for free illustrated leaflet.

The following ACCESSORIES are available for 'Avo' Testing Instruments.

AvoMeter Voltage Multipliers.

AvoMeter Transformers for A.C. Current Measurements.

AvoMeter Resistance Range Extension Units.

25kV. D.C. Voltage multipliers can be supplied for the 'AVO' Electronic Testmeter, the 'AVO' Electronic Multiplier and the Model 8, 8X and 8(S)X AvoMeters.

AvoMeter Shunts for D.C. Current.


AvoMinor Voltage Multipliers.

AvoMinor Resistance Range Extension Units.

AvoMinor Shunts.

Leather Cases are available for most Instruments.

● A Comprehensive Guide to the complete range of 'Avo' Instruments is available.

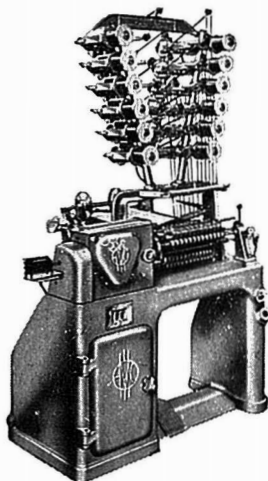

DOUGLAS and MACADIE COIL WINDERS

The Machine illustrated is the "Douglas" Fully Automatic Multi-Winder, for the high-speed production of large quantities of coils with or without paper interleaving. It will produce round, square or rectangular coils up to 6 in. each in length, and up to 4½ in. diameter. As many as 12 smaller coils can be wound simultaneously within the total available winding length of 15 inches, at headstock speeds of between 600 and 2,000 r.p.m.

Our complete catalogue illustrates twenty-seven different machines, ranging from a simple Hand-Winder to the Double-Bank Multi-Winder capable of producing 24 coils simultaneously, also Taping Machines and a Cotton Inserter Attachment.

Sole Proprietors and Manufacturers:

THE AUTOMATIC COIL WINDER & ELECTRICAL EQUIPMENT CO. LTD.


LONDON, S.W.1., ENGLAND.

Telephone: Victoria 3404 (9 lines)..


Telegrams: Autowinda, Sowest, London.

DIAGRAM OF STANDARD PIN CONNECTIONS


(viewed from underside of base)




BRITISH NINE PIN (B9)




BRITISH SEVEN PIN (B7)




B9G




'P' TYPE BASE (85C)




INTERNATIONAL OCTAL (AO8)




AMERICAN SIX PIN (UX6)




BRITISH 4/5 PIN (B5 & B4)




AMERICAN FIVE PIN (UX5)




MAZDA OCTAL (MO8)




B7A



AMERICAN SMALL SEVEN PIN (SM7)




AMERICAN FOUR PIN (UX4)




AMERICAN OCTAL (B8B or B8G)




SUB MINIATURE 8 PIN (B8D)




HIVAC FOUR PIN (SM4)




HIVAC FIVE PIN (SMS)




AMERICAN SEVEN PIN (UX7)




B7G



B9A



B3G



F8



B5A

COLOURED SPOT

CIVILIAN EQUIVALENTS OF SERVICE TYPES

The equivalents given below are purely for convenience, and it does not necessarily follow that the data for any given valve type will appear in the data pages or even that the valve given can be tested on an 'AVO' Valve Characteristic Meter, or an 'AVO' Valve Tester.

Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.
AD1	DLS10	ARP36	SP61	CV24	HL41	CV94	DS103
AR4	PM1HF	ARP37	QP25	CV25	4242A	CV95	R3/10
AR5	P220	ARP38	KTZ73	CV26	813	CV96	R3/16
AR6	LP2	ARS7	VS24	CV27	4357A	CV97	R2/10
AR7	4D1	ARS8	PM12V	CV28	ACT9	CV98	R2/38
AR8	HL23DD	ARTH2	ECH35	CV29	E1235	CV99	E1373
AR9	PM1LF	ARTP1	TP22	CV30	4270A	CV100	V2D33B
AR10	TDD2A	ARTP2	TP25	CV31	U20	CV105	E1271
AR11	4019B	AT20	MZ05/20	CV32	RG3-250M	CV108	BM313
AR12	4020A	AT35	DET25	CV33	4077A	CV109	9KP5
AR13	B406	AT37	ACT36	CV34	MR10	CV110	VS68
AR14	220RC	ATS25	807	CV38	E1198	CV114	E1265
AR15	220LF	ATP4	V248A	CV39	S22AF	CV115	E1415
AR16	220B	ATP5	V245	CV40	E1255	CV116	KR6/1
AR17	MH4	ATP7	V266	CV41	E1267	CV117	E1417
AR20	4021B	ATP10	4061A	CV42	E1256	CV118	SP61
AR21	EBC33	ATP35	PV1-35	CV44	E1155	CV119	XJ
ARD2	DI	ATP75	PT6	CV45	S130P	CV120	MF
ARD4	D42	ATP100	4069A	CV46	8011	CV121	VI920
ARDD1	10D1	ATS25A	807	CV49	3B/501A	CV122	E1336
ARDD3	6H6	ATS70	4282B	CV51	E1320	CV123	E1330
ARDD5	EB34	AU1	UI8	CV52	E1231	CV124	807
ARH1	6L7	AU2	RG250	CV53	3A/146J	CV125	2043
ARPI	PT2	AU3	UI2/14	CV54	V960	CV126	E1362
ARP2	SP2	AU3A	IS61	CV55	E1190	CV127	S30A
ARP3	9D2	AU4	UI7	CV56	E1325	CV128	SU750
ARP4	SP210	AU5	VI907	CV57	E1271	CV129	KRN2A
ARP5	VP2	AU6	GU50	CV58	E1273	CV130	KRN3
ARP6	SP4	AU8	U22	CV63	E1323	CV131	9D6
ARP7	42MPT	AU12	UI5	CV65	Pen25	CV132	V885
ARP8	AC4Pen	AU13	5Z4	CV66	RL37	CV133	6C4
ARP9	Pen1340	AW2	7475	CV69	E1326	CV135	EY91
ARP9A	7D8	AW3	S130	CV71	OSGLIM	CV136	7D9
ARPI0	PenA4	AW4	STV280/40	CV72	V1120	CV137	EAC91
ARPI1	TSP4	AW5	ME41	CV73	11E3	CV138	EF91
ARPI2	VP23	AW6	EM31	CV74	ESU74	CV139	6L34
ARPI3	VP210	CV1	D051	CV75	4313C	CV140	6AL5
ARPI4	220IPT	CV2	E1228	CV76	E1359	CV141	U4B
ARPI5	KTW63	CV3	AFN202	CV77	K TUBE	CV142	U2
ARPI6	6J7	CV4	E1229	CV78	E1137	CV143	U3
ARPI7	6F6	CV5	CV152	CV79	E1379	CV144	U4
ARPI8	KT24	CV6	E1148	CV80	VF01	CV145	U5
ARPI9	SP41	CV8	E1356	CV81	VF08	CV147	U7
ARP20	SP42	CV9	AL60	CV82	3A/147J	CV148	U8
ARP21	Z62	CV13	BT9B	CV84	4033A	CV149	U7
ARP22	116/Pen	CV14	XN	CV85	V2023	CV150	PK150
ARP23	MS/Pen	CV15	E1226	CV86	V1507	CV152	GU21
ARP24	220VPT	CV16	S25A	CV87	KRN2	CV153	E1411
ARP25	KT41	CV18	DET19	CV88	DV32	CV154	E1419
ARP26	KT44	CV19	EHT1	CV89	E1380	CV155	E1190
ARP33	MSP4	CV20	VI906	CV90	E1368	CV158	KR3
ARP34	EF39	CV21	VP41	CV92	E1332	CV159	ALI
ARP35	EF50	CV22	BT45	CV93	V625	CV160	E1342

Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.
CVI61	EI342	CV251	MX57	CV345	I2E1	CV431	85A1
CVI71	W21 (4 PIN)	CV252	ACR22	CV346	EZ22	CV432	MEI400
CVI72	EI468	CV254	9L01A	CV347	EBC2I	CV433	BICIE
CVI73	EF55	CV256	NS2	CV349	V2030E	CV434	QS75/60
CVI74	EI459	CV257	ACT22	CV352	EBC33	CV435	GTII
CVI75	XSGI-5	CV258	EI273	CV353	M500	CV436	ACT25
CVI76	XPI-5	CV259	EI495	CV354	MEI005	CV437	KT67
CVI77	813	CV260	SP6I	CV358	EF37A	CV438	GI20/1B
CVI78	EI458	CV261	R10	CV359	NEI7	CV439	22/11BXA
CVI80	KR4	CV262	9MP6	CV360	NEI8	CV440	I60IABC
CVI81	ECC32	CV264	API188	CV367	IN21B	CV441	VI052
CVI82	EI488	CV265	I9E2	CV368	9-3	CV443	CK505AX
CVI85	PM202	CV266	EI336	CV369	1B35	CV444	MZI-75
CVI86	EI342	CV267	EI336	CV370	2J42	CV445	5J/260E
CVI87	UI9	CV268	EI330	CV371	19G6	CV446	3Q/260E
CVI88	7475	CV269	VCR97	CV372	3C45	CV447	4078GA
CVI89	BS4	CV271	V986	CV374	S3A	CV449	85A2
CVI90	DLS10	CV272	KR6/4	CV375	EA50	CV450	EL38
CVI91	EI494	CV273	586I	CV377	V1135C	CV452	6AT6
CVI92	EI481	CV275	VI042	CV378	53KU	CV453	6BE6
CVI99	NT99	CV276	1IE2	CV379	ACT19	CV454	6BA6
CV200	MZ2-200	CV277	19G3	CV380	EF54	CV455	I2AT7
CV201	V630	CV278	EI606	CV382	T24/40JA	CV460	BS48
CV202	YF	CV279	NGI6	CV383	T24/40JB	CV461	BS92
CV207	AC/P4	CV281	X6I	CV384	DET5	CV462	BS84
CV208	1487	CV283	6AL5	CV385	DL7I	CV463	BS82
CV209	MX57	CV284	STV30/20	CV386	DF70	CV465	EF72
CV211	V2030B	CV285	VA35	CV387	DL72	CV466	EF73
CV212	LS594	CV286	QS95/10	CV389	VCRX210	CV467	EF70
CV214	EI531	CV287	ACT23	CV391	5B/255M	CV468	EC70
CV215	EI497	CV290	EI527	CV394	EM34	CV469	EA76
CV216	VR150/30	CV292	EI481	CV395	QS150/45	CV471	EL70
CV217	KRN3	CV296	DDR2	CV397	DET24	CV473	EY70
CV218	KRN3	CV298	FAI5	CV400	3DE7	CV474	5643
CV219	EI046	CV302	ECH22	CV403	FVD7	CV475	EF7I
CV220	63I/PI	CV303	EF22	CV405	927	CV487	CRT/5I
CV222	EI489	CV304	EL22	CV407	VCRX221	CV489	BT75
CV223	KRN2A	CV305	EF5I	CV408	A1714	CV490	19H5
CV224	KRN2A	CV306	MX52	CV409	A1820	CV491	I2AU7
CV225	ACT17	CV307	VCRS30	CV410	K3A	CV492	I2AX7
CV228	DV40B	CV309	QV04-7	CV411	GM5	CV493	6X4
CV229	I336	CV310	NHPI	CV412	A800	CV494	B12
CV230	DV55	CV311	54/444	CV413	GI50/20	CV495	5802
CV232	MF	CV312	ESU74	CV415	TT15	CV496	CGI4
CV233	B55	CV315	TYI-5I	CV416	6F17	CV498	NEI7
CV234	DV56	CV319	EI453	CV417	EC9I	CV499	5B/256M
CV235	U23	CV321	KT66	CV418	MX2	CV500	6T7
CV236	EI465	CV324	CVI628	CV419	EC9I	CV501	EBF32
CV237	KR6/2	CV326	ISB	CV420	VCRX277	CV502	LD210
CV238	RK6/3	CV327	EF52	CV421	CAT20C	CV503	5W4
CV240	ACT24	CV328	L9	CV422	QS105/45	CV504	6U5
CV242	GS18	CV329	6F33	CV423	25SN7	CV505	MTI6
CV243	4045A	CV335	VCR522B	CV424	QQV06-40	CV506	GL8023
CV244	AF2	CV336	VCR522C	CV425	CGI-C	CV508	4B49
CV245	4328D	CV337	27MI	CV426	EY5I	CV509	6V6G
CV248	GS16	CV339	24B2	CV428	5B/251M	CV510	6V6
CV249	4019A	CV343	V894	CV429	I2AEP6	CV511	6V6
CV250	CMG25RS	CV344	EI323	CV430	29CI	CV512	6W7

Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.
CV513	4J53	CV571	50L6	CV635	833	CV702	830B
CV514	2J36	CV572	6X5	CV636	836	CV703	12K8
CV515	6Y6	CV573	6X5	CV637	837	CV704	RK20A
CV516	3GPI	CV574	EZ35	CV638	838	CV705	ID5GP
CV517	OZ4A	CV575	5U4	CV639	843	CV706	6U7
CV518	AC/VPI	CV578	6A8	CV640	860	CV707	HK54
CV519	Pen4DD	CV579	6A8	CV641	861	CV708	161
CV520	VP2B	CV580	6A8	CV642	872A	CV709	72
CV521	R4410	CV581	6C5	CV643	874	CV710	368A
CV522	7B7	CV582	6C5	CV644	875A	CV711	32
CV523	12Y4	CV583	6G5	CV645	876	CV712	38
CV524	TT12	CV584	GS46	CV646	879	CV713	1B27
CV525	12A6	CV585	6C6	CV647	884	CV714	C6A
CV526	12A6	CV586	EL37	CV648	885	CV716	8013A
CV527	DA60	CV587	6Q7	CV649	956	CV717	5R4GY
CV528	VA16	CV588	6Q7	CV650	958	CV718	5FP7
CV529	12AH7	CV589	6Q7	CV651	991	CV719	2J21A
CV530	G71E	CV590	6SJ7	CV652	1603	CV720	723A
CV531	12CB	CV591	6SJ7	CV653	1611	CV723	1619
CV532	GUI1	CV592	6SJ7	CV654	1612	CV724	816
CV533	CAT17C	CV593	GZ32	CV655	1613	CV725	1B24
CV534	12J5	CV594	6SH7	CV656	1616	CV726	35Z3
CV535	12J5	CV595	6SH7	CV657	1620	CV727	IN21
CV536	4120/AA	CV596	2C45	CV658	1622	CV728	IP5GT
CV537	12SA7	CV597	2X2A	CV659	1625	CV729	5V4
CV538	12SA7	CV598	715C	CV660	6AC7	CV730	6A3
CV539	1B23	CV599	1B51	CV661	6AB7	CV731	6F6
CV540	12SC7	CV600	5CPI	CV662	8012	CV733	REL8D
CV541	1B3	CV601	5BP1	CV663	8025	CV734	228A
CV542	5J23	CV602	3API	CV664	9002	CV735	845
CV543	12SK7	CV603	10	CV665	9003	CV736	905
CV544	12SK7	CV604	30	CV666	9004	CV737	906
CV545	ACSP3	CV606	37	CV667	9005	CV738	953
CV546	12SQ7	CV608	41	CV668	35T	CV739	3API
CV547	12SQ7	CV609	42	CV669	279A	CV740	5MPI
CV548	LP2	CV610	45	CV670	645	CV741	5LPI
CV549	25A6	CV611	56	CV676	726A	CV742	FG67
CV550	25A6	CV612	57	CV677	701A	CV743	GET2
CV551	25L6	CV613	58	CV678	702A	CV744	GET4½
CV552	25L6	CV614	75	CV679	703A	CV745	HK24
CV553	25L6	CV615	76	CV683	316A	CV746	468PI
CV554	D63	CV616	77	CV684	274B	CV747	6AC7
CV555	25Z5	CV617	80	CV686	OC3	CV749	IN23A
CV556	QP25	CV618	83	CV687	446B	CV750	01A
CV557	D42	CV619	84/6Z4	CV688	2C43	CV751	HY75
CV558	25Z6	CV621	801	CV689	700A	CV752	0A4
CV559	25Z6	CV622	802	CV690	RK48A	CV753	1A3
CV560	TSP4	CV623	803	CV691	357A	CV754	1A4P
CV561	35L6	CV624	804	CV692	OZ4	CV755	1A5
CV562	35L6	CV625	805	CV693	HF300	CV756	1A5
CV563	DA30	CV626	808	CV694	12SG7	CV757	1A6
CV564	35Z3	CV627	810	CV695	700B	CV758	1B4P
CV565	35Z3	CV628	811	CV696	700C	CV759	1B5
CV566	RG-2	CV629	814	CV697	12SJ7	CV760	1B7
CV567	35Z5	CV630	826	CV698	12SJ7	CV761	1B22
CV568	35Z5	CV631	828	CV699	700D	CV762	1C21
CV569	ECC35	CV632	829	CV700	12SR7	CV764	ID5
CV570	3Q/195E	CV634	832	CV701	ESA892	CV765	ID7

Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.
CV766	1E5GP	CV830	4TSP	CV894	7G7	CV998	2000T
CV767	IF4	CV832	5API	CV895	7H7	CV999	3C22
CV768	IF5G	CV833	89	CV896	7K7	CV1000	4DI
CV769	IF6	CV834	5B/300B	CV897	7J7	CV1001	SU2150A
CV770	IF7	CV836	5BP4	CV898	7N7	CV1002	E1192
CV771	IG5	CV837	12C8	CV899	7Q7	CV1018	215SG
CV772	IG6	CV838	5CP7	CV900	7R7	CV1019	PM2
CV773	IG6	CV839	5GPI	CV901	7Y4	CV1020	220P
CV774	IH4	CV840	5H4	CV902	7W7	CV1021	210LP
CV775	ILA6	CV841	5U4	CV904	892R	CV1022	220PA
CV776	ILB4	CV842	5W4	CV905	9HP7	CV1023	230XP
CV777	ILC5	CV843	6AB5	CV906	1602	CV1025	DET25
CV778	ILC6	CV844	6AC5	CV908	12A5	CV1027	210LF
CV779	ILD5	CV845	6AC5	CV909	12A7	CV1028	220VSG
CV780	ILH4	CV846	6AC7	CV910	12A8	CV1029	ESU150
CV781	ILN5	CV847	6AF6g	CV911	12B8	CV1030	4060A
CV782	IR5	CV848	6AG5	CV913	12DP7	CV1031	ESG250
CV783	IS4	CV849	6AC7	CV914	12DP7	CV1032	220B
CV784	IS5	CV850	6AK5	CV915	12FP7	CV1034	DET3
CV785	IT4	CV851	6B4	CV916	12H6	CV1035	QP2I
CV786	IT5	CV852	6C4	CV917	12J7	CV1036	220PA
CV787	2A7	CV854	6C7	CV918	12K7	CV1037	MH4
CV788	832A	CV855	6C2I	CV919	12SF5	CV1038	MHL4
CV789	3C24	CV856	6G8	CV920	12SF5	CV1039	1561
CV790	2API	CV857	6H7	CV921	12SF7	CV1040	PX25
CV792	2C22	CV858	6J6	CV922	12SH7	CV1041	PM12M
CV793	2C33	CV859	6J8	CV923	12SJ7	CV1042	210LF
CV794	2D2	CV860	6K5	CV924	12SL7	CV1043	210PG
CV795	2D4A	CV861	6K5	CV925	12SN7	CV1044	210DDT
CV796	2DI3C	CV862	6L5	CV927	12Z3	CV1045	X56
CV797	2D2I	CV864	6P7	CV929	13SPA	CV1046	PT25H
CV798	2E22	CV865	6SD7	CV930	14F7	CV1047	TZ05-50
CV800	2J22	CV866	6SJ7Y	CV931	15	CV1049	210SPT
CV801	2J54	CV867	6SR7	CV932	446A	CV1050	HL2
CV802	2C26	CV870	6V7	CV933	15E	CV1051	Pen220A
CV803	2V3	CV871	6Z5	CV934	15R	CV1052	EL32
CV804	2V3	CV872	6Z7	CV936	24A	CV1053	EF39
CV805	50Y6	CV873	6ZY5	CV937	25A7	CV1054	EB34
CV807	3A4	CV874	7	CV938	25AC5	CV1055	EBC33
CV808	3A5	CV875	1642	CV939	25B6	CV1056	EF36
CV809	3A/105B	CV876	7A6	CV940	25B8	CV1057	EK32
CV811	129I	CV877	7A7	CV941	HK24	CV1058	EP60
CV812	3B24	CV878	7A8	CV942	25Y5	CV1059	955
CV814	3DPI	CV879	7B4	CV943	26	CV1060	807
CV815	3D6	CV880	7B5	CV944	27	CV1061	DET19
CV816	3DPI	CV881	7B5	CV945	28D7	CV1062	TY1-50
CV817	3EPI	CV882	7B6	CV946	28D7	CV1064	U12/14
CV818	3Q4	CV883	7B8	CV947	31	CV1065	SP6I
CV819	3Q5	CV884	7BP7	CV948	32L7	CV1066	P6I
CV820	3S4	CV885	7C5	CV949	33	CV1067	6J5
CV821	4AI	CV886	7C5	CV961	NC13	CV1068	STV280/40
CV822	4B24	CV887	7C6	CV964	E4205-B7	CV1069	STV280/80
CV823	7A	CV888	7D7	CV966	E6504-M16	CV1070	7475
CV824	4E27	CV889	7D8	CV977	Twin CV55	CV1071	U52
CV825	4SHA	CV890	7E5	CV979	DSL10	CV1072	GU50
CV826	4THA	CV891	7E6	CV987	NC13A	CV1073	H63
CV828	4TPB	CV892	7E7	CV995	6AJ5	CV1074	6J7
CV829	4TPB	CV893	7F7	CV996	EL32	CV1075	KT66

Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.
CVI076	DA4I	CVI153	PM254	CVI238	PM24D	CVI327	Pen1340
CVI077	EM3I	CVI154	PM4DX	CVI240	PZI-35	CVI328	7D8
CVI078	DI	CVI155	DEQ	CVI246	PM202	CVI329	PenA4
CVI079	KT8	CVI156	DEQ	CVI250	4279A	CVI330	TSP4
CVI080	4307A	CVI158	PMI4	CVI252	42I2E	CVI331	VP23
CVI081	4052A	CVI159	PMI4	CVI253	EI16I	CVI332	VP2I
CVI082	220TH	CVI160	104V	CVI255	EI189	CVI333	220IPT
CVI083	210VPT	CVI161	104V	CVI256	EI232	CVI334	KT24
CVI087	14L	CVI163	PD220A	CVI259	ESU450	CVI335	SP4I
CVI088	832	CVI164	ACSG	CVI260	ESU208	CVI336	SP42
CVI090	EI046	CVI165	VMS4	CVI261	RX3-120	CVI337	116/Pen
CVI091	EF50	CVI166	P220	CVI262	GUI	CVI338	220VPT
CVI092	EA50	CVI167	PM24A	CVI263	RGI-125	CVI340	KT44
CVI095	954	CVI168	PX4	CVI264	UI8	CVI341	MSP4
CVI096	5B/502A	CVI169	VMP4G	CVI265	UI5	CVI342	QP25
CVI097	ECR60	CVI170	D4I	CVI266	UI5	CVI343	KTZ73
CVI098	E960T	CVI171	AT4	CVI267	U4020	CVI344	TP22
CVI099	X66	CVI172	VMP4G	CVI268	5Y3	CVI345	TP25
CVI100	KTW62	CVI173	354V	CVI279	MU2	CVI347	ECH35
CVI101	MHLD6	CVI177	KT42	CVI280	6L7	CVI355	ESU300
CVI102	BL63	CVI175	AP4	CVI281	KTW6I	CVI356	U22
CVI103	Y63	CVI176	AP4	CVI282	MSP4	CVI359	ME4I
CVI104	PTI5	CVI177	4DI	CVI283	SP4	CVI361	MZ05-20
CVI105	ML6	CVI178	DA30	CVI284	MS/Pen	CVI363	DET16
CVI106	9D2	CVI179	ML4	CVI285	6N7	CVI365	4282B
CVI107	15D2	CVI180	244V	CVI286	6L6	CVI366	V248A
CVI108	8D2	CVI181	KT4I	CVI287	KT32	CVI367	V245
CVI109	4DI	CVI182	H42	CVI288	244V	CVI368	V266
CVI110	SI30	CVI183	W42	CVI289	156I	CVI369	406IA
CVI111	VI907	CVI184	A373	CVI290	SU2150A	CVI370	PVI-35
CVI112	VI026	CVI186	6F6	CVI291	HVR2	CVI371	PZI-35
CVI113	UI7	CVI187	D4I	CVI296	MUI4	CVI372	4069A
CVI114	EI024	CVI188	N43	CVI300	10DI	CVI374	807
CVI116	V872	CVI189	AC6Pen	CVI301	6H6	CVI382	ACR10
CVI117	4IMTL	CVI190	ACP4	CVI302	D42	CVI400	CIC
CVI118	KT2	CVI191	KTZ4I	CVI303	PMIHF	CVI401	CL33
CVI119	DDL4	CVI192	Z62	CVI304	LP2	CVI402	CY3I
CVI120	SU2150A	CVI193	X65	CVI305	4DI	CVI403	DD4I
CVI121	T4I	CVI194	20AI	CVI306	HL23DD	CVI404	EF36
CVI122	4IMXP	CVI195	KTW63	CVI307	PMILF	CVI405	EI199
CVI123	EF8	CVI196	AC5PenDD	CVI308	TDD2A	CVI406	HL4I
CVI124	MS/Pen	CVI197	EC53	CVI309	4019B	CVI407	Pen45
CVI125	MS/PenB	CVI198	ACP4	CVI310	KCI	CVI408	P4I
CVI126	4SH	CVI200	202	CVI311	B406	CVI409	SP2
CVI127	Pen46	CVI201	4317	CVI312	220RC	CVI410	TH2
CVI128	GTIC	CVI202	304	CVI313	220LF	CVI411	TH4I
CVI129	MS/Pen	CVI205	EI007	CVI314	DLS10	CVI412	TV4
CVI130	HL23	CVI206	D060	CVI316	4021B	CVI413	UU6
CVI133	V960	CVI207	ES450	CVI317	5625	CVI414	VP4I
CVI134	HVR2	CVI208	PM256	CVI318	VS24	CVI415	4011A
CVI135	EI148	CVI219	MZI-100	CVI319	PMI2V	CVI418	10DI
CVI136	EF54	CVI220	4033A	CVI320	SP2	CVI419	11D3
CVI137	EC52	CVI221	PZI-75	CVI321	9D2	CVI420	4078A
CVI141	DPQ	CVI222	ACT6	CVI322	SP2100	CVI422	3D/10A
CVI143	GTIA	CVI223	DET5	CVI323	VP2	CVI423	9D2
CVI144	BTI9	CVI235	DET12	CVI324	SP4	CVI424	20AI
CVI151	PM3		(SPECIAL)	CVI325	42MPT	CVI425	7D5
CVI152	PM4DX	CVI237	PM24D	CVI326	AC4Pen	CVI426	EK2

Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.
CVI427	EF9	CVI530	6LYI	CVI669	P625	CVI773	82
CVI428	EBC3	CVI543	I2MD6	CVI671	402IA	CVI774	I12A/I2A
CVI429	EL2	CVI553	ESU450X	CVI672	PEN36C	CVI775	36
CVI430	ACSP3	CVI567	2C25	CVI673	PM2HL	CVI776	6D7
CVI431	ACTI6	CVI568	4062A	CVI675	N43	CVI777	7C7
CVI432	CMG25	CVI569	R3	CVI676	LS8A	CVI778	10ID
CVI433	EC3I	CVI570	EK32	CVI677	AC52	CVI779	102D
CVI434	EM4	CVI572	807	CVI678	HLA2	CVI780	30TWIN
CVI435	GU2	CVI573	4074B	CVI683	MKT4	CVI781	310B
CVI436	HL2	CVI574	SP4I	CVI684	APP4C	CVI782	340A
CVI437	EII43	CVI576	KT38	CVI686	D418	CVI783	9JP1
CVI438	KT6I	CVI577	EII43	CVI687	D418	CVI784	6AK7
CVI439	MT9F	CVI578	EF50	CVI691	DDL4	CVI785	IN26
CVI440	MT9L	CVI579	954	CVI692	AC/P	CVI786	3K33
CVI441	MTI2A	CVI581	ECH35	CVI695	DH30	CVI787	4C35
CVI442	MTI4	CVI585	T4I	CVI696	B2I	CVI790	7Z4
CVI443	RI	CVI586	HL23	CVI697	X4I	CVI792	1960
CVI444	42SPT	CVI587	ECR35	CVI698	A819	CVI793	724B
CVI445	40I2A	CVI588	ECR30	CVI699	SP4I	CVI794	959
CVI446	40I7B	CVI596	09I	CVI700	SP4I	CVI795	723A/B
CVI447	4030C	CVI600	CATI	CVI701	XLO	CVI796	DW4
CVI448	4043C	CVI601	CARI	CVI702	XP	CVI797	408IA
CVI449	4064B	CVI602	CAR4	CVI711	6B7	CVI798	205I
CVI450	4227A	CVI606	CAT2	CVI715	EBC3	CVI799	350B
CVI451	4274A	CVI610	MT4	CVI716	EI54I	CVI800	IA7
CVI452	4300A	CVI611	MR4	CVI718	ACTP	CVI801	GS118
CVI453	4378	CVI614	ESI500A	CVI719	U22	CVI802	IA7
CVI454	225DU	CVI615	ESU1500	CVI720	XLI-5	CVI803	IC5
CVI455	41IU	CVI618	ES250M	CVI721	XPI-5	CVI805	IC5
CVI456	Pen383	CVI619	42I2D	CVI722	A90I	CVI806	ID5
CVI457	VPI33	CVI622	4052A	CVI724	5A/I02D	CVI808	2J32
CVI458	4IMP	CVI623	RGL250	CVI727	Z22	CVI809	2J33
CVI459	MU2	CVI625	RG3-250	CVI731	5130	CVI810	3J34
CVI460	X4I	CVI626	RGI-240A	CVI732	ML4	CVI811	ID8
CVI461	U22	CVI628	GU8	CVI733	40I8AG	CVI812	IE7
CVI462	A915	CVI629	RG3-I250A	CVI734	3Q/2I3E	CVI813	2DPI
CVI463	CBL3I	CVI630	ESP450	CVI749	205D	CVI814	5LP1
CVI464	EF39	CVI637	LS5	CVI750	33A/100A	CVI815	6Q5
CVI466	P57	CVI640	4002D	CVI751	34	CVI816	6Y3
CVI467	PY3-600	CVI642	DER	CVI752	35	CVI817	IG4
CVI468	SP4	CVI643	EI32	CVI753	35A5	CVI818	IH5
CVI469	Z22	CVI645	EI33	CVI754	35TG	CVI819	6P5
CVI470	3P/270B	CVI649	6C5	CVI755	1626	CVI820	IH5
CVI471	4049A	CVI650	LS58	CVI756	1629	CVI821	IN5
CVI472	CMG25	CVI651	G455B	CVI757	900I	CVI822	2J48
CVI473	CMG25	CVI652	P220A	CVI758	1L4	CVI823	IN5
CVI474	CE20	CVI653	KCI	CVI759	2C26A	CVI824	IQ5
CVI501	EII92	CVI655	4019B	CVI760	2J26	CVI825	KT45
CVI502	KT32	CVI656	LS8	CVI761	3FP7	CVI826	IQ5
CVI503	KT33C	CVI657	4020B	CVI762	6AK6	CVI827	M510
CVI504	VI90I	CVI658	LS9B	CVI763	6J4	CVI828	M512
CVI505	MH4I	CVI659	4022B	CVI764	CE2	CVI829	IT5
CVI506	ESP450	CVI660	LS7	CVI766	CX25	CVI830	IB3
CVI508	VI913	CVI661	DL	CVI768	7076	CVI831	2A3
CVI510	EI242	CVI663	4021B	CVI769	2A6	CVI832	0A2
CVI518	09D	CVI664	B406	CVI770	7A4	CVI833	0B2
CVI522	E4013-B4	CVI665	DH	CVI771	39/44	CVI834	2A5
CVI526	3EGI	CVI667	LS8A	CVI772	47	CVI835	3B28

Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.
CVI836	4B26	CVI906	6E5	CVI970	6SC7	CV2135	8D5
CVI837	2B7	CVI907	CS2-C	CVI971	IT4	CV2136	6BW6
CVI838	QQZO4-15	CVI908	6F5	CVI972	6SF5	CV2138	GM4
CVI839	6FI3	CVI909	6F5	CVI973	6SF5	CV2139	EHM2
CVI841	BS52	CVI910	6F5	CVI974	6S7	CV2140	B6
CVI842	2G	CVI911	6F6	CVI975	6S7	CV2141	B6E
CVI843	2Y2	CVI912	6F6	CVI977	UL41	CV2142	B12E
CVI844	GS3/B	CVI913	CS44X	CVI978	6SG7	CV2143	B24
CVI846	5T4	CVI914	4J31	CVI979	61BT	CV2144	B24E
CVI847	19H4	CVI915	6F7	CVI980	185BT	CV2145	M6
CVI848	20A2	VC1916	4J33	CVI981	6SK7	CV2146	DM6
CVI849	5W4	CVI917	6F8	CVI982	6SK7	CV2147	G24H
CVI850	6L19	CVI918	6F8	CVI984	6SC7	CV2148	GM5B
CVI851	5X4	CVI919	6F4	CVI985	6SL7	CV2149	GM1B
CVI852	5X4	CVI920	6LD20	CVI986	6SN7	CV2150	MX103
CVI853	6P25	CVI921	U24	CVI988	6SN7	CV2151	MX105
CVI854	5Y3	CVI924	TY2-125	CVI989	SD6	CV2152	MX107
CVI855	UU9	CVI926	6G6	CVI990	6SQ7	CV2153	MX108
CVI856	5Y3	CVI927	B142	CVI991	6SQ7	CV2159	BR153
CVI857	5Y4	CVI928	12BA6	CVI993	6SS7	CV2160	ESU77
CVI858	BS62	CVI929	6H6	CVI995	6ST7	CV2162	12L01A
CVI859	BS4A	CVI930	6H6	CVI996	6ST7	CV2164	K302
CVI860	30D5	CVI931	6H6	CVI999	IV	CV2173	G10H
CVI861	5Z3	CVI932	6J5	CV2000	EF9I	CV2174	G240/2D
CVI862	6AQ5	CVI933	6J5	CV2001	EF9I	CV2175	DG7-5
CVI863	5Z4	CVI934	6J5	CV2002	7D9	CV2179	E2134
CVI864	5Z4	CVI935	6J7	CV2003	7D9	CV2180	19H4
CVI865	6R4	CVI936	6J7	CV2004	6AL5	CV2183	X661
CVI866	M503	CVI937	6J7	CV2005	6AL5	CV2185	88D
CVI867	6A6	CVI938	6K6	CV2006	12AU7	CV2187	Z239/IG
CVI868	5T01A	CVI939	37X50	CV2007	12AU7	CV2188	W7/2D
CVI869	12T01A	CVI940	6K6	CV2008	8054	CV2189	V240C/2K
CVI870	6A7	CVI941	6K7	CV2009	V738	CV2190	V233A/IK
CVI873	6AB7	CVI942	6K7	CV2010	6J6	CV2191	DG13-2
CVI876	1852	CVI943	6K7	CV2011	12AU7	CV2192	9MW5AX
CVI878	6AD7	CVI944	6K8	CV2014	5763	CV2193	89D
CVI879	HP410I	CVI945	6K8	CV2015	DDR2	CV2194	G400/IK
CVI880	7BM1A	CVI946	6K8	CV2101	DF72	CV2195	EF9I
CVI882	6AG7	CVI947	6L6	CV2102	DL75	CV2199	GC10A
CVI883	4H/180E	CVI948	6L6	CV2103	DF73	CV2202	XE2
CVI884	33A/158M	CVI949	6D4	CV2104	DAF70	CV2203	FX215
CVI885	6B5	CVI950	6L7	CV2105	DF70	CV2208	G50/IG
CVI886	EC80	CVI951	6L7	CV2106	DL66	CV2209	6F33
CVI887	6B6	CVI953	6N6	CV2107	DF66	CV2210	5544
CVI889	TSY4-500	CVI954	6N6	CV2108	9M06A	CV2212	13D3
CVI891	6B7	CVI955	EF9I	CV2110	E2004	CV2213	NT2
CVI892	2K28	CVI956	6N7	CV2115	E2004	CV2214	3B/240M
CVI893	6B8	CVI957	6N7	CV2124	BK24	CV2215	5545
CVI894	6B8	CVI958	6N7	CV2125	BD78	CV2216	30E8/PI
CVI895	STV/70/60	CVI959	50C5	CV2126	3V/42DB	CV2217	6K25
CVI896	6C8	CVI960	6R6	CV2127	6CH6	CV2220	5B/257M
CVI897	4J34	CVI961	12AU6	CV2128	6AJ8	CV2223	G10/371K
CVI898	4J35	CVI962	6R7	CV2129	5763	CV2224	G1/371K
CVI899	6L18	CVI963	6R7	CV2130	TT16	CV2225	150B2
CVI900	6D6	CVI964	6R7	CV2131	5022	CV2231	E2266
CVI901	6F11	CVI966	6SA7	CV2132	90AV	CV2232	DDX52
CVI902	6D8	CVI967	6SA7	CV2133	90CG	CV2233	G5H
CVI905	4-65A	CVI969	6SC7	CV2134	90CV	CV2234	X662

Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.
CV2235	EY84	CV2535	53	CV2601	271A	CV2668	846
CV2237	IAD4	CV2536	53A	CV2602	272A	CV2669	849
CV2238	5672	CV2537	55	CV2603	274A	CV2670	849H
CV2239	5676	CV2538	59	CV2604	275A	CV2671	851
CV2240	3B4	CV2539	61P	CV2605	282A	CV2673	852
CV2241	DY70	CV2540j	63D	CV2608	300A	CV2674	863
CV2245	33/160E	CV2541	71A	CV2609	330A	CV2675	864
CV2254	5678	CV2542	72	CV2610	3030	CV2676	865
CV2257	UDI66C	CV2543	73	CV2611	04TH	CV2678	5799
CV2258	C43B	CV2544	78	CV2612	307A	CV2679	866Jr
CV2259	DL68	CV2545	79	CV2613	310A	CV2680	868
CV2260	DF64	CV2546	81	CV2614	311A	CV2683	878
CV2266	CC3L	CV2547	83V	CV2615	313C	CV2685	880
CV2270	90AG	CV2548	84	CV2616	314A	CV2686	889
CV2271	GC10B	CV2549	85	CV2617	323A	CV2687	889R
CV2275	DC70	CV2550	100T	CV2618	327A	CV2688	891R
CV2277	E222I	CV2551	100TH	CV2619	328A	CV2690	904V
CV2284	4J50	CV2552	100TH	CV2620	329A	CV2691	913
CV2287	G10H	CV2553	101F	CV2621	330B	CV2692	918
CV2288	DL66	CV2554	111A	CV2622	331A	CV2693	10KP7
CV2289	U37	CV2556	117L7	CV2623	332A	CV2694	930
CV2291	1909A	CV2557	117N7	CV2624	337A	CV2695	931
CV2293	XB-1	CV2558	117Z6	CV2625	338A	CV2696	931A
CV2296	NSP2	CV2560	2J51	CV2626	346A	CV2697	935
CV2300	3A4	CV2561	122A	CV2627	349A	CV2698	5896
CV2500	35Z4	CV2562	164V	CV2628	349B	CV2699	6088
CV2501	40	CV2563	204A	CV2630	351A	CV2700	957
CV2502	41FP	CV2565	2050	CV2631	352A	CV2701	958A
CV2503	41MH	CV2566	205E	CV2633	362A	CV2704	7E5
CV2504	41MHL	CV2567	205F	CV2634	367	CV2705	1203
CV2505	41MPG	CV2569	210DET	CV2636	375A	CV2706	7C4
CV2506	41MPT	CV2570	210HF	CV2637	388A	CV2707	1231
CV2507	IU4	CV2571	210HL	CV2638	393A	CV2709	1R4
CV2508	41STH	CV2572	450TH	CV2639	394A	CV2710	3D6
CV2509	41FP	CV2573	5651	CV2640	405BU	CV2711	1500T
CV2510	1Z2	CV2574	210VPA	CV2642	417A	CV2712	1609
CV2511	420T	CV2575	5670	CV2643	2C40	CV2713	1610
CV2512	420TDD	CV2576	211SP	CV2644	460BU	CV2714	1614
CV2514	43	CV2577	26A7	CV2645	RI	CV2715	1630
CV2516	2C39a	CV2578	5687	CV2647	532	CV2716	6SC7
CV2517	2E30	CV2579	218	CV2648	632A	CV2717	1729
CV2518	4B32	CV2580	220C	CV2650	12AY7	CV2718	1876
CV2519	4X150A	CV2581	2200T	CV2651	707B	CV2719	1924
CV2520	5C22	CV2582	220VS	CV2652	709A	CV2721	6CJ6
CV2521	6AH6	CV2585	39	CV2653	714A	CV2722	3025
CV2522	6AS6	CV2586	240B	CV2654	715A	CV2723	869B
CV2523	6AS7G	CV2587	242C	CV2655	715B	CV2725	09
CV2524	6AU6	CV2588	244A	CV2656	724A	CV2726	6CK6
CV2525	6AV6	CV2589	250TH	CV2657	800	CV2727	26D
CV2526	6AV6	CV2591	100TH	CV2658	806	CV2728	29D
CV2527	6BA7	CV2592	256B	CV2659	3D21A	CV2729	EF80
CV2528	45DS	CV2593	257A	CV2660	809	CV2730	5800
CV2529	451U	CV2594	258B	CV2661	812	CV2731	63DS
CV2530	45Z5	CV2595	259A	CV2662	5639	CV2733	395I
CV2531	46	CV2597	262A	CV2663	815	CV2734	4003A
CV2532	49	CV2598	264A	CV2664	822	CV2735	4015A
CV2533	50	CV2599	264C	CV2665	825	CV2738	RGI-240
CV2534	50L6	CV2600	267B	CV2666	829B	CV2742	114

Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.
CV2743	4033AF	CV2817	6L6GA	CV2886	M2H	CV2970	5656
CV2745	4050AG	CV2818	AC/PT8	CV2887	DACI	CV2971	5675
CV2746	4064A	CV2819	AC/S	CV2888	EL31	CV2972	5876
CV2747	6U5G	CV2820	AC/SP1	CV2889	DD620	CV2973	GU7
CV2748	5Z4GT	CV2821	ECC33	CV2890	DDT	CV2975	6BQ5
CV2749	4081	CV2822	AC/SG	CV2891	DE5	CV2976	NE2
CV2750	89J	CV2823	AC/SP3	CV2892	DE5B	CV2977	H2
CV2751	4096AB	CV2824	AC/SPen	CV2895	DETISW	CV2978	H12
CV2752	4PR60A	CV2825	ACT6	CV2896	52CG	CV2979	H30
CV2753	5684	CV2826	1B63A	CV2897	7MB1A	CV2980	DM70
CV2754	5685	CV2827	12C8gt	CV2899	DET10	CV2981	H410
CV2755	4251AX	CV2829	293A	CV2900	DET10	CV2982	H610
CV2756	4260A	CV2830	AC/TH1	CV2901	EF86	CV2983	DL94
CV2759	4304	CV2831	2C51	CV2907	DF1	CV2984	6080
CV2760	430B	CV2832	AC/VP2	CV2909	DH73	CV2985	HD24
CV2761	4304BB	CV2833	AF3	CV2910	DK1	CV2986	HD203A
CV2762	4316A	CV2834	AGT1	CV2911	DL2	CV2987	HF100
CV2764	4606	CV2835	5R4WGY	CV2912	DL63	CV2988	HF200
CV2765	4673	CV2836	APP4G	CV2913	DLS1	CV2989	HK354E
CV2766	4687	CV2837	APP4G	CV2914	1B40	CV2990	6136
CV2767	4960	CV2839	AR300	CV2920	E1148	CV2991	HL2
CV2768	8003	CV2840	5UP7	CV2925	EBF2	CV2992	6106
CV2769	9006	CV2841	ARPI2T	CV2926	EBL31	CV2994	HL23
CV2770	13077	CV2842	6C4W	CV2927	EC50	CV2995	HL23DD
CV2772	23043	CV2843	6J6W	CV2929	ECH3	CV2996	HL41DD
CV2773	68503	CV2844	6X4W	CV2930	ECH33	CV2997	HL63
CV2774	68504	CV2847	5704	CV2931	2B22	CV2998	HL133
CV2775	68506	CV2848	CK707	CV2932	2V42	CV2999	HL133DD
CV2776	68510	CV2849	K1051	CV2933	2C46	CV3500	HL210
CV2777	4B28	CV2850	AT200A	CV2934	3BP1A	CV3501	HL610
CV2778	2J21A	CV2851	3D22	CV2935	5JPI	CV3502	HL1320
CV2779	4B36	CV2852	2J56	CV2936	4B22	CV3503	HLDD1320
CV2786	26J	CV2854	6AN5	CV2937	6A05	CV2505	HY114B
CV2789	9LP7	CV2855	6K4	CV2938	EL33	CV3506	HY615
CV2791	K332	CV2856	1N23B	CV2939	6F4	CV3508	6208
CV2792	2K25	CV2857	1N23BM	CV2940	EL36	CV3510	4B31
CV2793	2J50	CV2858	3B24W	CV2941	EL40	CV3511	371B
CV2794	C10SS/2G	CV2859	5846	CV2942	EM1	CV3515	KB2
CV2795	1L4	CV2860	AZ1	CV2943	ESU76	CV3516	KK2
CV2796	6L6WGB	CV2861	AZ2	CV2944	ESU1500	CV3519	KT30
CV2797	5894A	CV2862	AZ31	CV2945	ESU75	CV3520	KT31
CV2798	QQV03-10	CV2864	B21	CV2946	ESU150	CV3523	6146
CV2799	QQV03-20	CV2865	B30	CV2947	ESU300	CV3526	EL85
CV2800	A40	CV2866	2C51W	CV2948	ESU450	CV3527	KTW73
CV2801	A40/N3	CV2869	3JP7	CV2949	FI23A	CV3529	KTZ41
CV2803	2915	CV2870	CC3D	CV2950	129B	CV3530	KTZ73
CV2804	A915A	CV2871	CAT6	CV2952	FA13	CV3531	L2
CV2805	A294	CVS872	CAT9	CV2953	FA14	CV3532	L21
CV2806	AC/2HL	CV2874	1005	CV2954	FC2A	CV3533	L22DD
CV2807	AC2HL	CV2875	CL4	CV2955	FC4	CV3524	L30
CV2808	AC2Pen	CV2876	2D21W	CV2956	FC13C	CV3537	L500
CV2809	AC5Pen	CV2877	6AK5W	CV2957	FG17	CV3538	L610
CV2811	AC/HL	CV2878	CRT1	CV2958	FG27A	CV3541	LS6A
CV2812	AC/HL	CV2879	CRT1	CV2959	3B21	CV3546	MHD4
CV2813	AC/HLDD	CV2882	6AL5W	CV2960	FP54	CV3547	MHI4
CV2814	5D21	CV2883	6A05W	CV2967	8020	CV3548	1B24A
CV2815	ACP	CV2884	6AS6	CV2968	7F8	CV3549	1B38
CV2816	3JP12	CV2885	54NCPI1	CV2969	GT1	CV3550	1B41

Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.	American Army No.	Civilian No.
CV3552	MPT4	CV3631	Pen45DD	CV3707	6AL7gt	CV3786	VMP4G
CV3553	MS4B	CV3633	Pen231	CV3709	STV150/200	CV3787	VP2
CV3554	MPT42	CV3634	Pen428	CV3711	N78	CV3788	VP4
CV3557	MR300	CV3635	Pen1340	CV3712	STV280/80A	CV3790	VP13C
CV3558	MR300/E	CV3636	Pen1346	CV3714	822SPec	CV3791	VP21
CV3561	MS/Pen	CV3637	7BP7A	CV3715	SW5	CV3792	VP23
CV3562	MSP41	CV3638	PenA4	CV3719	SW7	CV3793	VP24
CV3563	MT11SW	CV3639	6F4	CV3721	T4D	CV3794	VP210
CV3564	MT12	CV3640	PJ8	CV3722	T20	CV3795	VP215
CV3565	ME41	CV3641	PM1HL	CV3723	T41	CV3796	VP1322
CV3567	MUI	CV3642	PM1LF	CV3724	T200	CV3797	V944A
CV3569	4J52	CV3643	PM2A	CV3726	TDD2A	CV3798	OA3
CV3570	MU4250	CV3644	726C	CV3727	TDD4	CV3799	OB3
CV3571	MVSPen	CV3645	PM2DX	CV3730	TMC15B	CV3800	VS2
CV3572	MVSPenB	CV3646	845W	CV3731	TMC16B	CV3802	VS24
CV3573	MZ05-20	CV3647	PM22A	CV3732	TMC20B	CV3803	VS24
CV3574	MZ1/76	CV3648	PM24E	CV3733	3KPI	CV3804	W21
CV3575	3B26	CV3649	PM22	CV3735	TP26	CV3805	W30
CV3576	MX40	CV3650	12AY7	CV3739	TX3-200	CV3806	W31
CV3577	25A7gt	CV3651	12SH7gt	CV3740	TX5-400	CV3808	6T4
CV3578	PM22D	CV3652	PT5	CV3741	TZ2-300	CV3809	807w
CV3579	PT5E	CV3653	PT6	CV3742	TZ20	CV3810	WD30
CV3580	304TL	CV3654	PT11	CV3743	U5	CV3812	IP31
CV3581	V1501	CV3655	12SP7	CV3744	U6	CV3813	8A
CV3582	VP4B	CV3656	PT425	CV3745	1B58	CV3815	3BZ2
CV3583	5HPI	CV3657	PV05-15	CV3746	U14	CV3816	X21
CV3584	21/2	CV3658	PVI-35	CV3747	U15	CV3817	X21
CV3586	471A	CV3666	12SW7	CV3748	2X2	CV3818	X22
CV3687	705A	CV3667	RGI-250	CV3749	576	CV3819	X24
CV3588	706A	CV3668	12SY7	CV3750	U22	CV3820	X24
CV3590	708A	CV3669	2K48	CV3751	U21	CV3021	X31
CV3593	713A	CV3671	RK25	CV3752	U30	CV3822	X31
CV3594	717A	CV3672	RK28	CV3753	U31	CV3823	X41
CV3595	721A	CV3673	RK28A	CV3754	U50	CV3825	X63
CV3596	726B	CV3674	RK31	CV3756	U600	CV3826	X65
CV3599	829B	CV3676	2J42	CV3758	UR3C	CV3828	X66
CV3600	202PI	CV3677	RK47	CV3759	R2	CV3829	293a
CV3601	7193	CV3678	2BP1	CV3760	UU5	CV3830	XHI-5
CV3602	5J26	CV3679	RK49	CV3761	UU7	CV3831	XL2
CV3604	GL464	CV3680	RK60	CV3763	VI23B	CV3832	XP2
CV3605	GL464	CV3681	RK62	CV3766	V312	CV3833	XSG2.OV
CV3612	5686	CV3683	RKR47	CV3767	V339	CV3834	XW2
CV3613	6AR6	CV3687	4J49	CV3768	V503	CV3836	Z21
CV3614	6BL6	CV3688	2C33	CV3770	V955	CV3837	Z21
CV3615	6BM6	CV3689	3B29	CV3772	V970	CV3838	Z62
CV3616	6BN6	CV3690	RZ1-150	CV3773	VI010	CV3839	Z66
CV3618	6L6wga	CV3691	S23	CV3774	VI020	CV3842	5J29
CV3619	6SJ7wgt	CV3692	S23	CV3775	VI021	CV3843	5J30
CV3620	P220	CV3694	SI30A	CV3776	VI023	CV3844	5J31
CV3621	P410	CV3695	S215	CV3777	VI029	CV3845	RS366
CV3622	P610	CV3696	S215A	CV3778	VI105	CV3846	RS261
CV3623	PA40	CV3697	12SX7gt	CV3779	4J26	CV3847	RS250
CV3624	PE7B	CV3698	S610	CV3780	4J27	CV3848	RS260
CV3625	PE8	CV3699	5693	CV3781	4J28	CV3849	RS217
CV3626	PenB4	CV3702	SG215	CV3782	4J29	CV3850	RS207
CV3627	6SN7wgt	CV3703	SP4B	CV3783	4J30	CV3851	RS253
CV2628	1B35A	CV3704	SPI3C	CV3784	5B/102A	CV3852	RS285
CV3630	Pen44	CV3705	5691	CV3785	VMP4G	CV3853	RS15

Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.	Service No.	Civilian No.
CV3854	RS47	CV4001	F/6063	NR46	D4I	NT82	PM202
CV3855	RS329	CV4002	F/6064	NR47	PX25	NU3	U12/14
CV3856	RS330	CV4003	12AU7	NR48	EBC33	NU5	RX3-120
CV3857	RS283A	CV4005	6X4	NR49	EF36	NUI2	U18
CV3858	RS18	CV4006	6059	NR50	AT4	NUI3	U15
CV3859	RV271A	CV4007	6AL5W	NR51	VMP4G	NUI3A	U15
CV3860	RS282	CV4008	5719	NR52	354V	NUI5	U4020
CV3861	RS281	CV4009	6BA6W	NR53	KT42	NUI6	GU5
CV3862	RS55	CV4010	5654	NR54	AP4	NUI7	UU5
CV3863	RS289	CV4011	6AS6W	NR54A	AP4	NUI8	U17
CV3864	RS389	CV4012	5750	NR55	4DI	NU20	U50
CV3865	RS288	CV4013	5670	NR56	DA30	NU31	MU2
CV3866	RS203	CV4014	6064	NR57	ML4	NU33	SU2150A
CV3867	RSQ15/40	CV4015	6065	NR58	244V	NU33A	HVR2
CV3868	RSQ15/5	CV4016	5814	NR59	KT41	NU34	HVR2
CV3870	RGQ10/4D	CV4017	5751	NR60	H42	VI77	EM3I
CV3871	RS254	CV4018	2D21W	NR61	W42	VI103	Y63
CV3872	RS255	CV4019	6AQ5W	NR64	KTW62	VR18	215SG
CV3873	RS566	CV4020	OA2	NR65	MSP4	VR19	PM2
CV3877	1B56	CV4021	3B24WA	NR66	D4I	VR21	210LF
CV3879	4-400A	CV4022	6135	NR67	6L7	VR22	220PA
CV3880	4-100A	CV4023	6AU6WA	NR68	6Q7	VR27	210LF
CV3881	EB4I	CV4024	12AT7WA	NR69	Y63	VR28	220VSG
CV3882	EBC4I	CV4025	6AL5	NR70	MS/Pen	VR32	220B
CV3883	EAF42	CV4026	6R4wga	NR71	MS/PenT	VR35	QP2I
CV3884	ECC40	CV4027	5Y3wgta	NR72	N43	VR37	MH4
CV3885	EF40	CV4028	OB2wa	NR73	6N7	VR38	MHL4
CV3886	EF4I	CV4029	5902	NR74	PVI-35	VR40	PX25
CV3887	EF42	CV4031	6J6wa	NR75	ACP4	VR41	PM12M
CV3888	ECH42	CV4032	5814a	NR76	KTZ41	VR43	210PG
CV3889	EL4I	CV6008	2B4I	NR77	6L6	VR44	210DDT
CV3890	EL42	NGT1	DPQ	NR78	6C5	VR45	X56
CV3891	EZ40	NGT2	GTIC	NR78A	L63	VR46	PT25H
CV3892	AZ4I	NGT4	GTIA	NR79	Z62	VR47	TZ05-20
CV3893	4X150G	NGT12I	T4I	NR80	E1148	VR49	210SPT
CV3894	6BF7	NGT128	GTIC	NR81	6K7	VR53	EF39
CV3904	2K4I	NR15	PM3	NR82	X65	VR54	EB34
CV3907	720C	NR15A	PM4DX	NR83	6J7	VR55	EBC33
CV3908	6BH6	NR16	PM254	NR84	20A1	VR56	EF36
CV3909	6BJ6	NR16A	PM4DX	NR85	6F6	VR57	EK32
CV3912	1U5	NR18	DEQ	NR86	KTW63	VR57A	EK32
CV3918	5JP2A	NR22	PM14	NR87	AC5PenDD	VR59	955
CV3924	6AC7w	NR23	PM14	NR94	ACP4	VR65	SP6I
CV3927	12K8	NR26	MHL4	NS1	STV280/80	VR65A	SP4I
CV3935	14R7	NR27	104V	NS3	202	VR66	P6I
CV3936	14S7	NR27A	104V	NS4	4713	VR67	6J5
CV3937	14R7	NR28	PM2	NS5	304	VR78	D1
CV3939	6BM6a	NR31	MH4	NT18	D060	VR82	220TH
CV3944	2J30	NR35	PD220A	NT20	PM256	VR83	210VPT
CV3945	2K45	RN37	ACSG	NT36	DAI00	VR91	EF50
CV3947	4J54	NR38	VMS4	NT37	4033A	VR91A	EF50
CV3948	4J55	RN39	PM22A	NT38A	PZI-75	VR92	EA50
CV3949	4J56	NR40	PM24D	NT39	ACT36	VR95	954
CV3950	4J57	NR41	210VPT	NT40	DET5	VR95A	954
CV3951	4J58	NR42	P220	NT58	DET12	VR99	X66
CV3952	4J59	NR43	PM24A	NT62	PM24D	VR99A	ECH35
CV3953	4J78	NR44	PX4	NT62A	PM24D	VR100	KTW62
CV3956	719A	NR45	VMP4G	NT65A	PZI-35	VR101	MHLD6

Service No.	Civilian No.	Service No.	Civilian No.	American Army No.	Civilian No.	American Army No.	Civilian No.
VR102	BL63	VT501	EI 192	VT49	39/44	VT115	6L6
VR105	ML6	VT501A	EI 192	VT50	50	VT116	65J7
VR106	9D2	VU29	E5U150	VT51	841	VT117	65K7
VR107	15D2	VU39	MU12/14	VT54	34	VT118	832
VR108	8D2	VU64	U12/14	VT55	865	VT119	2X2
VR109	4DI	VU71	U52	VT56	56	VT120	954
VR109A	4DI	VU71A	U52	VT57	57	VT121	955
VR116	V872	VU72	GU5	VT58	58	VT122	530
VR117	41MTL	VU111	V1907	VT60	850	VT124	1A5
VR117A	41MTL	VU113	U17	VT62	801	VT125	1C5
VR118	KT2	VU120	5U2150A	VT63	42	VT126	6X5
VR119	DDL4	VU120A	5U2150A	VT64	800	VT128	1630
VR122	41MXP	VUI33	V960	VT65	6C5	VT129	304TL
VR123	EF8	VUI34	HVR2	VT65A	6C5G	VT130	250TL
VR124	M5/Pen	VU504	V1901	VT66	6F6	VT131	125K7
VR125	M5/PenB	VU508	V1913	VT66A	6F6G	VT132	12K8
VR126	45H	VW36	220PA	VT67	30 spec.	VT133	125R7
VR129	M5/Pen	VW42	210LF	VT68	6B7	VT134	12A6
VR130	HL23	VW48	2155G	VT69	6D6	VT135	12J5
VR135	E1148			VT70	6F7	VT136	1625
VR136	EF54	American	Civilian	VT72	842	VT137	1626
VR137	EC52	Army No.	No.	VT73	843	VT138	1629
VR502	KT32	VT1	203A	VT74	5Z4	VT139	VR150-30
VR503	KT33C	VT2	205B	VT75	75	VT140	1628
VR505	MH41	VT4B/C	211	VT76	76	VT141	531
V568	5TV280/40	VT5	215A	VT77	77	VT143	805
V569	5TV280/80	VT6	212A	VT78	78	VT144	813
V570	7475	VT7	WX12	VT80	80	VT145	5Z3
VT20	220P	VT8	UV204	VT83	83	VT146	IN5GT
VT23	230XP	VT17	860	VT84	84/6Z4	VT147	1A7
VT23A	230XP	VT19	861	VT85	6K7	VT148	1D8
VT25	DET25	VT22	204A	VT86	6K7	VT149	3A8
VT45	X56	VT24	864	VT87	6L7	VT150	65A7
VT46	PT25H	VT25	10	VT88	6R7	VT151	6A8
VT50	HL2	VT26	22	VT89	89	VT152	6K6
VT51	Pen 220A.	VT27	30	VT90	6H6	VT153	12C8
VT52	EL32	VT28	24	VT91	6J7	VT154	814
VT60	807	VT29	27	VT92	6Q7	VT161	125A7
VT60A	807	VT30	01A	VT93	6B8	VT162	125J7
VT61	DET19	VT31	31	VT94	6J5	VT163	6C8
VT61A	TV03-10	VT33	33	VT95	2A3	VT164	1619
VT62	TY1-50	VT34	207	VT96	6N7	VT165	1624
TV73	6F5	VT35	35/51	VT97	5W4	VT166	371A
VT74	6J7	VT36	36	VT98	6U5/6G5	VT167	6K8
VT75	KT66	VT37	37	VT99	6F8	VT168A	6Y6
VT75A/B	KT44	VT38	38	VT100	807	VT169	12C8
VT76	DA41	VT39	869	VT101	837	VT170	1E5GP
VT79	KT8	VT39A	869A	VT103	65Q7	VT171	1R5
VT80	4307A	VT40	40	VT104	125Q7	VT172	1S5
VT81	4052A	VT41	851	VT105	65C7	VT173	1T4
VT88	832	VT42	872	VT106	803	VT174	355
VT96	5B/502A	VT43	845	VT107	6V6	VT175	1613
VT104	PT15	VT44	32	VT108	450TH	VT176	6AB7
VT105	ML6	VT45	45	VT109	2051	VT177	1LH4
VT127	Pen46	VT46	866	VT111	5BP4/	VT178	1LC5
VT139	MH4	VT46A	866A		1802P4	VT179	1LN5
VT180	EF39	VT47	47	VT112	6AC7	VT180	3LF4
VT195	5Z4G	VT48	41	VT114	5T4	VT181	7Z4

American Army No.	Civilian No.	American Army No.	Civilian No.	American Army No.	Civilian No.	American Army No.	Civilian No.
VT182	3B7	VT205	65T7	VT228	8012	VT250	EF50
VT183	IR4	VT206A	5V4G	VT229	65L7	VT251	WL441
VT184	VR90/30	VT207	12AH7	VT230	350A		series
VT185	3D6	VT208	7B8	VT231	65N7	VT252	923
VT187	575A	VT209	125G7	VT232	E1148	VT254	304TH
VT188	7E6	VT210	1S4	VT233	65R7	VT255	705A
VT189	7F7	VT211	65G7	VT234	114B	VT256	GL486
VT190	7H7	VT212	958	VT235	615	VT257	K-7
VT191	316A	VT213A	6L5	VT236	836	VT259	829
VT192	7A4	VT214	12H6	VT237	957	VT260	OA3
VT193	7C7	VT215	6E5	VT238	956	VT264	3Q4
VT194	7J7	VT216	816	VT239	1LE3	VT266	1616
VT195	1005	VT217	811	VT240	710A	VT267	WL578
VT196	6W5	VT218	100TH	VT241	7E5	VT268	125C7
VT197A	5Y3G	VT220	250TH	VT243	7C4	VT269	717A
VT198A	6G6	VT221	305	VT244	5U4	VT277	417
VT199	6557	VT222	884	VT245	2050	VT279	GY2
VT200	VR105-30	VT223	1H5	VT246	918	VT282	ZG489
VT201	25L2	VT224	RK34	VT247	6AG7	VT287	815
VT202	9006	VT225	307A	VT248	3CPI/180pl	VT288	125H7
VT203	9003	VT226	3EPI/1806PI	VT249	1006	VT289	125L7
VT204	HK24G	VT227	7184				

B.V.A. UTILITY EQUIVALENTS

The last figure of this number denotes the manufacturer and can be disregarded.
e.g., All the 260 series are equivalent to an EL33.

B.V.A. No.	Civilian No.	B.V.A. No.	Civilian No.	B.V.A. No.	Civilian No.	B.V.A. No.	Civilian No.
132	HL23DD	162	Pen25	211	DW4/350	264	EL33
142	VP23	172	TP25	243	EF39	274	ECH35

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
OZ4	007 060 010		—		250		58	3K Ω	No Data Available			A08	CCR
OO	364 200 000		5	0	40		1·	0·66	No Data Available			UX4	T
00A	364 200 000		5	0	45		1·5	0·66	No Data Available			UX4	T
OI	364 200 000		5	4·5	90		2·5		80			UX4	T
OIA	364 200 000		5	4·5	90		2·5	0·725	80		0·72	UX4	T
OIAA	364 200 000		5	4·5	90		3·2	0·90	90		0·85	UX4	T
OIB	364 200 000		5	4·5	90		2·5	0·72	90		0·72	UX4	T
O84	642 300 000		4	2·0	125		4·0	1·4	125		1·4	B4	T
I	281 300 000		6				60		REC		20mA	UX4	R
IA3	281 008 300		1·4						D			B7G	D
IA4E	365 200 000	G ₁	2	3	150	75	2·2	0·65	100	75	0·6	UX4	P
IA4P	365 200 000	G ₁	2	3	90	75	2·2	0·72	80	75	0·7	UX4	P
IA4T	265 300 000	G ₁	2	3	150	75	2·2	0·625	100	75	0·6	UX4	P
IA5	036 540 200		1·4	4·5	90	90	4	0·85	80	75	0·8	A08	P
IA6	266 453 000	G ₁	2	0	150	75	3	0·425	80	60	0·4	UX6	P
IA7	026 546 300	G ₁	1·4	0	90	50	1·8	0·55	80	60	0·5	A08	H
IAB5	365 004 220		1·2	1·5	150	150	6·8	1·35	No Data Available			B8B	P
IAB6	265 461 300		1·4	4·1	60	60	1·65	0·1	No Data Available			B7G	H
IAC5	*4* 23* 650		1·25	4·5	60	60	2·0	0·75	60	60	0·75	A08	P
IAC6	266 464 300		1·4	4·0	60		4	1·2	80			B7G	H
IAD5	*4* 23* 650		1·25	3·0	60	60	1·85	0·73	60	60	0·73	A08	P
IAE4	265 024 300		1·25	0	90	90	3·5	1·55	90	90	1·55	B7G	P
IAF4	265 024 300		1·4	0	90	90	1·65	0·95	80	90	0·9	B7G	P
IAF5	208 564 300		1·4	0	90	90	1·1	0·6	80	90	0·6	B7G	DP
IAH5	208 564 300		1·4	1·5	60	60	0·17	0·17	60	60	0·17	B7G	DP
IAJ4	265 *24 300		1·4	0·8	75	75	1·4	0·65	80	75	0·75	B7G	P
IAX2	230 232 032	D ₁	1·4						D			B9A	D
IB3	020 000 300		1·25						D			A08	D
IB4P	365 200 000	G ₁	2	3	90	75	1·6	0·6	80	60	0·6	UX4	P
IB4(T)	265 300 000	G ₁	2	2	175	75	1·7	0·65	100	60	0·6	UX4	P
IB5	268 943 000		2	3	150		0·8	0·57	100		0·5	UX6	DDT
IB6	265 406 300		1·4	1·5	90	75	1·5	0·75	80	75	0·75	B7G	P
IB7	026 546 300	G ₁	1·4	0	90	50	1·5	0·875	80	60	0·8	A08	H
IB8	037 546 280		1·4	{ 0 6	90	0	0·15	0·27	80		0·15	A08	PDT
IC	289 300 000		6		90	90	6·3	1·15	80	75	1·1		
							1·0	D				UX4	D
IC1	266 424 300		1·4	4	75		4·5	1·2	80		1·4	B7G	H
IC2	266 464 300		1·4	4	60		4	1·2	80		1·4	B7G	H
IC3 (U.S.A.)	260 406 300		1·4	3	90		1·4	0·76	80		0·7	B7G	T
IC4	365 200 000	G ₁	2	0	175	75	2·5	1	150	75	1	UX4	P
IC5	036 540 200		1·4	7·5	90	90	7·5	1·55	80	75	1·5	A08	P
IC6	366 452 000	G ₁	2	0	175	75		1·05	150	75	1·05	UX4	P
IC7	026 546 300	G ₁	2	0	175	75		1·05	150	75	1·05	A08	P
ID3	402 306 060		1·2	5	90		12·5	3·4	100		3·4	B8A	T
ID4	264 530 000		2	6	175	175	9·5		100	100		UX5	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
ID5	802 310 000		40				120		REC		30mA	B5	R
ID5eg	026 500 300	G ₁	2	3.0	125	60	2.2	0.68	100	60	0.6	A08	P
ID5GP	036 500 200	G ₁	2	3	90	75	2.2	0.72	80	60	0.7	A08	P
ID5GT	036 500 200	G ₁	2	3	150	75	2.2	0.65	100	60	0.6	A08	P
ID6	280 183 000		25				60		REC		20mA	UX6	R
ID7	036 546 200	G ₁	2	0	150	75	3	0.425	150	75	1.05	A08	P
ID8	037 546 280	G ₁	1.4	9	90	0	1.1	0.575	80	60	0.5	A08	DTP
					90	90	5	0.925	80	75	0.9		
ID13	281 0*8 300		1.4						D			B7G	D
IE3	402 203 060		1.2	0	150		20	3.5	No Data Available			B9A	T
IE4	026 040 300		1.4	3	90		1.4	0.76	80		0.76	A08	T
IE5GP	036 500 200	G ₁	2	3	90	75	1.6	0.6	80	60	0.6	A08	P
IE5	036 500 200	G ₁	2	3	175	75	1.7	0.65	100	60	0.6	A08	P
IEF	036 447 250		2	4.5	150	150	7.5	1.425	100	100	1.4	A08	PP
IF1	265 024 300		1.4	0	60	60	1.65	0.75	80	60	0.75	B7G	P
IF2	265 024 300		1.4	1	90	75	2.9	0.92	80	75	0.92	B7G	P
IF3	265 024 300		1.4	1	90	50	1.8	0.75	80	60	0.75	B7G	P
IF4	364 520 000		2	3	90	90	4	1.4	80	75	1.4	UX5	P
IF5	036 540 200		2	3	90	90	4	1.4	80	75	1.4	A08	P
IF6	365 892 000	G ₁	2	1.5	175	75	2.2	0.65	150	75	0.6	UX6	DDP
IF7	036 985 200	G ₁	2	1.5	175	75	2.2	0.65	150	75	0.6	A08	DDP
IF7GV	036 895 200	G ₁	2	1.5	175	75	2.2	0.65	150	75	0.6	A08	DDP
IFD1	2*8 564 300		1.4	1.5	60	60	0.17	0.17	80	60	0.17	B7G	DP
IFD9	208 564 300		1.4	1	75	75	1.6	0.63	80	75	0.63	B7G	P
IG4	036 040 200		1.4	6	90		2.3	0.825	80		0.825	A08	T
IG5	036 540 200		2	6	90	90	8.5	1.5	80	75	1.5	A08	P
IG6	026 447 300		1.4	0	90		1.0	0.675	80		0.67	A08	TT
IH4	026 040 300		2	9	150		3	0.9	100		0.9	A08	T
IH5	036 080 200	G ₁	1.4	0.5	100		0.06	0.336	80		0.27	A08	DT
IH6	036 894 200		2	3	150		0.8	0.575	100		0.57	A08	DDT
IJ5	036 540 200		2	16.5	150	150	7	0.95	100	100	0.9	A08	P
IJ6	026 447 300		2	3	150		1.7		100			A08	TT
IJ6GX	026 447 300		2	0	125		2		125			A08	TT
IK4	365 200 000	G ₁	2	0	150	75	2.5	1.05	150	75	1.05	UX4	P
IK5	026 500 300	G ₁	2	0	125	75	2.5	1.05	125	75	1.05	A08	P
IK5B	026 600 300	G ₁	2		90	60	3	0.9	No Data Available			A08	P
IK6	369 852 000	G ₁	2	3	150	90	0.9	0.6	100	75	0.6	UX6	DDP
IK7	026 895 300	G ₁	2	4.5	125	150	1.5	0.7	100	100	0.7	A08	DDP
IL4	265 024 300		1.4	0	90	75	2.9	0.925	80	75	0.9	B7G	P
IL5	026 540 300		2	6	175	175	9.5	2.4	100	150	2.4	A08	P
IL6	266 451 300		1.4	0	90	50	4	0.55	No Data Available			B7G	H
ILA4	365 004 020		1.4	4.5	90	90	4	0.85	80	75	0.85	B8B	P
ILA4E	365 004 020		1.4	4.5	90	90	3.5	0.8	80	75	0.8	B8B	P
ILA6	366 454 020		1.4	0	90	50		0.55	80	60	0.5	B8B	H
ILA6E	366 454 020		1.4	0	90	50		0.55	80	60	0.5	B8B	H

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
ILB4	365 004 020		1.4	9	90	90	5	0.925	80	75	0.9	B8B	P
ILB6	276 554 430		1.4	{ 0	75		1.2		80			B8B	H
					90	75	0.4		80	75			
ILC5	365 124 020		1.4		90	50	1.15	0.775	80	60	0.77	B8B	P
ILC6	266 454 030		1.4	0	90	50	3	0.55	80	60	0.5	B8B	H
IL60	642 300 000		1.0		150		6.0	1.2	150		1.2	B4	T
ILD5	365 804 020		1.4	0	90	50	0.6	0.578	80	60	0.5	B8B	DP
ILE3	350 0*4 020		1.4	3	90		1.4	0.76	80		0.76	B8B	T
ILF3	360 004 020		1.4	3	90		1.4	0.76	80		0.76	B8B	T
ILG5	365 125 020		1.4	1.5	90	90	3.7	1.15	80	90	1.15	B8B	P
ILH4	360 804 020		1.4	0	90		0.15	0.275	80		0.27	B8B	DT
ILN5	365 124 020		1.4	0	90	90	1.6	0.8	80	90	0.8	B8B	P
ILN5E	365 124 020		1.4	0	90	90	1.6	0.8	80	90	0.8	B8B	P
IM5G	036 500 200	G ₁	2	0	150	75	2.5	1	150	75	1	A08	P
IN5	036 500 200	G ₁	1.4	0	90	90	1.2	0.750	80	90	0.75	A08	P
IN6	036 548 200		1.4	4.5	90	90	3.4	0.8	80	75	0.8	A08	DP
IPI	365 024 300		1.4	5.2	90	90	5.0	1.4	80	75	1.4	B7G	P
IP5	036 500 200	G ₁	1.4	0	90	90	2.3	0.75	80	90	0.75	A08	P
IP10	264 536 200		1.4	7	90	75	7.4	1.57	80	60	1.57	B7G	P
IP11	365 024 300		1.4	4.5	90	90	9.5	2.15	80	75	2	B7G	P
IQ5	036 540 200		1.4	4.5	90	90	9.5	2.2	80	75	2.2	A08	P
IQ6	040 238 650		1.25	0	60	60	1.6	0.6	No Data Available			A08	P
IR	026 510 300	G ₁	1.4	0	90	90	1.2	0.75	80	90	0.75	A08	P
IR4	200 800 130		1.4						D			B8B	D
IR5	266 424 300		1.4	4	75		4.5	1.2	80		1.4	B7G	H
IS4	264 526 300		1.4	7	90	75	7.4	1.575	80	60	1.5	B7G	P
IS5	208 564 300		1.4	0	75	75	1.6	0.625	80	75	0.625	B7G	DP
IS6	604 238 050		1.2		60	60	1.6	0.6	No Data Available			B8A	DP
ISA6	021 405 360		1.4	0	90	75	2.45	0.97	80	75	0.97	A08	P
ISB6	036 580 240		1.4	0	90	75	1.45	0.665	80	75	0.66	A08	DP
IT	036 500 320	G ₁	1.4	4.5	90	90	9.9	2.1	80	75	2.1	A08	P
IT2	123 000 000	D ₁	1.4						D			B3G	D
IT4	265 024 300		1.4	0	90	75	3.5	0.9	80	75	0.9	B7G	P
IT5	036 540 200		1.4	6	90	90	6.5	1.15	80	75	1.15	A08	P
IT6	604 238 050		1.2	0	60	60	1.6	0.6	No Data Available			B8A	DP
IU4	265 024 300		1.4	0	90	90	1.0	0.9	80	90	0.9	B7G	P
IU5	265 804 300		1.4	0	75	75	1.6	0.625	80	75	0.6	B7G	DP
IU6	266 451 300		1.4		75	50			No Data Available			B7G	H
IV	281 300 000		6				60		REC		20mA	UX4	R
IV2	*** 23* **8		0.625						D			B9A	D
IV4	260 *24 300		1.2		125	100	1.6		125	100	1.6	B7G	P
IV5	*4* 23* 650		1.2	4.5	60	60	2	0.75	No Data Available			B7G	P
IW4	265 004 300		1.4	9	90	90	5	0.925	80	75	0.9	B7G	P
IW50	642 300 000		1						D			B4	D
IX2	230 232 032	D ₁	1.25						D			B9A	D

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
IY2	200 300 000	D ₁	1-4						D			UX4	D
IZ2	232 232 300	D ₁	1-4				2		D			B7G	R
2	642 300 000		2	4	150		1-5		100			B4	T
2/25A	200 300 000	D ₁	6				30		REC		18mA	UX4	R
2/50A	200 300 000	D ₁	5				60		REC		20mA	UX4	R
2A3	264 300 000		2-5	45	250		60	5-2	100		5-2	UX4	T
2A3H	364 200 000		2-5	62	300		40	5-25	100		5-25	UX4	T
2A5	265 413 000		2-5	16-5	250	250	34	2-5	100	PenLF	2-5	UX6	P
2A6	26B 913 000	G ₁	2-5	2	250		0-9	1-11	150		1-1	UX6	DDT
2A7	265 541 300	G ₁	2-5	8	250	100	3-5	1-15	150	100	1-1	5m7	H
2AF4	642 314 600		2-5	4-0	100		15	6-6	80		6-0	B7G	T
2B3	*20 000 3*0	D ₁	1-7						D			A08	D
2B5	267 413 000		2-5		300		9		No Data Available			UX6	TT
2B7	265 891 300	G ₁	2-5	3	250	125	9	1-125	100	100	1-12	UX7	DDP
2B7S	265 891 300	G ₁	2-5	3	250	100	6	1	100	100	1	UX7	DDP
2B21	300 200 000	D ₁	2-5				5		D			UX4	R
2B22	021 010 310	D ₁	6						D			A08	D
2B25	200 800 300		1-4						D			B7G	D
2B26	280 300 000		2-5				120		REC		30mA	UX4	R
2B35	123 000 000	D ₁	6						D			B3G	D
2B36	123 000 000	D ₁	4						D			B3G	D
2BN4	142 351 400		2	2	150		9	6-8	100		7-0	B7G	T
2C21	217 461 300	G ₁	6	16-5	250		8-3	1-375	100		1-37	UX7	TT
2C22	020 000 310	A ₁ G ₁	6	10-5	300		11	3	100		3	A08	T
2C23	264 300 000		7-5	32	350		16	1-55	100		1-5	UX4	T
2C26	020 000 310	A ₁ G ₁	6	15	350		16		100			A08	T
2C48	265 004 130		6	15	250	250	70		100	150		B8B	P
2C50	265 004 130		6	15	250	250	70		100	150		B8B	P
2C51	214 607 413		6	2	150		8-2	5-5	125		5-5	B9A	TT
2C52	461 471 230		12-5	2	250		1-3	1-9	200		1-9	A08	TT
2D1	289 130 000		2-5						D			UX5	DD
2D2	892 310 000		2						D			B5	DD
2D4	892 310 000		4						D			B5	DD
2D4A	892 310 000		4						D			B5	DD
2D4B	091 231 800		4						D			B7	DD
2D13	023 180 000	D ₂	13						D			B5	DD
2D13a	823 190 000		13						D			B5	DD
2D13C	892 310 000		13						D			B5	DD
2D21	412 316 100		6		400		50	6kΩ	No Data Available			B7G	Thyratron
2E22	254 130 000	A ₁	6		400	250	100		100	PenLF		UX5	P
2E24	235 242 300	A	3	18-5	400	200	16	3-2	200	100	3-2	A08	P
2E26	125 141 300	A	6	20	200	200	20	3-5	100	75	3-5	A08	P
2E30	413 365 200		3	20	250	250	40	3-7	100	PenLF	3-7	B7G	P
2E50	412 265 300		6	20	250	250	10	3-4	100	100		B7G	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
2F7	275 641 300	G ₁	2.5	3.0 3.0	100 250	100	4.0 2.8		100 No Data Available		3.8	UX7	TP
2HMD	452 310 000	A ₁ A ₂	4		200	100	3.8	1.14	100	100	1.1	B5	PP
2K2	026 500 300		2	2.0	100	100	2.5	0.9	100	100	0.9	A08	P
2P	642 300 000		2	22	250		40	7	100		7	B4	T
2S	289 130 000		2.5				15		REC		10mA	UX5	RR
2T/270K	112 311 100	D ₁	4						REC		5mA	B7G	R
2U14	642 300 000		2		125		2	0.6	125		0.6	B4	T
2U15	642 300 000		2		150		4	0.8	100		0.8	B4	T
2V2	020 000 03*	D ₁	2.5						D			A08	D
2V3	020 000 300	D	2.5						D			A08	R
2W3	020 800 030		2.5			60			REC		20mA	A08	R
2X2	300 200 000	D ₁	2.5				5		D			UX4	R
2X2A	300 200 000	D ₁	2.5				5		D			UX4	R
2X3	020 800 030		2.5				120		REC		30mA	A08	R
2XP	642 300 000		2	36	300		50	7	100		7	B4	T
2Y2	200 300 000	D ₁	2.5				5		D			UX4	R
2Z2	280 300 000		2.5				60		REC		20mA	UX4	R
3	642 300 000		2	7.5	150		3.4	0.9	100		0.9	B4	T
3A2	230 232 032	D ₁	3						D			B9A	D
3A3	*2* 0*0 3*0	D ₁	3						D			A08	D
3A4	365 426 300		1.4	8.4	150	90	13.3	1.9	100	75	1.9	B7G	P
3A5	264 347 200		1.4	2.5	90		3.7	1.8	80		1.8	B7G	TT
3A8	237 546 380	G ₁	1.4	0 0	90 90	0 60	1.5 0.2	0.325	80 80	60 60	0.32	A08	DDT
3A/107A	264 300 000		4	8	125		6.5	1.6	100		1.6	UX4	T
3A/107B	642 300 000		4	8	125		6.5	1.6	100		1.6	B4	T
3A/108A	264 300 000		2	1.5	125		0.9	0.5	100		0.5	UX4	T
3A/108B	642 300 000		2	1.5	125		0.9	0.5	100		0.5	B4	T
3A/109A	264 300 000		4	8	125		19	1.2	100		1.2	UX4	T
3A/109B	642 300 000		4	8	125		19	1.2	100		1.2	B4	T
3A/154M	260 0*4 130		6	2	250		12	3	100		3	B8B	T
3AL5	192 310 800		3				5		D			B7G	DD
3AU6	412 365 100		3	1.0	250	150	10.0	5.2	100	150	5.0	B7G	P
3AV6	412 398 600		3	2.0	250		1.2	1.6	200		1.6	B7G	DDT
3AY6	412 389 600		3	2.0	250		1.2	1.6	200		1.6	B7G	DDT
3B2	*2* 0** 3*0	D ₁	3						D			B8A	D
3B4	524 332 600		1.25	75.0	150	125		1.7	No Data Available			B7G	P
3B5	036 540 320		1.4	7	75	75	6.7	1.5	80	60	1.5	A08	P
3B7	364 204 730		1.4	0	90		5.2	1.85	80		1.85	B8B	TT
3B21	289 300 000		2.5				120		REC		30mA	UX4	RR
3B22	289 300 000		2.5				120		REC		30mA	UX4	RR
3B23	200 300 000	D ₁ D ₂	2.5				120		REC		30mA	UX4	RR
3B24	320 200 000	D ₁	2.5				30		REC		15mA	UX4	R
3B25	200 300 000	D ₁	2.5				120		REC		15mA	UX4	R

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
3B26	030 000 200	D ₁	2.5				15		REC		10mA	A08	R
3B27	280 300 000		2.5				120		REC		30mA	UX4	R
2B/240M	214 444 130	A	6	1	300		50	27	No Data Available			B8B	T
3B/241M	214 444 130	A	19	1	300		50	27	No Data Available			B8B	T
3B/252B	642 310 000		6	20	400		60	10	100		8	B5	T
3BA6	412 365 100		3	1.0	250	100	11.0	4.4	100	100	4.4	B7G	P
3BC5	412 365 100		3	1.3	250	150	7.5	5.7	100	150	5.8	B7G	P
3BE6	412 366 100		3	2.0	100		11.0	7.0	100		5.0	B7G	H
3BN6	412 354 600		3	1.0	60	60	0.25	1.0	80	60	1.0	B7G	P
3BU8	157 231 461		3	1.0	100	60	1	1.5	100	60	1.5	B9A	PP
3BY6	412 365 400		3	2.5	250	100	6.5	2.4	100	100	2.0	B7G	H
3BZ6	412 265 100		3	1.0	125	125	14.0	8.0	200	150	6.0	B7G	P
3C2	020 *3* 2*0	D ₁	1.5						D			A08	D
3C4	265 *24 300		1.4	0.8	75	75	1.4	0.65	80	75	0.75	B7G	P
3C5	036 540 320		1.4	9	90	90	6	1.4	80	75	1.4	A08	P
3C6	206 447 320		1.4	0	90		4.5	1.3	80		1.3	A08	TT
3C36	412 365 100		3	2.2	200	150	9.5	6.2	100	150	6.0	B7G	P
3CB6	412 365 100		3	1.0	125	125	13.0	8.0	100	150	6.0	B7G	P
3CF6	412 365 100		3	1.0	125	125	12.0	7.8	100	150	6.0	B7G	P
3CS6	412 365 100		3	1.0	100	30	1.0	1.1	100		1.1	B7G	H
3D6	365 004 230		1.4	4.5	150	90	10.2	2.4	100	75	2.4	B8B	P
3DT6	412 365 100		3	2.2	150	100	11	0.8	150	100	2.0	B7G	P
3E5	365 024 300		1.4	8	90	90	6	1.2	80	75	1.2	B7G	P
3E6	265 134 020		1.4	0	90	90	2.5	1.8	90	90	1.8	A08	P
3G10	892 300 000		2.5				30		REC		15mA	B4	RR
3G130	892 300 000		2.5				30		REC		15mA	B4	RR
3LE4	365 004 230		1.4	9	90	90	1.8	1.6	80	75	1.6	A08	P
3LF4	365 004 230		1.4	4.5	90	90	8	2	80	75	2	B8B	P
3Q4	364 526 300		1.4	5	90	90	6.9	1.975	80	75	1.9	B7G	P
3Q5	036 540 320		1.4	4.6	90	90	8	2	80	75	2	A08	P
3S4	364 526 300		1.4	7	90	75	7.4	1.574	80	60	1.5	B7G	P
3V4	365 024 300		1.4	4.5	90	90	7.7	2	80	75	2	B7G	P
4	642 300 000		2	1	150		1	0.9	150		0.9	B4	T
4/100BU	892 300 000		4				120		REC		30mA	B4	RR
4A6G	026 447 230		2	1.5	90		1.2	0.9	80		0.9	A08	TT
4A07	642 300 000		4	2	100		1.4	1.2	100		1.2	B4	T
4A08	642 300 000		4		150		4	1.8	100		1.0	B4	T
4A10	642 300 000		4	2.5	125		6	1.8	125		1.8	B4	T
4A15	642 300 000		4		100		7	2.2	100		2.2	B4	T
4A80	642 310 000		4		150		6	2	150		2	B5	T
4A90	642 310 000		4		200		8	3.5	100		3.0	B5	T
4A120	642 310 000		4		125			1.4	125		1.4	B5	T
4BC8	741 236 410		4	2.2	150		10.0	6.2	150		5.0	B9A	TT
4BQ7A	741 236 410		4	2.0	150		9.0	6.4	100		6.0	B9A	TT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
4BZ7	741 236 410		4	2.2	150		10.0	6.8	100		6.0	B9A	TT
4C1	264 300 000		3	3	90		5	1	80		1	UX4	T
4C1A	364 200 000		3	3	90		5	1	90		1	UX4	T
4C2	642 310 000		4	5	125		11	2.5	125		2.5	B5	T
4C3	642 310 000		4	3.5	200		6	2.4	100		2.0	B5	T
4C4	642 310 000		4	3.5	200		6	2.4	100		2.0	B5	T
4C5	642 300 000		4	10	400		30	4	No Data Available			B4	T
4C102	642 300 000		4	45	250		40	2	No Data Available			B4	T
4C103	642 300 000		4	35	225		45	3.5	No Data Available			B4	T
4D1	000 231 600	G ₁	13	3	250		10	4	150		4	B7	T
4D80	642 310 000		4		100		2	1	100		1	B5	T
4G30	892 300 000		4				15		D			B4	RR
4G105	892 300 000		4				30		REC		15mA	B4	RR
4G200	892 300 000		4				60		REC		20mA	B4	RR
4H07	642 300 000		4		150		3	1.1	100		1.0	B4	T
4H08	642 300 000		4		150		5	1.2	100		1.0	B4	T
4H80	642 310 000		4		200		6	2	100		0.2	B5	T
4K30	642 300 000		4	10	150		20	3.6	100		3.0	B4	T
4K32	642 300 000		4	15	200		30	3.6	100		3.0	B4	T
4K50	642 300 000		4	20	200		60	5	No Data Available			B4	T
4K60	642 300 000		4	20	300		60	3.5	No Data Available			B4	T
4K61	642 300 000		4		300			3	No Data Available			B4	T
4L11	642 300 000		4		150		7	1.4	100		1.0	B4	T
4L12	642 300 000		4		150		9	2	100		1.5	B4	T
4L13	642 300 000		4		200		8	2	100		2	B4	T
4L13a	642 300 000		4	11	200		14	2.5	No Data Available			B4	T
4L14	642 300 000		4		200		10	2.2	No Data Available			B4	T
4L15	642 300 000		4		100			2.2	100		2.2	B4	T
4L16	642 300 000		4	8	150		100	2.2	100		2.0	B4	T
4L20	643 300 000		2		100			1.4	100		1.4	B4	T
4L28	643 300 000		4	4	150		10.5	4	100		3.0	B4	T
4L29	642 300 000		4	8	150		20	3.6	No Data Available			B4	T
4LMBT	642 310 000		4	1	200		3.4	2.6	100		2	B5	T
4N08	642 300 000		4		100		8	1.2	100		1.2	B4	T
4N100	642 310 000		4		150			3.5	100		3	B5	T
4N110	642 310 000		4		200		5	1.5	100		1.3	B5	T
4NG	892 300 000		4				30		REC		15mA	B4	RR
4P25	642 300 000	G ₂	4	19	250	150	12	1.3	No Data Available			B4	P
4S	289 130 000		2.5						D			UX5	D
4S09	542 300 000	A ₁	4		200		1	0.6	No Data Available			B4	P
4S120	542 310 000	A ₁	4		200		2	0.7	No Data Available			B5	P
4S121	542 310 000	A ₁	4		200	100	6	1.0	No Data Available			B5	P
4S126	642 310 000	A ₁	4	2	200	100	3	2	No Data Available			B5	P
4THA	645 231 700	G ₁	4	5 2	100 250		1.5 3.5	1.5 2.5	80 100	60 100	1.5 2.2	B7	TH

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
4TP	446 231 500	A ₂	4	5	150	150	16	4.5	150	100	4.5	B7	TP
4TPB	061 231 500	G ₁	4	3	250	150	12	8	100	100	7	B7	P
4TSA	045 231 600	A ₁	4	0	250	100	5.0	1.6	250	100	1.6	B7	P
4TSP	041 231 500	A	4	3	250	150	12	8	100	100	7	B7	P
4W03	642 300 000		4		80		0.04	1.1	80		1.1	B4	T
4W03n	642 300 000		4		200		0.04	1.1	100		1.0	B4	T
4W08	642 300 000		4		150				No Data Available			B4	T
4W100	642 310 000		4		200		1.5	3.5	100		3	B5	T
4W120	642 310 000		4		200		2	0.07	No Data Available			B5	T
4W200	642 310 000		4		150			3.3	100		3	B5	T
4XP	642 300 000		4	28.5	250		48	7	100		6	B4	T
5A6	601 225 413		2.5	15	150	150	40		100	100		B9A	P
5A/102D	026 510 310	G ₁	7.5	18	175	150	42	2.5	100	100	2.5	A08	P
5A/136D	026 510 310	G ₁	7.5	5.5	250	150	5.2	2	100	100	2	A08	P
5A/150A	265 113 000	G ₁	10	5.5	250	150	5.2	2	100	100	2	UX6	P
5A/152M	265 104 130		6	2	250	50	10	7.5	100	100	5	B8B	P
5A/155M	256 101 403		6	2	250	250		6.5	100	100	5	B9G	P
5A/156M	256 101 403		6	1.7	250	250		7.7	100	150	6	B9G	P
5A/157D	026 510 310	G ₁	6	2	250	100		1.8	100	100	1.8	A08	P
5A/163K	141 236 115		6	1.5	200	200	15	15	No Data Available			B9A	P
5AM8	145 236 181		5	1.7	200	150	11.5	7.0	100	150	7.0	B9A	DP
5AN8	641 237 541		5	{ 6.0 2.2	200 200	150	13.0 9.5	3.3 6.2	100 100	60 150	3.0 6.0	B9A	TP
5AQ5	412 365 400		5	12.5	250	250	45.0	4.1	100	PenLF	4.0		
5AS4	030 908 020		5				120		REC		30mA	A08	RR
5AS8	541 238 116		5	2.2	200	150	9.5	6.2	100	150	6.0	B9A	DP
5AT8	461 237 514		5	{ 1.0 1.8	100 250	150	8.5 7.7	5.8 4.6	100 100	60 150	5.0 4.0	B9A	TP
5AU4	020 809 030		5				180		REC		40mA		
5AV8	146 234 157		5	{ 6 2.2	200 200	150	13 1	3.3 9.5				B9A	TP
5AW4	020 809 030		5				120		REC		40mA		
5AX4	020 809 030		5				60		REC		20mA	A08	RR
5AZ4	020 809 030		5				60		REC		20mA	B8B	RR
5B1	542 300 000	A ₁	2	1	150	90	2	1.3	150	90	1.3	B9A	P
5B8	146 234 157		5	{ 6 1.8	200 200	150	13 9.5	3.3 6.3	100 100	60 150	3 6	B9A	TP
5B/110M	265 104 130		6	6	250	150	38	6.5	100	100	5		
5B/250A	254 130 000	A	6	12.5	400	250	83	6.3	100	150	6	UX5	P
5B/251M	215 044 130	A	6	15	250	250	72	6	100	100	5	B8B	P
5B/252M	265 044 130		6	15	250	250	72	6	100	100	5	B8B	P
5B/253M	265 044 130		19	15	250	250	72	6	100	100	5	B8B	P
5B/254M	215 144 130	A	6	20	300	250	50	5.6	100	100	5	B8B	P
5B/255M	215 144 130	A	6	20	300	250	50	5.6	100	100	5	B8B	P
5B/256M	215 144 130	A	19	20	300	250	50	5.6	100	100	5	B8B	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
5B/257M	215 144 130	A	12	20	300	250	50	5-6	100	100	5	B8B	P
5BE8	461 237 414		4	{ 1	150		18	8-5	100	60	7	B9A	TP
5BK7a	741 236 411		5	{ 1	250	100	10	5-2	150	100	5	B9A	TP
5BR8	461 237 514		5	2	150		10-7	9-3	100		9	B9A	TT
5E255	642 350 000		2	{ 150	250	100	10	5-2	No Data Available			B9A	TP
				4-5	150	150	9-5	2-5	100	100	2-5	B5	P
5E415	642 350 000		4	25	300	200	20	1-7	100	PenLF	1-7	B5	P
5J6	672 344 100		5	3-0	150		5-0	4-5	100		5-3	B7G	TT
5PT4A	041 231 500	A ₁	4	4-5	250	150	4-5	1-7	No Data Available			B7	P
5P29	120 540 310	A ₁	6	7	250	250	100	14-3	No Data Available			A08	P
5Q5	036 540 320		1-4	4-6	90	90	4-5	2	80	75	2	A08	P
5R4	020 809 030		5				60		REC		20mA	A08	RR
5R4GY	030 809 020		5				60		REC		20mA	A08	RR
5T4	020 809 030		5				120		REC		30mA	A08	RR
5T8	†91 238 146		5	3-0	250		1-0	1-2	150		1-3	B9A	DDDT
5U4	020 809 030		5				120		REC		30mA	A08	RR
5U8	645 237 114		5	{ 1-0	150		18-0	8-5	100	60	7-0	B9A	TP
				1-0	250	100	10-0	5-2	150	100	5-0		
5V4	030 809 020		5				60		REC		20mA	A08	RR
5V6	026 540 310			12-5	250	250	45-0	4-1	100	PenLF	4-0	A08	P
5W4	020 809 030		5				60		REC		20mA	A08	RR
5X3	289 300 000		5				15		REC		10mA	A08	RR
5X4	008 090 230		5				120		REC		30mA	A08	RR
5X8	146 231 457		5	{ 1-0	100		8-5	5-8	100	60	5-0	B9A	TP
				1-8	250	150	7-7	4-6	100	150	4-0		
5Y3GB	030 809 020		5				60		REC		20mA	A08	RR
5Y3GR	020 809 030		5				60		REC		20mA	A08	RR
5Y3GT	020 809 030		5				60		REC		20mA	A08	RR
5Y4	008 090 230		5				60		REC		30mA	A08	RR
5Y4SG	008 090 230		5				60		REC		20mA	A08	RR
5Z3	289 300 000		5				120		REC		30mA	UX4	RR
5Z4	030 809 020		5				60		REC		20mA	A08	RR
5Z4G	030 809 020		5				60		REC		20mA	A08	RR
6A3	264 300 000		6	36	250		60	5-25	100		5	UX4	T
6A4	264 530 000		6	9	150	150	14	1-9	100	100	1-9	UX5	P
6A5	026 040 310		6	45	250		60	5-25	100		5	A08	T
6A6	274 146 300		6	5	250		6	3-1	100		3-1	UX7	TT
6A7	265 541 300	G ₁	6	8	250	100	3-5	1-15	100	100	1-15	Sm7	H
6A7E	265 541 300	G ₁	6	8	250	100	3-5	1-15	100	100	1-15	Sm7	H
6A7S	265 541 300	G ₁	6	8	250	100	3-5	1-15	100	100	1-15	Sm7	H
6A8GT	026 545 310	G ₁	6	8	250	100	3-5	1-15	100	100	1-15	A08	H
6AB4	602 304 100		6	2	250		10	5-5	200		5-5	B7G	T
6AB7	021 415 360		6	3	300	200	12-5	5	100	150	5	A08	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE	
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V			
6AB8	641 237 154		6	{ 2 8-0	100	0	4	1.4	100	60	1.4	B9A	TP	
6AC5	026 040 310		6		200	200	17.5	3.5	100	150	3.5		A08	T
6AC7	021 415 360		6	2	300	150	10	9	100	100	8		A08	P
6AD4	402 012 080		6		100		1.4	2	100		2		B8B	T
6AD5	026 040 310		6	2	250		0.9	1.5	200		1.5		A08	T
6AD7	427 546 310		6	{ 25 16.5	250	0	4	0.325	100	60	0.32	A08	TP	
6AD8	541 236 891		6		250	250	34	2.5	100	PenLF	2.5		B9A	DDP
6AE5	026 040 310		6	2.0	250	85	6.7	2.3	No Data Available				A08	T
6AE6	026 740 310		6	15	100		7	1.2	80		1.2		A08	TT
6AE7	026 414 310		6	1.5	250		6.5	1	200		1		A08	TT
			6	13.5	250		10	3	100		3	A08	TT	
6AE8	541 237 46*		6	{ 2 2	100		5.2	2.2	100	60	2.8	B9A	TH	
6AF4	642 314 600		6		250	90	3.5		150	90			B7G	T
6AF5	026 040 310		6	4	100		15	6.6	80		6		A08	T
6AG5	412 365 100		6	18	175		7	1.5	100		1.5		B7G	P
6AG6	026 540 310		6	1.5	250	150	6.5	5	100	100	5		A08	P
			6	6	250	250	32	10	100	PenLF	9	A08	P	
6AG7	120 415 360		6	3	300	150	30	11	100	100	10	A08	P	
6AH4	420 060 310		6	23	250		30	4.5	100		4	A08	T	
6AH5	520 604 310		6	18	350	250		5.2	100	PenLF	5	A08	P	
6AH6	412 365 100		6	2	300	150	10	9	100	100	8	B7G	P	
6AH7	461 471 230		6	16	250		10	2.2	100		2.2	A08	TT	
6AH7GT	417 146 230		6	9	250		12	2.4	100		2.4	A08	TT	
6AJ4	414 464 234		6	2	125		8	7	100		10	B9A	T	
6AJ5	412 365 100		6	7.5	180	75	2.9	2.75	No Data Available			B7G	P	
6AJ7	020 415 360		6		300	150	10.0	9.0	150	150	.75	A08	P	
6AJ8	541 237 164		6	{ 3.0 2.0	100		5.0	2.3	100	60	2.3	B9A	TH	
					250	100	6.5	2.4	150	100	2.4			
6AK5	412 365 100		6	2.3	150	150	7	4.3	100	100	4		B7G	P
6AK6	412 365 100		6	9	175	175	15	2.3	100	100	2.3		B7G	P
6AK7	120 415 360		6	3	300	150	30	11	100	100	9		A08	P
6AK8	891 238 146		6	3.0	250		1.0	1.2	100		1.3	B9A	DDDT	
6AL5	192 310 800		6						D			B7G	RR	
6AL6	020 540 310	A	6	14	250	250	72	6	100	PenLF	6	A08	P	
6AM4	414 464 234		6	1.5	150		2.8	7	100		9	B9A	T	
6AM5	412 360 500		6	13.5	250	250	16	2.6	100	PenLF	2.6	B7G	P	
6AM6	412 361 500		6	{ 1.5 2	200	150	4	6.4	100	PenLF	5	B7G	P	
6AM8	145 236 181		6		250	250	10	7.5	100	PenLF	5		B9A	DP
				1.7	200	150	11.5	7.0	100	150	7.0			
6AN4	642 314 600		6		125		7	2.9	100		2.9	B7G	T	
6AN5	412 365 100		6	6	125	125	35	8	100	100	7	B7G	P	
6AN6	289 111 300		6						D			B7G	DDDD	
6AN7	541 236 074		6	{ 2.0 2.0	100		5.0	2.0	100	60	2.8	B9A	TP	
					250	100	3.0	0.75	100	100				
6AN8	641 237 541		6	6	200		13	3.3	100	60	3		B9A	TP
				2.2	200	150	9.5	6.2	100	150	6			

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6AQ4	412 314 600		6	2.0	250		6.0	8.5	200		8.0	B7G	T
6AQ5	412 365 400		6	12.5	250	250	45	4.1	100	PenLF	4	B7G	P
6AQ6	412 398 600		6	3	250		1.0	1.2	150		1.2	B7G	DDT
6AQ7	918 461 230		6	2	250		2.3	1.6	100		1.6	A08	DDT
6AQ8	741 236 410		6	2.3	250		10.0	5.9	100		5.0	B9A	TT
6AR5	412 365 000		6	16	250	250	34	2.4	100	PenLF	2.4	B7G	P
6AR6	106 052 430		6	36	300	300	58	4.3	100	PenLF	4.3	A08	P
6AR7GT	206 598 130	G	6	2	250	100	7	2.5	100	100	2.5	A08	DDP
6AR7	461 891 230		6	2	250		1.3	1.05	200		1.05	A08	DDT
6AS5	142 345 600		6	8.5	150	125	35	5.6	100	100	5	B7G	P
6AS6	412 365 100		6	2	125	125	5.5	3.5	100	100	3.5	B7G	P
6AS7	471 461 230		6	31.5	150		125	7	100		7	A08	TT
6AS8	541 238 116		6	2.2	200	150	9.5	6.2	100	150	6	B9A	DP
6AT6	412 389 600		6	3	250		1	1.2	150		1.2	B7G	DDT
6AT7n	641 237 410		6	{ 2 1	{ 250 100		{ 10 3.7	{ 5.5 4.0	{ 100 100		{ 5 4.0	{ B9A	TT
6AT8	461 237 514		6	{ 8.5 15.2	{ 100 250	150	{ 8.5 7.7	{ 5.8 4.6	100	60	{ 5.8	{ B9A	TP
6AU4	001 080 230		6				120		REC		40mA	A08	R
6AU5	421 060 350		6	20	175	150	50	5.6	80	60	6	A08	P
6AU6	412 365 100		6	1	250	150	10.0	5.2	100	150	5.2	B7G	P
6AU7	641 227 413		3	8.5	250		10.5	2.2					
6AU8	164 231 457		6	{ 1.25 1.5	{ 150 200	125	{ 8.5 15.0	{ 4.9 7.0	{ 100 100	60	{ 5.0 7.0	{ B9A	TP
6AV4	802 309 100		6				30		REC		15mA	B7G	RR
6AV5	421 060 350		6	22.5	250	150	57	5.9	100	100	5.8	A08	P
6AV6	412 389 600		6	2	250		1.2	1.6	200		1.6	B7G	DDT
6AW4	289 130 000		6				30		REC		15mA	UX5	RR
6AW5	208 190 310		6				30		REC		15mA	A08	RR
6AW6	412 365 100		6	1.8	250	150	7	5	100	150	5	B7G	P
6AW7	149 816 230		6	0	100		1.4	1.2	100		1.2	A08	DDT
6AW8	146 231 457		6	{ 2.0 3.0	{ 200 200	150	{ 4.0 13.0	{ 4.0 9.0	{ 100 100	60	{ 4.0 9.0	{ B9A	TP
6AX2	23* 232 *32	D ₁	6						D			B9A	D
6AX4	001 080 230		6				120		REC		35mA	A09	R
6AX5	029 080 310		6				60		REC		20mA	A08	RR
6AX6	028 190 310		6				120		REC		30mA	A08	RR
6AX7	641 227 413		3	2	250		1.2	1.6	100		1.2	B9A	TT
6AY8	026 589 310	G ₁	6	5	250	100	52	9.5	100	90	9	A08	DDP
6AZ8	751 324 164		6	{ 6.0 2.3	{ 200 200	150	{ 13.0 9.5	{ 3.3 6.0	{ 100 100	60	{ 3.0 6.0	{ B9A	TP
6B4	026 040 300		6	36	250		60	5.25	100		5	A08	T
6B6	026 980 310	G ₁	6	2	250		0.9	1.1	100		1.1	A08	DDT
6B7	265 891 300	G ₁	1	3	250	125	9	1.125	100	100	1.1	Sm7	DDP
6B7E	265 891 300	G ₁	6	3	250	125	9	1.125	100	100	1.1	Sm7	DDP

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6B7S	265 891 300	G ₁	6	3	250	125	9	1-125	100	100	1-1	Sm7	DDP
6B8	026 985 310	G ₁	6	3	250	125	10	1-325	100	100	1-3	A08	DDP
6B8G	026 985 310	G ₁	6	3	250	125	9	1-125	100	100	1-2	A08	DDP
6B8SG	026 985 310	G ₁	6	3	250	125	9	1-125	100	100	1-2	A08	DDP
6BA6	412 365 100		6	1	250	100	11	4-4	100	100	4-4	B7G	P
6BA7	641 231 106		6	2	100		18	7	100		7	B9A	H
6BA8	146 231 457		6	8	200		8	2-7				B9A	TP
6BC4	642 314 460		6	1-5	150		14-5	10	100		10-0	B8A	T
6BC5	412 365 100		6	1-3	250	150	7-5	5-7	100	150	5-7	B7G	P
6BC7	180 239 1-1		6				5		D			B9A	RRR
6BC8	741 236 410		6	2-2	150		10-0	6-2	150		5	B9A	TT
6BD5	421 060 350		6	12	200	200		5	100	100	5	A08	P
6BD6	412 365 100		6	3	250	100	9	2	100	100	2	B7G	P
6BD7	641 238 09*		6	3-0	250		1-0	1-2	150		1-2	B9A	DDT
6BE6	412 366 100		6	2	100		11	7-0	100		5	B7G	H
6BE7	541 236 114		6	1	250	20	0-95	0-7	No Data Available			B9A	N
6BF5	412 365 400		6	7-5	100	100	36	7-5	100	90	7	B7G	P
6BF6	412 398 600		6	9	250		9-5	1-9	100		1-9	B7G	DDT
6BF7	642 113 470		6		100		8	4-8	100		4-8	B8D	TT
6BG6	021 040 350	A	6	15	250	250	70	6	100	PenLF	5	A08	P
6BH5	541 236 000		6	2-5	250	100	6-0	1-7	150	100	1-7	B9A	P
6BH6	412 365 100		6	1	250	150	7-4	4-6	100	PenLF	4-6	B7G	P
6BH8	146 231 457		6	5-0	150		9-5	3-3				B9A	TP
6BJ5	412 36* 500		6	1-6	200	125	15-0	7-0	No Data Available			B9A	TP
6BJ6	412 365 100		6	5	250	250	35	10-5	100	150	10	B7G	P
6BJ7	1-0 239 181		6	1	250	100	9-2	3-6	100	100	3-6	B7G	P
6BK5	604 231 450		6						D			B9A	DDD
6BK6	412 389 600		6	5	250	250	35	8-5	100	150	8	B9A	P
6BK7	741 236 410		6	2	250		1-2	1-6	100		1-6	B7G	DDT
6BK7-A	741 236 410		6	1-0	100		9-0	6-1	100		6-0	B9A	TT
6BL4	**1 *8* 230		6	2	150		10-7	9	REC		9	B9A	TT
6BL7	471 461 230		6										
6BL8	645 237 114		6	180					REC		40mA	A08	R
6BM5	412 365 400		6	9	250		40	6-2	100		6	A08	TT
6BN4	142 361 400		6	2	100		14	5	100	60	5	B9A	TP
6BN5	441 231 615		6	2	175	175	10	6-2	100	150	6	B9A	TP
6BN6	142 354 600		6	6	250	250	30	7	No Data Available			B9A	P
6BN7	741 231 406		6	2-2	150		9	7-0	100		6-6	B7G	T
6BN8	026 895 310	G ₁	6	10-8	225	225	26-0	3-2	100	150	3-2	B9A	P
6BQ5	*41 23* 6*5		6	1	60	60	0-25	1	80	60	1	B7G	P
6BQ6	020 540 310	A	6	15	250		24	5-5	No Data Available			B9A	TT
			6	1	125		5	2					
			6	3	250	125	9	1-13	100	100	1-1	A08	DDP
			6	7-3	250	250	48-0	11-3	100	150	10-0	B9A	P
			6	22-5	250	150	57	5-9	100	100	5	A08	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6BQ7	741 236 410		6	2	150		9	6	150		6	B9A	TT
6BQ7-A	741 236 410		6	2	150		9	6.4	100		5	B9A	TT
6BR7	041 230 651		6	3	250	100	2	1.225	100	100	1.2	B9A	P
6BR8	461 237 514		6	1.0 0.85	150 250		18 10	8.5 5.2	100 100	60 100	8	B9A	TP
6BS7	001 230 651	G ₁	6	3	250	100	2	1.25	100	100	1.2	B9A	P
6BT4	280 009 130		6				30		REC		15mA	B8A	RR
6BT6	412 389 600		6	3	250		1	1.2	150		1.2	B7G	DDT
6BU6	412 389 600		6	9	250		9.5	1.9	100		1.9	B7G	DDT
6BU8	157 231 461		6		100	60	2.2		100	60		B9A	PP
6BV7	865 239 141		6	5	250	250	38	10	100	150	10	B9A	DDP
6BV8	146 239 118		6	3.7	200		11	5.6	100			B9A	DDT
6BW6	*41 230 651		6	13	300	225	34	3.75	100	150	3.7	B9A	P
6BW7	141 230 651		6	1.4	250	250	9.7	8.2	100	100	7	B9A	P
6BX4	802 308 100		6				30		REC		15mA	B7G	RR
6BX6	141 230 651		6	3	200	200	8	7.2	100	150	6	B9A	P
6BX7	471 461 230		6	16.4	250		42	7.6	100		6	A08	TT
6BY5	120 980 310		6				60		REC		20mA	A08	RR
6BY6	412 365 400		6	2.5	250	100	6.5	2.4	100	100	2	B7G	H
6BY7	141 230 651		6	2.0	250	100	10.0	6.0	150	100	5.0	B9A	P
6BY8	026 598 310	G ₁	6	4	250	250	44	12	100	PenLF	10	A08	DD
6BZ6	412 365 100		6	1.0	125	125	14	8	125	125	7	B7G	P
6BZ7	741 236 410		6	2.2	150		10.0	6.8	100		6.0	B9A	TT
6C4	602 364 100		6	8.5	250		10.5	2.2	100		3	B7G	T
6C5	026 040 310		6	8	250		8	2	100		2	A08	T
6C6	265 113 000	G ₁	6	3	250	100	2	1.225	100	100	1.2	UX6	P
6C7	260 981 300	G ₁	6	9	250		4.5	1.25	100		1.2	Sm7	DDT
6C8	026 147 310	G ₁	6	4.5	250		3.2	1.6	100		1.6	A08	TT
6C9	276 454 130		6	2.5 2.5	100 250		5.0 8.0	3.0 2.5	100 100	60 100	3.0 2.5	B8A	TH
6C10	276 454 130		6	2.0 2	100 250		5.0 8.0	2.2 2.4	100 200	60 100	2.8 2.4	B8A	TH
6C31	027 546 310	G ₁	6	4 3	100 250		7 5	3.4 2.8	100 100	60 100	5 3.1	A08	TH
6CA5	142 345 600		6	4.5	125	125	36	9.2	125	126	9.2	B7G	P
6CA7	126 540 310		6	14.5	250	250	67.0	9.0	100	100	9.0	A08	P
6CB5	521 441 350	A	6	30.0	175	175	90	8.8	100	100	8.0	A08	P
6CB6	412 365 100		6	1.0	125	125	13	8.0	100	150	6	B7G	P
6CD6	021 040 350	A	6	30	175	175	75	7.7	100	100	7.0	A08	P
6CF6	412 365 100		6	1.0	125	125	12	7.8	100	150	6	B7G	P
6CG6	412 365 100		6		250	150	9	2	100	100		B7G	P
6CG7	641 237 410		6	8.0	250		9.0	2.6	100		3.0	B9A	TT
6CH6	041 230 651		6	4.5	250	250	40	11.0	100	150	9.0	B9A	P
6CH7	741 236 411		6	2.2	150		10	6.8	150		6.8	B9A	TT
6CJ5	260 054 130		6	2.5	250	100	6	2.2	100	100	2.2	B8A	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6CJ6	*41 23* *51	A	6	22	175	175	45	6.2	100	100	5	B9A	P
6CK5	260 054 130		6	7	250	250	36	10	100	PenLF	8	B8A	P
6CK6	541 231 600		6	5.5	250	250	36.0	10.0	100	150	9.0	B9A	P
6CL6	145 236 154		6	3	250	150	30	11	No Data Available			B9A	P
6CM6	504 234 106		6	12.5	250	250	45	4.1	100	100		B9A	P
6CM7	701 236 441		6	{ 7.0 8.0	200 250		5.0 20.0	2.0 4.4	No Data Available			B9A	TT
6CN6	120 540 310	A	6	7	250	250	100	14.3	100	PenLF	10	A08	P
6CN7	981 331 462		3	3	250		1.0	1.2	100		1.3	B7G	DDT
6CQ6	412 361 500		6	2.5	250	200	8.0	2.5	100	150	2.5	B7G	P
6CR6	182 365 400		6		250	100	9.5	1.95	250	100	1.95	B7G	DT
6CS6	412 365 100		6	1.0	100	30	1.0	1.1	No Data Available			B7G	H
6CT7	268 154 130		6	2	250	100	5	1.8	100	100	1.8	B8A	DP
6CU5	142 345 600		6	8	125	100	50	7.5	125	100	7.5	B7G	P
6CU6	020 540 310	A	6	22.5	250	150	57	6.0	100	100	6.0	A08	P
6CU7	276 454 130		6	{ 2 2	100 250		5 3	2.2 2	100 100	60 100	2.8 3.5	B8A	TH
6CV7	264 089 130		6	3	250		1	1.3	150		1.3	B8A	DDT
6CW7	147 234 116		6	1.5	90		12	6	100		6	B9A	TT
6D1	123 000 000	D ₁	6						D			B3G	D
6D2	192 310 800		6						D			B7G	RR
6D3	812 380 000		6						D			B7G	R
6D5	026 040 310		6	40	275		31	2.1	100		2.1	A08	T
6D6	265 113 000	G ₁	6	3	250	100	8.2	1.6	100	100	1.6	UX6	P
6D7	265 101 300	G ₁	6	3	250	100	2	1.225	100	100	1.2	Sm7	P
6D8	027 546 310	G ₁	6	{ 3	150 250		4.2 3.5		100 150	60 100		A08	H
6DA6	041 230 651		6	2.0	250	100	9.0	3.6	250	100	3.6	B9A	P
6DB6	412 365 100		6	1	150	150	5.8	2	100	100		B7G	P
6DC6	412 365 100		6	2.2	200	150	9.5	5.5	150	100	5.0	B7G	P
6DE6	412 365 100		6	1.1	125	125	16	8	100	100	8	B7G	P
6DQ6	020 540 310	A	6	22.5	250	150	75	6.6	125	100		A08	P
6DR4	123 000 000	D ₁	6						D			B3G	D
6DT6	412 365 100		6	2.2	150	100	1.1	0.8	150	100	2.0	B7G	P
6E6	274 146 300		6	27.5	250		18	1.7	100		1.7	UX7	TT
6E7	265 101 300	G ₁	6	3	250	100	8.2	1.6	100	100	1.6	Sm7	
6E8G	027 546 310	G ₁	6	{ 150 250			3.3 2.3	2.8	150 100	60 100	2.8	A08	TH
6EH6	412 365 100		6	1	250	150	7.4	4.6	100	150	4	B7G	P
6EX4	802 309 100		6				30		REC		15mA	B9A	
6F1	261 514 130		6	1.8	200	200	10	9	100	PenLF	8	B8A	P
6F5	020 600 310	G ₁	6	2	250		0.9	1.5	100		1.5	A08	T
6F6	026 540 310		6	16.5	250	250	34	2.5	100	PenLF	2.5	A08	P
6F7	275 641 300	G ₁	6	{ 3.0 3.0	100 100		3.5 6.3	0.5 1.05	100 100	60 100	0.5 1.05	Sm7	TP

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6F7B	275 641 300	G ₁	6	3.0 3.0	100 100	100	3.5 6.3	0.5 1.05	100 100	60 100	0.5 1.05	UX7	TP
6F7E	275 641 300	G ₁	6	3.0 3.0	100 100	100	3.5 6.3	0.5 1.05	100 100	60 100	0.5 1.05	UX7	TP
6F7M	023 756 410	G ₁	6	3.0 3.0	100 100	100	3.5 6.3	0.5 1.05	100 100	60 100	0.5 1.05	UX7	TP
6F8	027 146 310	G ₁	6	8	250		9	2.6	100		2.6	A08	TT
6F11	260 154 130		6	1.8	250	100	4.4	2.2	100	100	2.2	B8A	P
6F12	412 361 500		6	2	250	250	10	7.5	100	150	5	B7G	P
6F13	260 154 130		6	1.8	200	200	10	9	150	150	8	B8A	P
6F14	260 154 130		6	1.25	150	150	28	10.6	100	100	8	B8A	P
6F15	260 154 130		6.3	2.5	250	100	7	2.3	100	100	2.3	B8A	P
6F16	261 154 130		6.3	2.5	250	100	6	2.2	100	100	2.2	B8A	P
6F17	412 361 500		6	2	150	150	46	6	100	100		B7G	P
6F18	141 230 651		6	1.3	175	100	12	4.5	125	100		B9A	P
6F32	216 510 030	G ₁	6	4.5	200	200	5.1	3	100	150	3	M08	P
6F33	412 361 500		6	4	200	200	5.75	3.55	100	150	3.5	B7G	P
6G6	026 540 310		6	9	175	175	15	2.3	100	100	2.3	A08	P
6G7	026 985 310	G ₁	6	3	250	125	10	1.325	100	100	1.3	A08	DDP
6G8	026 985 310	G ₁	6	3	250	125	9	1.125	100	100	1.1	A08	DDP
6H4	020 800 310		6						D			A08	D
6H6	029 180 310		6						D			A08	DD
6H8G	026 895 310	G ₁	6	2	250	125	8.5	2.4	100	100	2.4	A08	DDP
6H8MG	026 895 310	G ₁	6	2	250	125	6	1.8	100	100	1.8	A08	DDP
6J4	412 344 600		6	1.5	150		15	12	100		10	B7G	T
6J5	026 040 310		6	8	250		9	2.6	100		2.6	A08	T
6J6	762 344 100		6	3	150		5	4.5	100		5.3	B7G	TT
6J7	026 510 310	G ₁	6	3	250	100	2	1.225	100	100	1.2	A08	P
6J8	027 546 310	G ₁	6	3 3	150 250	100	1.3	1.2	100 100	60 100	1.6	A08	TH
6K5	026 000 310	G ₁	6		250		1.1	1.4	200		1.4	A08	T
6K6	026 540 310		6	18	250	250	32	2.3	100	PenLF	2.3	A08	P
6K7	026 510 310	G ₁	6	3	250	125	10.5	1.65	100	100	1.6	A08	P
6K8	027 546 310	G ₁	6	1 3	100 250	100	8 4	2.5 1.2	100 100	60 100	3 1.6	A08	TH
6K25	026 040 310		6		100		30	2KΩ	No Data Available			A08	Thyratron
6L1	274 164 130		6	8.6	200		10	2.8	100		2.0	B8A	TT
6L5G	026 040 310		6	9	250		8	1.9	100		1.9	A08	T
6L6	026 540 310		6	18	350	250	54	5.2	100	PenLF	5.2	A08	P
6L7	026 540 310	G ₁	6	3	250	100	5.3	1.1	100	100	1.1	A08	H
6L18	260 064 130		6	13.3	250		12.0	5.5	80		7.0	B8A	T
6L19	274 164 130		6	1.8	200		5	3.1	150		3.1	B8A	TT
6L34	412 314 600		6	1.5	250		10	9	150		7	B7G	T
6LD3	264 098 130		6	1.9	250		0.85	1.95	150		1.9	B8A	DDT
6LD20	264 098 130		6	5.9	250		5	2.3	100		2.3	B8A	DDT

VALVE	SELECTOR SWITCH No.	T.C.	Vr	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6M5	541 230 600		6	7	250	250	36	10.0	100	100	10.0	B9A	P
6M6	026 540 310		6	6	250	250	36	9.5	100	PenLF	8	A08	P
6M7	026 510 310	G ₁	6	2.5	250	125	10.5	3.4	100	100	3.2	A08	P
6M7MG	026 510 310	G ₁	6	2.5	250	125	6	2	100	100	2	A08	P
6M8	137 546 280	G ₁	6	1.0	100		0.5	1.1	100	60	1.1	A08	DTP
				3.0	100	100	8.5	1.9	100	100	1.9		
6N4	412 361 400		6	3	175		12	6	150		6	B7G	T
6N7	027 446 310		6	5	250		3	1.6	100		1.6	A08	TT
6N8	541 236 891		6	2	250	90	5	2.2	100	90	2.2	B9A	DDP
6NK7	026 510 310	G ₁	6	2	250	100	5	2.3	100	100	2.3	A08	P
6P1	026 540 310		6	8.5	250	250	40	8.8	100	150	8	A08	P
6P5	026 040 310		6	13.5	250		5	1.25	100		1.4	A08	T
6P6	215 413 000	A	6	80	250	150	34		100	100		UX6	P
6P7	023 756 410	G ₁	6	3.0	100		3.5	0.5	100	60	0.5	A08	TP
				3.0	100	100	6.3	1.05	100	100	1.05		
6P8	027 546 310	G	6		100		2.2		100	60		A08	TH
				2.4	250	75	1.5		100	75			
6P9	412 365 400		6	6	250	250	30	7	No Data Available			B9A	P
6P25	026 540 310		6	8.5	250	250	40	8.8	100	PenLF	8	A08	P
6P26	026 540 310		6	8.5	250	250	40	8.8	100	PenLF	8	A08	P
6P28	020 540 310	A	6	8.8	100	250	72	9.5	100	PenLF	9	A08	P
6PX6	026 540 310		6	6	250	35	9.2	9.2	100	PenLF	8	A08	P
6PZ8	026 589 310	G ₁	6	6	250	250	36	9.2	100	PenLF	8	A08	DDP
6Q4	441 230 446		6	1.5	250		15		150			B9A	T
6Q6	026 080 310		6	3	250		1.2	1.05	150		1.05	A08	DT
6Q7	026 980 310	G ₁	6	3	250		1	1.2	150		1.2	A08	T DD
6QL6	541 236 154		6	11.5	175	175	52	9.5	125	100		B9A	P
6R	026 510 310	G	6	2	250	100			100	100		A08	P
6R4	401 230 060		6	2	150		30	5.5	100		5	B9A	T
6R6	026 500 310	G ₁	6	3	250	100	7	1.45	100	100	1.4	A08	P
6R7	026 980 310	G ₁	6	9	250		9.5	1.9	100		1.9	A08	DDT
6R8	811 239 146		6	9	250		9.5	1.9	100		1.9	B9A	DDDT
6RV	026 510 310	G ₁	6	2	250	100	6.4	2.1	100	100	2.1	A08	P
6S4	*1* 234 **6		6	8	250		26	4.5	100		4.5	B9A	T
6S6	120 600 350	G ₁	6	2	250	100	13	4	100	100	4	A08	P
6S7	026 510 310	G ₁	6	3	250	100	8.5	1.75	100	100	1.7	A08	P
6S8	118 916 230	G ₁	6	2	250		0.9	1.1	200		1.1	A08	DDDT
6SA7	126 641 310		6	3.6	100		12	4.3	100		4.5	A08	H
6SA7G	026 641 310		6	3.6	100		12	4.3	100		4.5	A08	H
6SB7Y	126 541 310		6	1	250	100	3.8		100	100		A08	H
6SC5	026 400 310		6	4	250		7.5	2.7	100		2.7	A08	T
6SC7	074 461 230		6	2	250		2	1.325	200		1.3	A08	TT
6SD7	021 415 360		6	2	250	100	6	3.6	100	100	3.6	A08	P
6SE7	021 415 360		6	1.5	250	100	4.5	3.4	100	100	3.4	A08	P
6SF5	014 060 320		6	2	250		0.9	1.5	200		1.5	A08	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6SF7	041 586 230		6	1	250	100	12.4	2.05	100	100	2	A08	DP
6SG7	021 415 360		6	1	250	125	11.8	4.7	100	100	4.7	A08	P
6SH7	021 415 360		6	1	250	150	10.8	4.9	100	150	4.9	A08	P
6SJ7	021 415 360		6	3	250	100	3	1.65	100	100	1.6	A08	P
6SK7	021 415 360		6	3	250	100	9.2	2	100	100	2	A08	P
6SL7	461 471 230		6	2	250		2.3	1.6	150		1.6	A08	TT
6SN7	461 471 230		6	8	250		9	2.6	100		2.6	A08	TT
6SQ7	041 896 230		6	2	250		0.9	1.1	200		1.1	A08	DDT
6SR7	041 986 230		6	9	250		9.5	1.9		100	1.9	A08	DDT
6SS7	021 415 360		6	3	250	100	9	1.85	100	100	1.8	A08	P
6ST7	041 896 230		6	9	250		9.5	1.9	100		1.9	A08	DDT
6SU7	471 461 230		6	2	250		2.3	1.6	200		1.6	A08	TT
6SV7	041 586 230		6	1	250	150	7.5	3.4	100	150	3.5	A08	DP
6SZ7	041 986 230		6	3	250		1	1.2	200		1.2	A08	DDT
6T	205 413 000	A ₁	6	12.5	250	250	4.5	4.1	100	PenLF	4	UX6	P
6T4	642 314 600		6	3.0	80		18.0	7.0	80		7.0	B7G	T
6T6	026 500 310	G ₁	6	1	250	100	10	5.5	100	100	5.5	A08	P
6T7	026 980 310	G ₁	6	3	250		1.2	1.05	150		1.05	A08	DDT
6T8	†91 238 146		6	3	250		1	1.2	150		1.2	B9A	DDDT
6TE8	427 546 310	G ₁	6	{ 2 2	100 250	100	3.7 3.5		100 100	60 100		A08	TH
6TE9	651 237 440		6	{ 2.5 1.5	100 200	90	4 3	2 0.75	100 100		2	B9A	TH
6TH8	027 546 310	G ₁	6	{ 1.5 14.5	150 300	75	6 3.5		150 100	90 75		A08	TH
6TP	205 413 000	A ₁	6		250	250	72	6	100	PenLF	6	UX6	P
6U3	**1 23* **8		6				180		REC		40mA	B9A	R
6U4	001 080 230		6				120		REC		30mA	A08	R
6U6	026 540 310		6	14	200	150	56	6.2	100	100	6.2	A08	P
6U7	026 510 310	G ₁	6	3	250	100	8	1.5	100	100	1.5	A08	P
6U8	645 237 114		6	{ 1 1	150 250	0 100	18 10	8.5 5.2	100 150	60 100	7 5	B9A	TP
6V3	080 230 808	C	6				120		REC		30mA	B9A	R
6V4	8*1 23* 9**		6				30		REC		15mA	B9A	RR
6V5	006 540 320		6	12.5	250	250	45	4.1	100	PenLF	4.1	A08	P
6V6	026 540 310		6	12.5	250	250	45	4.1	100	PenLF	4	A08	P
6V7	026 980 310	G ₁	6	20	250		8	1.1	100		1.1	A08	DDT
6V8	681 234 †19		6	3	250		1	1.2	100		1.3	B9A	DDDT
6W2	023 000 000	D ₁	6						D			B3G	D
6W3	**1 23* **8		6				120		REC		40mA	B9A	R
6W4	001 080 230		6				120		REC		30mA	A08	R
6W5	028 090 310		6				60		REC		20mA	A08	RR
6W6	026 540 310		6	9.5	150	150	58	8	100	100	8	A08	P
6W7	026 510 310	G ₁	6	3	250	100	2	1.225	100	100	1.2	A08	P
6WC5	265 414 300		6	1.5	250	100			125	100		UX7	O

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6X2	023 000 000	D ₁	6						D			B3G	D
6X3	020 000 310	D ₁	6				5		D			A08	R
6X4	802 309 100		6				30		REC		15mA	B7G	RR
6X5	028 090 310		6				30		REC		15mA	A08	RR
6X8	146 231 547		6	{ 1.0 1.8	100 250	150	8.5 7.7	5.8 4.6	100 100	60 150	5.0 4.0	B9A	TP
6Y3	020 000 300	D ₁	6				30		REC		15mA	A08	R
6Y5	208 193 000		6				30		REC		15mA	UX6	RR
6Y6	026 540 310		6	13.5	150	150	58	7	100	100	7	A08	P
6Y7	027 446 310		6	0	250		5.3		200			A08	TT
6ZY5	028 090 310		6				15		REC		15mA	A08	RR
6Z3	381 200 000		6				60		REC		20mA	UX4	R
6Z4	289 130 000		6				30		REC		15mA	UX5	RR
6Z5	328 192 000		6				30		REC		15mA	UX6	RR
6Z6	028 190 310		6				30		REC		15mA	A08	RR
6Z7	026 447 310		6	0	175		4.2	0.55	150		0.55	A08	TT
6ZDH3A	264 813 000		6	2	225		1.5	1.5	100		1.2	UX6	DT
6ZPI	265 413 000		6	9	200	200	15	1.75	100	100		UX6	P
7A2	642 310 000	S	4	16.5	250	250	34	2.35	100	PenLF	2.3	B5	P
7A2	045 231 600		4	16.5	250	250	34	2.35	100	PenLF	2.3	B7	P
7A3	045 231 600		4	6	250	250	32	10	100	PenLF	9	B7	P
7A4	260 0*4 130		6	8	250		9	2.6	100		2.6	B8B	T
7A5	265 004 130		6	9	125	125	44	6	100	90	6	B8B	P
7A6	219 008 130		6				5		D			B8B	RR
7A7	265 104 130		6	3	250	100	9.2	2	100	100	2	B8B	P
7A8	266 451 130		6	1	250	100	14	1.4	100	100	1.6	B8B	O
7AB7	526 141 310		6	2	250	100	4	1.8	100	100	1.2	B8B	P
7AC7	412 365 100		6		300	150	10	9	100	100	8	B7G	P
7AD7	265 104 130		6	2.3	300	150	28	9.5	100	150	9	B8B	P
7AF7	217 446 130		6	9	250		9	2.1	100		2.1	B8B	TT
7AG7	265 114 130		6	2	250	250	6	4.2	200	200	4.2	B8B	P
7AH7	265 114 130		6	2	250	250	6.8	3.3	100	150	3.3	B8B	P
7AJ7	265 104 130		6	3	250	100	2.2	1.575	100	100	1.5	B8B	P
7AK7	265 104 130		6	0	150	90	40	6.5	150	90	6	B8B	P
7AN7	147 234 116		7.5	1.5	90		12	6	100		6	B8A	TT
7AU7	741 226 413		3.5	8.5	250		10.5	2.2	100		2.2	B9A	TT
7B4	260 004 130		6	2	250		0.9	1.5	200		1.5	B8B	T
7B5	265 004 130		6	18	250	250	32	2.3	100	PenLF	2.3	B8B	P
7B6	264 *89 130		6	2	250		0.9	1.1	200		1.1	B8B	DDT
7B7	265 104 130		6	3	250	100	8.5	1.75	100	100	1.7	B8B	P
7B8	265 454 130		6	2	250	100		1.15	100	100	1.1	B8B	H
7C4	2*0 800 130		6				5		D			A08	R
7C5	265 002 130		6	12.5	250	250	45	4.1	100	PenLF	4.1	B8B	P
7C5LT	265 004 130		6	12.5	250	250	45	4.1	100	PenLF	4.1	B8B	P
7C6	264 198 130		6	1	250		1.3	1	250		1	B8B	DDT

VALVE	SELECTOR SWITCH No.	T.C.	V _f	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	I _a mA	mA/V	Anode Volts	Screen Volts	mA/V		
7C7	265 114 130		6	3	250	100	2	1.3	100	100	1.3	B8B	P
7D3	045 231 600		40	18	150	125	33	2.4	100	100	2.4	B7	P
7D5	045 231 600		13	16.5	250	250	34	2.35	100	PenLF	2.3	B7	P
7D6	045 231 600		40	6	250	250	32	10	100	PenLF	9	B7	P
7D7	076 451 130		6	3	250	100	1.3	0.27	125	100		B8B	TH
7D8	045 231 600		13	6	250	250	32	10	100	PenLF	9	B7	P
7D9	412 360 500		6	13.5	250	250	16	2.6	100	PneLF	2.6	B7G	P
7D9	045 231 600		13	25	250	250	32	1.8	100	PenLF	1.8	B7	P
7D10	*41 230 651		6	4.5	250	250	40	11	100	150	9	B9A	P
7E5	426 141 630		6	3	175		5.5	3	150		3	B8B	T
7E6	264 *98 130		6	8	250		9.5	1.9	100		1.9	B8B	DDT
7E7	269 854 130		6	3	250	100	7.5	1.3	100	100	1.3	B8B	DDP
7F7	217 446 130		6	2	250		2.3	1.6	200		1.6	B8B	TT
7F8	427 116 340		6	3	250		6	3.3	200		3.3	B8B	TT
7F16	261 154 130		6	2.5	250	100	6	2.2	100	100	2.2	B8A	P
7G7	265 114 130		6	2	250	100	6	4.5	100	100	4.6	B8B	P
7G8	265 441 730		6	2.5	250	100	4.5	2.1	100	100	2.1	B8B	PP
7H6	265 114 130		6	2.5	250	150	9.5	3.5	100	150	3.5	B8B	P
7H7	265 114 130		6	2	250	150	10	4.2	100	150	4.2	B8B	P
7J7	276 454 130		6	$\begin{Bmatrix} 3 \\ 3 \end{Bmatrix}$	$\begin{Bmatrix} 150 \\ 250 \end{Bmatrix}$	$\begin{Bmatrix} 100 \\ 100 \end{Bmatrix}$	$\begin{Bmatrix} 6.6 \\ 1.4 \end{Bmatrix}$	$\begin{Bmatrix} 1.4 \\ 1.4 \end{Bmatrix}$	$\begin{Bmatrix} 150 \\ 100 \end{Bmatrix}$	$\begin{Bmatrix} 60 \\ 100 \end{Bmatrix}$	$\begin{Bmatrix} 1.4 \\ 1.4 \end{Bmatrix}$	B8B	TH
7K7	216 498 130		6	2	250		2.3	1.6	200		1.6	B8B	DDT
7L7	265 104 130		6	1.5	250	100	4.5	3.1	100	100	3.1	B8B	P
7N7	217 446 130		6	8	250		9	2.6	100		2.6	B8B	TT
7Q7	266 414 130		6	2	100		15	6	100		4.5	B8B	H
7R1	280 300 000		7.5				60		REC		20mA	UX4	R
7R7	269 854 130		6	1	250	100	6.2	3.4	100	100	3.4	B8B	DDP
7S7	276 454 130		6	$\begin{Bmatrix} 1 \\ 2 \end{Bmatrix}$	$\begin{Bmatrix} 100 \\ 250 \end{Bmatrix}$	$\begin{Bmatrix} 100 \\ 100 \end{Bmatrix}$	$\begin{Bmatrix} 4.8 \\ 4 \end{Bmatrix}$	$\begin{Bmatrix} 1.4 \\ 2 \end{Bmatrix}$	$\begin{Bmatrix} 100 \\ 100 \end{Bmatrix}$	$\begin{Bmatrix} 60 \\ 100 \end{Bmatrix}$	$\begin{Bmatrix} 1.65 \\ 2.0 \end{Bmatrix}$	B8B	TH
7T7	265 104 130		6	1	250	150	10.8	4.9	100	150	4.9	B8B	P
7V7	265 114 130		6	2	300	150	10	5.8	100	150	5.8	B8B	P
7W7	265 114 130		6	2	300	150	10	5.8	100	150	5.8	B8B	P
7X6	218 009 130		6				30		REC		15mA	B8B	RR
7X7	264 189 130		6	1	250		1.9	1.5	250		1.5	B8B	DDT
7Y4	208 009 130		6				30		REC		15mA	B8B	RR
7Z4	209 008 130		6				60		REC		20mA	B8B	RR
8A1	041 231 500	A	4	1.5	200	75	3.5	4	100	75	4	B7	P
8A1	542 310 000	A	4	1.5	200	75	3.5	4	100	75	4	B5	P
8A2	542 310 000	A	4	2.1	200	100	3	2.4	100	100	2.4	B5	P
8A8	645 237 114		9	$\begin{Bmatrix} 2.0 \\ 2.0 \end{Bmatrix}$	$\begin{Bmatrix} 100 \\ 175 \end{Bmatrix}$	$\begin{Bmatrix} 100 \\ 175 \end{Bmatrix}$	$\begin{Bmatrix} 14.0 \\ 10.0 \end{Bmatrix}$	$\begin{Bmatrix} 5.0 \\ 6.2 \end{Bmatrix}$	$\begin{Bmatrix} 100 \\ 100 \end{Bmatrix}$	$\begin{Bmatrix} 60 \\ 150 \end{Bmatrix}$	$\begin{Bmatrix} 5.0 \\ 6.0 \end{Bmatrix}$	B9A	TP
8D2	061 231 500	G ₁	13	3	250	100	2	1.25	100	100	1.25	B7	P
8D3	412 361 500		6	2	250	250	10	7.5	100	150	5	B7G	P
8D4	026 510 310	G ₁	6	2	250	100	3	1.8	100	100	1.8	A08	P
8D5	041 230 651		6	3	250	100	2	1.225	100	100	1.2	B9A	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
8D6	141 230 651		6	2-0	175	175	10-0	2-5	100	100	2-5	B9A	P
8D7	001 230 651	G ₁	6	3	250	100	2	1-25	100	100	1-2	B9A	P
8G140	892 300 000		8				60		REC		20mA	B4	RR
9A1	045 231 500	A	4	1-5	200	75	5	4-25	100	75	4-2	B7	P
9A1	542 310 000	A	4	1-5	200	75	5	4-25	100	75	4-2	B5	P
9A3	061 231 500	G ₁	4	2	250	125	10	1-8	100	100	1-8	B7	P
9A8	645 237 114		9	2	100		14	5	100	60	5	B9A	TP
				2	175	175	10	6-2	150	150	10		
9AK8	†91 238 146		9-5	2-3	200		1-0	1-4	100		1-4	B9A	DDDT
9AQ8	641 237 410		9	2-1	200		10	5-8	200		5-8	B9A	TT
9BM5	412 365 400		9	6	250	250	30	7				B9A	P
9BW6	*41 130 651		9	12-5	250	250	45	4-1	100	150	4	B9A	P
9D2	061 231 500	G ₁	13	3	250	125	10-5	1-65	100	100	1-8	B7	P
9D6	412 361 500		6	2-5	250	200	8	2-5	100	100	2-5	B7G	P
9J6	762 344 100		9		100		8-5	5-3				B7G	TT
9P9	412 365 400		9	6	250	250	30	7				B9A	P
9U8	645 237 114		9-5	1-0	150		18-0	8-5	100	60	8-5	B9A	TP
				1-0	250	100	10-0	5-2	100	100	5-0		
10	264 300 000		7-5	32	350		16	1-55	100		1-55	UX4	T
10C1	276 454 130		28	3-3	100		6	3	100	60	3	B8A	TH
				2-5	175	100	8	2-5	100	100	2-5		
10C2	276 454 130		28	3-3	100		6-0	3-0	100	60	3-0	B8A	TP
				1-5	175	100	3-0	5-0	100	100	5-0		
10D1	892 310 000		13				5		D			B5	RR
10D2	192 310 800		19				5		D			B7G	RR
10F1	261 514 130		22	1-8	200	200	10	9	100	150	7	B8A	P
10F3	260 154 130		22	2-35	200	200	6	6-5	100	150	7	B8A	P
10F9	260 154 130		13	2-5	175	100	7	2-3	100	100	2-3	B8A	P
10F18	141 230 651		13	1-3	175	100	12	4-5				B9A	P
10LD3	264 098 130		14	1-1	150		0-5	1-95	150		1-9	B8A	DDT
10LD11	264 098 130		15	5-9	250		5	2-3	100		2-3	B8A	DDT
10P13	260 054 130		30	6-0	150	150	29	7-5	100	100	6-0	B8A	P
10P14	026 540 310		40	11	200	200	40	7-4	100	PenLF	6	A08	P
11	362 400 000		1-1	4-5	90		2-5	0-425	80		0-4	UX4	T
11A2	908 231 600	G ₁	4	2	200		3	2-8	150		2-8	B7	DDT
11D3	908 231 600	G ₁	13	2	250		0-4	1-1	200		1-1	B7	DDT
11D5	908 231 600	G ₁	13	3	250		3-8	1-5	150		1-5	B7	DDT
11E1	216 540 030		6		250	250	50	7-3	100	100	7	M08	P
11E2	020 540 310	A	6		200	200	25	9	100	150	8	A08	P
11E8	200 647 310	G ₁	11		150		20		100			A08	TT
11X5	028 090 310		11				30		REC		15mA	A08	RR
12	364 200 000		1-1	4-5	90		2-5	0-425	80		0-4	UX4	T
12A	264 300 000		5	4-5	90		5	1-5	80		1-5	UX4	T
12A4	142 330 406		6	9-0	250		3-0	8-0	250		8-0	B9A	T
12A5	265 413 200		6	15	100	100	17	1-7	100	90	1-7	UX7	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
12A6	026 540 310		12-5	12-5	250	250	30	3	100	PenLF	3	A08	P
12A7	265 181 300	G ₁	12-5	{ 12-5	150	150	9	0-975	100	100	0-9	} Sm7	RP
12A8	026 545 310	G ₁	12-5		250	100	3-5	1-15	100	100	1-1		H
12AB5	504 234 156		12		250	250	45-0	4-1	250	200	4-0	B9A	P
12AC5	26* *54 130		12	3	200	125	7-2	2-3	100	150	2-3	B8A	P
12AH7	417 146 230		12-5	3-6	100		3-7	1-55	80		1-55	A08	TT
12AH8	541 227 463		6	{ 0	100		5-7	3-5	100	60	3-5	} B9A	TH
12AK7	741 226 413		6		250	100	2-6		100	100			
12AL5	192 310 800		12-5		250		1-2	1-6	150		1-6	B9A	TT
12AQ5	412 365 400		12-5	12-5	250	250	45	4-1	100	150	4	B7G	RR
12AS5	142 345 600		12	8-5	150	100	35	5-6	150	100	5-6	B7G	P
12AT6	412 389 600		12-5	3	250		1	1-2	200		1-2	B7G	DDT
12AT7	741 226 413		6	2	250		10	5-5	200		5	B9A	TT
12AU4	001 080 230		12				120		REC		40mA	A08	R
12AU6	412 365 100		12-5	1	250	150	10-8	5-2	100	100	5-2	B7G	P
12AU7	741 226 413		6	8-5	250		10-5	2-2	100		2-2	B9A	TT
12AV5	421 060 350		12	22-5	250	150	57	5-9	100	100	5-8	A08	P
12AV6	412 389 600		12-5	2	250		1-2	1-6	150		1-6	B7G	DDT
12AV7	741 226 413		6	1-0	150		18	8-5	100		7	B9A	TT
12AW6	412 365 100		12-5	1-5	250	150	7	5	100	PenLF	5	B7G	P
12AW7	412 365 100		12-5	1-8	250	150	7	5	100	150	5	B7G	P
12AX4	001 080 230		12-5				120		REC		35mA	A08	R
12AX7	741 226 413		6	2	250		1-2	1-6	150		1-6	B9A	TT
12AY7	641 227 413		6	4	250		3	1-75	100		1-7	B9A	TT
12AZ7	741 226 413		12	2-0	250		10-0	5-5	100		5-5	B9A	T
12B4	142 330 406		6	17-5	150		34-0	6-4	150		6-3	B9A	T
12B6	026 080 310	G ₁	12-5	2	250		0-9	1-1	150		1-1	A08	DT
12B7	265 104 130		12-5	3	250	100	9-2	2	100	100	2	B8B	P
12B8	127 561 340	G ₁	12-5	{ 0	90	0	2-8	2-4	80	60	2-4	} A08	TP
12BA6	412 365 100		12-5		90	90	7	1-8	90	90	1-8		
12BA7	641 231 106		12-5	1	250	100	11	4-4	100	100	4-4	B7G	P
12BD6	412 365 100		12-5	2	100		18	7	100		7	B9A	H
12BE6	412 366 100		12-5	3	250	100	9	2	100	100	2	B7G	P
12BF6	412 366 100		12-5	2	100		11	7	100		5	B7G	H
12BF6	412 398 600		12-5	9	250		9-5	1-9	100		1-9	B7G	DDT
12BH7	741 226 413		6	10-5	250		11-5	3-1	100		4	B9A	TT
12BK5	604 231 450		12	5-0	250	250	35-0	8-5	100	150	8-0	B9A	P
12BK6	412 389 600		12-5	2	250		1-2	1-6	150		1-6	B7G	DD
12BN6	142 354 600		12-5	1	60	60	0-25	1	80	60	1	B7G	P
12BQ6	020 540 310	A ₁	12	22-5	250	150	57	5-9	100	100	5	A08	P
12BT6	412 389 600		12-5	3	250		1-0	1-2	150		1-2	B7G	DDT
12BU6	412 389 600		12-5	9	250		9-5	1-9	150		1-9	B7G	DDT
12BY7	141 223 651		6	2-1	250	150	25	12-0	150	100	10-0	B9A	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
12BZ7	741 226 413		6	2.0	250		2.5	3.2	100		3.0	B9A	TT
12C5	142 345 500		12	7.5	125	100	49	7.5	100	90	6	B7G	P
12C8	026 985 310	G ₁	12.5	3	250	125	10	1.325	100	100	1.3	A0B	DDP
12CA5	142 345 600		12	4.5	125	125	36	9.2	100	100	8	B7G	P
12CM6	504 234 106		12	12.5	250	250	45	4.1				B9A	P
12CS6	112 365 400		12	1	100	30	0.8	1.5	No Data Available			B7G	P
12CU6	020 540 310	A ₁	12	22	250	150	57	5.9				A0B	P
12DQ6	020 540 310	A ₁	12	22.5	250	150	75	6.6	100	100		A0B	P
12E1	020 540 310	A ₁	6	18	150	150	100	9.6	100	100	10	A0B	P
12E5	026 040 310		12.5	13.5	250		5	1.45	100		1.4	A0B	T
12E8	027 546 310	G ₁	12	{ 2	100		3.3		100	60		A0B	TH
12F	280 300 000		5		100	100	3	0.56	100	100	0.56		
12F5	020 600 310	G ₁	12.5	2	250		0.9	1.5	150		1.5	A0B	T
12G7	026 980 310	G ₁	12.5	3	250				D			A0B	DD
12G8	714 226 143		6										
12H4	623 364 100		6	8	250		9	2.6	90		3	B7G	T
12H6	029 180 310		12.5						D			A0B	DD
12J5	026 040 310		12.5	8	250		9	2.6	100		2.6	A0B	T
12J7	026 510 310	G ₁	12.5	3	250	100	2	1.225	100	100	1.2	A0B	P
12K7	026 510 310	G ₁	12.5	3	250	125	10.5	1.65	100	100	1.6	A0B	P
12K8	027 546 310	G ₁	12.5	{ 1 3	100		8	2.5	100	60	3	A0B	TH
12L6	026 540 310		12		250	100	4	1.2	100	100	1.6		
12L8	414 752 360		12.5	8.25	200	125	46	8.0	100	100	8.0	A0B	P
12M7	026 510 310	G ₁	12	9	175	175	13	2.15	100	100	2.1	A0B	PP
12NK7	026 510 310	G ₁	12.5	2.5	100	100	6	2.2	100	100	2.2	A0B	P
12O7	026 510 310	G ₁	12.5	2	250	100	5	2.3	100	100	2.3	A0B	P
12O7	026 980 310	G ₁	12.5	3	250		1	1.2	150		1.2	A0B	DDT
12S7	268 154 130		13	2	200	90	5	2	100	100	1.9	B8A	DP
12S8	118 916 230	G ₁	12.5	2	250		0.9	1.1	150		1.1	A0B	DDDT
12SA7	126 641 340		12.5	3.6	100		12	4.3	100		4.5	A0B	H
12SA7G	026 641 340		11.5	3.6	100		12	4.3	100		4.5	A0B	H
12SC7	074 461 230		12.5	2	250		2	1.325	150		1.3	A0B	TT
12SF5	014 060 320		12.5	2	250		0.9	1.5	150		1.5	A0B	T
12SF7	041 586 230		12.5	1	250	100	12.9	2.05	100	100	2	A0B	DP
12SG7	021 415 360		12.5	1	250	125	11.8	4.7	100	100	4.7	A0B	P
12SH7	021 415 360		12.5	1	250	150	10.8	4.9	100	150	4.9	A0B	P
12SJ7	021 415 360		12.5	3	250	100	3	1.65	100	100	1.6	A0B	P
12SK7	021 415 360		12.5	3	250	100	9.2	2	100	100	2	A0B	P
12SL7	461 471 230		12.5	2	250		2.3	1.6	150		1.6	A0B	TT
12SN7	461 471 230		12.5	8	250		9	2.6	100		2.6	A0B	TT
12SQ7	041 896 230		12.5	2	250		0.9	1.1	150		1.1	A0B	DDT
12SR7	041 986 230		12.5	9	250		9.5	1.9	100		1.9	A0B	DDT
12SS7	021 415 360		12.5	3	250	100	9	1.85	100	100	1.8	A0B	P
12SW7	041 986 230		12.5	9	250		9.5	1.9	100		1.9	A0B	DDT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
I25X7	471 461 230		12-5	8	250		9	2-6	100		2-6	A08	TT
I25Y7	126 641 340		12-5	1	100		22	4-5	100		4-5	A08	H
I2V6	026 540 310		12-5	12-5	250	250	45	4-1	100	150	4	A08	P
I2W6	026 540 310		12	9-5	150	150	58	8-0	100	100	8-0	A08	P
I2WC5	265 414 300		12	1-5	250	100			No Data Available			UX7	O
I2X3	210 300 000	D ₁	12-5				60		REC		20mA	UX4	R
I2X4	802 309 100		12-5				30		REC		15mA	B7G	RR
I2Y4	892 310 000		12				31		REC		15mA	UX4	RR
I2Z3	281 300 000		12-5				60		REC		20mA	UX4	R
I2Z5	281 319 200		6				30		REC		15mA	UX7	RR
I2ZDH3A	264 813 000		12	2	225		1-5	1-5	125		1-2	UX6	DT
I2ZPIA	265 413 000		12	9	200	200	30	0-3	100	PenLF		UX6	P
I3	298 300 000		5				60		REC		20mA	UX4	RR
I3BCIU	206 081 930	G ₁	12-5	1-8	200		3	2	150		2	B8B	DDT
I3BF2U	206 581 930	G ₁	12-5	2-1	200	200	5	2	100	200	2	B8B	DDP
I3DHA	908 231 600	G ₁	13	1-5	250		1	1-5	150		1-5	B7	DDT
I3DI	461 471 230		25	8	250		2	2-6	100		2-5	A08	TT
I3D2	461 471 230		6	8	250		9	2-6	100		2-6	A08	TT
I3D3	741 226 413		6	4-6	250		6	2-3	100		2-3	B9A	TT
I3F9U	206 501 130	G ₁	12-5	2-6	200	200	6-2	2-2	100	200	2-2	B8B	P
I3HI	023 110 560	G ₁	3	2	200	100	3	2	100	100	2	85C	P
I3H2	023 110 560	G ₁	13	3	200	100	8-2	1-8	100	100	1-8	85C	P
I3PGA	645 231 700	G ₁	13	20 3	200 250	100	4 3-5		100 100	60 100		B7	H
I35PA	061 231 500	G ₁	13	3	200	100	2-3	1-25	100	100	1-25	B7	P
I3VI	023 189 560	G ₁	13	8-5	200	200	45	4-4	100	PenLF	4	85C	DDP
I3VPA	061 231 500	G ₁	13	3	200	100	7	1-8	100	100	1-8	B7	P
I4	265 130 000	G ₁	14	3	250	90	4	1-05	100	90	1	UX5	P
I4A4	260 0*4 130		12-5	8	250		9	2-6	100		2-6	B8B	T
I4A5	265 004 130		12-5	12-5	250	250	30	3	100	PenLF	3	B8B	P
I4A7	265 104 130		12-5	3	250	100	9-2	2	100	100	2	B8B	P
I4AF7	216 447 130		12-5	9	250		9	2-1	100		2-1	B8B	TT
I4B6	264 *89 130		12-5	2	250		0-9	1-1	150		1-1	B8B	DDT
I4B8	265 454 130		12-5	2	250	100		1-15	100	100	1-1	B8B	P
I4C5	265 004 130		12-5	15	250	250	70		100	PenLF		B8B	P
I4C7	265 114 130		12-5	3	250	100	2-2	1-575	100	100	1-5	B8B	P
I4E6	264 *98 130		12-5	8	250		9-2	1-9	100		1-9	B8B	DDT
I4E7	269 854 310		12-5	3	250	100	7-5	1-3	100	100	1-3	B8B	DDP
I4F6	026 540 310		14	16-5	250	250	35	2-5	100	150	2-5	A08	P
I4F7	217 446 130		12-5	2	250		2-3	1-6	150		1-6	B8B	TT
I4F8	427 116 340		12-5	3	250		6	3-3	150		3-3	B8B	TT
I4H7	265 114 130		12-5	2	250	150	10	4-2	100	100	4-2	B8B	P
I4J7	276 454 130		12-5	3 3	150 250	100	6-6 1-4	1-4	100 100	60 100	1-4	B8B	TH

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
14K7	276 454 130		14	{ 1.85	100		10		100	60	2.8	B8A	TH
14L7	264 098 130		14		175	75	2.1	0.67	100	75	1.5		DDT
14N7	217 446 130		12.5	1.6	175		15	1.65	150		1.65	B8A	TT
14Q7	266 414 130		12.5	8	250		9	2.6	100		2.6	B8B	H
14R7	269 854 130		12.5	2	100		15	6	100		4.5	B8B	DDP
				1	250	100	6.2	3.4	100	100	3.4	B8B	
14S7	276 454 130		12.5	{ 1	100		4.8	1.4	100	60	1.6	B8B	TH
14V7	265 104 130		12.5		250	100	4	2	100	100	2.0		P
14W7	265 114 130		12.5	2	300	150	9.6	5.8	100	100	5.8	B8B	P
14X7	264 189 130		12.5	2.2	300	150	10	5.8	100	100	5.8	B8B	DDT
14Y4	208 009 130		12.5	1	250		1.9	1.5	150		1.5	B8B	RR
							30		REC		15mA	B8B	
14Z3	281 300 000		12.5				60		REC		20mA	UX4	R
15	265 130 000	G ₁	2	1.5	150	75	1.85	0.75	100	75	0.75	UX5	P
15	264 300 000		2.5	33	250		22	2.35	100		2.0	UX4	T
15A2	645 231 700	G ₁	4	{ 20	200		4		100	60		B7	H
15A6	541 231 600		15		3	250	100	3.5	100	100			P
				2.9	175	175	36	10	100	100	9	B9A	
15D1	645 231 700	G ₁	13	{ 20	200		4		100	60		B7	H
15D2	645 231 700	G ₁	13		3	250	100	3.5	100	100			H
				20	200		4		100	60		B7	
				3	250	100	3.5		100	100			
15X6	029 180 310		25				30		REC		15mA	A08	RR
16	280 300 000		7.5				60		REC		20mA	UX4	R
16A5	*41 23* 6*5		16	14.2	200	200	45	7.5	100	100	7	B9A	P
16A8	414 237 516		16	{ 11.5	100		3.5	3.0	100	60	3.0	B9A	TP
16D1	046 231 700		13		175	175	41	7.5	125	100			TT
17	264 130 000		14		300		45		100			B7	
17D1	869 231 500	G ₁	13	6	90		2.7	0.8	80		0.8	UX5	T
17N8	541 236 891		17	3	250	125	9	1.1	100	100	1.1	B7	DDP
					200	90	5	2.2	100	100	2	B9A	DDP
17Z3	*** 23* **8	C	17				120		REC		36mA	B9A	R
18	265 413 000		14	16.5	250	250	34	2.5	100	PenLF	2.5	UX6	P
18AK5	412 365 100		18	2.5	175	125	7.7	5.1	125	PenLF	5.1	B7G	P
18AQ5	412 365 100		18	7.2	175	175	28	3.5	100	125	3.5	B7G	P
18C51	214 607 413		18	2	150		8.2	5.5	150		5.5	B9A	TT
18J6	672 344 100		18	1	100		6.5	5	100		5	B7G	T
19AJ8	541 237 164		19	{ 3.0	100		5.0	2.3	100	60	2.3	B9A	TH
19AQ5	412 365 400		19		250	100	6.5	2.4	150	100	2.4		P
19AU4	**1 080 230		19	12.5	250	250	47	4.1	100	150	4	B7G	R
19BG6	021 040 350	A	19				120		REC		40mA	A08	P
				15	250	250	75	6.0	100	PenLF	6.0	A08	
19BY7	141 231 651		19	2	170	100	9.7	5.9	200	100	6	B9A	P
19C8	8†1 239 146		19	1	100		0.5	1.25	100		1.2	B9A	DDDT
19D8	541 237 464		19	{ 0	100		13.5	3.7	100	60	3.7	B9A	TH
					200	125	7.6	2.4	100	100	2.4		

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
19G3	020 000 300	D ₁	4				30		REC		17mA	A08	R
19G6	112 311 100	D ₁	4				30		REC		15mA	B7G	R
19H1	002 300 000	D ₁	4				60		REC		23mA	B4	R
19H4	020 000 300	D ₁	2.5				30		REC		13mA	A08	R
19J6	762 344 100		19	1	100		8.5	5.3	100		5.3	B7G	TT
19SU	**1 23* **8		19				120		REC		36mA	B9A	R
19T8	†91 238 146		19	3	250		1	1.2	150		1.2	B9A	DDDT
19U3	**1 23* **8		6				120		REC		40mA	B9A	R
19V8	681 234 †19		19	3	250		1	1.2	100		1.3	B94	DDDT
19W3	**1 23* *08		19				120		REC		35mA	B9A	R
19X3	**1 23* **8		19				120		REC		40mA	B9A	R
19X8	146 231 457		19	{ 1.0 1.8	100 250	150	8.5 7.7	5.8 4.6	100 100	60 150	5.0 4.0	B9A	TP
19Y3	**1 23* **8		19				120		REC		40mA	B9A	R
19	364 472 000		2	3	150		1.7		100			UX6	TT
20	364 200 000		3	16.5	90		3	0.415	80		0.4	UX4	T
20A1	645 231 700	G ₁	4	{ 12.5 1.5	100 250	75	2.3 2.2		100 100	60 75		B7	TH
20D1	182 310 900		9.5				5		D			B7G	RR
20D2	745 231 600	G ₁	13	{ 7.5 3	100 250	100	3.8 2.5		100 100	60 100		B7	TH
20D3	541 227 463		6	{ 1 3	100 250	100	3.6		100 100	60 100	3.6	B9A	TH
20F2	260 154 130		11	1.25	150	150	27	10.6	100	100	9.0	B8A	P
20J8	027 546 310	G ₁	20	{ 1.5 3	100 250	100	1.5 1.5		100 100	100		A08	H
20L1	274 164 130		12	12.0	250		10.0	2.8	100		2.8	B8A	TT
20P1	020 540 310	A	38	30	200	200	80	6	100	100	5	A08	P
20P2	020 540 310	A	38	7.5	225	225		13.5	100	100	10	A08	P
20P3	026 540 310		20	9.4	175	175	42	7.2	100	100	6	A08	P
20P4	020 540 310	A	38	33	200	200	70	10.0	No Data Available			A08	P
20P5	260 054 130		20	6.3	180	150	29	7.5	100	100	7.0	A08	P
21A6	*41 23* *51	A	21	28	200	200	40	6	100	100	5	B9A	P
21A7	276 454 130		21	{ 3 100	150 250	100	3.5 1.3		100 100	60 100		B8B	TH
21TH8	027 546 310		21	{ 2.5	200	90	4 3	2 0.75	100 100	60 90	2	A08	TH
22	365 200 000	G ₁	3	1.5	150	50	1.7	0.375	No Data Available			UX4	P
22AC	265 300 000	G ₁	2.5	3	90	90	4	1.05	80	90	1	UX4	P
24	264 300 000		2	13.5	175		8	1.6	100		1.2	UX4	T
24A	265 130 000	G ₁	2.5	3	175	90	4	1	100	90	1	UX5	P
24E	265 130 000	G ₁	2.5	3	175	90	4	1	100	90	1	UX5	P
24NG	281 193 000		40				30		REC		15mA	UX6	RR
24S	265 130 000	G ₁	2.5	3	175	90	4	1	100	90	1	UX5	P
25	542 300 000	A	2		150	75	2.5	1	100	75	1	B5	P
25	268 843 000		2	3	125		1	0.5	125		0.5	UX6	DDT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
25A6	026 540 310		25	18	150	125	33	2.375	100	100	2.3	A08	P
25A7	126 548 310		25	{ 15 0	100	100	60	1.8	REC		20mA	A08	RP
25ACID	206 008 030	G ₁	1.4		125		20.5	0.4	100	90	1.8		
25AV5GA	421 060 350		25		250	150	57	5.9	100	100	0.4	A08	DT
25AX4	001 080 230		25				120		REC		30mA	A08	R
25B6	026 540 310		25	22	150	150	61	5	100	100	5	A08	P
25B8	127 561 640	G ₁	25	{ 1.0 3.0	100		0.6	1.5	100	60	1.5	A08	TP
25BK5	604 231 450		25		100	100	7.6	2.0	100	100	2.0		
25BQ6	020 540 310		25		250	250	35	8.5	100	150	8	B9A	P
25C5	142 345 600	A	25	22.5	250	150	57	5.9	100	100	5	A08	P
			25	7.5	125	100	49	7.5	100	90	6	B7G	P
25C6	026 540 310		25	14	200	150	61	7.1	100	100	7	A08	P
25CA5	142 345 600		25	4.5	125	125	36	9.2	125	125	9.2	B7G	P
25CD6	021 040 350	A	25	30	175	175	75	7.5	100	100	7.5	A08	P
25CU6	020 540 310	A	25	22.5	250	150	57	5.9	100	100	6.0	A08	P
25D8	127 546 380	G ₁	25	{ 1.0 3.0	100		0.5	1.1	100	60	1.1	A08	DP
					100	100	8.5	1.9	100	100	1.9		
25DQ6	020 540 310	A ₁	25	22.5	250	150	75	6	100	100		A08	P
25E5	020 540 310	A ₁	25	21	175	175	100	11	No Data Available			A08	P
25FID	206 501 030	G ₁	1.4	2.5	125	125	1.2	0.72	100	100	0.7	A08	P
25L6	026 540 310		25	8.25	200	125	46	8	100	90	8	A08	P
25RE	281 193 000		25				30		REC		15mA	UX6	RR
25SN7	461 471 230		25	8	250		9	2.6	REC		2.5	A08	TT
25S	268 943 000		2	3	150		0.8	0.57	100		0.57	UX6	DDT
25T3G	020 000 310	D ₁ D ₂	25				60		REC		15mA	A08	RR
25U4	001 080 230		25				120		100		30mA	A08	R
25V5	028 190 310		25				60		REC		20mA	A08	RR
25W4	001 080 230		25				120		ERC		30mA	A08	R
25W6	026 540 310		25	8.5	250	125	46	8	100	100	8	A08	P
25W9	001 080 230		25				120		REC		30mA	A08	R
25X4	020 080 310		25				120		REC		30mA	A08	R
25X5	020 080 310		25				120		REC		30mA	A08	RR
25X6	028 190 310		25				30		REC		15mA	A08	RR
25Y4	020 080 310		25				60		REC		20mA	A08	R
25Y5	281 193 000		25				60		REC		20mA	UX6	RR
25Y5G	028 190 310		25				60		REC		20mA	A08	RR
25Y6	028 190 310		25				30		REC		15mA	A08	RR
25Z3	281 300 000		25				60		REC		20mA	UX4	R
25Z4	028 080 310		25				120		REC		30mA	A08	R
25Z5	291 183 000		25				60		REC		20mA	UX6	RR
25Z6	029 180 310		25				60		REC		20mA	A08	RR
26	264 300 000		1.5	10	150		5.5	1.1	100		1.1	UX4	T
26A6	412 365 100		26	1.8	250	250	10.5	4	100	100	4	B7G	P
26A7	414 752 360		26	4.5	30	30	20	5.5	No Data Available			A08	PP

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
26B6	026 540 310		35	18	250	125	33	2-375	100	90	2-3	A08	P
26BK6	412 389 600		26	2	250		1-2	1-6	150		1-6	B7G	DDT
26C6	412 398 600		26	9	250		9-5	1-9	100		1-9	B7G	DDT
26CG6	412 365 100		26		250	150	9	2	100	100		B7G	P
26D6	412 365 100		26	0	100	100	2-7	7-2	100	100	6	B7G	H
26NG	281 193 000		40				30		REC		15mA	UX6	RR
26Z6	801 239 010		26				60		REC		15mA	B9A	RR
27	264 130 000		2-5	21	250		5-2	0-95	100		0-95	UX5	T
275	264 130 000		2-5	21	250		5-2	0-95	100		0-95	UX5	T
275U	320 080 210		13				120		REC		30mA	A08	R
275V	230 080 310		13				180		REC		40mA	A08	R
28AK8	811 239 146		28	2	200		1-3	1-5	100		1-4	B9A	DDDT
28AX8	811 239 146		28	1-0	100		0-8	1-4	100		1-45	B9A	DDDT
28D7	245 671 430		28	3-5	30	30	12-5	3-4	No Data Available			B8B	PP
28Z5	208 009 130		28				60		REC		20mA	B8B	RR
29	264 413 000		2-5	3	175		4-5	1-45	100		1-4	UX6	T
29CI	220 283 330		4						D			A08	D
30	364 200 000		2	9	150		3	0-9	100		0-9	UX4	T
30CI	645 237 114		9	{ 2-0 2-0	100		14	5-0	100	60	5-1	B9A	TP
					175	175	10-0	6-6	100	150	6-0		
30GP9	026 543 100		30	19	200	100	45	3-5	100	100		A08	P
30LI	147 234 116		7-5	3-4	150		16-0	6-6	100		6-0	B9A	TT
30X	264 300 000		2	12-5	175		3-1	9-3	100		9	UX4	T
31	364 200 000		2	22-5	150		8	0-925	100		0-9	UX4	T
31A3	280 000 130		31				60		REC		20mA	B8A	R
32	365 200 000	G ₁	2	3	150	75	1-7	0-64	100	75	0-6	UX4	P
32E	365 200 000	G ₁	2	3	150	75	1-7	0-64	100	75	0-6	UX4	P
32L7	126 548 310		32-5	{ 5 14	90	90	38	6	REC 80	75	20mA 6	A08	RP
33	364 520 000		2		150	150	14-5	1-45	100	100	1-4		
33A/100A	020 440 310	A ₁ A ₂	6	14	300		10	3	No Data Available			A08	TT
33A/138A	204 140 300	A ₁ A ₂	6	7	250		15	3	100		3	UX7	TT
33A/158M	216 447 130		6	5	200		20	2-8	100		2-8	B8B	TT
34	365 200 000	G ₁	2	3	150	75	2-8	0-6	100	75	0-6	UX4	P
34E	365 200 000	G ₁	2	3	150	75	2-8	0-6	100	75	0-6	UX4	P
35	265 130 000	G ₁	2-5	3	250	90	6-5	1-05	100	75	1-05	UX5	P
35A5	265 004 130		35	8	200	100	41	5-9	100	90	5-9	B8B	P
35B5	412 365 400		35	7-5	125	100	40	5-8	100	90	5-8	B7G	P
35C5	142 345 600		35	7-5	125	100	40	5-8	100	90	5-8	B7G	P
35L6	026 540 310		35	7-5	200	100	40	5-8	100	90	5-8	A08	P
35QL6	451 236 154		35	11-5	175	175	52	9-5	100	100	8-3	B8A	P
35RE	281 193 000		35				60		REC		20mA	UX6	RR
355	265 120 000	G ₁	2-5	3	250	90	6-5	1-08	100	90	1-8	UX5	P
35W4	002 282 100		30				60		REC		20mA	B7G	R
35X4	**2 38* 100		35				60		REC		20mA	B7G	R

VALVE	SELECTOR SWITCH No.	T.C.	Vr	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
35Y4	280 200 130		27.5				60		REC		20mA	88B	R
35Y5	280 200 130		27.5				60		REC		20mA	88B	R
35Z3	280 000 130		35				120		REC		20mA	88B	R
35Z3LT	280 000 130		35				120		REC		30mA	88B	R
35Z4	020 080 310		35				120		REC		30mA	A08	R
35Z4GT	020 080 310		35				120		REC		30mA	A08	R
35Z5	022 080 310		27.5				60		REC		20mA	A08	R
35Z6	028 190 310		35				60		REC		20mA	A08	RR
36	265 130 000	G ₁	6	3	250	90	3.2	1.08	100	90	1.08	UX5	P
37	264 130 000		6	18	250		7.5	1.1	100		1.1	UX5	T
38	265 130 000	G ₁	6	18	175	175	14	1.05	100	100	1.05	UX5	P
39	265 130 000	G ₁	6	3	175	90	5.8	1	100	90	1	UX5	P
40	364 200 000		5	1.5	175		0.2	0.2	150		0.2	UX4	T
40PPA	045 231 600		40	25	150	150	36	4	100	100	4	B5	P
40SUA	802 310 000		40				60		REC		20mA	B5	R
40Z5	022 080 310		35				120		REC		30mA	A08	R
41	265 413 000		6	18	250	250	32	2.3	100	100	2.3	UX6	P
41E	265 413 000		6	18	250	250	32	2.3	100	100	2.3	UX6	P
41FP	642 310 000		4	18	250		19	2.8	100		2.8	B5	T
41M	026 540 310		6	18	250	250	32	2.3	100	PenLF	2.3	A08	P
41MDG	652 310 000	G ₁	4	0	150	100		0.25	150	100	0.25	B5	P
41MH	642 310 000		4	1.5	200		3.2	4	150		4	B5	T
41MHF	642 310 000		4	2	150		2.5	2.8	125		2.8	B5	T
41MHL	642 310 000		4	3	200		4	4.5	150		4.5	B5	T
41MLF	642 310 000		4	4.5	175		7.5	1.9	125		1.9	B5	T
41MP	642 310 000		4	7.5	200		24	7.5	100		7	B5	T
41MPG	545 231 600	G ₁	4	1.5	250	100	3.3		100	100		B7	H
41MPT	041 231 500	A ₁	4	1.5	250	100	12	4.8	100	100	4.8	B7	P
41MRC	642 310 000		4	1	200		2.5	2.6	150		2.6	B5	T
41MSG	465 230 574		4	1.5	125	60	0.8	2.5	100	60	2.5	B9	PP
41MTA	642 310 000		4	1	100		4.9	4	100		4	B5	T
41MTB	642 310 000		4	1	100		3.6	2.6	100		2.6	B5	T
41MTL	642 310 000		4	2.5	200		5.9	3	100		3	B5	T
41MTS	645 231 700		4	1	250	100	5	1.6	100	100	1.6	B7	PP
41MVSG	542 310 000	A ₁	4	1.5	200	100	3	2	100	100	2	B5	P
41MXP	642 310 000		4	12.5	200		40	7.5	100		7	B5	T
41STH	645 231 700	G ₁	4	1.5	100		2		100	60		B7	TH
				1.5	200	60	1		100	60			
42	265 413 000		6	16.5	250	250	34	2.5	100	PenLF	2.5	UX6	P
42E	265 413 000		6	16.5	250	250	34	2.5	100	PenLF	2.5	UX6	P
42MP/Pen	045 231 600		4	5.5	250	250	32	7	100	PenLF	7	B7	P
42MPT	041 231 500	A	4	3	200	200	34	8.5	100	PenLF	8	B7	P
42/OT	045 231 600		4	5.5	250	275	34	7	100	PenLF	7	B7	P
42/OTDD	968 231 500	G ₁	4	5.5	250	250	34	7	100	PenLF	7	B7	DDP
42PTB	061 231 500	G ₁	4	3	200	200	34	8.5	100	150	8	B7	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
42SPT	04I 23I 500	A	4	10.5	250	250	64	11	100	PenLF	10	87	P
43	265 413 000		25	18	150	125	33	2.375	100	100	2.3	UX6	P
43E	265 413 000		25	18	150	125	33	2.375	100	100	2.3	UX6	P
43MG	026 540 310		25	18	250	125	33	2.375	100	100	2.3	A08	P
43IU	892 300 000		4				60		REC		20mA	B4	RR
44	265 130 000	G ₁	6	3	175	90	5.8	1	100	90	1	UX5	P
44A/160M	24I 657 143		6	14	250	150	30	3.9	100	100	3	B9G	PP
44IU	892 300 000		4				60		REC		20mA	B4	RR
44SU	802 300 000		4				30		REC		15mA	B4	R
45	264 300 000		2.5	50	250		34	2.175	100		2.1	UX4	T
45A	264 300 000		2.5	68	325		43	2.37	100		2.37	UX4	T
45A5	26* 54 130		45	9	175	175	54	9.5	100	100	7	B8A	P
45IU	892 300 000		4				120		REC		30mA	B4	RR
45LIU	206 540 130		45	13	200	200	45	7.5	100	100	7	A08	P
45Z3	28* 108 300		45				60		REC		20mA	B7G	R
45Z5	022 080 310		37.5				60		REC		20mA	A08	R
46	264 630 000		2.5	33	250		22	2.35	100		2.3	UX5	T
47	264 530 000		2.5	16.5	250	250	31	2.5	100	PenLF	3.8	UX5	P
48	265 413 000		30	10	100	100	52	3.8	100	90	3.8	UX6	P
49	264 630 000		2	20	125		6	1.125	100		1.1	UX5	T
50	264 300 000		7.5	70	400		55	2.1	100		2.1	UX4	T
50A5	265 004 130		50	7.5	125	100	49	8	100	90	7	B8B	P
50AX6	028 190 310		50				120		REC		30mA	A08	RR
50CID	206 089 030	G ₁	1.4	1.5	100		1.5	0.92	100		0.92	A08	DDT
50B5	412 365 400		50	7.5	125	100	49	7.5	100	90	6	B7G	P
50C5	142 345 600		50	7.5	125	100	49	7.5	100	90	6	B7G	P
50C6	026 540 310		50	13.5	150	150	58	7	100	100	7	A08	P
50CD6	021 040 350	A	52	30	175	175		7.5	100	100	7	A08	P
50F2D	206 501 030	G ₁	1.4	1.5	100	125	1.4	1	100	100	1	A08	P
50LID	206 540 030		1.4	4.5	100	125	4.8	1	100	100	1	A08	P
50L6	026 540 310		50	8.25	200	125	46		100	75	8	A08	P
50X6	219 008 130		50				60		REC		20mA	B8B	RR
50YIU	388 208 120		45				120		REC		30mA	A08	R
50Y6	029 180 310		50				60		REC		20mA	A08	RR
50Y7	028 193 310		46				60		REC		20mA	A08	RR
50Z6	029 180 310		50				120		REC		30mA	A08	RR
50Z7	029 183 310		48				60		REC		20mA	A08	RR
51	265 120 000	G ₁	2.5	3	250	90	6.5	10.5	175	90	10.2	UX5	P
52	264 530 000		6	1	125	100	41	2	125	100	2	UX5	P
52CD6	021 040 350	A	52									A08	P
52KU	030 908 020		5				60		REC		20mA	A08	RR
53	274 146 300		2.5	5	250		6	3.1	100		3.1	UX7	TT
53KU	030 908 020		5				120		REC		30mA	A08	RR
54KU	030 908 020		5				120		REC		30mA	A08	RR
55	269 813 000	G ₁	2.5	20	250		8	1.1	100		1.1	UX6	DDT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
55A/165M	245 761 430		12	15	150	150	60	4	100	100		B8G	PP
56	264 130 000		2.5	13.5	250		5	1.45	100		1.45	UX5	T
56AS	264 130 000		6	13.5	250		5	1.45	100		1.45	UX5	T
57	265 113 000	G ₁	2.5	3	250	100	2	1.225	100	100	1.2	UX6	P
57AS	265 113 000	G ₁	6	3	250	100	2	1.22	100	100	1.2	UX6	P
58	265 113 000	G ₁	2.5	3	250	100	8	1.5	100	100	1.5	UX6	P
58AS	265 113 000	G ₁	6	3	250	100	8	1.5	100	100	1.5	UX6	P
59	265 411 300		2.5	18	250	250	35	2.5	100	PenLF	2.5	UX7	P
59B	265 410 300		2.5	26	250	250	26	6	100	PenLF	6	UX7	P
60/250	892 300 000		4				30		REC		15mA	B4	RR
61BT	200 540 310	A	6	20	200	200	40	4	100	100	4	A08	P
61SPT	520 604 310		6	10.5	250	250	64	11	100	PenLF	9	A08	P
61SPT	021 540 310	A	6	10.5	250	250	64	11	100	PenLF	9	A08	P
62BT	020 540 310	A	6	18	175	175	100	10	100	100	9	A08	P
62DDT	264 098 130		6	3	250		1.0	1.3	150		1.3	B8A	DDT
62TH	276 454 130	G ₁	6	{ 2	100		5	2.2	100	60	2.6	B8A	TH
62VP	261 154 130		6	2.5	150	100	8	2	100	100	3.5		
63	020 540 230	A ₁	1.2	22.5	250	125	25		100	100	2	A08	P
63SPT	256 101 403		6	2	250	250	10	6.5	100	PenLF	6	B9G	P
63TP	641 237 154		6.3	{ 2.3	100		4	1.9	100	60	1.4	B9A	TP
				8	200	200	17	3.3	100	150	3		
64	265 130 000	G ₁	6	3	175	90	3.1	1.05	100	90	1.05	UX5	P
64SPT	141 230 651		6.3	2	175	175	10	7.4	100	100	6	B9A	P
65	265 130 000	G ₁	6	3	175	90	4.5	1	100	90	1	UX5	P
66KU	280 009 130		6				30		REC		15mA	B8A	RR
67	264 130 000		6	9	150		5	1.1	100		1.1	UX5	T
67PT	261 054 130		6	7	250	250	36	10	100	50	9	B8A	P
68	265 130 000	G ₁	6	13.5	150	90	14	1.4	100	75	1.4	UX5	P
69	264 413 000		6	3	175		4.5	1.45	150		0.5	UX6	T
70	264 413 000		6	6	175		2.3	0.5	150		0.5	UX6	T
70A7	126 548 310		70	{ 7.5	125	100	60		REC		15mA	A08	RP
							40	5.8	100	90	5.8		
70L7	126 541 380		70	{ 7.5	125	100	60		REC		20mA	A08	RP
							40	7.5	100	90	6.5		
71	264 300 000		5	40	175		20	1.7	100		1.7	UX4	T
71A	264 300 000		5	16.5	90		10	1.4	80		1.4	UX4	T
71B	264 300 000		5	40	175		20	1.7	100		1.7	UX4	T
72	300 200 000	D ₁	2.5				30		REC		15mA	UX4	R
73	*2* 0** 3*0	D ₁	2.5				15		REC		10mA	A08	R
75	269 813 000	G ₁	6	2	250		0.9	1.1	150		1.1	UX6	DDT
76	264 130 000		6	13.5	250		5	1.45	100		1.4	UX5	T
77	265 113 000	G ₁	6	3	250	100	2.3	1.25	100	100	1.2	UX6	P
77E	265 113 000	G ₁	6	3	250	100	2.3	1.25	100	100	1.2	UX6	P
78	265 113 000	G ₁	6	3	250	125	10.5	1.65	100	100	1.6	UX6	P
78E	265 113 000	G ₁	6	3	175	75	4	1.1	100	75	1.1	UX6	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
79	274 163 000	G ₁	6	0	250		5.3	1.8	150		1.8	UX6	TT
80	298 300 000		5				60		REC		20mA	UX4	RR
80M	289 300 000		5				60	REC			20mA	UX4	RR
81	280 300 000		7.5				60		REC		20mA	UX4	R
81M	280 300 000		7.5				60		REC		20mA	UX4	R
82	289 300 000		2.5				60		REC		20mA	UX4	RR
82V	389 200 000		2.5				60		REC		20mA	UX4	RR
83	289 300 000		5				120		REC		30mA	UX4	RR
83V	398 200 000		5				60		REC		20mA	UX4	RR
84	289 130 000		6				30		REC		15mA	UX5	RR
85	269 813 000	G ₁	6	20	250		8	1.1	100		1.1	UX6	DDT
85AS	268 913 000	G ₁	6	20	250		8	1.11	100		1.1	UX6	DDT
85S	268 913 000	G ₁	6	10.5	250		3.7	0.75	125		1.1	UX6	DDT
88	289 300 000	G ₁	5				60		REC		20mA	UX4	RR
89	265 113 000		6	10	100	100	9.5	1.2	100	90	1.2	UX6	P
90	264 413 000		2.5	0	150		3.5	1.4	150		1.4	UX6	T
90AC	642 610 000		4	12.5	200		40	7.5	100		7	B5	T
92	264 413 000		6	0	250		3.5	1.4	100		1.4	UX6	T
95	265 413 000		2.5	20	325	300	42	2.3	100	PenLF	2.3	UX6	P
96	281 300 000		10				120		REC		30mA	UX4	R
98	289 130 000		6				30		REC		15mA	UX5	RR
99V	426 300 000		3.3	4.5	90		2.5	0.42	100		0.42	UX4	T
99X	264 300 000		3.3	4.5	90		2.5	0.42	100		0.42	UX4	T
100AC	642 310 000		4	6	200		5	2	100		2	B5	T
104V	642 310 000		4	1	100		15	3.5	100		3.5	B5	T
112A	364 200 000	A ₁ G ₁	5	4.5	90		5	1.575	80		1.5	UX4	T
114	020 000 300		1.4		175		15		100			A08	T
114B	020 000 300		1.4	4.0	175		12	1.1	100		1.1	A08	T
116/Pen	005 231 600		11.5	1	100	100		7	100	100	6	B7	P
117L7	126 458 310		117	{ 5.2	100	100	60 43		REC 100		20mA 5.3	A08	RP
117M7	126 458 310		117	{ 5.2	100	100	60 43		REC 100	90	20mA 5.3	A08	RP
117Z3	*02 381 000		117				60		REC		20mA	B7G	R
117Z4	020 080 310		117				60		REC		20mA	A08	R
117Z6	029 180 310		117				60		REC		20mA	A08	RR
120	642 310 000		2	12	150		12		100			B5	T
121VP	26* *54 130	A	12.5	3.0	200	126	7.2	2.3	100	150	2.3	B8A	P
124AC	542 310 000		4	1.4	200	60	1.6	0.9	100	60	0.9	B5	P
141DDT	264 089 130		14	1.55	170		1.5	1.65	100		1.5	B8A	DDT
141TH	276 454 130		14	{ 2 2	100 250	100	5.0 8.0	2.0 2.2	100 100	60 75	2.8 1.5	B8A	TH
142BT	026 540 310		14	8.5	200		29	3.7	100	100	3.7	A08	P
144V	642 310 000		4	8	200		6	1.4	100		1.4	B5	T
154V	642 310 000		4	6	200		9	2	100		2	B5	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
164V	642 310 000		4	9	200		12	3.4	100		3.4	B5	T
171DDP	541 236 891		17	2	200	125	5	2.2	100	100	2	B9A	DDP
181	264 300 000		3	30	175		16	1.05	100		1.05	UX4	T
182A	264 300 000		5	45	200		18	1.5	100		1.5	UX4	T
182B	264 300 000		5	35	250		18	1.5	100		1.5	UX4	T
182B	264 300 000		5	35	250		18	1.5	100		1.5	UX4	T
183	264 300 000		5	60	250		30	1.7	100		1.7	UX4	T
185BT	020 540 310	A	18	18	175	175	100	9.5	100	100	8	A08	P
185BTA	020 540 310	A ₁	18	18	175	175	100	9.5	100	100	8	A08	P
200A	264 300 000		5	0	50		1.5	0.67	No Data Available			UX4	T
202DDT	809 231 600	G ₁	20	3	200		3	2.4	150		2.4	B7	DDT
202MPG	545 231 600	G ₁	20	1.5	200	100	3.0		100	100		B7	H
202SPB	061 231 500	G ₁	20	1.5	250	100	4.8	2.8	100	100	2.8	B7	P
202STH	645 231 700	G ₁	20	1.5	100		2		100	60		B7	TH
				1.5	200	60	1		100	60			
202VP	041 231 500	A	20	1.5	250	100	4.3	2.2	100	100	2.2	B7	P
202VPB	061 231 500	G ₁	20	1.5	250	100	4.3	2.2	100	100	2.2	B7	P
203THA	545 231 600	G ₁	20	2	250	100	3.5		100	100		B7	H
205D	264 300 000		4.5	29	400		30		No Data Available			UX4	T
205E	264 300 000		4.5	22.5	350		29	1.94	No Data Available			UX4	T
205F	264 300 000		4.5	18	300		31	1.75	No Data Available			UX4	T
210DDT	682 390 000	G ₁	2	1	100		2.3	1.1	100		1.1	B5	DDT
210DET	642 300 000		2	4.5	150		3	1.1	100		1.1	B4	T
210HF	642 300 000		2	3	150		1.6	1.5	100		1.5	B4	T
210HL	642 300 000		2	3	150		1.6	1.1	100		1.1	B4	T
210LF	642 300 000		2	4.5	150		4.8	1.4	100		1.4	B4	T
210PG	642 230 700	G ₁	2	0	150	40	1.1		No Data Available			B7	H
				1.5	150		0.4						
210RC	642 300 000		2	1.5	150		0.85	0.8	150		0.8	B4	T
210SPG	645 230 700	G ₁	2	0	150	40	1.1		No Data Available			B7	H
				1	150		0.4						
210SPT	041 230 500	A	2	1	150	60	2.9	1.3	150	60	1.3	B7	P
210T	264 300 000		7.5	32	350		16	1.55	100		1.55	UX4	T
210VPA	041 230 500	A	2	1	150	60	2.9	1.11	150	60	1.1	B7	P
210VPT	041 230 500	A	2	1	150	60	2.9	1.1	150	60	1.1	B7	P
213	289 300 000		5				30		REC		15mA	UX4	RR
213Pen	*41 23* *51	A ₁	21	22	175	175	45	6.2	100	100	6	B9A	P
215P	642 300 000		2	7.5	150		10	2.25	100		2.2	B4	T
215SG	542 300 000	A	2	1	150	60	2.5	1.1	150	60	1.1	B4	P
217A	228 300 000		10			120			REC		30mA	UX4	R
220B	446 230 700		2	1	125		3		125			B7	TT
220DD	892 310 000		2						D			B5	DD
220HPT	642 350 000		2	4.5	150	150	8	2.5	100	100	2.5	B5	P
220IPT	040 230 500	A	2	1.5	125	60	2.2	1	100	60	1	B7	P
2200T	642 350 000		2	4.5	150	150	9.5	2.5	100	100	2.5	B5	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
220P	642 300 000		2	7.5	150		11	2.25	100		2.2	B4	T
220PA	642 300 000		2	4.5	150		10	4	100		4	B4	T
220PT	642 350 000		2	9	150	150	19	2.5	100	100	2.5	B5	P
2205G	542 300 000	A	2	1	150	60	3.1	1.6	100	60	1.6	B4	P
220TH	645 230 700	G ₁	2	3	100		1.7	1.2	100	60	1.2	B7	TH
				0	125	60	0.6	0.6	125	60	0.6		
220V5	542 300 000	A	2	1	150	60	3.6	1.6	100	60	1.6	B4	P
220V5G	542 300 000	A	2	1	150	60	5	1.6	100	60	1.6	B4	P
225DU	082 323 900		2				15		REC		10mA	B7	RR
230	642 300 000		2	20	150		18	3	100		3	B4	T
230	200 300 000	D ₁	5				30		REC		15mA	UX4	R
230PT	642 350 000		2	15	150	150	14	2	100	100	2	B5	P
230XP	642 300 000		2	18	150		22	3	100		2	B4	T
231D	264 300 000		3	3	90		2.1	8.4	100		0.51	UX4	T
240B	446 230 700		2	1	125		8.5		100			B7	TT
240QP	446 235 700		2	12	150	150	6		100	100		B7	PP
244	264 130 000		2	6	150		5.5	1	100		1	UX5	T
244V	642 310 000		4	5.5	200		5.5	2.8	100		2.8	B5	T
245A	265 130 000	G ₁	2	1.5	150	50	4.8	0.65	No Data Available			UX5	P
247A	206 040 030		2	4.5	150		3.2	0.94	100		0.94	A08	T
249B	223 300 000	D ₁	2.5				120		REC		30mA	UX4	R
252A	264 300 000		5	50	400		60	3.4	100		3.4	UX4	T
255	268 943 000		2	3	150		0.8	0.57	100		0.5	UX6	DDT
257	264 530 000		5	21.5	125	100	20	1.35	100	90	1.3	UX5	P
257A	240 300 000	A ₁	3	3	90		2.1	0.51	100		0.51	UX4	T
259A	265 130 000	G ₁	2	1.5	175	75	5.5	1.38	100	75	1.3	UX5	P
259B	265 130 000	G ₁	2	1.5	175	75	5.5	1.38	100	75	1.3	UX5	P
262B	261 300 000	G ₁	10	4.5	150		2.8	0.9	100		0.9	UX4	T
264	264 300 000		1.1	9	150		2.5	0.64	100		0.64	UX4	T
264E	264 300 000		1.5	8	100		2.1	0.58	100		0.58	UX4	T
264C	264 300 000		1.5	8	100		2.1	0.58	100		0.58	UX4	T
271A	264 130 000		5	30	400		37.5	2.9	100		100	UX5	T
272A	264 130 000		10	15	150		5.4	0.76	100		0.76	UX5	T
274A	289 300 000		5				60		REC		20mA	UX4	RR
274B	289 300 000		5				60		REC		20mA	UX4	RR
275A	264 300 000		5	4.5	200		47	2.7	100		2.7	UX4	T
281A	264 530 000		5	60	150	75	35	1.47	No Data Available			UX5	P
283A	265 130 000	G ₁	2	1.5	175	75	5.9	1.36	100	75	1.36	UX5	P
285	265 130 000	G ₁	2	12	175	150	8.8	0.88	100	100	0.88	UX5	P
286A	265 113 000	G ₁	2	1.5	175	75	6.2	1.2	100	75	1.2	UX6	P
290A	265 113 000	G ₁	10	1.5	175		5.4	1.22	150		1.2	UX6	P
291A	275 641 300	G ₁	10	3	175		4.5		No Data Available			B7	H
				7.5	175	75	3.1		No Data Available				
292A	268 913 000	G ₁	10	6	150		2.1	0.66	100		0.66	UX6	DDT
293A	265 413 000		10	18	175	175	14.5	1.05	100	100	1.05	UX6	P

VALVE	SELECTOR SWITCH No.	T.C.	Vr	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
302THA	645 231 700	G ₁	30	{ 2	100		1.5		100	60		B7	TH
303A	268 943 000		2	6	250	100	3.5		250	100			
304AC	542 310 000	A	4	2	150		2	0.64	100		0.64	UX6	DDT
309A	265 413 000		10	1.5	200	100	3	1.9	100	100	1.9	B5	P
310A	265 113 000	G ₁	10	3	175	75	4.8	1.1	100	60	1.1	UX6	P
					150	150	5.5	1.8	100	100	1.8	UX6	P
310B	265 113 000	G ₁	10	3	150	150	5.5	1.8	100	100	1.8	UX6	P
311A	265 130 000	G ₁	10	15	150	150	30	2.8	100	100	2.8	UX5	P
311SU	28* *** 130		31				60		REC		20mA	B8A	R
324A	200 300 000	D ₁	5				5		D			UX4	R
328A	265 113 000	G ₁	7.5	3	150	150	5.5	1.8	100	100	1.8	UX6	P
329A	265 130 000	G ₁	7.5	15	150	150	37.5	3.3	100	100	3	UX5	P
329L	265 130 000	G ₁	7.5	15	150	150	37	3.3	100	100	3	UX5	P
332Pen	026 540 310		33	8.5	200	200	45	8	100	100	7	A08	P
336A	265 413 000		10	14	250	250	30	4.2	100	100		UX6	P
337A	265 113 000	G ₁	10	3	150	150	6.3	1.6	100	100	1.6	UX6	P
345A	289 130 000		6				60		REC		20mA	UX5	RR
347A	020 600 310	G ₁	6	4.5	150		2.8	0.9	100		0.9	A08	T
348A	026 510 310	G ₁	6.3		125	125	5.5	1.8	100	100		A08	P
349A	026 540 310		6	14	250	250	30	4.2	100	PenLF	4.2	A08	P
350B	026 540 310		6	20	400	250	85	6.25	No Data Available			A08	P
351A	028 090 310		1				120		REC		20mA	A08	RR
352A	268 913 000	G ₁	10	6	150		2.1	0.65	100		0.65	UX6	DDT
354V	642 310 000		4	4.5	250		6.5	3.5	100		3	B5	T
361A	243 560 000		1.4		50	40	0.4	0.57	No Data Available			UX5	P
362A	243 560 000		1.4		50	50	1.26	0.57	No Data Available			UX5	P
367A	060 524 310		6	20	400	250	85	6.2	No Data Available			A08	P
373A	021 455 310		2		150		2	1.32	100		1.3	A08	P
374A	021 405 310		3		125		18	3	125		3	A08	P
375A	026 540 310		20		40		12	4.7	No Data Available			A08	
383A	120 406 030		6		125		7.5	2.8	100		2.8	A08	T
385A	125 040 130		6		125		7.5	2.5	100		2.5	A08	P
387A	125 040 130		6		125		5.6	4	100		3.8	A08	P
401A	264 300 000		5	9	50		1.5	0.8	No Data Available			UX4	T
402	264 300 000		3	40	175		40	1	100		1	UX4	T
402-OT	005 231 600	G ₁	40	12	250	250	32	7	100	PenLF	7	B7	P
402P	000 231 600	G ₁	4	12.5	200		20	7.5	100		7	B7	T
402Pen	005 231 600	G ₁	40	6.7	200	200	40	7	100	100	7	B7	P
402PenA	005 231 600	G ₁	40	9	150	150	56	8	100	100	8	B7	P
405BU	892 300 000		4				15		REC		10mA	B4	RR
406	642 300 000		4		150		5.5	0.5	100		0.5	B4	T
408BU	892 300 000		4				15		REC		10mA	B4	RR
410HF	642 300 000		4	2.5	200		0.2	0.22	100		0.2	B4	T
410P	642 300 000		4	16	250		12	1.8	100		1.8	B4	T
410RC	642 300 000		4	2.5	200		0.2	0.2	100		0.2	B4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vr	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
410SG	542 300 000	A	4	1	200	100	4.5	0.9	100	100	0.9	B4	P
412BU	892 300 000		4				30		REC		17mA	B4	RR
412SU	802 300 000		4				60		REC		22mA	B4	R
415PT	642 350 000		4	25	300	200	20	1.7	100	PenLF	1.7	B5	P
415QT	642 350 000		4	25	300	200	20	1.8	100	PenLF	1.8	B5	P
415SP	642 300 000		4	18	150		11	1.6	100		1.6	B4	T
420T	045 231 600		4	4.4	250	250	40	10.5	100	PenLF	9	B7	P
425PT	642 350 000		4	17	250	150	12	1.3	100		1.3	B5	P
441U	892 300 000		4				60		REC		20mA	B4	RR
442BU	892 300 000		4				60		REC		20mA	B4	RR
450	642 300 000	A	4	55	250		50	3.5	100		3.5	B4	T
450	264 300 000		7 5		400		55	2.1	100		2.0	UX4	T
450AC	542 310 000		4		200	100	3.5	3	100	100	3	B5	P
451PT	26* *54 130		45	9	175	175	54.5	9.5	100	100	7	B8A	P
451U	823 900 000		4				120		REC		30mA	B4	RR
460BU	892 300 000		4				60		REC		20mA	B4	RR
482A	264 300 000		5	45	200		18	1.5	100		1.5	UX4	T
482B	264 300 000		5	35	250		18	1.5	100		1.5	UX4	T
483	264 300 000		5	60	250		30	1.7	100		1.7	UX4	T
484V	642 310 000		4	2.5	200		0.25	1.2	100		1.2	B5	T
485	264 130 000		3	9	175		5.8	1.4	100		1.4	UX5	T
486	026 040 300		3	3	90		3	0.61	80		0.6	A08	T
500	892 300 000		4				30		REC		15mA	B4	RR
506	892 300 000		4				30		REC		15mA	B4	RR
506BU	892 300 000		4				30		REC		15mA	B4	RR
506K	892 300 000		2				30		REC		15mA	B4	RR
509	892 300 000		2				60		REC		20mA	B4	RR
511D	892 300 000		4				60		REC		20mA	B4	RR
605	642 300 000		4	6	150		10	1.4	100		1.4	B4	T
612BU	892 300 000		6				30		REC		15mA	B4	RR
615	642 300 000		4	41	150		4	1.4	100		1.4	B4	T
620T	642 300 000		6	95	400		62.5	2.3	100		2.3	B4	T
635GTX	026 040 310		6	20	350		20		No Data Available			A08	T
660	642 300 000		6	100	400		120	2.3	100		2.3	B4	T
680XP	642 300 000		6	100	400		3.5	1.1	100		1.1	B4	T
713A	021 415 360	A	6	2	125	125	7.5	3.95	100	100	3.9	A08	P
717A	021 415 360		6	2	125	125	7.5	4	100	100	4	A08	P
731A	412 365 100		6	2.3	150	150	7	4.3	100	100	4	B7G	P
802	205 411 300		6	18	400	250	30	2.2	No Data Available			UX7	P
805	642 300 000		6	6	150		10	1.4	100		1.4	B4	T
807	254 130 000	A	6	12.5	400	250	83	6.5	100	PenLF	6	UX5	P
816	200 300 000		D ₁	2.5			120		REC		30mA	UX4	R
825	642 300 000		6	0	150		6	1.4	150		1.4	B4	T
825BU	892 300 000		7.5				60		REC		20mA	B4	RR
836	2** 00* 300		D ₁	2.5			120		REC		30mA	B7G	R

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
840	254 130 000	A	2	3	175	75	1	0.4	100	60	0.4	UX5	P
842	264 130 000		7.5	100	400		25	1.25	100		1.25	UX5	T
843	264 130 000		2.5	25	350		25	1.7	100		1.7	UX5	T
864	364 200 000		1.1	4.5	90		2.9	0.61	80		0.61	UX4	T
871	200 300 000	D ₁	2.5				120		REC		30mA	UX4	R
879	300 200 000	D ₁	2.5				5		D			UX4	R
884	026 040 310		6		300		55	4KΩ	No Data Available			A08	Thyratron
885	264 130 000		2.5		300		55	4KΩ	No Data Available			UX5	Thyratron
904V	642 310 000		4	2	200		2	2	150		2	B5	T
950	041 230 500	A	2	16.5	175	150	7	0.95	100	100	0.95	B7	P
951	265 300 000	G ₁	2	3	175	60	1.7	0.65	100	60		UX4	P
985	289 130 000		5				30		REC		15mA	UX5	RR
986	289 300 000		5				60		REC		20mA	UX4	RR
994V	642 310 000		4	0	100			3.6	100		3.6	B5	T
1002	802 300 000		1.8				60		REC		25mA	B4	R
1005	008 092 030		6				30		REC		15mA	A08	RR
1007	008 090 230		1.0				60		REC		20mA	A08	RR
1012	289 300 000		1.7				120		REC		30mA	UX4	RR
1028	202 322 200	D ₁	6				60		REC		23mA	B7G	R
1103	809 231 600	G ₁	13	2	225		1.5	1.5	100		1.2	B7	DDT
1130	892 300 000		1.8						D			B4	DD
1201	426 141 630		6	3	175		5.5	3	150		3	B8B	T
1201	892 300 000		25						D			B4	DD
1203	200 800 130		6						D			A08	D
1203A	200 800 130		6						D			A08	D
1204	526 141 310		6	2	250	100	1.75	1.2	100	100	1.2	B8B	P
1206	265 441 730		6	2.5	250	100	4.5	2.1	100	100	2.1	B8B	PP
1221	265 113 000	G ₁	6	3	250	100	2	1.22	100	100	1.2	UX6	P
1223	026 510 310	G ₁	6	3	250	100	2	1.22	100	100	1.2	A08	P
1229	265 300 000	G ₁	2	3	150	75	1.7	0.64	100	75	0.64	UX4	P
1230	264 300 000		2	9	150		3		100			UX4	T
1231	265 104 130		6	30	300	300	13	6.3	100	100	6.3	B8B	P
1232	265 114 130		6	2	250	100	6	4.5	100	100	4.5	B8B	P
1247	000 230 000	D ₁	0.625						D			B8A	D
1273	265 104 130		6	3	250	100	2.2	1.5	100	100	1.5	B8B	P
1274	028 090 310		6				30		REC		15mA	A08	RR
1275	289 300 000		5				120		REC		30mA	UX4	RR
1276	264 300 000		4.5	45	250		60	5.25	No Data Available			UX4	T
1280	265 104 130		12.5	3	250	100	2.2	1.5	100	100	1.5	B8B	P
1282	265 114 130		6	2	300	150	10	5.8	100	150	5.8	B8B	P
1284	265 104 130		12.5	3	250	100	9	2	100	100	2	B8B	P
1288	364 204 730		1.4	0	90		5.2	1.85	80		1.85	A08	TT
1291	274 304 620		1.4		90		5.2	1.85	80		1.85	A08	TT
1292	364 204 730		1.4	0	90		5.2	1.85	80		1.85	A08	TT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
1293	260 004 030		1.4		90		4.7	1.3	80		1.3	A08	T
1294	200 800 130		1.4						D			A08	D
1299	365 004 230		1.4	4.5	150	90	10.2	2.4	100	90	2.4	B8B	P
1560	289 300 000		5				60		REC		20mA	UX4	RR
1560	892 300 000		5				60		REC		20mA	B4	RR
1561	892 300 000		4				60		REC		20mA	B4	RR
1562	280 300 000		7.5				120		REC		30mA	UX4	R
1602	264 300 000		7.5	23.5	250		10	1.33	100		1.33	UX4	T
1603	265 113 000	G ₁	6	3	250	100	2	1.225	100	100	1.2	UX6	P
1608	264 300 000		2.5	90	400		95		No Data Available			UX4	T
1609	364 520 000		1.1	1.5	125	75	2.5	0.725	100	75	0.72	UX5	P
1610	264 530 000		2.5	16.5	250	250	31	2.5	100	PenLF	3.8	UX5	P
1611	026 540 310		6	16.5	250	250	34	2.5	100	PenLF	2.5	A08	P
1612	026 540 310	G ₁	6	3	250	100	5.3	1.1	100	100	1.1	A08	H
1613	026 540 310		6	16.5	250	250	34	2.5	100	PenLF	2.5	A08	P
1614	026 540 310		6	18	350	250	54	5.2	100	PenLF	5.2	A08	P
1616	200 300 000	D ₁	2.5				120		REC		30mA	UX4	R
1619	026 540 310		2.5	10	300	250	45	4.5	100	PenLF	4.5	A08	P
1620	026 510 310	G ₁	6	3	250	100	2	1.225	100	100	1.2	A08	P
1621	026 540 310		6	16.5	250	250	34	2.5	100	PenLF	2.5	A08	P
1622	026 540 310		6	18	350	250	54	5.2	100	100	5.2	A08	P
1624	026 540 310		2.5	20	400	300	25		100	PenLF		A08	P
1626	026 040 310		12.5	32	250		20	2.1	100		2.1	A08	T
1631	026 540 310		12.5	18	350	250	54	5.2	100	PenLF	5.2	A08	P
1632	026 540 310		12.5	8	200	100	50	9.5	100	90	9	A08	P
1633	471 461 230		25	8	250		11.5	2.6	100		2.6	A08	TT
1634	074 461 230		12.5	2	250		2	1.325	150		1.3	A08	TT
1635	027 446 310		6	0	300		3.5	0.9	100		0.9	A08	TT
1637	026 500 310	G ₁	6	18	250	250	32	3.8	100	PenLF	3.8	A08	P
1638	029 180 310		6						D			A08	DD
1639	026 890 310	G ₁	6	5.5	250		5	2	100		2	A08	DDT
1641	200 300 000	D ₁ D ₂	5				120		REC		30mA	UX4	RR
1641/RK60	200 300 000	D ₁ D ₂	5				15		REC		12mA	UX4	RR
6142	216 471 300	G ₁	6	16.5	250		8.3	1.3	110			UX7	TT
1644	414 752 360		12.5	9	175	175	13	2.15	100	100	2.1	A08	PP
1649	021 415 360		6	2	300	150	10	9	100	100	8	A08	P
1654	2** 00* 300	D ₁	1.4						D			B7G	D
1655	074 461 230		6	2	250		2	1.325	200		1.3	A08	TT
1659	268 913 000	G ₁	2.5	2	250		0.9	1.1	150		1.1	UX6	DDT
1662	364 526 300		1.4	8.4	150	90	13.3	1.9	100	75	1.9	B7G	P
1664	026 985 310	G ₁	2.5	3	250	125	10	1.325	100	100	1.3	A08	DDP
1701	892 300 000		1.8				120		REC		30mA	B4	RR
1801	892 300 000		4				15		REC		10mA	B4	RR
1805	892 300 000		4				30		REC		15mA	B4	RR
1807	892 300 000		4				30		REC		15mA	B4	RR

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
1810	003 200 000	D ₁	4				30		REC		15mA	B4	R
1815	892 300 000		4				60		REC		20mA	B4	RR
1817	892 300 000		4				120		REC		30mA	B4	RR
1821	892 300 000		4				30		REC		15mA	B4	RR
1823	892 300 000		4				30		REC		15mA	B4	RR
1831	892 300 000		4				30		REC		12mA	B4	RR
1832	082 300 000		4				120		REC		30mA	B4	R
1851	021 415 360		6		300	150	10	9	100	100	8	A08	P
1852	021 415 360		6		300	150	10	9	100	100	8	A08	P
1853	021 415 360		6	3	300	200	12.5	5	100	150	5	A08	P
1861	892 300 000		4				60		REC		20mA	B4	RR
1867	389 200 000		4				60		REC		20mA	UX4	RR
1875	023 000 000	D ₁	4				5		D			8SC	R
1876	123 000 080		4				5		D			8SC	R
1877	002 300 000	D ₁	4				3		D			B4	R
1882	023 080 090		5				60		REC		20mA	8SC	RR
1883	023 080 090		5				60		REC		20mA	8SC	RR
2051	026 041 310		6		250		75	2.5kΩ	No Data Available			A08	Thyratron
2101	264 530 000		2	4.5	150	150	8	1.7	100	100	1.7	UX5	P
2102	268 953 000		2	1	100		2.5	1.3	100		1.3	UX6	DDT
2103	274 546 300		2	7.5	150	150	4	1.6	100	100	1.6	UX7	PP
2151	265 413 000		14	31	250	250	47	2.4	100	PenLF	2.4	UX6	P
2318	892 300 000		4				30		REC		15mA	B4	RR
2506	892 300 000		4				15		REC		10mA	B4	RR
3006	802 300 000		4						D			B4	D
3074A	204 140 300	A ₁ A ₂	6		300		50	3.0	No Data Available			UX7	TT
3075A	002 300 000	D ₁	2						DI			B4	D
3329A	265 113 000	G ₁	7.5		175	125	31	2.9	100	100		UX6	P
3481	026 510 310	G ₁	6	13.5	150	150	5.5	1.8	100	100	1.8	A08	P
3720	364 200 000		5	1.5	175		0.2	0.2	150		0.2	UX4	T
3871	264 300 000		30	19	100	100	52	3.8	100	90	3.8	UX6	P
3872	364 200 000		2	9	150		3		100			UX4	T
3873	365 200 000	G ₁	2	3	150	75	1.5	0.64	100	75	0.6	UX4	P
3921	264 300 000		2.5	50	250		34	2.17	100		2.1	UX4	T
3924	265 130 000	G ₁	2.5	3	175	90	4	1	100	90	1	UX5	P
4019A	264 300 000		4		200		9.7	1.3	100		1.2	UX4	T
4019B	642 300 000		4	4	100		7.5	1.27	100		1.2	B4	T
4020A	264 300 000		2	2	150		1.2	0.6	100		0.6	UX4	T
4020B	264 300 000		2	2	150		1.2	0.6	100		0.6	UX4	T
4021A	264 300 000		4	10	150		32.5	3	100		0.6	UX4	T
4021B	642 300 000		4	8	125		23	3	100		3	B4	T
4022AR	264 300 000		4	6	200		16.2	2.2	100		2.0	UX4	T
4033	264 130 000		6	20	400		50	9	100		8	UX5	T
4033A	642 310 000		6	20	400		50	9	100		8	B5	T
4033L	642 310 000		6	20	400		60	10	100		8	B5	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
4037A	802 300 000		4				120		REC		30mA	B4	R
4061A	205 411 300	A	6	10	400	200	50	2.5	100	150	2.5	B7	P
4074A	204 140 300	A ₁ A ₂	6	13	300		15	3	100		3	UX7	TT
4077A	003 200 000	D ₁	5				120		REC		30mA	B4	R
4274A	289 300 000		5				120		REC		30mA	UX4	RR
4310A	265 113 000	G ₁	10	5.5	250	150	5.2	2	100	100	2	UX6	P
4328A	265 113 000	G ₁	7.5	5.5	250	175		2	100	150	2	UX6	P
4328D	026 510 310	G ₁	7.5	5.5	250	150	5.2	2	100	100	2	A08	P
4608	642 310 000		4	6	150		11	2.5	100		2.5	B5	T
4610	542 310 000	A	4	1.3	200	100	1.5	0.9	100	100	0.9	B5	P
4613	642 300 000		4	22	250		48	3.5	No Data Available			B4	T
4614	642 310 000		4	16	200		12	1.3	No Data Available			B5	T
4618	542 310 000	A	4	2	200	100	3	2.2	100	100	2.2	B5	P
4619	892 300 000		4				30		REC		15mA	B4	RR
4631	264 300 000		2	1.5	150		0.7		150			UX4	T
4636	542 310 000		4	2	200	100	3	2.3	100	100		B5	P
4650	642 350 000		4	63	300	300	30		No Data Available			B5	P
4652	892 300 000		4				60		REC		20mA	B4	RR
4654	411 230 050	A	6	14	250	275	72.0	8.5	No Data Available			58	P
4654K	023 114 500	A ₁	6	12.6	250	275	72	8.5	125	125		85C	P
4655	462 300 000		4.5				60		REC		15mA	B4	RR
4657	642 310 000		4	1.5	200		1	2.2	200		2.2	B5	T
4670	432 564 570		2	8.5	90		1		80			85C	PP
4673	642 310 000	G ₁	4	2.5	250	200	8	5	100	PenLF	5	B5	P
4673	023 110 560	G ₁	4	4	250	200	8	5	100	150	5	85C	P
4679	026 447 300		6	2.5	250		8	5	100		4.6	A08	P
4682	023 100 560	G ₁	4		375	250	24		100	PenLF		85C	P
4683	023 004 060		4		350		43		100			85C	T
4684	023 104 560		4		375	250	24		100	PenLF		85C	P
4688	023 104 560		4		375	275	48		100	PenLF		85C	P
4689	023 104 560		6		375	275	48		100	PenLF		85C	P
4694	023 104 560				375	250	24		100	PenLF		85C	P
4699	023 104 560		6	12.5	300	300	55	13	100	PenLF	9	85C	P
5516	235 242 300	A	3	14	400	250	75	4	100	PenLF	4	A08	P
5556	264 300 000		4.5	30	350		9	0.98	No Data Available			UX4	T
5590	412 365 100		6		90	90	3.9	2	80	90	2	B7G	P
5591	412 365 100		6	1.9	175	125	7.7	5.0	150	100		B7G	P
5603	021 415 360		6		150	150	50	5.4	100	100	5.4	A08	P
5608	412 365 100		6	12	125	125	7.5	5	100	90	5	B7G	P
5610	612 364 000		6	1.5	90		17	4	80			B7G	T
5618	265 134 200		3	8	275	75	19	3.5	100	60	3.5	B7G	P
5636	412 163 510		6	3	100	100	4	1.9	100	100	1.9	B8D	P
5637	402 013 060		6		100		1.4	2.7	100		2.7	B8B	T
5641	082 813 080		6				30		REC		15mA	B8D	R
5647	381 280 000		6				5.0		D			B5A	D

VALVE	SELECTOR SWITCH No.	T.C.	VI	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg-Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
5654	412 365 100	G ₁	6	2	125	125	7.5	5	100	100	5	B7G	P
5659	026 540 310		12.5	12.5	250	250	32		100	PenLF		A08	P
5660	026 895 310		12.5	3	250	125	10	1.325	100	100	1.3	A08	DDP
5661	021 415 360		12.5	0.4	250	100	9.2	2	100	100	2	A08	P
5670	214 607 413		6	2	150		8.2	5.5	125		5.5	B9A	TT
5678	652 430 000		1.2	1.5	40	40	1.8	1	No Data Available			B5A	P
5679	218 309 120		6				5		D			B8B	RR
5686	141 235 615		6	12.5	250	250			No Data Available			B9A	P
5687	641 221 437		6	12.5	250		16	4.1	100		7	B9A	TT
5690	238 192 310		6				120		REC		30mA	A08	RR
5691	471 461 230		6	2	250		2.3	1.6	150		1.6	A08	TT
5692	471 461 230		6	9	250		6.5	2.2	100		2.2	A08	TT
5693	021 415 360		6	3	250	100	3	1.65	100	100	1.6	A08	P
5694	126 447 310		6	6	300			7	No Data Available			A08	TT
5718	462 603 160		6	2.0	100		13.0	5.5	100		5.5	B8D	T
5719	402 013 060	G ₁	6	1.3	150		1.8	2.3	100		1.6	B8B	T
5722	802 208 300		3						D			B7G	D
5725	412 365 100		6	2	125	125	5.2	3.2	100	100	3.5	B7G	P
5726	192 310 800		6						D			B7G	RR
5732	026 510 310		6	3	125	100	8	2.2	100	100	2	A08	D
5749	412 365 100		6	1	250	100	11	4.4	100	100	4.3	B7G	P
5750	412 366 400		6	2	100		11	7.0	100		6	B7G	H
5751	741 226 413		6	3.0	250		1.0	1.2	100		1.2	B9A	TT
5763	601 235 144		6	7.5	250	250	45	7	100	PenLF	7	B9A	P
5812	413 365 200		3	23	250	250	40	4.1	100	PenLF	4.1	B7G	P
5814	741 226 413	D ₁	6	8.5	250		10.5	2.2	100		3.0	B9A	TT
5824	026 540 310		25	22	125	125	61	5	125	125	5	A08	P
5825	200 300 000		1.5						D			UX4	D
5838	028 090 310		12				30		REC		15mA	B8A	RR
5839	028 090 310		26				30		REC		15mA	A08	RR
5840	412 163 510		6	1.4	100	100	7.0	5.0	100	100	5.0	B8D	P
5842	602 441 443		6	1.5	150		26	2.4	100		2.4	B9A	T
5847	402 106 053		6	2	150	150	13	12.5	150	150	12	B9A	P
5851	206 005 340		2.5	7.5	125	125	5.5	1.6	125	125	1.6	B8B	P
5852	028 090 310		6				30		REC		15mA	A08	RR
5873	264 114 730		6	3	150		9	2.9	100		2.3	B8B	TT
5879	401 230 561		6	3	250	100	1.8	1	100	100	1	B9A	P
5881	026 540 310		6	12.5	300	200	48	5.3	100	150	5	A08	P
5896	812 093 100		6				30		REC		15mA	B8B	RR
5899	412 163 510		6	2.0	100	100	13.0	5.5	100	100	5.0	B8D	P
5900	412 163 510		5		100	100		4.5	100	100	4.5	B8A	P
5901	412 163 510		6		100	100	7.5	2.4	100	100	2.4	B8A	P
5903	812 093 100		26				5		D			B8B	RR
5906	412 163 510		26		100	100		5	100	100	5	A08	P
5910	265 *24 300		1.4		90	90	1.6	0.45	100	90	0.4	B7G	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
5915	412 365 100		6	0	75	75	6.3	2	80	75	2	B7G	H
5916	412 163 510		26		100	100		1.28	100	100	1.2	B8A	P
5920	762 344 100		6	2.1	100		8.5	6	100		6	B7G	P
5930	264 300 000		2.5	45	250		60		No Data Available			UX4	T
5931	020 809 030		5				120		ERC		30mA	A08	RR
5932	026 540 310		6	14	250	250	72	6	100	PenLF	5.2	B7G	P
5961	126 541 340		6		250	100			100	100		A08	P
5963	741 226 413		6	0	75		8	2.8	80		2.8	B9A	TT
5964	762 344 100		6	1	100		9.5	6	100		6	B7G	TT
5965	741 226 413		6	1.8	150		8.2	6.5	150		6.0	B9A	TT
5967	624 334 260		1.25		40		3	2	No Data Available			B8B	TT
5968	240 670 430		1.25		40		0.7	1.3	No Data Available			B8B	TT
5969	245 675 430		1.25	3	125	40	6	1.7	No Data Available			B8B	PP
5977	402 013 060		6		100			4.5	100		4.5	B8B	T
5987	462 613 060		6		100			1.85	100		1.85	B8B	T
5992	026 540 310		6	12.5	250	250	45	4.1	100	PenLF	4	A08	P
5993	802 309 100		6				30		REC		15mA	B7G	RR
6005	412 365 400		6	12.5	250	250	45	4	100	150	4	B7G	P
6026	001 230 460		6	2.6	125		12	5.9	100		5.9	B8B	T
6028	412 365 100		10	1.8	125	125	7.5	5.0	100	125	5.0	B7G	P
6042	461 471 230		25	8	250		9	2.6	100		2.6	A08	TT
6045	672 344 100		6	0.5	100		9	6.4	100		6.4	B7G	TT
6046	026 540 310		25	8.2	200	125	46	8	100	125	8	A08	P
6052	812 093 100		6				30		REC			B8B	RR
6053	812 093 100		26				5		D			B8B	DD
6057	741 226 413		6	2	250		1.2	1.6	150		1.6	B9A	TT
6058	192 310 800		6						D			B7G	RR
6059	041 230 651		6	3	250	100	2	1.225	100	100	1.2	B9A	P
6060	741 226 413		6	2	250		10	5.5	200		5	B9A	TT
6061	*41 230 651		6	13	300	225	34	3.75	100	150	3.7	B9A	P
6062	601 235 144		6	7.5	250	250	45	7	100	150	7	B9A	P
6063	802 309 100		6				30		REC		15mA	B7G	RR
6064	412 361 500		6	2	250	250	10	7.5	100	150	5	B7G	P
6065	412 361 500		6	2.5	250	250	8	2.5	100	100	2.5	B7G	P
6066	412 389 600		6	3	250		1	1.2	150		1.2	B7G	DDT
6067	741 226 413		6	8.5	250		10.5	2.2	100		2.2	B9A	TT
6072	741 226 413		6	4	250		3	1.75	100		1.7	B9A	TT
6080	471 461 230		6	30	100		100	7	No Data Available			A08	TT
6082	471 461 230		26.5	30	100		100	7	No Data Available			A08	TT
6084	501 236 014		6		250	100	3	1.8	150	100	1.8	B9A	P
6085	641 227 413		6	5.5	250		6	2.7	100		2	B9A	TT
6086	541 236 **1		18		200	125	10	9	100	100		B9A	P
6087	020 809 030		5				60		REC		20mA	A08	RR
6100	602 364 100		6	8.5	250		10.5	2.2	100		3.0	B7G	T
6101	762 344 100		6	2	150		9	5.5	100		6	B7G	TT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6110	812 093 100		6				5		D			B8B	RR
6111	642 113 470		6	1.9	100		8.5	5	100		5	B8B	TT
6112	642 113 470		6	1.2	100		0.8	1.8	100		0.8	A08	P
6113	641 471 230		6	3	250		3	1.7	100		1.6	A08	TT
6132	*41 230 651		6	4.5	250	250	40	11	100	150	9	B9A	P
6134	021 415 360		6	2	300	150	10	9	100	150		A08	P
6135	6*2 364 100		6	8.5	250		10.5	2.2	100		2.2	B7G	T
6136	412 365 100		6	1.0	250	150	10.6	5.2	100	150	5	B7G	P
6137	021 415 360		6	3	250	100	9.2	2	100	100	2	A08	P
6146	125 141 130	A	6	30	200	200	100	7	No Data Available			A08	P
6147	206 035 240		1.25	7.5	125	125	5.5	1.6	100	125	1.5	B8B	P
6153T	023 164 570	G ₁	6	2	100		16	5	100	60	5	85C	TH
				2	250	100	12	3.5	100	100	3		
6156	412 360 500		6	13.5	250	250	16	2.6	100	150	2.6	B7G	P
6157	**1 23* ***	D ₁	6				120		REC		30mA	B9A	R
6158	741 226 413		6	4.6	250		6	2.3	100		2.3	B9A	TT
6159	125 141 130	A	26	30	200	100	100	7	No Data Available			A08	P
6180	461 471 230		6	8	250		9	2.6	100		2.6	A08	TT
6186	412 365 100		6	1.4	250	150	7	5	100	100	5	B7G	P
6187	412 365 100		6	2	125	125	5.2	3.2	100	125	3.0	B7G	P
6197	145 236 154		6	3	250	150	30	11	100	150	10	B9A	P
6201	741 226 413		6	2	250		10	5.5	100		5	B9A	TT
6202	802 309 100		6				60		REC		20mA	B7G	RR
6203	800 230 109		6						REC			B9A	RR
6211	741 226 413		6	2	100		4.6	3.6	100		3.6	B9A	TT
6215	020 000 300	D ₁							D			A08	D
6216	641 236 510		6	6	200	100	47	8.8	100	100		B9A	P
6227	041 230 651		6		200	200	30	9	100	100		B9A	P
6247	442 613 000	A ₁	6	3	200		4	3	100		2.6	B7G	T
6265	412 365 100		6	1	250	150	9	4	100	125		B7G	P
6267	501 236 014		6	1.0	250	100	3.0	1.85	100	100	1.8	B9A	P
6293	125 141 300	A	6		200	200	100	7.3	No Data Available			A08	P
6302	265 113 000	G ₁	6	2.2	300	150	11	9	No Data Available			UX6	P
6305	112 311 100	D ₁	4				5		REC		5mA	B7G	R
6325	108 090 230		6				60		REC		20mA	A08	RR
6350	614 227 140		6	2	250		12	5.5	100		5	B9A	TT
6374	**1 23* **8	D ₁	6				120		REC		30mA	B9A	R
6375	400 230 060		1.25	4.5	150		12.0	3.4	150		3.4	B8D	T
6385	214 607 413		6	2.1	150		82	5.5	125		5.5	B9A	TT
6397	306 025 240		1.25	7.5	125	125	7	1.9	100	100		B8B	P
6417	601 235 144		12.5	7.5	250	250	45	7	100	150	7	B9A	P
6443	**1 23* ***	D ₁	6				120		REC		36mA	B9A	R
6463	614 227 143		6	2	250		12	5.5	100			B9A	TT
6485	412 365 100		6	1.6	300	150	10	9	100	100		B7G	P
6488	412 653 160		6	2.0	100	100	7.5	5.0	100	100	5.0	B4	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6489	261 360 000		6		100		8		100			SM5	T
6516	412 360 500		6	13.5	250	250	16.0	2.6	100	150	2.6	B7G	P
6550	026 540 310		6	16.5	400	225	87	9	No Data Available			A08	P
7000	026 510 310	G ₁	6	3	250	100	2	1.225	100	100	1.2	A08	P
7184	026 540 360		6	15	250	250	70		100	PenLF		A08	P
7193	020 000 310	A ₁ G ₁	6	10.5	300		11	3	100		3	A08	T
7700	265 113 000	G ₁	6	3	250	100	2		100	100		UX6	P
7752	412 365 100		6	2	125	125	5.5	3.5	100	100	3.5	B7G	P
7755	412 365 100		6		30	30	3	2.75	No Data Available			B7G	P
7756	106 052 430		6	36	300	300	58	4.3	100	PenLF	4.3	A08	P
8013A	200 300 000	D ₁	2.5				15		REC		10mA	B4	R
8016	020 000 030	D ₁	1.25						D			A08	D
8020	200 300 000	D ₁	5				120		REC		30mA	UX4	R
9001	412 365 100		6	3	250	100	2	1.4	100	100	1.4	B7G	P
9002	612 364 100		6	7	250		6.3	2.2	100		2.22	B7G	T
9003	412 365 100		6	3	250	100	6.7	1.8	100	100	1.8	B7G	P
9006	812 380 100		6				5		D			B7G	R
9072	020 000 310	A ₁ G ₁	6		300		15	2.5	No Data Available			A08	T
18013	061 231 500	G ₁	4		200	200	8	5	100	100		B7	P
18014	005 231 600	G ₁	4		200	200	35	8	100	100		B7	P
18015	061 231 500		21		125	125	8	8.3	125	125	8.3	B7	P
18016	005 231 600		21		125	125	48	9	125	125	9	B7	P
18040	265 104 130		18	3.4	200	200	15	10	100	150	10	B8B	P
18042	541 236 **1		18	1.8	200	100	8.3	8.2	100	100	8	B9A	P
18045	041 230 651		18	3	200	200	20	11	100	150	10	B9A	P
18046	041 230 651		18	3	200	200	20	11	100	150	10	B9A	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
A11A	892 300 000		4				60		REC		20mA	B4	RR
A11B	892 300 000		4				60		REC		20mA	B4	RR
A11C	892 300 000		4				60		REC		20mA	B4	RR
A11D	892 300 000		4				60		REC		20mA	B4	RR
A20B	892 310 000		4						D			B5	DD
A23A	809 231 600	G ₁	4	1	100			2.9	100		2.9	B7	DDT
A26	264 300 000		15	1.5	90		4.5	1.16	80		1.16	UX4	T
A27D	819 236 500	G ₁	4	6	250	250	36	9.5	100	PenLF	9.5	B7	DDP
A28	264 300 000		15	1.5	90		7.5	1.16	80		1.16	UX4	T
A30	264 300 000		15	27	175		22	1.08	100		1.08	UX4	T
A30B	642 310 000		4	2	250		10	5.5	200		5.5	B5	T
A30D	642 310 000		4	3.5	200		6	2.4	100		2.4	B5	T
A32	264 300 000		15	3	150		1.5	0.94	150		0.94	UX4	T
A36A	645 231 700	G ₁	4	2	150		6	1.2	150	60	1.2	B7	TH
A36B	645 231 700	G ₁	4	2	200	100	3.5		200	75			
				2	100		22	6	100	60	6	B7	TH
				2	250	150	3.5		100	PenLF			
A36C	645 231 700	G ₁	4	3	100	0	9	3.8	100	60		B7	TH
				2.5	250	100	3.25		100	100	5.5		
A40	264 300 000		15	40.5	175		21	1.5	100		1.5	UX4	T
A40M	254 130 000	A	4	1.5	200	100	3	2	200	100	3	UX5	P
A40M	542 310 000	A	4	1.5	200	100	3	2	200	100	3	B5	P
A48	264 300 000		15	4.5	90		4.5	1.18	80		1.18	UX4	T
A50A	542 310 000	A	4	2	200	100	3	2.3	100	100	2.3	B5	P
A50A	040 231 500	A	4	2	200	100	3	2.3	100	100	2.3	B7	P
A50B	061 231 500	G ₁	4	1.5	250	250	6	3.5	200	200	3.5	B7	P
A50M	041 231 500	A	4	2	200	125	4.5	2.3	100	100	2.3	B7	P
A50M	542 310 000	A	4	2	200	125	4.5	2.3	100	100	2.3	B5	P
A50N	542 310 000	A	4	2	225	100	4.25	2.5	200	100	2.5	B5	P
A50N	041 231 500	A	4	2	225	100	4.25	2.5	200	100	2.5	B7	P
A50P	060 231 500	G ₁	4	3	250	250	11.5	2	100	PenLF	2	B7	P
A70B	642 310 000	S	4	25	250	250	36	2.6	100	PenLF	2.6	B5	P
A70B	045 231 600		4	25	250	250	36	2.6	100	PenLF	2.6	B7	P
A70C	045 231 600		4	3	250	250	36	9	100	PenLF	9	B7	P
A70D	045 231 600		4	3	250	250	36	9	100	PenLF	9	B7	P
A70D	642 350 000		4	5.8	250	250	36	9.5	100	150	8	B5	P
A70E	045 231 600		4	14	250	275	72	8.5	100	PenLF	8.5	B7	P
A70P	045 231 600		4	14.5	250	250	70		100	PenLF		B7	P
A80A	123 174 560	G ₁	4	1.8	90		2		80	60		8SC	O
				8.5	250	75	1.6		100	75			
A80A	645 231 700	G ₁	4	1.8	90	75	2		100	90	1.3	B7	O
				8.5	250	75	1.5		100	90	1.5		
A104	642 300 000		1.1	10	100		5	0.35	100		0.35	B4	T
A106	264 300 000		1.4	9	100		2	0.4	100		0.4	UX4	T
A106	642 300 000		1.4	9	100		2	0.4	100		0.4	B4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
A109	264 300 000		1.4	9	150		2	0.45	100		0.4	UX4	T
A110	264 300 000		1.4	4.5	125		3	0.4	125		0.4	UX4	T
A110	642 300 000		1.4	4.5	125		3	0.4	125		0.4	B4	T
A125	642 300 000		1.25	3	150		0.4	0.45	100		0.4	B4	T
A203	642 300 000		2	30	150		12	1.5	100		1.5	B4	T
A205	642 300 000		2	18	150		7	1.2	100		1.2	B4	T
A206	642 300 000		2	8.5	150		3.8		100		1	B4	T
A209	642 300 000		2	9	150		4	1.0	100		1.0	B4	T
A210	642 300 000		2	9	125		3	0.9	100		0.9	B4	T
A211	642 300 000		2	2	150		2	1.2	100		1.2	B4	T
A225	642 300 000		2	3	150		1	1.0	100		1.0	B4	T
A235	042 300 000	A	2	0	150		1.5	0.4	150		0.4	B4	T
A241	642 300 000	S	2	2	20	20	1.2	1.0	No Data Available			B4	P
A242	265 300 000	G ₁	2	3	125	75	1.7	0.6	100	75	0.6	UX4	P
A303	264 300 000		3	27	150		3	0.6	100			UX4	T
A306	264 300 000		3	15	150		1.5	0.4	100			UX4	T
A404	642 300 000		4	10	100		4	0.45	100		0.45	B4	T
A406	642 300 000		4	9	150		6	0.45	100		0.45	B4	T
A408	642 300 000		4	4	150		4	1.5	100		1.5	B4	T
A409	642 300 000		4	9	150		3.5	0.9	100		1.2	B4	T
A410	642 300 000		4	3	150		3.5	0.5	100		1.2	B4	T
A410	264 300 000		4	3	150		3.5	0.5	100		1.2	UX4	T
A410N	642 300 000		4	3	150		3.5	0.5	100		0.5	B4	T
A411	642 300 000		4	3	200		6	2.5	150		2.5	B4	T
A414K	642 300 000		4	4.5	150		4	2	100		2	B4	T
A415	642 300 000		4	4	150		4	1.5	100		2	B4	T
A416	642 300 000		4	4.5	150		4	2	100		2	B4	T
A402	642 300 000		4	4	150		4	1.5	100		1.5	B4	T
A425	642 300 000		4	2.5	200		0.25	1.2	100		1.2	B4	T
A430	642 300 000		4	3	200		6	2.5	150		2.5	B4	T
A430	042 300 000	A	4	0	150		1.5	0.5	150		0.5	B4	T
A430N	642 310 000		4	4.5	250		6.5	3.5	100		3	B5	T
A435	642 300 000		4	1	150		2.1	0.5	150		0.5	B4	T
A440N	642 310 000		4	1.6	200		0.2	2.2	150		2.2	B5	T
A442	542 300 000	A	4	1	200	100	4	0.7	200	100	0.8	B4	P
A442	254 300 000	A	4	1	200	100	4	0.7	200	100	0.8	UX4	P
A557	602 310 000	G ₁	4	8	150		28	2	180		2	B5	T
A577	602 310 000	G ₁	4	20	250		40	2	No Data Available			B5	T
A600	642 300 000		6	9	150		4	1.5	100		1.5	UX4	T
A609	642 300 000		6	9	150		4	1.5	100		1.5	B4	T
A615	642 300 000		6	4.5	150		4	2.4	100		2.4	B4	T
A630	642 300 000		6	1.5	150		0.7	1.5	150		1.5	B4	T
A635	642 300 000		6	1	150		1.2	1.5	150		1.5	B4	T
A642	542 300 000	A	6	1	200	100		0.7	200	100	0.7	B4	P
A802	642 310 000		4	3	100		2.5	2.5	100		2.5	B5	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
A819	060 231 500	G ₁	4		250	250	8	7.5	100	100		B7	P
A863	026 500 310	G ₁	6	3	250	100	2	1.23	100	100	1.2	A08	P
A901	045 231 600		5		100	100	50	9	No Data Available			B7	P
A1685	026 510 310	G ₁	6.3	3	125	100	8	3.2	100	100	3.2	A08	P
A2087	6*2 360 800		4.4				5		D			B7G	R
A1685M	026 510 310	G ₁	6	3	125	100	8	3.2	100	100	3.2	A08	P
A1714	412 30* 600		6	2.5	150		10	8.5	100		8	B7G	T
A1820	265 004 130		6		250	250	40	10.5	100	PenLF	9	B8B	P
A1834	471 461 230		6	40	100		60	3	No Data Available			A08	TT
A2118	642 300 000		20	3	200		6	2.3	100		2	B4	T
A2134	412 36* 500		6	7.8	150	150	55	9.5	100	100	9	B7G	P
A2272	21* *1* *13		6.3						D			B9G	R
A4090	642 310 000		4	3.5	250		6	2.4	150		2.4	B5	T
A4110	642 300 000		4	3.5	200		6	2.4	100		2.2	B4	T
AABI	023 110 980		4						D			8SC	DDD
AA61	274 164 130		6	5.2	250		6	2.7	100		2.7	B8A	TT
AB1	902 310 000	D ₁	4						D			B5	DD
AB2	902 310 000	D ₁	4						D			B5	DD
ABCI	023 198 060	G ₁	4	7	250		4	2	100		2	8SC	DDT
ABLI	023 198 560	G ₁	4	6	250	250	36	9	100	PenLF	9.0	8SC	DDP
AC/042	642 300 000		2	38	300		50	5	100		5	B4	T
AC/044	642 300 000		4	38	300		50	5	100		5	B4	T
AC054	642 300 000		4	22	250		48	3.5				B4	T
AC/064	642 300 000		4	21	200		20	3	100		3	B4	T
AC084	642 300 000		4	22	300		17	1.1	100		1.1	B4	T
AC084N	642 300 000		4	0	100		21	2.5	100		2.5	B4	T
AC2	023 100 060	G ₁	4	5.5	250		6	2.5	100		2.5	8SC	T
AC2DD	869 231 500	G ₁	4	5.5	250	250	32		100	PenLF		B7	DDP
AC2/HL	642 310 000		4	1.75	200		4.9	5	100		5	B5	T
AC2/Pen	045 231 600		4	5.3	250	250	32	8.5	100	PenLF	8	B7	P
AC2/PenDD	869 231 500	G ₁	4	5.3	250	250	32	8.5	100	PenLF	8	B7	DDP
AC3Pen	045 231 600		4	3	250	250	36	9	100	PenLF	9	B7	P
AC4/Pen	045 231 600		4	8.5	225	225	52	11	100	PenLF	10	B7	P
AC5/Pen	045 231 600		4	8.5	250	250	40	9.4	100	PenLF	9.4	B7	P
AC5/PenDD	869 231 500	G ₁	4	8.5	250	250	40	9.4	100	PenLF	9.4	B7	DDP
AC6/Pen	045 231 000	A	4	6.9	300	225	63	9.5	100	100	8.5	B7	P
AC104	642 310 000		4	10	150		8.5	3.5	100		3.5	B5	T
AC701	103 060 020	G ₁	4	1.6	40		0.5	0.7	No Data Available			B8D	T
ACD	802 310 000		4						D			B5	D
ACDD	892 310 000		4						D			B5	DD
AC/DDT	809 231 600	G ₁	4	4	200		5	2.3	100		2.3	B7	DDT
AC/DX	642 310 000		4	3	200		5	3.5	100		3.5	B5	T
AC/G	642 310 000		4	7.5	200		8	2.7	100		2.7	B5	T
ACHF	642 310 000		4	3	200		3	2.5	100		2.5	B5	T
ACHL	642 310 000		4	4.5	250		7	3	100		3	B5	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
AC/HLDD	809 231 600	G ₁	4	3	200		4.9	2.6	100		2.6	B7	DDT
ACHLDDD	910 231 680	G ₁	4	3	200		4.9	2.6	100		2.7	B9	DDDT
ACHL4	642 310 000		4	5	250		5	3.3	100		3.3	B5	T
ACHL4DD	809 231 600	G ₁	4	3	250		7	2.5	100		2.5	B7	DDT
ACHM4	542 310 000	A	4		250	100	10	2.5	100	100	2.5	B5	P
AC/HP	041 231 500	A	4	2	200	100	4.2	3.2	100	100	3.2	B7	P
AC/HP	543 210 000	A	4	2	200	100	4.2	3.2	100	100	3.2	B5	P
ACHVP	542 310 000	A	4	2	200	100	3	2.3	100	100	2.3	B5	P
ACHI	174 652 300	G ₁	4	2	150		11	2.0	100	60	2	C7	TH
ACH4	642 310 000		4	2	75	75	2.5		80	75			
			4	4	200		3	3.3	100		3.3	B5	T
ACH4	642 310 000		4	4	200		3	3.3	100		3.3	B5	T
AC/L	642 310 000		4	13.5	250		17	4.25	100		4.25	B5	T
ACL4	642 310 000		4	15	250		9	4	100		4	B5	T
AC/LP	642 310 000		4	14	200		18	4.25	100		4.25	B5	T
ACME4	642 310 000	S	4	16	250	250	26		100	PenLF		B5	P
ACP	642 300 000		4	21	200		19	3	100		3	B4	T
AC/P	642 310 000		4	13.5	200		17	2.75	100		2.75	B5	T
ACPN	642 350 000		4	12	250	200	22		100	PenLF		B5	P
ACPNDH	642 350 000		4	10	250	200	18		100	PenLF		B5	P
AC/PP	642 300 000		4	25	400		50	5	100		5	B4	T
ACPP	045 231 600		4	5.5	250	250	32		No Data Available			B7	P
AC/Pen.	045 231 600		4	15.5	250	250	32	2.7	100	PenLF	2.5	B7	P
AC/Pen.	642 310 000	S	4	12	200	200	24	2.5	100	PenLF	2.5	B5	P
ACPT	642 310 000	S	4	8	250	200	31		100	PenLF		B5	P
ACPX4	642 310 000		4	18	250		30	4	100		4	B5	T
ACPX4a	642 300 000		4	25	250		50	5	100		5	B4	T
ACPI	642 310 000		4	28	200		24	2.3	100		2.3	B5	T
ACP4	042 310 000	A	4	1	100		7		100		7	B5	T
ACP4	642 310 000		4	20	250		20	4	100		4	B5	T
ACQ	045 231 600		4	22	400	250	57	6	100	PenLF	6	B7	P
ACQA	045 231 600		6	23	400	250		6	100	PenLF	6	B7	P
AC/SG	542 310 000	A	4	1.5	200	60	4.5	1.9	200	60	1.9	B5	P
AC/SGVM	542 310 000	A	4	2	200	60	5.8	1.8	200	60	2	B5	P
AC/SH	542 310 000	A	4	1.5	200	75	7.4	3.5	200	75	3.5	B5	P
AC/SL	041 230 500	A	4	1	200	75	3.8	3.3	200	75	3.3	B7	P
AC/SL	061 230 500	G ₁	4	1	200	75	3.8	3.3	200	75	3.3	B7	P
AC/S2	542 310 000	A	4	1.5	200	75	7	4.3	200	60	3.4	B5	P
ACSPI	041 231 500	A	4	3	200	200	4.9	2.7	100	PenLF	2.7	B7	P
ACSP3	061 231 500	G ₁	4	1.7	250	100	7.9	7	200	100	7.5	B7	P
AC/SIVM	542 310 000	A	4	1.5	200	75	5.6	1.1	200	75	1.1	B5	P
ACS2Pen	041 231 500	A	4	1.5	250	100	8	4.6	200	100	5.5	B7	P
ACTHI	645 231 700	G ₁	4	2.7	75		6.0	3.0	80	60	3	B7	TH
			4	3	250	100	3	3.5	100	100	3.5		

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
ACTHIA	271 640 530	G ₁	4	{ 3 3	75 250	100	6.0 3	3.0 3.5	80 100	60 100	3 3.5	MO8	TH
ACTP	571 231 640	G ₁	4	{ 3 5	150 250	0	1.5 5.5	1.4 1.6	100 200	60 PenLF	1.4 1.6		TP
ACVG	542 310 000	A	4	0	200	75	5	3	200	75	3	B5	P
ACVH	542 310 000	A	4	1.5	200	75	9.3	3.3	200	75	3.3	B5	P
AC/VP	041 231 500	A	4	1.5	200	100	5.7	3	200	100	3	B7	P
AC/VP	542 310 000	A	4	1.5	200	100	5.7	3	200	100	3	B5	P
ACVPB	061 231 500	G ₁	4	1.5	250	150	12	4	250	200	4	B7	P
AC/VPI	041 231 500	A	4	2.8	250	200	7.4	2	100	PenLF	2	B7	P
AC/VP2	061 231 500	G ₁	4	2.8	250	200	7.4	2	100	PenLF	2	B7	P
AC/VP4	041 231 500	A	4		250	100	6	3	100	100	3	B7	P
ACVS	542 310 000	A	4	1.5	200	75	4.4	3	200	75	3	B5	P
ACVS4	542 310 000	A	4	2	250	50	6	2	200	60	2	B5	P
AC/Y	045 231 600		4	10	250	250	32	3.5	100	PenLF	3.5	B7	P
AC/Y	642 310 000	S	4	10	250	250	32	3.5	100	PenLF	3.5	B5	P
AC/YC	045 231 600		4	10	250	250	68	7.5	100	PenLF	7.5	B7	P
AC/YY	045 231 600		4	10	250	250	68		100	PenLF		B7	P
AC/Z	642 310 000	S	4	5.5	250	250	32	8	100	PenLF	8	B5	P
AC/Z	045 231 600		4	5.5	250	250	32	8	100	PenLF	8	B7	P
AC/ZDD	869 231 500	G ₁	4	5.5	250	250	32	8	100	PenLF	8	B7	DDP
AD	281 300 000		6				60		REC		20mA	B4	R
ADI	023 004 060		4	45	250		60	6	100		6	8SC	T
ADI/350	023 004 060		4	66	350		84		100			8SC	T
ADG	642 310 000		20	10	200		10	3.5	100		3.5	B5	T
ADHF	642 310 000		20	3	200		5	3.5	100		3.5	B5	T
ADHP	041 231 500	A	20		200	100	5	2.8	200	100	2.8	B7	P
ADL	642 310 000		20	13	200		20	3	100		3	B5	T
ADPN	642 350 000		20	15	250	200	22		100	PenLF		B5	P
ADVHP	041 231 500	A	20		200	100	5.5	2.5	200	100	2.5	B7	P
AE	265 413 000		13	13.5	100	100	8.5	1.65	100	90	1.65	UX6	P
AF	281 300 000		2.5				120		REC		20mA	UX4	R
AF2	542 310 000	A	4	2	225	100	4.25	2.5	200	100	3.2	B5	P
AF3	023 110 560	G ₁	4	3	250	100	8	1.8	250	100	1.8	8SC	P
AF7	023 110 560	G ₁	4	2	250	100	3	2.1	250	100	2.1	8SC	P
AG	289 300 000		5				120		REC		20mA	UX4	RR
AF8	026 546 310		6	2	200	50	3.5		No Data Available			A08	O
AG495	642 310 000		4	4	200		4	2.5	100		2.5	B5	T
AG4100	642 300 000		4	3	150		5	2	125		2	B4	P
AH1	023 145 560	G ₁	4	2	250	75	3	1.8	200	75	1.8	8SC	P
AH100	023 145 560	G ₁	4	2.5	200	100	5.5	1.5	100	100	1.5	8SC	P
AH4105	542 310 000	A	4	2	200	125	4.5	2.3	100	100	2.3	B5	
AK2	123 164 570	G ₁	4	{ 2 2	100 250	75 75	4.2 4.3	0.9 2.2	80 100	75 75	0.9 2.0	8SC	O

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg-Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
AL1	023 004 560	G ₁	4	15	250	250	36	2.8	100	PenLF	2.8	8SC	P
AL2	023 100 560		4	25	250	250	36	2.6	100	PenLF	2.6	8SC	P
AL2/375	023 100 560		4	25	250	250	36	2.6	100	PenLF	2.6	8SC	P
AL3	245 231 600		4	3	250	250	36	9	100	PenLF	9	B7	P
AL3	023 104 560		4	6.5	250	250	36	9.5	100	150	8	S8C	P
AL4	145 231 600		4	3	250	250	36	9	100	PenLF	9.5	B7	P
AL4	023 104 560		4	6.5	250	250	36	9.5	100	150	8	8SC	P
AL4/375	145 231 600		4	6	250	250	34	9.5	100	PenLF	8	B7	P
AL4/375	023 104 560		4	6	250	250	34	9.5	100	150	8	8SC	P
AL5	145 231 600		4	14	250	275	72	8.5	100	PenLF	7	B7	P
AL5	023 104 560		4	15	250	250	72	7	100	150	6	8SC	P
AL5/375	023 104 560		4	14	250	275	72	8.5	100	PenLF	6	8SC	P
AL60	041 231 500	A	4	7	250	250	72	14.5	100	PenLF	8.5	B7	P
AL495	642 310 000		4	12	250		20	4	100		4	B5	T
AMOE	045 231 600		4	14	250	250	72	9	100	PenLF	9	B7	P
AN4092	642 310 000		4	3.5	200		6	2.0	100		2	B5	DT
AP495	642 310 000	G ₁	4	1.5	200		2.5	5	150		5	B5	T
APP4A	045 231 600		4	16.5	250	250	36	3.5	100	PenLF	3.5	B7	P
APP4As	023 100 560		4	16.5	250	250	36	3.5	100	PenLF	3.5	8SC	P
APP4B	045 231 600		4	5	250	250	32	10	100	PenLF	10	B7	P
APP4Bs	023 104 560		4	5	250	250	32	10	100	PenLF	10	8SC	P
APP4C	145 231 600		4	5	250	250	36	10	100	PenLF	10	B7	P
APP4D	145 231 600		4	16	250	250	72	7	100	PenLF	7	B7	P
APP4E	145 231 600		4	13.5	350	275	72	8.5	100	PenLF	8.5	B7	P
APP4E	023 104 560		4	13.5	350	275	72	8.5	100	PenLF	8.5	8SC	P
APP4G	041 231 500	G ₁	4	6	250	250	36	10	100	PenLF	10	B7	P
APP4G	005 231 600		4	6	250	250	36	10	100	PenLF	10	B7	P
APP495	642 350 000		4	23	300	200	25	2	100	100	2	B5	P
APP4100	642 310 000		4	15	250	250	24	2.5	100	150	2.5	B5	P
APP4120	642 310 000	S	4	15	350	200	22	3.5	100	100	3.5	B5	P
APV4	892 300 000		4				60		REC		20mA	B4	RR
APV4100	892 300 000		4				60		REC		20mA	B4	RR
APV4200	892 300 000		4				60		REC		20mA	B4	RR
AR495	642 310 000		4	1	100			5	100		5	B5	T
AR4100	642 310 000		4	3	200		3	2	150		2	B5	T
AR4101	642 310 000		4	1	100			3	100		3	B5	T
AS494	542 310 000	A	4		200	100	15	1.5	100	100	1.5	B5	P
AS495	542 310 000		4	2	200	100	1	3.4	200	100	3.4	B5	P
AS4100	542 310 000		4	6	200	100	4	1.425	100	90	1.4	B5	P
AS4120	542 310 000		4	2	250	100	3	3	150	100	3	B5	P
AS4125	542 310 000	A	4	2	250	100	3	3	200	100	3	B4	P
AX	264 300 000		5	9	150		3	0.8	100		0.8	UX4	T
AX1	892 300 000		4				60		REC		20mA	B4	RR
AX50	892 300 000		4				120		REC		30mA	B4	RR
AZ1	023 080 090		4				30		REC		15mA	8SC	RR

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
AZ2	023 080 090		4				60		REC		20mA	8SC	RR
AZ3	023 180 090		4				60		REC		20mA	8SC	RR
AZ4	023 080 090		4				120		REC		30mA	8SC	RR
AZ11	902 300 080		4				60		REC		20mA	F8	RR
AZ12	902 300 080		4				60		REC		20mA	F8	RR
AZ21	288 039 920		2				30		REC		17mA	A08	RR
AZ31	020 809 030		4				30		REC		15mA	A08	RR
AZ32	020 809 030		4				60		REC		20mA	A08	RR
AZ33	028 090 300		4				60		REC		20mA	A08	RR
AZ41	*8* **9 230		4				30		REC		10mA	B8A	RR
AZ50	023 080 090		4				120		REC		30mA	8SC	RR
B2	642 300 000		2	2	125		2	1.2	100		1.2	B4	T
B7	642 300 000		6		125		8	0.67	100		0.67	B4	T
B11	642 300 000		6		200		20	1.4	100		1.4	B4	T
B21	447 230 600		2	6	150		2.2		100			B7	TT
B22	446 230 700		2		150		5		150			B7	TT
B23	642 300 000		2		125		4	0.75	100		0.75	B4	T
B24	446 230 700		2	0	150		7		100			B7	TT
B30	447 231 600		13	0	175				100			B7	TT
B36	471 461 230		13	8	250		9	2.6	100		2.6	A08	TT
B63	264 147 300		6	5	250		6	3.1	200		3.1	UX7	TT
B65	471 461 230		6	8	250		9	2.6	100		2.6	A08	TT
B105	264 300 000		1.4	18	150		8	1.0	100			UX4	T
B105	642 300 000		1.4	18	150		8	1.0	100			B4	T
B152	741 226 413		6	2	250		10.0	5.5	200		5	B9A	TT
B203	642 300 000		2	26	150		11	1.5	100		1.5	B4	T
B204	264 300 000		2	22.5	125		8	0.9	100		0.9	UX4	T
B205	642 300 000		2	18	150		7	1.2	100		1.2	B4	T
B205	264 300 000		2	18	150		7	1.2	100			UX4	T
B217	642 300 000		2	4.5	150		3	1.3	100		1.3	B4	T
B217	264 300 000		2	4.5	150		3	1.3	100		3	UX4	T
B228	264 300 000		2	2	150		2	1.2	150		1.4	UX4	T
B228	642 300 000		2	2	150		2	1.2	100		1.2	B4	T
B230	446 230 700		2	1	150		5.5		150			B7	TT
B240	470 642 300		2	0	150		15		150			C7	TT
B240	264 473 000		2		150		15		No Data Available			UX6	TT
B242	542 300 000	A	2	0	200	75	4.5	1.1	100	75	1.1	B4	P
B242	254 300 000	A	2	0	200	75	4.5	1.1	100	75	1.1	UX4	P
B255	542 300 000	A	2	1	150	100	1.8	1.2	150	100	1.2	B4	P
B255	254 300 000	A	2	1	150	100	1.8	1.2	150	100	1.2	UX4	P
B262	542 300 000	A	2	1	150	100	1.8	1.3	150	100	1.3	B4	P
B262	265 300 000	G ₁	2	1	150	100	1.8	1.3	150	100	1.3	UX4	P
B309	741 226 413		6	2	250		10	5.5	100		5	B9A	TT
B319	147 234 116		7.5	1.5	90		12	6	100		6	B9A	TT
B329	741 226 413		6	8.5	250		10.5	2.2	100		2.2	B9A	TT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
B339	741 226 413	G ₁	6	2	250		1.2	1.6	150		1.6	B9A	T
B342	265 300 000		2	2.5	150	75	4	1.3	150	75	1.3	UX4	P
B403	642 300 000		4	30	150		15	1.5	100		1.5	B4	T
B403	264 300 000		4	30	150		15	1.5	100		1.2	UX4	T
B405	642 300 000		4	18	150		11	1.6	100		1.6	B4	T
B405	264 300 000		4	18	150		11	1.6	100		1.4	UX4	T
B406	642 300 000		4	15	150		8	1.4	100		1.4	B4	T
B406	264 300 000		4	15	150		8	1.3	100		1.3	UX4	T
B409	642 300 000		4	16	250		12	2	100		2	B4	T
B409	264 300 000		4	16	250		12	2	100		2	UX4	T
B415	642 300 000		4	4.5	150		3	2	100		2	B4	T
B415	264 300 000		4	4.5	150		3	2	100		2	UX4	T
B424	642 300 000		4	2.3	200		6	2.5	150		2.5	B4	T
B424S	642 300 000		4	3	200		6	2.5	100		2.5	B4	T
B424	264 300 000		4	2.3	200		6	2.5	150		2.5	UX4	T
B425	642 300 000		4	4.5	150		3	2	100		2	B4	T
B425	264 300 000		4	4.5	150		3	2	100		2	UX4	T
B438	264 300 000		4	2.5	200		0.2	2	150		2	UX4	T
B438	642 300 000		4	2.5	200		0.2	2	150		2	B4	T
B438S	642 300 000		4	1.5	200		2	2	150		2	B4	T
B442	542 300 000	A	4	1	200	100	4.5	0.9	200	100	0.9	B4	P
B442M	542 300 000	A	4	1	200	100	4.5	0.9	100	100	0.9	B4	P
B442M	254 300 000	A	4	1	200	100	4.5	0.9	100	100	0.9	UX4	P
B442S	542 300 000	A	4	1	200	100	4.5	0.9	100	100	0.9	B4	P
B443	642 350 000		4	17	200	150	12	1.2	100	PenLF	1.2	B5	P
B443S	642 350 000		4	12	250	75	12	1.6	100	60	1.6	B5	P
B443	264 300 000	G ₂	4	17	200	150	12	1.2	100	PenLF	1.2	UX4	P
B443s	642 300 000	G ₂	4	12	250	75	12	1.6	100	60	1.6	B4	P
B443s	264 300 000	G ₂	4	12	250	75	12	1.6	100	60	1.6	UX4	P
B491	642 310 000		4	1.5	200		4	4	150		4	B4	T
B543	642 350 000		5	15	200	150	12	1.3	150	100	1.3	B5	P
B543(s)	642 350 000		5	15	200	150	12	1.3	150	100	1.3	B5	P
B543	264 300 000	G ₂	5	15	200	150	12	1.3	150	100	1.3	UX4	P
B543	642 300 000	G ₂	5	15	200	150	12	1.3	150	100	1.3	B4	P
B605	642 300 000		6	18	150		9	1.8	100		1.8	B4	T
B605	264 300 000		6	18	150		9	1.8	100		1.8	UX4	T
B609	642 300 000		6	18	250		12	1.8	100		1.8	B4	T
B719	741 236 410		6	2	250		10.0	6.0	250		6.0	B9A	TT
B2006	642 310 000		20	18	200		15	1.6	100		1.6	B5	T
B2038	642 310 000		20	3	200		6	2.3	180		2.3	B5	T
B2041	602 300 000	G ₁	20	1	100		2.5	0.1	100		0.1	B4	T
B2042	542 310 000	A	20	2	200	60	4	1	100	60	1	B5	P
B2043	642 310 000	S	20	18	200	200	20	1.7	100	100	1.7	B5	P
B2044S	642 310 000	D ₁	20	3	200		6	1.8	100		1.8	B5	DT
B2045	542 310 000	A	20	2	200	60	4	1	150	60	1	B5	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
B2046	542 310 000	A	20	2	200	100	3	2.2	150	100	2.2	B5	P
B2047	542 310 000	A	20	2	200	100	4	2	150	100	2	B5	P
B2055	542 310 000	A	20	1.5	200	100	3	2	100	100	2	B5	P
B2052T	542 310 000	A	20	2	200	100	3	2	150	100	2	B5	P
B2099	642 310 000		20	1.6	200		0.08	3	150		3	B5	T
BA2	446 230 700		2	0	150		1.5		150			B7	TT
BB1	902 310 000	D ₁	16						D			B5	DD
BBC12	682 390 000	G ₁	2	4.5	150		2.5	1.5	100		1.5	B5	DDT
BB220A	446 230 700		2	3	150		4		100			B7	TT
BB240	446 230 700		2	0	150		5.4		100			B7	TT
BCH1	165 231 700	G ₁	24	{ 2	100		5	1.2	100		1.2	} B7	TP
BFI	642 300 000		4		200	50	1.3	0.75	100	60			
BF61	261 054 130		6	15	150		8	1.3	100		1.3	B4	T
BF62	261 054 130		6	7	250	250	36	10	100	150	8	B8A	P
BF451	261 054 130		45	10	225	225	26	3.2	100	150	3.2	B8A	P
				9	175	175	54.5	9.5	100	100	7	B8A	P
BL2	652 310 000	G ₁	30	20	200	100	40	3	100	90	3	B5	P
BL63	027 146 310	G ₁	6	16	250		14	4.2	100		4.2	A08	TT
BHP61	023 010 560	G ₁	2	0.5	125	125	2.5	0.7	125	125	0.7	8SC	P
BLP61	023 004 560		2		150	150	7	2.7	100	100		8SC	P
BM968	200 300 000	D ₁	2.5				60		REC		35mA	UX4	R
BPM04	412 365 400		6.3	12.5	250	250	45	4.5	100	PenLF	4	B7G	P
BW3	642 350 000		2	4.5	150	125	6	2.2	100	100	2.2	B5	P
BW602	642 300 000		2	12	150		12	3.4	100		3.4	B4	T
BW1304	642 300 000		2	6	150		6	3.2	100		3.2	B4	T
BX2	446 230 700		2	0	175		2.5		100			B7	TT
BX604	642 300 000		2	12	150		8	1.5	100		1.5	B4	T
C3G	261 504 130		6.3	1.8	225	150	13	13.5	100	100		B8B	P
C3G	216 514 130		6.3	1.8	225	150	13	13.5	100	100		B8B	P
C3M	261 504 130		20	4.5	225	150	15.0	6.0	100	100	5.2	B8B	P
C9	642 300 000		4	9	150		3.5	0.9	100		0.9	B4	T
C10B	023 100 080		20				75		REC		23mA	8SC	R
C10B	802 310 000		20				60		REC		23mA	B5	R
C20C	982 310 000		13						D			B5	DD
C23B	809 231 600	G ₁	13	5	200		4	2	100		2	B7	DDT
C25	642 300 000		4	2.5	200		2.3	1.2	150		1.2	B4	T
C30	261 504 130		6.3	4.5	225	150	15	6	100	100		B8B	P
C30B	000 231 600	G ₁	13	4	200		4	3.2	150		3.2	B7	T
C36A	645 231 740		21	{ 1.5	100		4	2	125	60	1.2	} B9	TH
					225	75	3		100	75			
C36C	645 231 740		29	{ 2.5	100		4	2	100	60		} B9	TH
					225	75	3	3.5	250	100			
C50B	061 231 500	G ₁	13	2.2	200	200	2.5	2.8	100	PenLF	2.8	B7	P
C50N	061 231 500	G ₁	13	2	200	200	9.5	2	100	150	2	B7	P
C70D	023 110 560	G ₁	33	8.5	200	200	45	8	100	PenLF	7	8SC	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
C70D	045 231 600	G ₁	35	8.5	200	200	45	8	100	PenLF	7	B7	P
C80B	123 154 560		13	1.5	200	90	1.6		150	75		85C	O
C109	642 300 000		1	9	150		3.5	0.5	100		0.5	B4	T
C125	642 300 000		1	3	150			0.8	125		0.8	B4	T
C135	042 300 000	A	1.4	1	150		1.5	1	150		1	B4	T
C142	542 300 000	A	1	1.5	150	75	1.7	0.8	100		0.8	B4	P
C243	642 350 000		2	15	150	150	17	1.5	100	100	1.5	B5	P
C243N	642 350 000		2	4.5	150	125	6	2.2	150	100	2.2	B5	P
C243N	264 530 000		2	4.5	150	125	6	2.2	150	100	2.2	UX5	P
C405	642 300 000		4	32	250		20	1.9	100		1.9	B4	T
C405	264 300 000		4	32	250		20	1.9	100		1.9	UX4	T
C408	642 300 000		4	7	150		14	2.9	100		2.9	B4	T
C443	642 350 000		4	25	300	200	20	1.7	100	PenLF	1.7	B5	P
C443N	642 350 000		4	42	300	200	20	1.5	100	PenLF	1.5	B5	P
C443N/S	642 350 000		4	20	300	150	20	1.5	100	100	1.5	B5	P
C453	642 350 000		4	25	300	200	20	1.7	100	PenLF	1.7	B5	P
C508	264 300 000		5	9	150		6.2	1.7	100		1.7	UX4	T
C509A	642 300 000		4	10	150		10	1	100		1	B4	T
C603	642 300 000		6	40	175		20	1.7	100		1.7	B4	T
C606	642 300 000		6	27	250		20	3.3	100		3.5	B4	T
C643	642 350 000		6	21	300	200	20	1.5	100	PenLF	1.5	B5	P
CBC1	023 198 060	G ₁	13	7	250		4	2	100		2	85C	DDT
CBL1	023 189 560	G ₁	44	8.5	200	200	45	8	100	PenLF	7	85C	DDP
CBL6	023 198 560	G ₁	44	8	100	100	45	6	100	75	6	85C	DDP
CBL31	026 985 310	G ₁	44	8.5	200	200	45	8	100	PenLF	7	A08	DDP
CB215	446 230 700		2	1	150		15	1.7	100		1.7	B7	TT
CB215S	023 064 470		2	1	150		12	1.7	100		1.7	85C	TT
CB220	446 230 700		2	3	150		15		100			B7	TT
CCHI	023 164 570	G ₁	20	{ 10 2	200		2.5	2.3	100	60	2.3	} 85C	TH
					200	50	2		100	60			
CCH2	023 164 570	G ₁	29	{ 10 2	200		2.5	2.3	100	60	2.3	} 85C	TH
					200	75	2		100	75			
CCH35	027 546 310	G ₁	7.5	{ 2 2	100		5.4	2.2	100	60	2.8	} A08	TH
					250	100	5	2.4	200	100	4		
CCI	023 100 060	G ₁	13	3.7	200		2.6	2	150		2	85C	T
CC2	023 100 060	G ₁	13	5.5	250		6	2.5	200		2.5	85C	T
CE230	320 200 000	D ₁	2.5				30		REC		15mA	UX4	R
CF1	023 110 560	G ₁	13	2	200	100	3	2.3	100	100	2.3	85C	P
CF2	023 110 560	G ₁	13	2	200	100	4.5	2.2	100	100	2.2	85C	P
CF3	023 110 560	G ₁	13	2	100	75	7.5	2.1	100	75	2.1	85C	P
CF7	023 110 560	G ₁	13	2	100	100	3	2.1	100	100	2.1	85C	P
CF50	123 100 560	G ₁	30	2	100	100	1.5	3.3	100	100	3.3	85C	P
CF61	276 454 130		6	{ 2 2	100		5	2.2	100		2.8	} B8A	TH
					250	100	3	2	100	100	2.4		
CF141	276 454 130		14	{ 2 2	100		6.4	2.2	100		2.8	} B8A	TH
					200	90	2.7	1.5	100	75	1.5		

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
CHI	023 145 560	G ₁	13	2	250	75	3	1.8	200	75	1.8	8SC	P
CKI	023 154 560	G ₁	13	1.5	200	90	8	3	200	75	1.6	8SC	P
CK3	461 230 650	G ₁	19	15	200	100	2.5		No Data Available			S8	O
CK1002	008 090 010		6				30	3K Ω	No Data Available			A08	CCR
CK1005	008 092 030		6.3				30		REC		15mA	A08	RR
CK1006	289 300 000		2				60		REC		20mA	UX4	RR
CK1007	008 092 030		1				60		REC		20mA	A08	RR
CK1012	289 300 000		2				120		REC		30mA	UX4	RR
CK1024	008 090 010		6				60	3K Ω	No Data Available			A08	CCR
CK1091	200 900 300		1.4						D			B7G	D
CK5814	741 226 413		6	8.5	250		10.5	2.2	100		2.2	B9A	TT
CL1	023 100 560	G ₁	13	14	200	200	25	2.5	100	PenLF	2.5	8SC	P
CL2	023 100 560	G ₁	24	15	100	100	50	3.8	200	75	3.8	9SC	P
CL3	160 452 300		35	9.5	200	200	40	5.5	150	100	5	C7	P
CL4	023 100 560	G ₁	33	8.5	200	200	45	8	100	PenLF	7	8SC	P
CL6	023 100 560	G ₁	35	9.5	200	100	45	8	100	90	7	8SC	P
CL33	026 540 310		33	8.5	200	200	45	8	100	100	7	A08	P
CV135	812 380 000		6				60		REC		23mA	B7G	R
CV137	812 314 600		6	3	200		7.5	2.5	100		2.5	B7G	DT
CV139	412 314 600		6	1.5	250		10	9	100		6	B7G	T
CV1510	265 501 403		6		400	250	30	3	100	150	3	B9G	P
CY1	023 100 080		20				120		REC		23mA	8SC	R
CY1c	803 210 000		20				60		REC		20mA	B5	R
CY2	123 190 080		30				60		REC		20mA	8SC	RR
CY21	208 001 003		25				120		REC		23mA	B9G	R
CY31	020 080 310		20				120		REC		30mA	A08	R
CY32	029 180 310		30				60		REC		23mA	A08	RR
CZ501d	265 113 000		3.5	2.5	250	125	6.5	3.5				UX6	P
CZ504D	265 113 000		5.5	13.5	250	200	40	3.5				UX6	P
D _{1/2}	280 300 000		7.5				60		REC		20mA	UX4	R
D1	123 000 000	D ₁	4				5		D			B3G	R
D1	642 300 000		4	1	40		1	0.8	No Data Available			B4	T
D1	289 300 000		5				60		REC		20mA	UX4	RR
D2	642 300 000		4	6	100		2.2	0.25	100		0.25	B4	T
D2M9	182 310 900		6.3				5		D			B7G	DD
D4	642 310 000		4	3	200		4	3.3	150		3.3	B5	T
D13U	023 100 060	G ₁	13	5	225		6	2.5	100			8SC	T
D020	642 300 000		7.5	50	400		55	2.1	100		2.1	B4	T
D024	642 300 000		4	40	400		63	7.5	100		6.0	B4	T
D025	642 300 000		6	75	300		60	3.75	100		3.75	B4	T
D026	642 300 000		4	92	400		63	3.8	100		3.8	B4	T
D030	642 300 000		4	100	400		60	6.9	100		6.0	B4	T
DO42	918 236 500	G ₁	4	6	250	250	36	9.5	100	150	8.0	B7	DDP
D41	892 310 000		4						D			B5	DD

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
D42	812 300 000	A	4						D			B4	D
D43	012 300 000		4				15		D			B5	DD
D61	268 154 130		6.3	2	250	125	5	1.8	100	100		B8A	P
D63	028 190 210		6						D			A08	DD
D77	192 310 800		6				5		D			B7G	DD
D105	264 300 000		1	18	150		8	2	150		2	UX4	T
D105	642 300 000		1	18	150		8	2	150		2	B4	T
D110	264 300 000		4	40	250		40	2.7	100		2.7	UX4	T
D110	642 300 000		4	40	250		40	2.7	100		2.7	B4	T
D121	268 154 130		12.5	2	200	90	5	2	100	100	2	B8A	DP
D152	192 310 800	G ₁	6						D			B7G	RR
D210	642 300 000		2	3	150		3.5	1.25	100		1.25	B4	T
D210SW	603 200 000		2	4.5	150		2.4	1.35	100		1.35	B4	T
D243	642 350 000		2.5	27	300	200	20	2	100	PenLF	2	B5	T
D400	892 310 000		4						D			B5	D
D404	642 300 000	D ₁	4	10	100		4	0.45	100		0.45	B4	T
D410	642 300 000		4	3	150		3.5	0.5	150		0.5	B4	T
D418	102 300 000		4						D			B4	D
D604	023 181 910		6						D			8SC	DD
DA	000 231 600		13	2.6	200		3.7	2.2	150		2.2	B7	T
DA1	642 300 000	A ₁	2	1	40		0.25	0.4	No Data Available			Sm4	T
DA2	642 300 000		2	2.15	40		1.25	0.5	No Data Available			Sm4	T
DA3	642 300 000		2	2.8	40		1.8	0.62	No Data Available			Sm4	T
DA30	642 300 000		4	70	300		60	3.5	100		6.0	B5	T
DA42	214 300 000		7.5		400			3.0	No Data Available				T
DA90	281 0*8 300	A	1.4				5		D			B7G	R
DA406	542 300 000		4	2.5	150	75	3	0.8	100	75	0.8	B4	P
DAC1	023 008 060		1.4	1	90		0.14	0.27	80		0.27	8SC	DT
DAC21	206 008 030		1.4	1	90		0.5	0.3	80		0.3	A08	DT
DAC22	264 008 030		1.25		90		0.35	0.3	90		0.3	B8G	DT
DAC25	264 228 230	G ₁	1.4	1	125		0.6	0.35	125		0.35	A08	DT
DAC31	036 080 200		1.4	1	90		0.45	0.27	80		0.27	A08	DT
DAC32	036 080 200		1.4		90		0.15	0.275	90		0.275	A08	DT
DAF11	802 362 450		1.4	0	90	50	0.22	2	80	60	2	F8	DP
DAF40	268 354 230		1.4	1.0	75	75	0.85	0.7	80	75	0.8	B9A	DP
DAF41	268 354 230		1.4	1.0	75	75	0.85	0.7	80	75	0.8	B9A	DP
DAF70	604 238 050		1.25	0	60	60	0.8	0.45	No Data Available			B8D	DP
DAF91	208 564 300		1.4	1	90	90	2	0.72	80	90	0.72	B7G	DP
DAF92	265 804 300		1.4	1	90	90	2	0.72	90	90	0.72	B7G	DP
DAF96	208 564 300		1.4	1.5	60	60	0.17	0.17	80	60	0.17	B7G	DP
DAF191	2*8 564 300	A	1.4		60	60	2.2	0.75	No Data Available			B7G	DP
DAS1	542 300 000		2	2.7	125	125	1.5	0.58	100	100	0.58	Sm4	P
DB	446 230 700		25	0	250		40		250			B7	TT
DBC21	206 098 030		1.4	1.5	125		1.6	0.9	100		0.9	A08	DDT
DBC31	026 980 300		1.4	1.5	125		1.6	0.9	100		0.9	A08	DDT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
DC2/HLDD	809 231 600	G ₁	25	1	200			2	200		2	B7	DDT
DC2P	642 310 000		35	13.5	200		17	3.75	200		3.75	B5	T
DC2/Pen	045 231 600		35	10	250	200	30	2.5	100	PenLF	2.5	B7	P
DC2/Pen	642 310 000	S	35	10	250	200	30	2.5	100	PenLF	2.5	B5	P
DC25G	542 310 000	A	20	1	200	75	5.5	1.8	200	75	1.8	B5	P
DC25GVM	542 310 000	A	20	2	200	60	5.8	1.5	200	60	1.5	B5	P
DC3HL	642 310 000		25	1	80		0.34	0.38	80		0.38	B5	T
DC11	602 302 400		1.4	2.5	90		2.0	1.0	80		1.0	F8	T
DC25	260 024 030		1.4	3.5	100		1.8	0.85	100		0.85	B8B	T
DC70	400 230 060		1.25	4.5	150		14.5	3.7	100		3.4	B8D	T
DC80	402 320 060		1.2	0	150		20	3.5	100			B9A	T
DC90	266 044 300		1.4	3.0	90		3.0	1.1	9.0		1.1	B7G	T
DC96	266 044 300		1.4	2.5	90		2.1	1.0	90		0.95	B7G	T
DC193	2*4 *36 200		1.4	5	100		10	2.4	100		2.4	B7G	T
DCC90	274 346 200		1.4	2.5	90		3.7	1.8	80		1.8	B7G	TT
DCH11	723 465 430	G ₁	1.25	4	90		0.85		100	60		F8	TH
					125	60			100	60			
DCH21	207 540 630		1.4	0	60		2.1	1.4	No Data Available			A08	TH
				0	90	60	1		80	60			
DCH22	276 454 030		1.4	0	60		1.4		No Data Available			A08	TH
				0	90	50	0.75						
DCH25	276 454 030		1.4	0	60		2	1.3	No Data Available			A08	TH
				0	90	60	1		80	60			
DCH31	027 546 300		1.4		60		2.1	1.4	No Data Available			A08	TH
					90	60	1	1.4	80	60			
DC/HL	642 310 000	G ₁	6	1	100			3	100		3	B5	T
DC/P	642 310 000		8	1	200			4.5	200		4.5	B5	T
DDPP6B5	023 189 560		6	5	250	250	36	10	100	PenLF	9	85C	DDP
DDR2	256 101 030		6	5	250	250	40	12	No Data Available			A08	P
DDR7	412 236 *50		6	12.5	250	250	16	2.6	100	PenLF	2.6	B8A	P
DC/5G	542 310 000	A	6		200	75		2.75	200	75	2.75	B5	P
DD4	892 310 000		4						D			B5	DD
DD4D	091 231 800		4						D			B7	DD
DD6	892 310 000		6						D			B5	DD
DD6	192 310 800		6						D			B7G	RR
DD6G	192 310 800		6						D			B7G	RR
DD6Ds	023 180 910		6						D			85C	DD
DD13	892 310 000		13						D			B5	DD
DD41	219 080 130		4						D			M08	DD
DD101	219 080 130		10						D			M08	DD
DD207	892 300 000	D ₁	2						D			B4	DD
DD465	902 310 000		4						D			B5	DD
DD620	892 310 000		6						D			B5	DD
DD818	892 310 000		8						D			B5	DD
DDAI	892 310 000		4						D			B5	DD

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
DDDI1	742 302 460		1.2	4.5	125		1.5	1.0	125		1.5	A08	TT
DDD25	206 447 030		1.4	1.5	100		3.5	1.2	100		1.2	A08	TT
DDL4	892 310 000		4				5		D			B5	RR
DDP4B	968 231 500	G ₁	4	5	250	250	36	8	100	PenLF	7	B7	DDP
DDP4M	918 236 500	G ₁	4	5	250	250	36	8	100	PenLF	7	B7	DDP
DD/Pen	849 231 500	A	4	2.5	200	100	5	2.7	100	100	2.7	B7	DDP
DDPP4B	869 231 500	G ₁	4	5	250	250	36	10	100	PenLF	9	B7	DDP
DDPP4BS	023 189 560	G ₁	4	5	250	250	36	10	100	PenLF	9	8SC	DDP
DDPP4M	869 231 500	G ₁	4	5	250	250	36	10	100	PenLF	9	B7	DDP
DDPP6B	968 231 500	G ₁	6	6	250	250	36	9.5	100	PenLF	9	B7	DDP
DDPP39	968 231 500	G ₁	35	8	200	200	45	8.5	100	PenLF	8	B7	DDP
DDPP39M	918 236 500	G ₁	35	8	200	200	45	8.5	100	PenLF	8	B7	DDP
DDPP39S	023 198 560	G ₁	35	8	200	200	45	8.5	100	PenLF	8	8SC	DDP
DDT	908 231 600	G ₁	4	3	200		3	2.4	150		2.4	B7	DDT
DDT2	682 390 000	G ₁	2	3	150		1	1.4	100		1.4	B5	DDT
DDT2B	682 390 000	G ₁	2	4.5	150		2.5	1	100		1.0	B5	DDT
DDT2BS	023 089 060	G ₁	2	4.5	150		2.5	1	100		1.0	8SC	DDT
DDT4	809 231 600	G ₁	4	3	200		3	2.5	150		2.5	B7	DDT
DDT4(S)	908 231 600	G ₁	4	5	250		4	3.6	150		3.6	B7	DDT
DDT4(S)	023 198 060	G ₁	4	5	250		4	3.6	150		3.6	8SC	DDT
DDT6	809 231 600	G ₁	6	5.5	250		5	2	150		2	B7	DDT
DDT6S	023 189 060	G ₁	6	5.5	250		5	2	150		2	8SC	DDT
DDT13	908 231 600	G ₁	13	4	200		5	2.3	150		2.3	B7	DDT
DDT13S	023 189 060	G ₁	13	5	200		4	3.6	100		3.6	8SC	DDT
DDT16	809 231 600	G ₁	16	3	200		5	2.5	100		2.5	B7	DDT
DDT213	809 231 600	G ₁	13	4	200		5	2.25	150		2.2	B7	DDT
DDT215	682 390 000	G ₁	2	3	150		3	1.6	100		1.6	B5	DDT
DDT220	682 390 000	G ₁	2.5	4.5	150		2.5	1	100		1.0	B5	DDT
DE1	264 130 000		2.5	21	250		5.2	0.975	100		0.975	UX5	T
DE5	280 300 000		2.5				120		REC		30mA	UX4	R
DET19	204 140 300	A ₁ A ₂	6	45.0	250		50		No Data Available			UX7	TT
DET20	020 000 310	A ₁ G ₁	6	5.5	250		12	3	100		3	A08	T
DF1	032 000 560	G ₁	1.4	1	90	90	1.2	0.75	80	90	0.75	8SC	P
DF11	602 302 450		1.4	0	90	50	0.9	0.65	80	60	0.6	F8	P
DF21	206 501 030	G ₁	1.4	1	90	90	1.2	0.7	80	90	0.7	A08	P
DF22	206 501 030	G ₁	1.4	1.5	90	90	1.4	1.1	80	90	1.1	A08	P
DF23	265 114 130		1.4	1.5	90	60	0.65	0.58	80	60	0.58	A08	P
DF25	265 114 130		1.4	1	125	60	1	0.65	125	60	0.65	A08	P
DF26	265 114 130		1.4	1.1	125	90	1.2	0.3	125	90	0.3	A08	P
DF31	026 510 300	G ₁	1.4	1	90	90	1.2	0.65	80	90	0.65	A08	P
DF32	026 510 300	G ₁	1.4	1.5	90	90	1.4	1.1	80	90	1.1	A08	P
DF33	036 500 200	G ₁	1.4	0.5	90	90	0.82	0.75	80	90	0	A08	P
DF64	652 430 000		0.625	0.62	20	20	0.65	0.1	No Data Available			B5A	P
DF65	265 430 000		0.625	1.15	20	20	0.05	0.1	No Data Available			B5A	P
DF66	653 420 000		0.625	1.05	20	20	0.05	0.1	No Data Available			B5A	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
DF67	653 420 000		0.625	1.15	20	20	0.05	0.1	No Data Available			B5A	P
DF70	*4* 23* 650		0.625	0	40	40	0.37	0.22	No Data Available			B8D	P
DF72	*40 230 650		1.25	0	60	60	1.7	1.0	No Data Available			B8D	P
DF73	*40 230 650		1.25	0	80	75	1.7	0.8	No Data Available			B8D	P
DF91	265 024 300		1.4	1	90	75	3.5	0.9	80	60	0.9	B7G	P
DF96	265 024 300		1.4	1	90	75	3.7	1	80	60	1	B7G	P
DF96	265 *24 300		1.4	0.8	75	75	1.4	0.65	80	75	0.75	B7G	P
DF97	265 224 300		1.4	0	60	60	1.68	0.84	80	75	0.8	B7G	P
DF191	265 *24 300		1.4		60	60	4.2	1	No Data Available			B7G	P
DF904	265 *24 300		1.4	0	90	90	1.6	0.9	90	90	0.9	B7G	P
DF906	265 3*4 300		1.4	0	40	40	3	1.7	No Data Available			B7G	P
DFF50	246 557 430		1.4	11	20	20	22.5	1.2	No Data Available			A08	PP
DFF51	246 557 430		1.4	1	20	20	2.1	0.7	No Data Available			A08	PP
DFF101	634 572 400		1.4	0	40	40	1	0.22	No Data Available			B7G	PP
DG210	642 350 000		2	1.5	100	20	1	1	No Data Available			B5	P
DH	642 310 000		16	3	200		6	3.7	100		3.7	B5	T
DH30	908 231 600	G ₁	13	2	200		2.8	4.5	150		4.5	B7	DDT
DH42	908 231 600	G ₁	4	3	250		1.1	1.2	150		1.2	B7	DDT
DH63	026 890 310	G ₁	6	3	250		1.1	1.2	150		1.2	A08	DDT
DH73	026 890 310	G ₁	6	1	250			2	250		2	A08	DDT
DH74	026 890 310	G ₁	13	3	250		1.1	1.2	100		1.2	A08	DDT
DH76	026 980 310	G ₁	13	3	250		1.1	1.2	150		1.2	A08	DDT
DH77	412 389 600		6	3	250		1	1.2	150		1.2	B7G	DDT
DH81	264 *98 130		6	3	250		1	1.2	150		1.2	B8B	DDT
DH101	264 *98 130		19	3	250		1	1.2	150		1.2	B8B	DDT
DH107	412 389 600		19	3	250		1	1.2	150		1.2	B7G	DDT
DH142	264 089 130		14	1.6	175		1.5	1.65	100		1.6	B8A	DDT
DH147	026 890 310	G ₁	6	5.5	250		5	2	100		2	A08	DDT
DH149	264 198 130		6	1.0	250		1.3	1.0	250		1.0	B8A	DDT
DH150	264 098 130		6	3	250		1.0	1.3	150		1.3	B8A	DDT
DH719	981 231 146		6	3	250		1.0	1.5	100		1.3	B9A	DDDT
DHD	908 231 600	G ₁	16	1	200			2.2	200		2.2	B7	DDT
DHL	642 310 000		16	1.5	150		3.8	4.5	100		4.5	B5	T
DK1	023 064 560	G ₁	1.4	0	90	50	1.8	0.55	80	60	0.55	8SC	H
DK21	206 540 630	G ₁	1.4	2	60	60	4.5	1.4	80	60	1.4	A08	H
DK32	036 546 200	G ₁	1.4	0	90	50	1.8	0.55	80	60	0.55	A08	H
DK40	265 454 030		1.4	2	75	75	0.9	0.7	80	75		B8A	O
DK91	266 424 300		1.4	4	75		4.5	1.2	80		1.4	B7G	H
DK92	266 464 300		1.4	4	60		4.0	1.2	80		1.2	B7G	H
DK96	265 461 300		1.4	4.1	60	60	1.65	0.1	No Data Available			B7G	H
DL	642 310 000		16	8	200		25	4.5	100		4.5	B5	T
DL1	023 004 560		1.4	3	90	90	4	1.25	80	75	1.25	8SC	P
DL2	032 004 560		1.4	7.5	90	90	7.5	1.55	80	75	1.55	8SC	P
DL11	602 302 450		1.4	4.4	90	90	3.7	1.0	80	90	1	F8	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
DL21	206 540 030		1.4	3	90	90	4	1.3	80	90	1.3	A08	P
DL22	265 024 330		1.4	4	125	125	5	1.6	100	100	1.6	A08	P
DL25	265 204 330		1.4	4.7	125	125	4.5	2.1	100	100	2.1	A08	P
DL31	036 540 200		1.4	3	90	90	4	1.25	80	75	1.25	A08	P
DL33	036 540 320		1.4	4.5	90	90	9.5	2.2	80	75	2.2	A08	P
DL35	036 540 200		1.4	7.5	90	90	7.5	1.55	80	75	1.55	A08	P
DL36	036 540 200		1.4	4.5	90	90	9.5	2.2	90	90	2.2	A08	P
DL41	362 054 220		1.4	3	90	90	4	1.3	80	90	1.3	B8A	P
DL63	026 890 310	G ₁	6	3	250		4.2	1.6	100		1.6	A08	DDT
DL64	652 430 000		1.25	1.5	20	20	0.16	0.18	No Data Available			B5A	P
DL65	365 420 000		1.25	0.2	20	20	0.47	0.42	No Data Available			B5A	P
DL67	653 420 000		1.25	0.2	20	20	0.47	0.42	No Data Available			B5A	P
DL68	653 420 000		1.25	2.2	20	20	0.6	0.43	No Data Available			B5A	P
DL70	*40 230 650		1.25	7.5	150	90	7.5	1.9	150	90	1.0	B8D	P
DL71	*4* 23* 650		1.25	1.25	40	40	0.6	0.55	No Data Available			B8D	P
DL72	*4* 23* 650	G ₁	1.25	4.5	40	40	1.25	0.5	No Data Available			B8D	P
DL74	026 890 310		13	3	250		5.1	1.65	100		1.65	A08	DDT
DL75	*40 230 650		1.25	2.5	90	90	17	0.85	90	90	0.9	B8D	P
DL82	264 *98 130		6.0	2	200			1.4	150		1.4	B8B	DDT
DL91	264 536 200		1.4	7	90	75	7.4	1.58	80	60	1.5	B7G	P
DL92	264 536 200		1.4	7	90	75	7.4	1.58	80	75	1.58	B7G	P
DL93	365 426 300		1.4	8.4	150	90	13.3	1.9	100	75	1.9	B7G	P
DL94	365 024 300		1.4	4.5	90	90	9.5	2.15	80	75	2.15	B7G	P
DL95	264 536 200		1.4	4.5	90	90	9.5	2.15	80	75	2.1	B7G	P
DL96	265 034 200		1.4	3.0	60	60	3.5	1.4	60	60	1.4	B7G	P
DL98	504 230 600		2.5	38	150	125	25		No Data Available			B7G	P
DL145	264 098 130		15	5.9	250		5	2.3	150		2.3	B8A	DDT
DL192	264 536 200		1.4	7	60	60	7	1.5	No Data Available			B7G	P
DL193	265 436 200		1.4	7.5	150	60	9.5	2.9	150	60	2.9	B7G	P
DL907	365 004 200		1.4	5.5	125	125	15	3.1	125	125	3.1	B7G	P
DLL21	246 547 330		1.4	8.7	125	125	1		100	100		A08	PP
DLL25	046 547 230		1.4	9.4	125	125	17		125	125		B8G	PP
DLL31	326 447 250		1.4	5	90	90	3		80	75		A08	PP
DLL101	264 574 300		1.4	7	90	60	8.2	1.1	80	60	1.2	B7G	PP
DLL102	264 574 300		1.4	{ 0 0	40 40	40 40	1.3 2.0	0.55 0.55	No Data Available No Data Available			B7G	PP
DLP51	023 004 560	C G ₁	4	17	250	250	36	2.5	No Data Available			8SC	P
DN41	968 231 500		4	3.3	250	200	32	10	100	PenLF	9	B7	DDP
DNI43	264 598 130		6	6.2	250	275	44	9.5	100	PenLF	9	B8B	DDP
DO24	642 300 000		4	40	400		63	7.5	No Data Available			B4	T
DO26	642 300 000		4	92	400		63	3.8	No Data Available			B4	T
DO30	642 300 000		4	100	400		60	4	100		4	B4	T
DP	264 008 030		16	7.5	200		25	6	100		6	M08	DT
DP5	642 350 000		4	5	250	250	10	4	100	PenLF	4	B5	P
DP7	023 004 560		4	20	250	250	20	2.5	100	PenLF	2.5	8SC	P
DP61	412 365 100		6	2.3	150	150	7	4.3	150	150	4	B7G	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
DP495/6	869 231 500	G ₁	4	6.5	250	250	35	9.5	100	PenLF		B7	DDP
DP4480	819 236 500	G ₁	44	8.4	200	200	46	8	100	PenLF	7	B7	DDP
DP/Pen	045 231 600		16	10	200	200	31	3.5	100	100	3.5	B7	P
DPT	045 231 600		16	10	200	200	40	3.1	100	PenLF	3.1	B7	P
DS	000 231 600	G ₁	13	3	200		4	2.5	150		2.5	B7	T
DS	542 310 000	A	16	1.5	200	75	2.8	1.1	200	75	1.1	B5	P
DSB	542 310 000	A	16	1	150	90	3.4	3.2	150	90	3.2	B5	P
DSPen	061 231 500	G ₁	16	1.5	200	100	4.7	2.3	200	100	2.3	B7	P
DT7	642 300 000		4	16	200		14	2	100		2	B4	T
DT436	023 198 060	G ₁	4	7	250		4	2	100		2	8SC	DDT
DT1366	023 198 060	G ₁	13	5	200		4	2	100		2	8SC	DDT
DU1	802 300 000		4				30		REC		15mA	B4	R
DU2	892 300 000		4				30		REC		17mA	B4	RR
DU3	892 300 000		4				15		REC		10mA	B4	RR
DU4	892 300 000		4				30		REC		15mA	B4	RR
DU5	892 300 000		4				30		REC		17mA	B4	RR
DU10	802 300 000		4				60		REC		25mA	B4	R
DVSG	542 310 000	A	16	1	200	75	7.5	2.5	100	75	2.5	B5	P
DVS Pen	542 310 000	A	16	1.5	200	100	5.5	2	200	100	2	B5	P
DWI	892 300 000		4				15		REC		10mA	B4	RR
DW2	892 300 000		4				30		REC		15mA	B4	RR
DW3	892 300 000		4				30		REC		15mA	B4	RR
DW4	892 300 000		4				60		REC		20mA	B4	RR
DW4/350	892 300 000		4				60		REC		20mA	B4	RR
DW4/500	892 300 000		4				60		REC		20mA	B4	RR
DW5	802 300 000		4				120		REC		30mA	B4	R
DW7X	892 300 000		4				30		REC		15mA	B4	RR
DW8	892 300 000		5				30		REC		15mA	B4	RR
DW30	892 300 000		7.5				60		REC		20mA	B4	RR
DW802	642 300 000		4	25	250		26	4	100		4	B5	T
DWI508	642 310 000		4	7.5	150		4	1.5	100		1.5	B5	T
DW4011	642 310 000		4	5.0	200		5.0	3.6	150		3.6	B5	T
DW4023	642 310 000		4	3.0	150		2.5	1.75	100		1.7	B5	T
DX2	642 300 000		2	3	150		3.5	1.4	100		1.4	B4	T
DY30	*2* 0*0 3*0	D ₁	1.25						D			A08	D
DY80	23* 232 *32	D ₁	1.25						D			B9A	D
DY86	32* 323 *23	D ₁	1.4						D			B9A	D
DY604	642 300 000		4	15	150		8	1.3	100		1.3	B4	T
DZ2	542 300 000	A	4	1	200	100	4	0.7	100	100	4	B4	P
E	642 300 000		4	9	200		1.7	0.4	100		0.4	B4	T
E	264 300 000		3	22.5	125		6.5		125			UX4	T
E4	642 300 000		4	16	200		12	1.8	100			B4	T
E4D	892 300 000		4				30		REC		15mA	B4	RR
E4F	892 300 000		4				60		REC		20mA	B4	RR
E4H	802 300 000		4				125		REC		30mA	B4	R

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
E4K	003 200 000	D ₁	4				60		REC		20mA	B5	R
E4L	003 200 000	D ₁	4				120		REC		30mA	B5	R
E20V	023 100 080		20				60		REC		20mA	8SC	R
E80CC	641 337 412		6-3	5-5	250		6	2-7	100		2	B9A	TT
E80F	501 236 014		6-3	1-65	250	100	3	1-85	150	100	1-8	B9A	P
E80L	041 230 651		6-3	5-2	200	200	30	9	100	100		B9A	P
E81L	041 230 651		6-3	2-5	200	200	20	11	100	100		B9A	P
E83F	541 236 **1		6-3	1-7	200	125	10	9	100	100		B9A	P
E88CC	641 237 410		6-3	6-5	150		1-0		100			B9A	TT
E90CC	672 344 100		6-3	2-1	100		8-5	6	100		8-5	B9A	TT
E91H	412 365 100		6-3	5	125	75	0-5	0-6	125	75	0-6	B7G	H
E92CC	672 344 100		6-3	1-7	150		8-5	6	100		5-6	B7G	TT
E180F	141 23* 615		6	1-0	200	150	13-1	16-5	No Data Available			B9A	P
E235	642 300 000		2	12	200		18	3	100		3	B4	T
E405	642 300 000		4	32	250		20	2	100		2	B4	T
E406	642 300 000		4	34	250		8	2-3	100		2-3	B4	T
E406N	642 300 000		4	34	250		8	2-3	100		2-3	B4	T
E408	642 300 000		4	30	400		26	2	100		2	B4	T
E408N	642 300 000		4	36	400		30	2-7	100		2	B4	T
E409	642 310 000		4	16	200		12	1-3	100		1-3	B5	T
E409N	642 310 000		4	16	200		12	1-3	100		1-3	B5	T
E410	642 300 000		4	28	400		30	6	100		6	B4	T
E414	642 310 000		4	6	150		6-5	2	100		2	B5	T
E414	642 300 000		4	15	150		8	1-3	100		1-3	B4	T
E415	642 310 000		4	8	200		6	1-4	100		1-4	B5	T
E415	264 130 000		4	8	200		6	1-4	100		1-4	UX5	T
E420	642 300 000		4	18	150		11	1-6	100		1-6	B4	T
E422	642 300 000		4	16	250		12	5	100		5	B4	T
E424	642 310 000		4	2-5	200		6	2-4	100		2-4	B5	T
E424R	612 300 000	G ₁	4	5	200		6	1-6	100		1-6	B4	T
E424N	642 310 000		4	3-5	200		6	2-4	100		2-4	B4	T
E425	642 310 000		4	4-5	150		3	1	100		1	B5	T
E428	642 310 000		4	3-5	208			2-4	100		2-4	B5	T
E430	642 310 000		4	3	150		4	2	100		2	B5	T
E430N	642 310 000		4	15	200		15	3	100		3	B5	T
E435	642 310 000		4	1-5	200		3	3	100		3	B5	T
E438	642 310 000		4	2-5	200		0-3	1-5	100		1-5	B5	T
E441N	652 300 000	G ₁	4	0	100	0	1-7	1	100		1	B4	T
E442	542 310 000	A	4	1-3	200	60	1-5	0-9	200		0-9	B5	P
E442S	542 310 000	A	4	2	200	60	4	1	100	60	1	B5	P
E443H	642 350 000		4	15	250	250	36	2-8	100	PenLF	2-8	B5	P
E443N	642 350 000		4	40	400	200	30	1-9	100	100	1-9	B5	P
E444	258 413 000	A	4	3	200	90	4	3	100	90		UX6	DP
E444N	258 413 000	A	4	3	100	90	4	3	100	90	3	UX6	DP
E444S	642 310 000	D ₁	4	3-5	200		6	2	100		2	B5	DT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
E445	542 310 000	A	4	2	200	100	6	1	100	100	1	B5	P
E446	542 310 000	A	4	2	200	100	3	2-3	100	100	2-3	B5	P
E447	542 310 000	A	4	2	200	125	4-5	2-3	100	100	2-3	B5	P
D448	164 552 300	G ₁	4	1-5	200	100	3		100	100		C7	P
E449	165 452 300	G ₁	4	2	200	75	3	1-8	100	75	1-8	C7	P
E451	642 350 000		4		400		17		No Data Available			B4	T
E452T	542 310 000	A	4	2	200	100	3	2	100	100	2	B5	P
E452T	254 130 000	A	4	2	200	100	3	2	100	100	2	UX5	P
E453	045 231 600		4	15	250	250	24	2-5	100	PenLF	2-5	B7	P
E454	216 809 300	G ₁	4	3-5	200		3-5	1-6	100		1-6	UX7	DDT
E455	542 310 000	A	4	1-5	200	100	3	2	100	100	2	B5	P
E455	254 130 000	A	4	1-5	200	100	3	2	100	100	2	UX5	P
E462	542 310 000	A	4	2	200	100	3	2	100	100	2	B5	P
E463	045 231 600		4	22	250	250	36	2-7	100	PenLF	2-7	B7	P
E499	642 310 000		4	1-6	200		0-2	4	150		4	B5	T
E501D	265 113 000	G	3	2-5	250	125	6-5	3-5	100	100		UX6	T
E501R	265 113 000	G	6-3	2-5	250	125	6-5	3-5	100	100		UX6	T
E504D	265 413 000		5	13-5	250	200	40	3-5	100	100		UX6	P
E504P	265 413 000		6-3	13-3	250	200	40	3-5	100	100		UX6	P
E543	045 231 600		4	15	250	250	24	2-5	100	PenLF	2-5	B7	P
E646	020 080 310		26				120		REC		30mA	A08	R
E703	642 300 000		7-5	100	400		30	1	100		1	B5	T
E851	030 908 020		5				120		REC		30mA	A08	RR
E1137	366 446 622		6	2-3	250		32	16	No Data Available			B9G	T
E1148	020 000 310	G ₁ A	6	5-5	250		14	3-0	100		3-0	A08	T
E1192	021 450 310	A	6	11	250	150	30	3-5	100	100	3-5	A08	P
E1242	265 101 403		6		400	250	30	3	100	150	3	B9G	P
E1323	020 000 310	A G ₁	6	3	100		25	6-7	100		6	A08	T
E1413	265 024 300		1-4	1	90	75	3-5	0-9	80	75	0-9	B7G	P
E1478	642 300 000		4	1	100			6-9	100		6-0	B5	T
E1484	208 564 300		1-4	1	90	90	2-7	0-63	80	90	0-6	B7G	DP
E1489	241 657 143		6		350	250	21	3-9	100	100	3-9	B9G	PP
E1517	412 361 500		6	2-5	200	200	8	2-5	100	100	2-5	B7G	P
E1518	412 361 500		6	2	250	250	10	7-5	100	150	5	B7G	P
E1606	461 471 230		6	8	250		9	2-6	100		2-6	A08	TT
E1624	6*2 364 100		6	8-5	250		10-5	2-2	100		2-2	B7G	T
E1654	026 510 310	G ₁	6	1-5	200	200	10-9	8-5	100	150	8	A08	P
E1662	412 360 500		6	12	250	250	20	2-6	100	PenLF	2-6	B7G	P
E1677	002 300 000	D ₁	2				15		REC		10mA	B4	R
E1678	026 510 310	G ₁	13	3	250	100	7-6	1-5	100	100	1-5	B7G	P
E1681	026 540 310		15	13	175	175	35	2-5	100	100	2-5	A08	P
E1682	020 800 310		30				120		REC		30mA	A08	R
E1706	256 051 463		6	8	250	175	80	13	100	100	10	B9G	P
E1709	064 471 230		6	2	250		2	1-35	150		1-3	A08	TT
E1733	009 **8 230		6				60		REC		20mA	B8B	RR

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
E1736	265 004 130		6	4-4	250	250	40	10-5	100	PenLF	10-0	B8B	P
E1740	209 008 130		6				30		REC		15mA	B8B	RR
E1751	192 310 800		6				5		D			B7G	RR
E1780	009 **8 230		4				30		REC		15mA	B8B	RR
E1787C	316 541 120		6	9	250	175	50	8	100	100	8	B9G	P
E1794	265 104 130		19	3	250	75	2-5	2-8	100	60	2-8	B8B	P
E1795	280 008 130		50				120		REC		30mA	B8B	R
E1796	265 004 130		80	9-5	175	175	70	10	100	100	9	B8B	P
E1809	265 104 136		6	3	250	100	8	2-8	100	100	2-8	B8B	P
E1813	264 198 130		19	3	250		1	1-2	100		1-2	B8B	DDT
E1816	364 526 300		1-4	7	90	75	7-4	1-575	80	60	1-5	B7G	P
E1835	005 231 600	G ₁	13	4-4	250	250	40	10-5	100	PenLF	9	B7	P
E1838	264 198 130		6	3	250		1	1-2	100		1-2	B8B	DDT
E1848	264 *98 130		6	2	200		10	1-4	200		1-4	B8B	DDT
E1884	002 300 000	D ₁	2				5		D			B4	R
E1912	412 389 600		6	3	250		1	1-2	100		1-2	B7G	DDT
E1935	241 657 143		6	26	250	200	30	3-9	100	100	3-9	B9G	PP
E1938	802 309 100		6				30		REC		15mA	B7G	RR
E1969	542 376 400		6	{ 2 1	100		5	2-2	100	60	2-8	B7G	TH
E1976	412 361 500		19		250	75	5-3	2-2	250	75			
E1984	412 36* 500		6	5-5	250	250	35	10	100	PenLF	9	B7G	P
E1985	281 008 300		40				60		REC		20mA	B7G	R
E1987	412 36* 500		40	8	175	150	50	10	100	100	9	B7G	P
E1994	471 461 230		13	8	250			2-6	100		2-6	A08	TT
E2004	*2* 0*0 3*0	D ₁	1-25				5		D			A08	R
E2020N	642 310 000		20	18	200		15	1-6	100		1-6	B5	T
E2047	412 361 500		12-5	2-5	200	200	8	2-5	200	200	2-5	B7G	P
E2122	902 308 100		6				30		REC		15mA	B7G	RR
E2128	241 657 143		19	16-5	250	150	30	3-9	100	100	3-9	B9G	PP
E2134	412 36* 500		6		175	175	55	9-5	100	100	7	B7G	P
E2153	412 36* 500		13	8	175	150	50	10	100	100	9	B7G	P
E2178	**1 23* **8		20				120		REC		38mA	B9A	R
E2179	*41 23* *51	A	20	12	150	150	50	8-5	100	100	7	B9A	P
E2185	026 040 310		6	8	250		9	2-6	100		2-6	A08	T
E2223	*** 23* **8		25				120		REC		30mA	B9A	R
E2256	**1 23* **8		20				120		REC		40mA	B9A	R
E2382	021 *4* 350	A	52		150	150	100	16	No Data Available			A08	P
EA40	200 800 130		6						D			B8A	D
EA50	123 000 000	D ₁	6						D			B3G	D
EA76	281 380 000		6				5		D			B5B	R
EAI11	023 010 000	D ₁	6-3				60		REC		20mA	F8	R
EA111	023 189 100		6-3				5		D			F8	DD
EA191	182 311 900		6-3				5		D			B7G	DD
EAB1	023 110 890		6						D			85C	DDD

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
EABC80	†91 238 146		6	3	250		1.0	1.2	100		1.3	B9A	DDDT
EAC91	812 314 600		6	3.2	200		7.5	2.8	100		2.8	B7G	DT
EA21	265 814 130		6.3	2	250	100	6	2.8	100	100		B8G	P
EA41	268 154 130		6	2	250	100	5.0	1.8	100	100	1.8	B8A	DP
EA42	268 154 130		6	2	250	100	5	1.8	100	100	1.8	B8A	DP
EB4	023 180 910		6						D			8SC	DD
EB11	802 301 190		6						D			F8	DD
EB34	029 180 310		6				5.0		D			A0B	DD
EB40	208 090 130		6						D			B8A	DD
EB41	201 908 130		6				5		D			B8A	RR
EB91	192 310 800		6						D			B7G	RR
EBC1	023 198 060	G ₁	6	7	250		4	2	100		2	8SC	DDT
EBC3	023 189 060	G ₁	6	5.5	250		5	2	100		2	8SC	DDT
EBC11	892 301 460		6	6.3	200		4	2	100		2	F8	DDT
EBC21	264 *89 130		6	5.5	250		5	2	100		2	B8B	DDT
EBC30	023 189 060	G ₁	6	4.3	200		4	2	150		2	8SC	DDT
EBC33	026 890 310	G ₁	6	5.5	250		5	2	100		2	A0B	DDT
EBC41	264 098 130		6	3	250		1	1.3	100		1.2	B8A	DDT
EBC81	641 238 090		6	3	250		1.0	1.2	250		1.2	B8A	DDT
EBC90	412 389 600		6	3	250		1	1.2	150		1.2	B7G	DDT
EBC91	412 389 600		6	2	250		1.2	1.6	200		1.6	B7G	DDT
EBF1	023 198 560	G ₁	6	3	250	125	9	1.1	100		1.1	8SC	DDP
EBF2	032 198 560	G ₁	6	2	250	100	5	1.8	100	PenLF	1.8	8SC	DDP
EBF11	982 361 450		6	2	250	100	5	1.8	100	100	1.8	F8	DDP
EBF15	982 361 450		6	2	250	100	12	5	100	100	5	FB	DDP
EBF21	268 954 130		6	3.2	250	100	7.5	2.2	100	100		B8G	DDP
EBF32	026 895 310	G ₁	6	2	250	100	5	1.8	100	100	1.8	A0B	DDP
EBF35	216 589 130	G ₁	6	2	250	100	5	1.8	100	100	1.8	A0B	DDP
EBFB0	541 236 891		6	2	250	90	5	2.2	100	90	2.2	B9A	DDP
EBFBI	541 236 891		6.3	2	250	75	6.7	1.1	100	100		B9A	DDP
EBF89	541 236 891		6.3	2	250	100	9	3.8	100	100		B9A	DDP
EBF171	892 541 360		6.3	3.2	250	80	6	1.8	100	80		B8B	DDP
EBL1	023 189 560	G ₁	6	6	250	250	36	9.5	100	PenLF	9.0	8SC	DDP
EBL21	264 598 130		6	6.2	250	275	44	9.5	100	PenLF	9.0	B8B	DDP
EBL31	026 895 310	G ₁	6	6	250	250	36	9.5	100	PenLF	9.0	A0B	DDP
EBL71	264 589 130		6	5	250	250	44	9.5	250	200	9.5	A0B	DDP
EC2	023 100 060	G ₁	6	5.5	250		6	2.5	100		1.5	8SC	T
EC21	206 401 003		6	4	250		5	2.7	100		2.5	B9G	T
EC31	026 040 310		6	16	250		20	3.2	100		3.2	A0B	T
EC40	244 644 130		6	1.5	275		15	12	100		9	B8A	T
EC41	206 040 130		6	5.5	175		20	4.5	125		4.5	B8A	T
EC52	241 600 003		6	2.6	250		10	6.5	100		6.5	B9G	T
EC53	123 000 000	A G ₁	6	3.3	200		7.5	2.9	100		2.9	B3G	T
EC54	244 664 413		6	1.5	250		10	9	100		7	B9G	T
EC70	462 603 160		6	2	100		13	5.5	100		5.5	B8D	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
EC80	441 230 446		6	1.5	250		15	12	150		10	B9A	T
EC81	401 230 060		6	2	150		30	5.5	100		4	B9A	T
EC90	6*2 364 100		6	8.5	250		10.5	2.2	100		3.1	B7G	T
EC91	412 314 600		6	2	250		6	8.5	200		8.0	B7G	T
EC92	602 304 100		6	2.0	250		10.0	5.0	100		5.0	B7G	T
EC93	642 314 600		6	4	100		16.0	8.0	100		8	B7G	T
ECC31	027 446 310		6	4.6	250		6	2.3	100		2.3	A08	TT
ECC32	461 471 230		6	4.6	250		6	2.3	100		2.3	A08	TT
ECC33	461 471 230		6	4	250		9	3.6	100		3.6	A08	TT
ECC34	461 471 230		6	16	250		10	2.2	100		2.2	A08	TT
ECC35	461 471 230		6	2.3	250		2.3	2	100		2	A08	TT
ECC40	274 164 130		6	5.2	250		6	2.7	100		2.7	B8A	TT
ECC81	741 226 413		6	1.5	200		8.5	6.5	150		5	B9A	TT
ECC82	741 226 413		6	8.5	250		10.5	2.2	100		2	B9A	TT
ECC83	741 226 413		6	2.0	250		1.2	1.6	150		1.6	B9A	TT
ECC84	147 234 116		6	1.5	90		12	6.0	100		6.0	B9A	TT
ECC85	741 236 410		6	2.3	250		10	5.9	100		5	B9A	TT
ECC91	672 344 100		6	0.85	100		8.5	5.3	100		5.3	B7G	TT
ECF1	023 164 570	G ₁	6	2.0	150	0	9.0	2.6	150	60	2.6	B7G	TP
				2.0	100	100	5.0	2.5	100	100	2.5		
ECF12	642 371 450		6	0	100	0	11.0	3.0	100	60	3.0	F8	TP
				2	250	100	5.0	2.0	100	100	2.0		
ECF80	645 237 114		6	2	100	0	14	5	100	60	5	B9A	TP
				2	175	175	10	6.2	100	150	6		
ECF82	645 237 114		6	1.0	100		18.0	8.5	100	60	7.0	B9A	TP
				1.0	250	100	10.0	5.2	100	100	5.0		
ECH2	023 164 570	G ₁	6	1	100		9.5	5.5	100	60	5.5	B8C	TH
				2.5	250	100	3.25		250	100			
ECH3	023 164 570	G ₁	6	2	100		5	2.4	100	60	2.8	B8C	TH
				2	250	100	4.8	2.5	200	100	2.5		
ECH4	123 614 570	G ₁	6	2	100		6.3	2.7	100	60	2.2	B8C	TH
				2	250	100	6.5	2.6	100	PenLF	2.6		
ECH11	264 371 450		6	2.0	100	0	5.0	2.4	100	60	2.8	F8	TH
				2.0	250	100	4.7	2.5	200	100	2.5		
ECH21	276 454 131		6	2	100		6.25	2.4	100	60	3.2	B8B	TH
				2	250	90	5.3	2.2	100	90	2.2		
ECH33	027 546 310	G ₁	6	2	100		5	2.4	100	60	2.8	A08	TH
				2	200	100	3		100	100			
ECH35	027 546 310	G ₁	6	2	100		5.4	2.2	100	60	2.8	A08	TH
				2	250	100	5	2.4	100	100	1.2		
ECH41	276 454 130		6	2	100		5	2.2	100	60	2.2	B8A	TH
				2	250	100	3	2	100	100	2.4		
ECH42	276 454 130		6	2	100		5	2.2	100	60	2.8	B8A	TH
				2	250	100	8	2	100	100	3.5		
ECH43	276 454 130		6	2	100		5	2.2	100	60	2.2	B8A	TH
				2	250	100	8	2	100	100	1.9		

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
ECH71	276 454 430		6	{ 2	250		2		100	60		B8B	TH
ECH80	541 23* 674		6-3	{ 2	250	100	3	0-75	100	100			
ECH81	541 237 164		6	{ 3	100		5	2-3	100	60	2-3	B9A	TH
				{ 2	250	100	6-5	2-4	150	100	2-4		
ECL11	452 371 460		6	{ 2-5	250	0	2-0	2-0	100	60	2-0	F8	TP
				{ 6-0	250	250	36	9-0	100	150	7-0		
ECL80	641 237 154		6	{ 2-3	100	0	4	1-4	100	60	1-4	B9A	TP
				{ 8-0	200	200	17-5	3-3	100	PenLF	3-0		
ECL82	414 237 516		6-3	{	100		3-5	2-5	100	60	2-5	B9A	TP
				{ 16	200	200	35	6-4	100	100	6		
ECL113	267 454 130		6	{ 1-0	150	0	2	1-6	100	60	1-6	B8A	TP
				{ 3-5	250	250	25	8-5	100	150	8-5		
ED111	266 104 430		6-3	5	200		40		No Data Available			B8A	T
EDD11	742 301 460		6	8-0	200		3-5		200		3-5	F8	TT
EDD111	742 311 460		6	8-0	250		9-0	2-3	100		2-3	F8	TT
EE50	256 501 403		6-3	3-0	250	250	10	14	No Data Available			B9G	P
EEL71	274 554 630		6-3	6-5	250	250	24	6-5	100	100		B8G	PP
EEPI	023 150 560		6-3	2-5	250	150	8	17	No Data Available			8SC	P
EEP71	023 110 560	G ₁	6	3	225	100	8	2-2	100	100		8SC	P
EF1	023 110 560	G ₁	6	2	250	100	3	2-3	100	100	2-3	8SC	P
EF2	023 110 560	G ₁	6	2	250	100	4-5	2-2	100	100	2-2	88SC	P
EF3	023 110 560	G ₁	6	2-5	250	100	8	1-8	100	100	1-8	8SC	P
EF5	023 110 560	G ₁	6	3	250	100	8	1-7	100	100	1-7	8SC	P
EF6	023 110 560	G ₁	6	2	250	100	3	2	100	100	2	8SC	P
EF7	023 110 560	G ₁	6	1-5	250	100	3	2-1	100	100	2-1	8SC	P
EF8	023 111 560	G ₁	6	2-5	250	250	8	1-8	100	PenLF	1-8	8SC	P
EF9	023 110 560	G ₁	6	2-5	250	100	6	2-2	100	100	2-2	8SC	P
EF11	602 301 450		6	2	250	100	6	2-2	100	100	2	F8	P
EF12	602 301 450		6	2	250	100	3	2-1	100	100	2	F8	P
EF12 spec.	602 301 450		6-3	2	250	100	3	1-7	100	100	1-5	F8	P
EF13	612 301 450		6	2	250	100	4-5	2-3	100	100	2	F8	P
EF14	612 350 140		6	4-5	200	200	12	7	100	150	6	F8	P
EF15	612 301 450		6	2	250	100	12	5-5	100	100	5	F8	P
EF22	265 104 130		6	2-5	250	100	6	2-2	100	100	2-2	B8B	P
EF25	023 110 560	G ₁	6	2	250	100	5	1-8	100	100	1-8	8SC	P
EF36	026 510 310	G ₁	6	2	250	100	3	1-8	100	100	1-8	A08	P
EF37	026 510 310	G ₁	6	2	250	100	3	1-8	100	100	1-8	A08	P
EF37A	026 510 310	G ₁	6	2	250	100	3	1-8	100	100	1-8	A08	P
EF38	126 510 310	G ₁	6	2-5	250	250	8	1-8	100	PenLF	1-8	A08	P
EF39	026 510 310	G ₁	6	2-5	250	100	6	2-2	100	100	2-2	A08	P
EF40	26* 145 130		6	2	250	150	3	1-8	100	150	1-8	B8A	P
EF41	261 154 130		6	2-5	250	100	6	2-2	100	100	2-2	B8A	P
EF42	260 154 130		6	2	250	250	10	9-5	100	PenLF	8-0	B8A	P
EF43	260 154 130		6	2	250	150	15	6-4	100	150	6	B8A	P
EF44	260 145 130		6-3	2	250	150	3	1-8	100	150	1-8	B8A	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
EF50	256 101 403		6	1.55	250	250	10	6.5	100	PenLF	6.0	B9G	P
EF51	261 154 130		6	2	250	250	14	9.5	100	PenLF	9.0	B8B	P
EF52	261 154 130		6	2	250	250	10	10	100	150	8	B8G	P
EF53	256 101 403		6	2	250	250	10	6.5	100	150	6.5	B9G	P
EF54	265 114 113		6	1.7	250	250	10	7.7	100	PenLF	7.0	B9G	P
EF55	256 101 403		6	4	250	150	10	7	100	100	6	B9G	P
EF70	412 163 510		6	2	100	100	3	2.5	100	100	2.5	B8D	P
EF71	412 163 510		6	2	100	100	13	5.5	100	100	5.5	B8D	P
EF72	412 163 510		6	1.4	100	100	7	5	100	100	5	B8D	P
EF73	412 653 160		6	2	100	100	7.5	5.5	100	100	5	B8D	P
EF80	141 230 651		6	2	175	175	10	7.2	100	100	6	B9A	P
EF81	541 236 000		6.3	2.5	250	125	6	2.2	100	100		B9A	P
EF82	*41 230 651		6	4.5	250	250	40	11	100	150	9	B9A	P
EF83	501 236 014		6.3	20	125	125	1.24		No Data Available			B9A	P
EF85	141 230 651		6	2	250	100	10	6	150	100	5	B9A	P
EF86	501 236 014		6	1	250	100	3	1.85	100	100	1.8	B9A	P
EF89	041 230 651		6	2.0	250	100	9.0	3.6	250	100	3.6	B9A	P
EF91	412 361 500		6	2	250	250	10	7.65	100	PenLF	5	B7G	P
EF92	412 361 500		6	2.5	250	200	8	2.5	100	PenLF	2.5	B7G	P
EF93	412 365 100		6	1	250	100	11.6	4.5	150	100	4	B7G	P
EF94	412 365 100		6	1.0	250	100	10.6	5.2	100	150	5.2	B7G	P
EF95	412 365 100		6	2.3	150	150	7	4.3	100	100	4	B7G	P
EF96	412 365 100		6	1.5	250	150	6.5	5.0	100	100	5.0	B7G	P
EF111	612 350 140		6.3	2	250	75	6	2.2	No Data Available			F8	P
EF112	612 350 140		6.3	2	250	100	3	2.1	100	100		F8	P
EF172	112 540 360		6.3	2	250	100	5	3	100	100		B8A	P
EF174	112 540 360		6.3	3.5	200	200	12	9	100	100		B8A	P
EF175	112 540 360		6.3	2.1	250	100	12	4.5	100	100		B8A	P
EF410	26* *54 130		6.3	2	250	100	6	2.7	100	100		B8A	P
EF800	141 230 651		6.3	2	175	175	10	7.2	100	100		B9A	P
EF802	141 23* 651		6.3	1.2	175	175	12	8	100	100		B9A	P
EF804	101 230 654		6.3	2	250	150	3	2	100	100		B9A	P
EF804S	101 230 654		6.3	2	250	150	3	2	100	100		B9A	P
EF805S	141 230 651		6.3	1.8	250	75	8	5.7	100	80		B9A	P
EFF50	265 414 573		6	2	250	200	6	8	100	PenLF	7	B9G	PP
EFF51	265 414 573		6	2	250	200	6	8	100	PenLF	7	B9G	PP
EFMI	023 114 560		6	2	250	100	1.3		No Data Available			8SC	IP (p. 135)
EFP20	256 145 130		6.3	2	250	200	5	12	100	100		B8G	P
EG420	802 300 000		4			120			REC		30mA	B4	R
EH1	023 145 560	G ₁	6	2	250	80	3	1.8	200	75	1.8	8SC	P
EH2	023 115 560	G ₁	6	3	250	100	4.2	1.4	100	100	1.4	8SC	P
EH90	412 365 100		6.3	1	100	30	1	1.1	No Data Available			B7G	H
EK1	123 174 560	G ₁	6	1.5	90		2		80			8SC	O
EK2	023 154 560	G ₁	6	8.5	250	75	1.6		100	75			O
				2	250	75	2.8	1.8	100	60	2.1	8SC	O

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
EK3	023 164 560	G ₁	6	2	100	60	11	3.8	100	60	3.8	8SC	O
EK32	026 545 310	G ₁	6	2.0	250	75	2.8	1.5	100	60	2.1	A08	O
EK90	412 366 100		6	2	100		11	7	100		5	B7G	H
EL1	023 100 560	G ₁	6	18.5	250	250	32	2.6	100	PenLF	2.6	8SC	P
EL2	023 100 560	G ₁	6	18	250	250	32	2.8	100	PenLF	2.8	8SC	P
EL3	023 104 560		6	6	250	250	36	9	100	PenLF	9	8SC	P
EL3N	023 104 560		6.3	6	250	250	36	9	100	PenLF	8	8SC	P
EL3/375	023 104 560		6.3	6	250	250	36	9	100	PenLF	8	8SC	P
EL5/375	023 104 560		6.3	14	250	275	72	8.5	No Data Available			8SC	P
EL5	023 104 560		6	14	250	275	72	8.5	100	PenLF	8.5	8SC	P
EL6	023 104 560		6	7	250	250	72	14.5	100	PenLF	10	8SC	P
EL6 spec.	023 104 560		6.3	7	250	250	72	14.5	100	PenLF	10	8SC	P
EL8	023 104 560		6.3	7.5	250	250	20	5.5	100	PenLF		8SC	P
EL11	602 301 450		6	6	250	250	36	9	100	150	7	F8	P
EL11N	602 301 450		6.3	6	250	250	36	9	100	150	7	F8	P
EL12	602 301 450		6	7	250	250	72	15	No Data Available			F8	P
EL12 Spec.	502 301 400	A ₁	6.3	7	400	350	42	10	No Data Available			F8	P
EL12/325	602 301 450		6.3	7	250	250	72	15	No Data Available			F8	P
EL12/375	602 301 450		6.3	7	375	250	72	15	No Data Available			F8	P
EL13	602 301 450		6.3	7.5	250	250	20	5.5	100	150	5	F8	P
EL20	265 104 130		6	34	300	300	12.5	3.7	100	100		B8B	P
EL22	265 004 130		6	7	250	250	44	9.5	100	PenLF	9	B8B	P
EL31	120 540 310		6	9	300	275	91	14	100	PenLF	10	A08	P
EL32	026 500 310	G ₁	6	18	250	250	32	2.8	100	PenLF	2.8	A08	P
EL33	026 540 310		6	6	250	250	36	9	100	PenLF	8	A08	P
EL34	126 540 310		6	14.5	250	250	57	8.5	100	100	8	A08	P
EL35	026 540 310		6	15.5	250	250	72	5	100	PenLF	5	A08	P
EL36	026 540 310		6	7	250	250	72	14.5	100	PenLF	10	A08	P
EL37	026 540 310		6	13.5	250	250	100	11	100	PenLF	10	A08	P
EL38	120 540 310	A	6	7	250	250	100	14.3	100	PenLF	10	A08	P
EL38N	120 540 310	A ₁	6	7	250	250	100	14.3	100	PenLF	10	A08	P
EL39	020 541 310	A ₁	6	23	175	125	45	6.5	100	100		A08	P
EL41	261 054 130		6	7.0	250	250	36	10.0	100	PenLF	8	B8A	P
EL42	261 054 130		6	10	225	225	26	3.2	100	PenLF	3.2	B8A	P
EL43	260 154 130		6	3	250	250	36	10	100	PenLF	8	B8A	P
EL44	200 154 130	A	6	22.5	250	250	20	5	100	PenLF	5	B8A	P
EL50	023 114 500	A	6	14	250	275	72	8.5	100	PenLF	8	8SC	P
EL51	023 104 500	A	6		400	300	44	7	100	150	7	8SC	P
EL53	023 104 560		6	7.7	400	250	24	8	100	150	7	8SC	P
EL54	023 104 560		6	12.2	300	300	55	13	No Data Available			8SC	P
EL60	216 005 413		6	14.5	250	250	67	9	100	100	8	B9G	P
EL70	412 163 510		6	9	100	100	31	2.2	100	90	2.2	B8D	P
EL80	541 230 600		6.3	6.5	250	250	36	10	100	150	9	B9A	P
EL81	*41 23* *51	A	6	38.5	250	250	32.0	4.6	100	100	2.2	B9A	P
EL82	*41 23* 6*5		6.3	10.4	175	175	54	9	100	100		B9A	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
EL83	541 231 600		6	5.5	250	250	36	10	100	150	9	B9A	P
EL84	*41 23* 6*5		6	7.3	250	250	48	11.3	100	150	10.0	B9A	P
EL85	441 231 615		6	10.8	225	225	26	3.2	100	150	3.2	B9A	P
EL86	*41 23* 6*5		6.3	12.5	175	175	70	10	100	100	9	B9A	P
EL90	412 365 400		6	12.5	250	250	45	4.1	100	150	4	B7G	P
EL91	412 360 500		6	13.8	250	250	16	2.6	100	PenLF	2.6	B7G	P
EL95	412 365 400		6.3	9	250	250	24	5.0	100	100		B7G	P
EL150	602 301 450		6.3	17	350	250	95	6.5	No Data Available			F8	P
EL171	102 541 360		6.3	12	250	250	40	9	No Data Available			B8A	P
EL172	102 541 360		6.3	7	250	250	72	15	No Data Available			B8A	P
EL803	541 231 600		6.3	3.5	200	200	36	10	100	100		B9A	P
EL820	*41 23* *51	A	6	38.5	250	250	32.0	4.6	100	150	4.0	B9A	P
EL821	*41 23* 651		6	4.5	250	250	40	11	100	150	10	B9A	P
EL822	*41 23* 651		6	2.5	250	150	40	13	100	100	10	B9A	P
ELLI	423 174 560		6	20	250	250	15	1.7	100	PenLF	1.8	8SC	PP
ELP71	023 104 560		6	7	250	250	36	9	100	PenLF		8SC	P
ELP72	023 100 560	G ₁	6	17	250	250	36	2.5	100	PenLF		8SC	P
ELP73	023 100 560	G ₁	6	17	250	250	36	2.5	100	PenLF		8SC	P
EQ80	541 236 114		6	1	250	20	0.95	0.7	No Data Available			B9A	N
ER4	002 300 000	D ₁	4				3		D			B4	D
EW60	280 000 103		6				120		REC		30mA	B9G	R
EY51	023 000 000	D ₁	6						D			B3G	D
EY70	082 813 080		6				30		REC		17mA	M8	R
EY80	**1 23* **8		6				120		REC		40mA	B9A	R
EY81	*** 23* **8		6.3				120		REC		40mA	B9A	R
EY82	*** 23* **8		6.3				180		REC		50mA	B9A	R
EY84	**1 23* ***	D ₁	6				120		REC		30mA	B9A	R
EY86	230 232 032	D ₁	6						D			B9G	R
EY91	812 380 000		6				60		REC		20mA	B7G	R
EZ1	023 180 090		6				30		REC		15mA	8SC	RR
EZ2	023 180 090		6				30		REC		15mA	8SC	RR
EZ3	023 180 090		6				60		REC		20mA	8SC	RR
EZ4	023 180 090		6				60		REC		20mA	8SC	RR
EZ11	902 300 180		6				30.0		REC		15mA	F8	RR
EZ12	902 300 180		6				60.0		REC		20mA	F8	RR
EZ22	208 009 130		6				60		REC		20mA	B8B	RR
EZ33	028 090 310		6				60		REC		20mA	A08	RR
EX35	028 090 310		6				30		REC		15mA	A08	RR
EZ40	280 *09 130		6				30		REC		15mA	B8A	RR
EZ41	280 009 130		6				30.0		REC		15mA	B8A	RR
EZ80	801 230 900		6				30.0		REC		15mA	B9A	RR
EZ81	8*1 23* 9**		6				75.0		REC		25mA	B9A	RR
EZ90	802 309 100		6.3				30		REC		15mA	B7G	RR
EZ91	802 309 100		6.3				30		REC		15mA	B7G	RR
F5	642 300 000		4	40	300		40	6	100		6	B4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
F10	642 300 000		4	15	300		30	5.5	100		5.5	B4	T
F100	642 350 000		4	16	250	250	42	2.5	100	PenLF	2.5	B5	P
F109	264 300 000		1.5	14.5	175		6.2	11.5	100		11	UX4	T
F109	642 300 000		1.5	14.5	175		6.2	11.5	100		11	B4	T
F203	264 300 000		2.5	56	275		36	2	100			UX4	T
F203	642 300 000		2.5	56	275		36	2	150		2	B4	T
F209(A)	642 310 000		2.5	21	250		5	1	100		1	B5	T
F209	642 300 000		2.5	21	250		5.2	0.97	100			B4	T
F209	264 300 000		2.5	21	250		5.2	0.97	100			UX4	T
F215	264 130 000		2.5	6	150		6.5	2	100		2	UX5	T
F215	642 310 000		2.5	6	150		6.5	2	100		2	B5	T
F242	265 130 000	G ₁	2.5	1.3	200	100	1.5	0.9	200	100	0.9	UX5	P
F410	642 300 000		4	15	275		13.5	2.8	100		2.8	B4	T
F443	642 350 000		4	30	400	200	45	3.2	100	100	3.2	B5	P
F443N	642 350 000		4	30	400	200	45	3.2	100	100	3.2	B5	P
F460	642 310 000		4	2	250		10	5.5	200		5.5	B5	T
F704	642 300 000		7.5	84	400		55	2.1	100		2.1	B5	T
F707	642 300 000		7.5	84	400		55	2.1	100		2.1	B4	T
F707	264 300 000		7.5	84	400		55	2.1	100		2.1	UX4	T
F708	264 300 000		7.5		400		30	1.6	100		1.6	UX4	T
FC2	265 230 700	G ₁	2	{ 0	150	50	2.0		150	60		B7	O
				{ 0	150	75	0.95	0.2	150	75			
FC2A	645 230 700	G ₁	2	{ 0	150	50	1.2		150	60		B7	O
				{ 0	150	50	0.7	0.27	150	60			
FC4	645 231 700	G ₁	4	{ 4	90	90	2.0	1	100	90	1.3	B7	O
				{ 4	250	90	1.6	1	250	90	1.5		
FC13	023 164 570	G ₁	13	{ 3	90	75	2	1.3	80	75		8SC	O
				{ 2	200	75	2.6	0.6	200	75			
FC13c	645 231 700	G ₁	13	{ 3	90	75	2.0	1.3	80	75	1.2	B7	O
				{ 2	200	75	2.6	0.6	200	75	0.6		
FC141	207 640 530	G ₁	1.4		90	90	0.55		80	90		M08	H
FH2118	165 452 300	G ₁	20	2	200	80	3		100	75		C7	P
FWI	893 200 000		4				30		REC		15mA	B4	RR
FW3	892 300 000		4				60		REC		20mA	B4	RR
FW4/500	982 300 000		4				120		REC		30mA	B5	RR
FW4/800	982 300 000		4			60			REC		20mA	B5	RR
FY	642 350 000		4	10	250	250	32	5	100	PenLF	5	B5	P
FZ1	023 180 090		13				30		REC		15mA	8SC	RR
G	264 300 000		5	3	175		0.2		100		0.2	UX4	T
G84	280 300 000		2.5				60		REC		20mA	UX4	RR
G407	642 300 000		4	4	125		4	1.3	100		4	B4	T
G409	642 300 000		4	4	125		4	1.3	100		4	B4	T
G431	892 300 000		4				30		REC		15mA	B5	RR
G459	023 080 090		4				60		REC		20mA	8SC	RR
G460	892 300 000		4				60		REC		20mA	B4	RR

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
G470	892 300 000		4				30		REC		15mA	B4	RR
G504	892 300 000		4				30		REC		15mA	B4	RR
G660	023 190 080		6.3				30		REC		15mA	8SC	RR
G715	802 300 000		7.5				120		REC		30mA	B4	R
G1054	892 300 000		4				30		REC		15mA	B4	RR
G1064	892 300 000		4				60		REC		20mA	B4	RR
G1380	023 180 090		12				30		REC		15mA	8SC	RR
G1404	802 300 000		4				120		REC		30	B4	R
G1503	892 300 000		2.5				30		REC		15mA	B4	RR
G2004	892 300 000		4				60		REC		20mA	B4	RR
G2005	892 300 000		5				60		REC		20	B4	RR
G2080	802 310 000		20				60		REC		20mA	B5	R
G2504	892 300 000		4				60		REC		20mA	B4	RR
G4004	892 300 000		4				120		REC		30mA	B48	RR
G4100	802 300 000		4				120		REC		30mA	B4	R
G4120	892 300 000		4				60		REC		20mA	B5	RR
G4150	892 300 000		4				60		REC		20mA	B4	RR
G4180	892 300 000		4				120		REC		30mA	B4	RR
G4300	892 300 000		4				120		REC		30mA	B4	RR
G/5749	412 365 100		6	1.0	250	100	11	4.4	100	100	4.4	B7G	P
G/5750	412 366 400		6	2.0	100		11	7.0	100		6	B7G	H
G/6042	461 471 230		25	8	250		9	2.6	100		2.6	A08	TT
G/6059	041 230 651		6	3	250	100	2	1.22	100	100	1.2	B7G	P
G/6060	741 226 413		6	2.0	250		10	5.5	200		5.0	B9A	TT
G/6061	*41 230 651		6	13.0	300	225	35	3.75	100	150	3.7	B9A	P
G/6062	601 235 144		6	7.5	250	250	45	7.0	100	150	7.0	B9A	P
G/6066	412 389 600		6	3.0	250		1.0	1.2	150		1.2	B7G	DDT
G/6100	602 364 100		6	8.5	250		10.5	2.2	100		3.0	B7G	T
G/6132	*41 230 651		6	4.5	250	250	40	11.0	100	150	9	B9A	P
G/6157	**1 23* ***	D ₁	6				120		REC		30mA	B9A	R
G/6158	744 226 413		6	4.6	250		6.0	2.3	100		2.3	B9A	TT
G/6180	461 471 230		6	8	250		9	2.6	100		2.6	A08	TT
G/6443	**1 23* ***	D ₁	6				120		REC		33mA	B9A	R
G/6516	412 360 500		6	12.5	250	250	16	2.6	100	PenLF	2.6	B7G	P
GG1	288 009 930		4				30		REC		15mA	B8B	RR
GN24	892 300 000		4				30		REC		15mA	B4	RR
GR4	892 300 000		4				120		REC		30mA	B4	RR
GTIC	642 310 000		4		200		48	3K Ω	No Data Available			B5	Thyratron
GZ30	020 908 030		5				60		REC		20mA	A08	RR
GZ31	620 908 030		5				120		REC		30mA	A08	RR
GZ32	030 809 020		5				60		REC		20mA	A08	RR
GZ33	030 809 020		5				120		REC		30mA	A08	RR
GZ34	*30 809 020		5				120		REC		30mA	A08	RR
GZ40	28* **9 130		5				30		REC		17mA	B8A	RR
GZ41	28* **9 130		5				60		REC		26mA	B8A	RR

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
H2	642 300 000		2	1	150		2.5	0.8	150		0.8	B4	T
H4	642 300 000		4	4	125		4	1.3	125		1.3	B4	T
H4D	809 231 600	G ₁	4	2.5	200		5.5	2.7	150		2.7	B7	DDT
H12	642 300 000		2	1.3	100		0.6	1.2	100		1.2	Sm4	T
H13	023 100 060	G ₁	13	4	200		6	2.5	100		2.5	A08	T
H20	642 310 000		20	1.6	200		0.2	1.0	100		1.0	B5	T
H30	000 231 600	G ₁	13	1.5	250		7.5	6.0	200		6	B7	T
H42	000 231 600	G ₁	4	2	250		1	1.7	200		1.7	B7	T
H63	020 600 310	G ₁	6	2	250		1	1.5	200		1.5	A08	T
H141D	206 080 030	G ₁	1.4	1	90		0.1	0.25	80		0.25	M08	DT
H210	642 300 000		2	3	150		1.1	1.15	100		1.15	B4	T
H406D	542 300 000	A	4	1.5	175	75	4	0.8	100	80		B4	P
H407 Spec.	642 300 000		4	9	150		3.5	0.9	100		0.9	B4	T
H410D	342 300 000	A	4	1.5	175	75	4	0.8	100	75		B4	P
H412	642 300 000		4	9	125		5	1.2	125		1.2	B4	T
H607	642 300 000		6	1	100			0.45	100		0.45	B4	T
H1818D	542 310 000		20	2	200	100	3	2	100	100		B5	P
H1918D	542 310 000		20	2	200	60	4	1	100	60		B5	P
H2018D	542 310 000		20	2	200	60	4	1	100	60		B5	P
H2518D	542 310 000	A	20	2.5	225	100	3.5	2	100	100		B5	P
H2618D	542 310 000	A	20	2.5	250	100	5	2	100	100		B5	P
H4080D	542 310 000	A	4	1.5	200	75	4	2.5	100	100		B5	P
H4111D	542 310 000	A	4	2.5	225	100	3.5	2	100	100		B5	P
H4115D	542 310 000	A	4	2.5	225	100	3.5	2	100	100		B5	P
H4125D	542 310 000	A	4	2	200	100	6	1	100	100		B5	P
H4128D	542 310 000	A	4	2.5	225	100	3.5	2	100	100		B5	P
H4129D	542 310 000	A	4	2.5	250	100	5	2	100	100		B5	P
HABC80	8†1 239 146		19	3	250		1	1.2	100		1.3	B9A	DDDT
HAD	908 231 600	G ₁	13	2.5	200		3.3	2	150		2	B7	DDT
HBC90	412 389 600		12.5	3	250		1.0	1.2	100		1.2	B7G	DDT
HBC91	412 398 600		12.5	2	250		1.2	1.6	100		1.6	B7G	DDT
HCH81	541 237 464		12.6	2.5	100	90	4	2	100	60	2	B9A	TH
HD2	642 300 000		2	5	200		5	1	150		1	B4	T
HD2	682 390 000	G ₁	2	2.5	150		3.5	1.3	100			B5	DDT
HD14	036 080 200	G ₁	1.4	0	90		0.06	0.36	100		0.28	A08	DT
HD21	682 390 000	G ₁	2	1.5	150		1.8	1.5	150		1.5	B4	DDT
HD22	682 390 000	G ₁	2	3	150		1.8	1.5	100		1.5	B5	DDT
HD23	682 390 000	G ₁	2	3	250		1	1.4	125		1.4	B5	DDT
HD24	682 390 000	G ₁	2	1.5	150		2.7	1.4	125		1.4	B5	DDT
HF61	26* *54 130		6.3	2.6	250	100	6	2.2	100	100	2.2	B8A	P
HF62	260 154 130		6.3	2	250	250	10	9	100	PenLF	8	B8A	P
HF85	141 230 651		12.5		250	90	8	5.7	100	90		B9A	P
HF93	412 365 100		12.5	1	250	100	11	4.4	100	100	4	B7G	P
HF94	412 365 100		12.5	1	250	150	10.6	5.2	100	100	3.9	B7G	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
HF12I	26* 054 103		12.5	3	200	125	7.2	2.3	100	100	2	B8A	P
HK90	412 366 100		12.5	2	100		11	7	100		5	B7G	H
HL2	642 300 000		2	1.5	150		2.2	1.5	150		1.5	B4	T
HL2	023 004 060		2	1.5	150		2.2	1.5	150		1.5	8SC	T
HL2K	642 300 000		2	1.5	150		2.2	1.5	150		1.5	B4	T
HL2S	023 004 060		2	1.5	150		2.2	1.5	150		1.5	8SC	T
HL3	206 040 030		2	1.5	125		0.5	1.5	125		1.5	M08	T
HL4	642 310 000		4	4.5	250		5	3.5	150		3.5	B5	T
HL4g	000 231 600	G ₁	4	4.5	250		5	3.5	150		3.5	B7	T
HL4gs	023 100 060	G ₁	4	4.5	250		5	3.5	150		3.5	8SC	T
HL13	023 100 060	G ₁	13	3.7	200		5	3.3	150		3	8SC	T
HL13	000 231 600	G ₁	13	2.75	200		6	3.5	150		3.5	B7	T
HL13c	000 231 600	G ₁	13	2.7	200		5	3.3	150		3.3	B7	T
HL13g	023 004 060	G ₁	13	5.5	250		6	2.5	150		2.5	8SC	T
HL13s	023 100 060	G ₁	13	3	200		6	3.5	150		3.5	8SC	T
HL21	642 300 000		2	3	150		1.75	1.5	125		1.5	B4	T
HL21DD	682 390 000	G ₁	2	2	150		2	1.3	125		1.3	B5	DDT
HL22 (MAZDA)	020 604 030		2	2	150		2	1.3	125		1.3	M08	T
HL22DD	206 080 930	G ₁	2	2	150		2	1.3	125		1.3	M08	DDT
HL23	206 040 030		2	2.4	150		1.5	1.2	125		1.2	M08	T
HL23DD	206 080 930	G ₁	2	2.8	150		1.5	1.05	125		1.2	M08	DDT
HL41	216 040 030		4	4.5	250		7	3.1	150		3.1	M08	T
HL41DD	216 090 830	G ₁	4	5.2	250		6	2.2	250		2.2	M08	DDT
HL42DD	216 090 830	G ₁	4	5	200		7.5	2.5	200		1.85	M08	DDT
HL90	412 365 400		19	12.5	250	250	45	4.1	100	150	4	B7G	P
HL92	142 345 600		50	7.5	125	125	49	7.5	100	100	7	B7G	P
HL94	142 345 600		30	6.7	100	100	43	9.2	100	100	9.2	B7G	P
HL133	216 000 030	G ₁	13	3.3	200		6	2.9	200		2.9	M08	T
HL133DD	216 090 830	G ₁	13	5.4	250		6	2.3	150		2.3	M08	DDT
HL134DD	216 080 930	G ₁	13	5	250		7	2.5	100		2.5	M08	DDT
HL135	023 100 060	G ₁	13	3	200		6	3.5	150		3.5	8SC	T
HL210	642 300 000		2	1	100			0.7	100		0.7	B4	T
HL410	642 300 000		4	6	150		1.2	0.83	150		0.83	B4	T
HL607	642 300 000		6	1	100			1	100		1	B4	T
HL1320	000 231 600	G ₁	13	3.3	200		6	3	150		3	B7	T
HLA1	642 310 000		4	1	200		5	8	200		7	B5	T
HLA2	642 310 000		4	2.5	200		6	5.5	150		5.5	B5	T
HLB1	642 300 000		2	3	150		2	1.5	100		1.5	B5	T
HL/DDI320	809 231 600	G ₁	13	3	200		4.3	1.9	150		1.9	B7	DDT
HM20	642 310 000		20	3.3	225		6	2.5	100		2.3	B5	T
HN309	641 237 154		12.6	2 9	250 150	150	2.8 24	2.2 5.6	100 150	60 150	2.0 5.6	B9A	TP
HP2	446 230 700		2	1	125		8.5		125			B7	TT
HP6	412 361 500		6	2	250	250	10	7.5	150	200	6.5	B7G	P
HPI3	061 231 500	G ₁	13	1	250	100	8	3.5	250	100	3.5	B7	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
HP13s	023 110 560	G ₁	13	1	250	100	8	3.5	250	100	3.5	8SC	P
HP210	542 300 000	A	2	1.5	150	150	1.9	1.9	150	150	1.9	B4	P
HP210	041 230 500	A	2	1.5	150	150	1.9	1.9	150	150	1.9	B7	P
HP210C	041 230 500	A	2	1	150	150	1.9	1.9	150	150	1.9	B7	P
HP210nc	542 300 000	A	2	1	150	150	1.9	1.9	150	150	1.9	B4	P
HP210nc	041 230 500	A	2	1	150	150	1.9	1.9	150	150	1.9	B7	P
HP211C	041 230 500	A	2	1	150	150	2.6	1.7	150	150	1.7	B7	P
HP211c	542 300 000	A	2	1	150	150	2.6	1.7	150	150	1.7	B4	P
HP211	041 230 500	A	2	1	150	150	2.6	1.7	150	150	1.7	B7	P
HP215	542 300 000	A	2	1.5	150	80	1.5	1.2	150	75	1.2	B4	P
HP215	041 230 500	A	2	1.5	150	80	1.5	1.2	150	75	1.2	B7	P
HP415	041 231 500	A	4	2	250	100	8	2.7	100	100	2.7	B7	P
HP1018	160 152 300	G ₁	10		250	150	2.3	1.25	100	PenLF	1.25	C7	P
HP1118	160 152 300	G ₁	10	3	250	150	10.5	1.65	100	100	1.65	C7	P
HP2018	041 231 500	A	20	2	200	100	4	3.5	200	100	2.5	B7	P
HP2018	542 310 000	A	20	2	200	100	4	3.5	100	100	3.5	B5	P
HP2118	041 230 500	A	20	2	200	100	5	3.5	100	100	3.5	B7	P
HP2118	542 310 000	A	20	2	200	100	5	3.5	100	100	2.5	B5	P
HP4100	542 310 000	A	4	2	200	100	3	3.5	100	100	3.5	B5	P
HP4101	041 231 500	A	4	2	200	100	3.5	3.5	100	100	3.5	B7	P
HP4101	542 310 000	A	4	2	200	100	3.5	3.5	100	100	3.5	B5	P
HP4101c	542 310 000	A	4	2	200	100	3.5	2.8	100	100	2.8	B5	P
HP4101c	041 231 500	A	4	2	200	100	3.5	2.8	100	100	2.8	B7	P
HP4105	542 310 000	A	4	2	250	100	4.5	3	100	100	3	B5	P
HP4105	041 231 500	A	4	2	250	100	4.5	3	100	100	3	B7	P
HP4106	041 231 500	A	4	2	200	100	5	3.5	100	100	3.5	B7	P
HP4106	542 310 000	A	4	2	200	100	5	3.5	100	100	3.5	B5	P
HP4106C	041 231 500	A	4		200	100	5	3.5	100	100	3.5	B7	P
HP4106C	542 310 000	A	4		200	100	5	3.5	100	100	3.5	B5	P
HP4115	041 231 500	A	4	2	200	100	4.3	3.2	100	100	3.2	B7	P
HP4115	542 310 000	A	4	2	200	100	4.3	3.2	100	100	3.2	B5	P
HP4115c	542 310 000	A	4	2	250	100	4.5	3.2	100	100	3.2	B5	P
HP4115c	041 231 500	A	4	2	250	100	4.5	3.2	100	100	3.2	B7	P
HR1	2** 3** *00	A	6						D			B7G	R
HR2	112 311 100	D ₁	4				5		D			B7G	R
HR2	642 300 000		2	2	150		1.2	0.6	125		0.6	B4	T
HR2S	023 004 060		2	2	150		1.2	0.6	125		0.6	8SC	T
HR3	112 311 100	D ₁	4				15		REC		10mA	B7G	R
HR4	112 311 100	D ₁	4				30		REC		15mA	B7G	R
HR5	112 311 100	D ₁	4				30		REC		15mA	B7G	R
HR6	112 311 100	D ₁	4				60		REC		20mA	B7G	R
HR7	020 000 030	D ₁	4				30		REC		15mA	A08	R
HR8	030 000 020	D ₁	4				30		REC		15mA	A08	R
HR11	020 000 030	D ₁	4						D			A08	D
HR210	642 300 000		2	1.5	200		1	1.3	150		1.3	B4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
HR406	642 300 000		4	3	200		1	1.5	150		1.5	B4	T
HR410	642 300 000		4	3	200		1	1.5	150		1.5	B4	T
HSD	809 231 600	G ₁	13	3	200		4.6	2.3	150		2.3	B7	DDT
HVR1	002 300 000	D ₁	2				5		D			B4	R
HVR2	003 200 000	D ₁	4				3		D			B4	R
HVR2A	003 200 000	D ₁	2				3		D			B4	R
HVU1	002 300 000	D ₁	4				3		D			B4	R
HY24	264 300 000		2	45	175		20		100			UX4	T
HY65	030 540 210	A ₁	6	45	350	200	63		100	100		A08	P
HY90	002 383 100		35				60		REC		25mA	B7G	R
HY113	264 030 000		1.4	4.5	50		0.4	0.25	No Data Available			UX5	T
HY115	364 520 000		1.4	1.5	50	20	0.03	0.06	No Data Available			UX5	P
HY125	364 520 000		1.4	3	50	50	0.9		No Data Available			UX5	P
HY615	020 000 310	A ₁ G ₁	6	35	300		20		100			A08	T
HY866	280 300 000		2.5				120		REC		30mA	UX4	R
HZ50	280 300 000		13				60		REC		20mA	UX4	R
IRV120/350s	023 180 090		4				60		REC		20mA	8SC	RR
IW2	893 200 000		4				30		REC		15mA	B4	RR
IW3	892 300 000		4				60		REC		20mA	B4	RR
IW4/350	892 300 000		4				60		REC		20mA	B4	RR
IW4/500	893 200 000		4				60		REC		20mA	B4	RR
K4	892 300 000		4				120		REC		30mA	B4	RR
K23A	682 390 000	G ₁	2	5.5	150		2.5	1.4	100		1.4	B5	DDT
K23B	682 390 000	G ₁	2	1.5	150		1.4	1.2	150		1.2	B5	DDT
K24	265 130 000	G ₁	2.5	1.5	175	75	2	0.8	100	75	0.8	UX5	P
K27	264 130 000		2.5	4.5	90		3	1	80		1	UX5	T
K30A	642 300 000		2	3	150		1.5	0.8	150		0.8	B4	T
K30B	642 300 000		2	7.5	150		4	0.9	100		0.9	B4	T
K30C	642 300 000		2	1.5	150		2	1.4	100		1.4	B4	T
K30D	642 300 000		2	3	150		4	1.5	100		1.5	B4	T
K30E	642 300 000		2	4.5	150		2	1.5	100		1.5	B4	T
K30g	642 300 000		2	7	150		6	3.5	100		3.5	B4	T
K30K	642 300 000		2	1.5	150		2.2	1.4	100		1.4	B4	T
K33A	064 234 700		2	0	150		3		150			B7	TT
K33B	446 230 700		2	1.5	125		3	2.1	125		2.1	B7	TT
K40B	542 300 000	A	2	0	150	75	2	1.5	100	75	1.5	B4	P
K40N	542 300 000	A	2	0	150	90	2.5	1.4	100	90	1.4	B4	P
K40N	041 230 500	A	2	0	150	90	2.5	1.4	100	90	1.4	B7	P
K50M	041 231 500	A	2	5	125	125	3	1.5	100	100	1.5	B7	P
K50N	064 235 500	G ₁	2	1.5	125	60	2	1.4	125	60	1.4	B7	P
K70B	642 350 000		2	4.5	150	150	9.5	2.5	100	100	2.5	B5	P
K70D	642 350 000		2	2.4	125	150	5	4	100	100	4	B5	P
K77A	465 230 574		2	10.5	125	150	2.5	4	100	100	4	B9	PP
K77B	446 235 700		2	11.7	150	150	3.8		100	100		B7	PP

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
K80A	645 230 700		2	{ 0 0	150 150	50 75	2 0.95		150 150	60 75		B7	O
K80B	645 230 700	G ₁	2	{ 0 0	150 150	150 150	2.1 0.7		150 150	60 60		B7	O
K435-10	642 300 000		4	3.0	300		50	5.0	100		5.0	B4	T
K450/50	642 300 000		4	50	400		120	5	100		5	B4	T
K1694	642 300 000		4	3.5	200		6	2.6	100		2.4	B4	T
KB2	289 130 000		2						D			S5	DD
KBC1	023 098 060	G ₁	2	4.5	150		2.5	1.0	100		1	8SC	DDT
KBC32	036 980 200	G ₁	2	1	100		2.4	1.2	100		1.2	A08	DDT
KC1	023 004 060		2	1.5	150		1.2	0.6	125		0.6	8SC	T
KC3	023 004 060		2	2.8	150		3	2.5	100		2.5	8SC	T
KC4	023 004 060		2	1.5	150		2.2	1.4	125		1.4	8SC	T
KC50	642 300 000		2	1	40		0.25	0.4	No Data Available			Sm4	T
KC51	642 300 000		2	2	40		1.25	0.5	No Data Available			Sm4	T
KCF30	037 546 200	G ₁	2	{ 1.0 2.5	100 125	0 80	3.7 1.5	1.6 0.9	100 100	60 75	1.7 0.9	A08	TP
KCHI	023 064 570	G ₁	2	{ 0.5 5	90 90		3 1	1.5 0.9	80 100	60 60	1.5 0.9	8SC	TH
KDD1	023 074 460		2	0	90		0.8		80			8SC	TT
KD50	642 300 000		2	2.8	40		1.8	0.56	No Data Available			Sm4	T
KE50	542 300 000	A	2	2	125	50	0.8	0.56	100	60	0.56	Sm4	P
KF1	050 412 300	A	2	1	125	150	3	1.8	125	150	1.8	C7	P
KF2	050 412 300	A	2	1	125	150	3	1.3	125	150	1.3	C7	P
KF3	023 010 560	G ₁	2	1	90	90	1	0.5	80	90	0.5	8SC	P
KF4	023 010 560	G ₁	2	1	90	90	1.2	0.7	80	90	0.7	8SC	P
KF7	023 004 500	A	2	1.5	90	90	1.8	0.7	80	90	0.7	8SC	P
KF8	023 004 500	A	2	1	90	90	1.5	0.6	80	90	0.6	8SC	P
KF35	026 510 300	G ₁	2	1.5	125	60	1.45	1.08	125	60	1.08	A08	P
KH1	023 051 560	G ₁	2	1.5	90	60	2.1	1.4	80	60	1.4	8SC	P
KK2	023 064 560	G ₁	2	1	90	50	2		80	60		8SC	O
KK32	037 546 200	G ₁	2.0	{ 0 0	150 150	50 50	2.1 0.7		150 150	60 60	2.1 0.7	A08	O
KL1	642 350 000		2	4.5	90	90	8	1.7	80	75	1.7	B5	P
KL1	032 004 560		2	4.5	90	90	8	1.7	80	75	1.7	8SC	P
KL2	023 004 560		2	7.5	90	90	11	1.8	80	75	1.8	8SC	P
KL4	023 004 560		2	2.5	90	90	4.7	1.8	80	75	2.8	8SC	P
KL5	032 004 560		2	4	90	90	4.8	1.4	80	75	1.4	8SC	P
KL35	036 540 200		2	4.5	125	150	5.6	2.2	100	100	2.2	A08	P
KLL3	423 564 570		2	12	150	150	8		100	100		8SC	PP
KLL32	026 447 350		2	11.3	125	150	3.8	2.6	100	100	2.6	A08	PP
KR5	264 530 000		6	9	150	150	14	1.9	100	100	1.9	UX5	P
KR20	264 413 000		2.5	0	250		3.5	1.4	250		1.4	UX6	T
KR22	264 413 000		6	0	250		3.5	1.4	250		1.4	UX6	T
KR25	265 413 000		2.5	16.5	250	250	34	2.2	100	PenLF	2.2	UX6	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
KR28	289 130 000		6				30		REC		15mA	UX5	RR
KR31	281 300 000		10				120		REC		30mA	UX4	R
KT2	642 350 000		2	4.5	150	150	7.5	2.5	100	100	2.5	B5	P
KT8	542 310 000	A	6	16	250	250	72	6	100	100	6	B5	P
KT8C	542 310 000	A	6	16	250	250	72	6	100	PenLF	6	B5	P
KT16	026 540 230		1.4	4.5	90	90	8.8	1.9	No Data Available			A08	P
KT21	642 350 000		2	2.5	150	125	5.3	5.3	100	100	5.3	B5	P
KT24	642 350 000		2	2.8	150	150	10	3.2	100	100	3.2	B5	P
KT30	045 231 600		13	12	250	250	40	3.9	100	PenLF	3.9	B7	P
KZ	802 310 000		20				60		REC		20mA	B5	R
KT31	305 221 600	G ₁	13	4	200	175	40	10	100	150	9	B7	P
KT32	026 540 310		26	7.6	125	150	75	9	100	100	8	A08	P
KT33	026 540 310		26	13.2	200	200	60	10	100	100	9	A08	P
KT33c	326 540 210		13	7	175	175	92	10	100	100	9	A08	P
KT35	326 540 210		13	11.5	200	200	50	10	100	100	9	A08	P
KT36	020 540 310	A	26	10.0	150	150	60	11.0	100	100	10.0	A08	P
KT41	045 231 600		4	4.4	250	250	40	10.5	100	PenLF	9	B7	P
KT42	045 231 600		4	16.5	250	250	34	2.5	100	PenLF	2.5	B7	P
KT44	041 231 500	A	4	15	250	250	85	6.25	100	PenLF	6.2	B7	P
KT45	041 231 500	A	4	15	250	250	85	6.3	100	PenLF	6.0	B7	P
KT55	*26 540 310		52	15	150	150	88.0	16	No Data Available			A08	P
KT61	026 540 310		6	4.4	250	250	40	10.5	100	PenLF	9	A08	P
KT63	026 540 310		6	16.5	250	250	34	2.5	100	PenLF	2.5	A08	P
KT66	026 540 310		6	15	250	250	85	6.3	100	PenLF	6.0	A08	P
KT67	256 001 403		6	9	250	175	80	13	100	100	10	B9G	P
KT71	026 540 310		48	9.8	175	175	70	10	100	100	9	A08	P
KT72	026 540 310		16	12.5	175	175	30	2.5	100	100	2.5	A08	P
KT73	026 540 310		6	12.5	175	175	35	2.5	100	100	2.5	A08	P
KT74	026 540 310		16	12.5	175	175	30	2.5	100	100	2.5	A08	P
KT76	026 540 310		15	13	175	175	35	2.5	100	100	2.5	A08	P
KT81	265 004 130		6	4.4	250	250	40	10.5	100	PenLF	9	B8B	P
KT101	265 004 130		80	9.5	175	175	70	10	100	100	9	B8B	P
KTW61	026 510 310	G ₁	6	3	250	100	10	2.9	100	90	2.9	A08	P
KTW62	026 500 310	G ₁	6	3	250	100	8	2.85	100	100	2.8	A08	P
KTW63	026 510 310	G ₁	6	3	250	100	7.6	1.5	100	90	1.5	A08	P
KTW73	026 510 310	G ₁	6	3	250	100	6.5	1.7	100	90	1.7	A08	P
KTW74	026 500 310	G ₁	13	3	250	100	6.5	1.7	100	90	1.7	A08	P
KTZ41	061 231 500	G ₁	4	1.5	250	250	18	12	200	200	10	B7	P
KTZ63	026 500 310	G ₁	6	2	250	100	1	1.23	100	100	1.2	A08	P
KTZ73	026 500 310	G ₁	6	3	250	100	2	1.5	100	90	1.5	A08	P
L2	642 300 000		2	3.8	150		4	1.5	125		1.5	B4	T
L2/B	642 300 000		2	3.8	150		4	1.5	125		1.5	B4	T
L2D	642 310 000		2	4.5	150		2	1.5	100		1.5	B5	T
L2/DD	682 390 000	G ₁	2	3.8	150		4	1.6	100		1.6	B5	DDT
L4	642 300 000		4	16	250		20	3.2	100		3.2	B4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
L11	642 300 000		1	12	100		2.8	0.57	100		0.57	B4	T
L12	642 300 000		2	3	40		2.2	0.8	No Data Available			Sm4	T
L21	642 300 000		2	6	150		2.2	1.8	100		1.8	B4	T
L21DD	682 390 000	G ₁	2	6	150		2.2	1.8	100		1.8	B5	DDT
L22DD	206 080 930	G ₁	2	42	150		4	1.55	100		1.55	A08	DDT
L30	040 231 600		13	8	200		25	4.2	100		4.2	B7	T
L42MD	642 350 000		4	20	250	250	22	2.5	100	100		B5	P
L62	026 040 310		6	8	250		9	2.6	100		2.6	A08	T
L77	6*2 364 100		6	8.5	250		10.5	2.2	100		2.2	B7G	T
L210	642 300 000		2	6	150		4.2	1.6	100		1.6	B4	T
L408	642 300 000		4	3	150		5	1.5	125		1.5	B4	T
L410	642 300 000		4	16	150		10	1.5	100			B4	P
L412	642 300 000		4	1.5	200		3	1.2	200		1.2	B4	T
L413	642 300 000		4	16	200		12	1.8	100		1.6	B4	T
L414	642 300 000		4	8	150		12	2.8	100		2.8	B4	T
L415	642 300 000		4	10	200		8	2	100		2	B4	T
L416D	643 200 000	G ₂	4		250	80	12	1.4	100	75		B4	P
L427D	642 350 000		4		300	200	20	1.5	100	100		B5	P
L486D	642 350 000		4	15	250	250	35	2.7	100	PenLF	2.7	B5	P
L491D	642 350 000		4	40	400	200	30	1.8	No Data Available			B5	P
L495	642 350 000		4	30				5				B5	P
L496D	642 350 000		4	17	250	250	36	2.5	100	100		B5	P
L497	642 350 000		4		400	200	45	3.2	No Data Available			B5	P
L510D	642 350 000		5	17	200	150	12	1.3	100	100		B5	P
L2318	642 350 000		20		200	200	20	1.7	100	100		B5	P
L4150D	642 310 000	G ₃	4		250	250	24	2.5	100	100		B5	P
LA	364 520 000		6	12	175	175	22	2.2	100	100	2.2	UX5	P
LD210	642 300 000		2	4.5	150		3	1.3	125		1.3	B4	T
LD410	642 300 000		4	6	200		4	1.8	100		1.8	B4	T
LG5	218 090 130		6				120		REC		30mA	A08	RR
LG14	123 000 000	D ₁	6				5		D			B3G	R
LK430	642 300 000		4		250		20	1.9	100			B4	T
LK460	642 300 000		4	40	225		30	2.2	No Data Available			B4	T
LK4110	642 300 000		4	36	400		30	2.7	No Data Available			B4	T
LK4112	642 300 000		4	21.6	250		48	3.5	No Data Available			B4	T
LK4200	642 300 000		4	36	400		45	4	No Data Available			B4	T
LL2	642 300 000		2	2.5	150		3	2.6	125		2.6	B4	T
LL2s	023 004 060		2	2.5	150		3	2.6	125		2.6	8SC	T
LL4	642 310 000		4	10	350		18	3.5	125		3.5	B5	T
LL610	642 350 000		5	17	200	150	12	1.3	No Data Available			B5	P
LN152	641 237 154		6	2.3	100		4.0	1.4	100	60	1.4	B9A	TP
				6.7	175	175	15.0	3.2	100	100	3.0		
LN309	641 237 154		12.5	8.5	250		10.5	2.2	100	60	2.0		
LP2	642 300 000		2	8.0	175	175	30	4.5	100	100	4.0	B4	T
				4.5	150		10	3.6	100		3.6		

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
LP4	642 300 000		4	36	250		48	5.5	100		5.5	B4	T
LP25	642 300 000		4	31	400		50	7.5	100		6.9	B4	T
LP220	642 300 000		2	4.5	150		5	3.5	100		3.5	B4	T
LU4A	642 300 000		4	16	200		12	1.8	100		1.6	B4	T
LZ319	645 237 154		9	{ 2.0 2.0	100 175	175	14 10	5 6	100 100	60 100	5.0 6.0	B9A	TP
M8079	192 310 800		6				5		D			B7G	RR
M8081	672 344 100		6	0.85	100		8.5	5.3	100		5.3	B7G	TT
M8082	412 360 500		6	12.4	250	250	16	2.6	No Data Available			B7G	P
M8083	412 361 500		6	2	250	250	10	7.65	No Data Available			B7G	P
M8096	601 235 144		6	7.5	250	250	45.0	7.0	100	150	7.0	B9A	P
M8097	812 314 600		6	2.8	200		7.5	2.8	100		2.8	B7G	DT
M8099	412 314 600		6	2	250		6.0	8.5	200		8.0	B7G	T
M8100	412 365 100		6	2.3	150	150	7	4.3	No Data Available			B7G	P
M8101	412 365 100		6	1.0	250	100	11.0	4.4	250	100	4.4	B7G	P
M8121	412 163 510		6	1.4	100	100	7.0	5.0	100	100	5.0	B8D	P
M8122	412 653 160		6	2.0	100	100	7.5	5.0	100	100	5.0	B8D	P
M8123	281 380 000		6				5.0		D			B8D	R
M8125	412 163 510		6	2.0	100	100	3.0	2.5	100	100	2.3	M8	P
M8135	412 3** 651		6	4.5	250	250	40.0	11.0	100	150	10.0	B9A	P
M8137	741 226 413		6	2.0	250		1.2	1.6	100		1.6	B9A	TT
M8138	802 309 100		6				30.0		REC		15mA	B7G	RR
M8156	462 603 160		6	2.0	100		13.0	5.5	100		5.5	B8D	T
M8157	265 511 413		6	30.0	300	250	25.0	1.9	100	100	1.9	B9G	P
M8161	412 361 500		6	2.5	250	200	8.0	2.5	100	PenLF	2.5	B7G	P
M8162	741 226 413		6	1.5	200		8.5	6.5	200		8.5	B9A	TT
MAZ41	*8* **9 230		4				30		REC		15mA	A08	RR
ME2	642 350 000		2	12	200	200	13		100	100		B5	P
ME25	642 350 000		4	30	400	300	60		100	100		B5	P
ME1400	026 510 310	A	4.5	2	40	40	8	0.24	No Data Available			A08	P
MH4	642 310 000		4	4	250		5	3.6	150		3.6	B5	T
MH40	642 310 000		4	3	200		2.7	2.4	100		2.4	B5	T
MH41	642 310 000		4	1.5	200		5.2	6	200		6	B5	T
MH206	645 230 600	G ₁	2	3	150	75	3.2		100	75		B7	H
MH1118	426 510 310	G ₁	10	3	200	100	3.5		100	90		A08	P
MH4105	645 231 700	G ₁	4	3	200	100	7.5		100	100		B7	H
MHD4	908 231 600	G ₁	4	4	250		4	2.2	100		1.9	B7	DDT
MHL4	642 310 000		4	8	250		8	2.5	100		2.5	B5	T
MHLD6	026 890 310	G ₁	6	5	200		11.5	3	100		3	A08	DDT
MKT4	045 231 600		4	11	250	200	32	3	100	100	3	B7	P
MKT4	642 310 000	S	4	11	250	200	32	3	100	100	3	B5	P
ML4	642 310 000		4	16	250		14	3.2	100		3.2	B5	T
ML6	642 310 000		6	8	200		24	3.8	100		3.8	B5	T
ML40	642 310 000		4	3	200			3	100		3	B5	T
MM4V	542 310 000	A	4	1.5	200	125	6	2.5	100	100	2.5	B5	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
MM20	542 310 000	A	20	0	200	100	6	3.5	100	100	3.5	B5	P
MO465	645 231 700	G ₁	4	1.5 1.5 8.5	75		2		80			B7 B5C	O
					250	75	1.6		100	75			
MO495	123 174 560	G ₁	4		90		2		80				
MP2	642 300 000		2	12	150		12.5	3	100		3	B4	T
MP4	067 231 500	G ₁	4		250	150	8	2.5	100	100	2.5	B7	PP
MP Pen	045 231 600		4	16	250	250	30	3.5	100	PenLF	3.5	B7	P
MP Pen	642 310 000	S	4	16	250	250	30	3.5	100	150	3.5	B5	P
MPT4	045 231 600		4	9	250	200	32	3	100	PenLF	3	B7	P
MPT4	642 310 000	S	4	9	250	200	32	3	100	PenLF	3	B5	P
MR1	802 300 000		4				120		REC		30mA	B4	R
MR4	642 300 000		4	3	200		6	2.5	150		2.5	B4	T
M54	542 310 000	A	4	1.5	250	75	2.4	1.1	250	75	1.1	B5	P
M54B	542 310 000	A	4	1	200	75	3.4	3.2	200	75	3.2	B5	P
M54c	542 310 000	A	4	1	200	75	3.4	3.2	200	75	3.2	B5	P
M5G/HA	542 310 000	A	4	1.5	200	80	2.1	2	100	75	2	B5	P
M5G/LA	542 310 000	A	4	1.5	200	75	5.2	3.75	100	75	3.75	B5	P
M5P4	041 231 500	A	4	1.5	200	75	2.4	1.1	100	75	1.1	B7	P
M5P4	542 310 000	A	4	1.5	200	75	2.4	1.1	100	75	1.1	B5	P
M5P4I	542 310 000	A	4	4	250	250	8.5	3.2	100	PenLF	3.2	B5	P
M5P4I	041 231 500	A	4	4	250	250	8.5	3.2	100	PenLF	3.2	B7	P
M5/Pen	041 231 500	A	4	1.5	200	100	4.8	2.8	100	100	2.8	B7	P
M5/Pen	542 310 000	A	4	1.5	200	100	4.8	2.8	100	100	2.8	B5	P
M5/PenA	542 310 000	A	4	2.5	200	150	9.0	4.0	100	150	4.0	B5	P
M5/PenA	041 231 500	A	4	2.5	200	150	9	4	100	150	4	B7	P
M5/PenB	061 231 500	G ₁	4	1.5	200	100	4.8	2.8	100	100	2.8	B7	P
M5/PenT	041 231 500	A	4	1.5	200	100	4.8	2.8	100	100	2.8	B7	P
M5/PenT	542 310 000	A	4	1.5	200	100	4.8	2.8	100	100	2.8	B5	P
MUI	002 300 000	D ₁	4				60		REC		20mA	B4	R
MU2	002 300 000	D ₁	2				5		D			B4	R
MUI2	892 300 000		4				60		REC		20mA	B4	RR
MUI2/14	892 300 000		4				60		REC		20mA	B4	RR
MUI4	892 300 000		4				60		REC		20mA	B4	RR
MU4250	232 300 000	D ₁	4				120		REC		30mA	B4	R
MV5G	542 310 000	A	4	1.5	200	75	7.5	2.5	100	75	2.5	B5	P
MV5Pen	542 310 000	A	4	2	250	125	5.1	2.3	200	100	2.3	B5	P
MV5Pen	041 231 500	A	4	1.5	200	100	4.3	2.2	100	100	2.2	B7	P
MV5PenB	061 231 500	G ₁	4	1.5	200	100	4.3	2.2	200	100	2.2	B7	P
MX40	645 231 700	G ₁	4	3 12	150	75			100	60		B7	TH
					250	75			100	75	2.8		
MZ05-20	642 300 000		6	12	350		45	4.2	100		4	B4	T
N14	036 540 200		1.4	7	90	90	7	1.55	80	75	1.55	A08	P
N15	026 540 230		1.4	7	90	90	7	1.55	80	75	1.55	A08	P
N16	026 540 230		1.4	4.5	90	90	9.5	2.1	80	90	2.1	A08	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
N17	264 536 200		1.4	7	90	75	7.4	1.58	80	60	1.58	B7G	P
N18	264 526 300		1.4	4.5	90	90	9.5	2.1	80	75	2	B7G	P
N19	365 024 300		1.4	4.5	90	90	7.7	2.0	80	75	2.0	B7G	P
N30	045 231 600		13	12	250	250	40	3.9	100	PenLF	3.9	B7	P
N31	205 331 600	G ₁	13	4	200	175	40	10	100	100	9	B7	P
N37	412 360 500		13	8.0	175	150	50	10.0	100	100	9.0	B7G	P
N40	045 231 600		4	3.5	250	250	32	2.9	100	150	2.9	B7	P
N41	045 231 600		4	4.4	250	250	40	10.5	100	PenLF	9	B7	P
N42	045 231 600		4	16.5	250	250	34	2.5	100	PenLF	2.5	B7	P
N43	005 231 600	G ₁	4	4.4	250	250	40	10	100	PenLF	9	B7	P
N63	026 540 310		6	16.5	250	250	34	2.5	100	150	2.5	A08	P
N66	026 540 310		6	15	250	250	85	6.3	100	150	6	A08	P
N77	412 360 500		6	12	250	250	20	2.6	100	PenLF	2.6	B7G	P
N78	412 360 500		6	5.5	250	250	35	10.0	100	150	9.0	B7G	P
N108	412 36* 500		40	8	175	150	50	10	100	100	9.0	B7G	P
N142	261 054 130		45	9.5	175	175	54.5	9.5	100	100	9.0	B8A	P
N144	412 360 500		6	12	250	250	20.0	2.6	100	PenLF	2.6	B7G	P
N145	261 054 130		40	6.3	175	150	29	7.5	100	100	7.0	B8A	R
N147	026 540 310		6	6	250	250	36	9	100	PenLF	8	A08	P
N148	265 004 130		6	12.5	250	250	45	4.1	100	100	4	B8A	P
N150	261 054 130		6	7	250	250	36	10	100	100	9	B8A	P
N151	261 054 130		6	13.5	250	250	22.5	2.9	100	100	2.9	B8A	P
N152	041 231 551	A	21.5	28	200	200	40.0	6.0	100	100	6.0	B9A	P
N153	541 231 600		15	2.3	175	175	36.0	10.0	100	100	9.0	B9A	P
N154	*41 23* 6*5		16	14.2	200	200	45	8.2	100	100	7	B9A	P
N155	441 231 615		6	10.8	225	225	26	3.2	150	100	3.2	B9A	P
N309	541 231 600		15	2.3	175	175	36.0	10.0	100	100	9.0	B9A	P
N329	*41 23* 6*5		16	14.2	200	200	45	8.2	100	100	7.0	B9A	P
N339	*41 23* *51	A	25	13	150	150	50.0	8.5	100	100	7.0	B9A	P
N349	*41 23* *51	A	20	12.0	150	150	5.0	8.5	100	100	7.0	B9A	P
N359	041 231 551	A	21.5	28	200	200	40	6	100	100	6	B9A	P
N709	*41 23* 6*5		6	7.3	250	250	48	11.3	100	150	10	B9A	P
N727	412 365 400		6	12.5	250	250	45.0	4.1	100	PenLF	4.0	B7G	P
NDD40	802 310 000		4						D			B4	D
NEP51	023 110 560		4	3	225	100	8	2.2	100	100		8SC	P
NF2	023 110 560	G ₁	12.5	2	200	250	3	2.1	100	150	2.1	8SC	P
NF3	023 110 560	G ₁	12.5	2	200	100	4.5	2.3	100	100	2.3	8SC	P
NG320	002 300 000	D ₁	2						D			B5	D
NG3020	002 300 000	A	2				5		D			B4	R
NHP51	023 110 560	G	4	2.5	225	100	3.5	2	100	100		8SC	P
NIX2	*41 23* *51	A	21.5	28	200	200	40	6	100	100	6	B9A	P
NLP61	023 104 560		4	7	250	250	4	9	100	100		8SC	P
NLP62	020 314 560		4	14	250	250	72	9	No Data Available			8SC	P
NSS42	542 310 000	A	4	2.5	225	100	3.5	2	100	100		B5	P
NSS43	542 310 000	A	4	2.5	225	100	3.5	2	100	100		B5	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
NSS183	542 310 000	A	20	2.5	225	100	3.5	2	100	100		B5	P
NT51	023 100 060	G	4	5	220		6	2.5	100		2.2	8SC	T
NVS4	542 310 000	A	4	2	200	100	6	1	100	100		B5	P
NW4	642 310 000		4	2.5	200		2.5	1	100		2.2	B5	T
015/400	642 300 000		4	35	400		40	4.5	100		4.5	B4	T
084	642 300 000		4	4	125		4	1.3	100		1.2	B4	T
OBC3	041 896 230		12.5	2	250		1	1.1	150		1.1	A08	DDT
OBF2	206 581 930		9	2	200	100	6	1.8	100	100	1.7	A08	P
OCH4	217 544 630		15	{	100		3.5		100	60	3.5	} A08	TH
					200	100	3	0.75	100	100	0.75		
OFI	026 510 310	G	6.3	3	250	100	8.5	1.75	100	100	1.7	A08	P
OF5	026 510 310	G	12.6		250	100	7	1.45	100	100	1.4	A08	P
OF9	206 501 130	G ₁	8.5		200	100	6	2.2	100	100	2	A08	P
OM1	020 080 310		30				120		REC		30mA	A08	R
OM3	028 190 310		6						D			A08	DD
OM4	026 980 310	G ₁	6	5	250		5.5	2.2	100		2.2	A08	DDT
OM5	026 510 310	G ₁	6	2	250	100	3	1.8	100	100	1.8	A08	P
OM6	026 510 310	G ₁	6	2.5	250	100	6	2	100	100	2	A08	P
OM7	026 510 310	G ₁	6	2.5	250	100	6	2	100	100	2	A08	P
OM9	026 500 310	G ₁	6	18	250	250	32	2.8	100	150	2.8	A08	P
OM10	027 546 310	G ₁	6	{	100		5.4	2.2	100	60	2.8	} A08	TH
					250	100	2.7	0.7	100	100	0.7		
OP41	045 231 600		4	12.5	250	250		9.1	100	100	8	B7	P
OP42	045 231 600		4	6.2	250	250		10.5	100	100	9	B7	P
OSW3105	041 896 230		6.3	2	250		0.9	1.1	100		1	A08	DDT
OSW3106	026 540 310		6.3	12.5	250	250	45	4.1	100	150	4	A08	P
OSW3107	020 809 030		5				60		REC		20mA	A08	RR
OSW3108	026 540 310		6.3	14	250	250	72	6	100	150	5	A08	P
OSW3109	028 190 300		6.3						D			A08	DD
OSW3111	021 415 360		6.3		250	100	9.2	2	100	100	2	A08	P
OSW3112	026 040 310		6.3	8	250		9	2.6	100		3	A08	T
O56/300	642 350 000		4	20	300	150	22	2	100	100		B5	P
P2	642 300 000		2	10	150		19	3.5	100		3.5	B4	T
P4	642 300 000		4	21	250		30	2.8	100		2.8	B4	T
P6MO	023 104 560		6.3	14	250	250	72	9	100	100		8SC	P
P12/250	642 300 000		4	44	250		60	6	100		6	B4	T
P15/250	642 300 000		4	44	250		60	6	100		6	B4	T
P15/250(S)	023 004 060		4	44	250		60	6	100		6	8SC	T
P24/450	642 300 000		7.5	70	400		55	2.1	100		2.1	B4	T
P25/400	642 300 000		6	100	350		70	3.7	100		3.7	B4	T
P25/500	642 300 000		6	90	400		65	3	100		3	B4	T
P26/500	642 300 000		4	100	400		62.5	4.2	100		4.2	B4	T
P27/500	642 300 000		4	27	400		62.5	8.5	100		8	B4	T
P30/500	642 300 000		4	100	400		60	4	100		4	B4	T
P41	216 040 030		4	11.8	250		16	4.5	100		4.5	M0B	T

VALVE	SELECTOR SWITCH No.	T.C.	Vr	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
P43M	642 350 000		4	17	250	250	36	2.5	100	100		B5	P
P61	216 040 030		6	11.8	250		16	4.5	100		4.5	M08	T
P215	642 300 000		2	12	150		8	2.2	100		2.2	B4	T
P220	642 300 000		2	7.5	150		6	3.0	100		3	B4	T
P22CA	642 300 000		2	14	150		15	2.7	100		2.7	B4	T
P222	642 300 000		2	7.5	150		6	3	100		3	B4	T
P225	642 350 000		2	4.5	150	150	5.6	2.2	100	100	2.2	B5	P
P240	642 300 000		2	1	100			3.7	100		3.7	B4	T
P240A	642 300 000		2	21	150		25	5	100		5	B4	T
P410	642 300 000		4	12	150		8	1.5	100		1.5	B4	T
P414	642 300 000		4	16	100		14	2.8	80		2.8	B4	T
P415	642 300 000		4	25	150		14	1.5	100		1.5	B4	T
P420	642 300 000		4	85	400		50	6	100		6	B4	T
P422	642 350 000		4	20	250	250	22	2.5	100	100		B5	P
P430	264 300 000		4	30	200		25	2.2	100		2.2	UX4	T
P434	032 004 560		4	17	250	250	36	2.5	100	100		8SC	P
P435	642 350 000		4	17	250	250	30	3	100	PenLF	3	B5	P
P440	642 350 000		4	30	400	200	45	5	No Data Available			B5	P
P440N	045 231 600		4	22.0	250	250	36	2.8	100	PenLF	2.8	B7	P
P441n	045 231 600		4	22	250	250	36	2.8	100	PenLF	2.8	B7	P
P455	264 300 000		4	15	250		30	5.5	100		5.5	UX4	T
P460	642 300 000		4	40	200		50	3.5	100		3.5	B4	T
P469	045 231 600		4	14	250	275	72	8.5	100	PenLF	7	B7	P
P495	045 231 600		4	6	200	200	32		100	100		B7	P
P496	045 231 600		4	6	200	200	32	9.5	100	100	8	B7	P
P520	642 350 000		5	17	200	150	12	1.3	100	100		B5	P
P625B	642 300 000		6	1	200			2.8	200		2.8	B4	T
P626	023 100 560		6.3	22	250	250	36	2.5	100	100		8SC	P
P628	023 100 560		6.3	17	250	250	36	2.5	100	100		8SC	P
P650	642 300 000		6	1	200			3.5	200		3.5	B4	T
P861	289 130 000		6				30		REC		15mA	UX5	RR
P1320	023 100 560		13	20	250	250	22	1.9	100	100		8SC	P
P2018	642 310 000		20	15	200		20	4	100		4	B5	T
P2060	023 104 560		24	19	200	100	40	3.15	100	90	3	8SC	P
P2460	642 310 000	S	24	19	200	100	40		100	90		B5	P
P3580	045 231 600		33	8.5	200	200	45	8	100	150	7	B7	P
P4100	642 300 000		4	40	400		30		100			B4	T
PAI	642 310 000		4	10	200		40	5	100		5	B5	T
PA20	642 300 000		2	36	300		49	5.2	100		5	B4	T
PA40	642 300 000		4	90	400		200	10	100		9	B4	T
PABC80	†91 238 146		9.5	2.3	200		1.0	1.4	100		1.4	B9A	DDDT
PABI	023 1†0 980		6						D			8SC	DDD
PBI	234 600 000		2	4.0	150		11.5	3.85	150		3.85	B4	T
PB495	892 300 000		4				30		REC		15mA	B4	RR
PBF2	026 895 310	G ₁	6	3	250	100	5.8	1.2	100	100	1.2	A08	DDP

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grd Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
PCC84	147 234 116		7.5	1.5	90		12.0	6.0	100		6.0	B9A	TT
PCC85	641 237 410		9	2.1	200		10	5.8	150		5.8	B9A	TT
PCF80	645 237 114		9	2	100		14.0	5.0	100	60	5.0	B9A	TP
				2.0	175	175	10.0	6.2	150	150	10.0		
PCF82	645 237 114		9.5	1.0	150	0	18	8.5	100	60	7.0	B9A	TP
				1.0	250	100	10	5.2	100	100	5.0		
PCL81	451 237 614		12.6	1.5	200		0.5	1.2	100	60	1.2	B9A	TP
				6.5	200	200	30	8.7	100	100			
PCL82	414 006 517		16	0	100		3	2.2	100	60	3	B9A	TP
				11	175	175	41	7.5	100	100	6		
PCL83	641 237 154		12.5	8.5	250	0	10.5	2.2	100	60	2.0	B9A	TP
				9.0	175	175	30	4.7	100	100	4.0		
PD220	446 230 700		2	1.15	150		0.8	0.9	150		0.9	B7	TT
PD220A	446 230 700		2	6	150		32	1.5	100		1.5	B7	TT
PDD2	264 589 130		6.3	6	250	250	36	9	100	100	8.5	A08	DDP
Pen4DD	918 236 500	G ₁	4	6	250	250	36	9.5	100	PenLF	8	B7	DDP
Pen4V	642 310 000	G ₂	4	10	250	200	35	3.0	100	PenLF	2.8	B5	P
Pen4VA	642 310 000	S	4	22	250	250	36	2.8	100	PenLF	2.8	B5	P
Pen4VA	045 231 600		4	22	250	250	36	2.8	100	PenLF	2.8	B7	P
Pen4VB	045 231 600		4	5.8	250	250	36	9.5	100	PenLF	8	B7	P
Pen4VX	642 310 000	S	4	15	350	200	22	3.5	100	150	3.5	B5	P
Pen13	023 100 560	G ₁	13	14	200	200	25	2.5	100	100	2.5	8SC	P
Pen13A	023 110 560	G ₁	33	8.5	200	200	45	8	100	100	6	8SC	P
Pen13C	045 231 600		13	11	250	250	32	6.5	100	PenLF	6	B7	P
Pen20	642 310 000	S	20	18	200	200	20	1.7	100	150	1.7	B5	P
Pen24	206 540 030		2	3.3	125	125	5	4	100	100	4	M08	P
Pen25	206 540 030		2	3.6	125	125	5	3	100	100	3	M08	P
Pen26	023 100 560	G ₁	24	19	200	100	40	3.1	100	60	3	8SC	P
Pen36A	145 231 600		35	8.5	200	200	45	8	100	150	7	B7	P
Pen36C	045 231 600		33	8.5	200	200	45	8	100	100	7	B7	P
Pen40DD	918 236 500	G ₁	44	8.5	200	200	45	8	100	100	7	B7	DDP
Pen44	216 540 030		4	11	300	275	70	10.6	100	PenLF	9	M08	P
Pen45	216 540 030		4	8.5	250	250	40	8.8	100	PenLF	8	M08	P
Pen45DD	216 590 830	G ₁	4	8.5	250	250	40	8.8	100	PenLF	8	M08	DDP
Pen46	210 540 030	A	4	8.5	300	225	63	8.5	100	PenLF	8	M08	P
Pen141	206 540 030		1.4	9	90	90	5.5	1.4	80	75	1.4	M08	P
Pen200	642 350 000		2	4.9	150	150	9	2.2	100	100	2.2	B5	P
Pen220A	642 350 000		2	9	150	150	18	2.2	100	100	2.2	B5	P
Pen230	642 350 000		2	4.5	150	125	6.0	2.2	150	125	2.2	B5	P
Pen231	642 350 000		2	2.5	125	125	5	3.6	100	100	3.6	B5	P
Pen383	216 540 030		38	10	175	175	64	10.5	100	100	9	M08	P
Pen384	216 540 030		38	7	125	125	40	7.8	100	100	7	M08	P
Pen425	642 350 000		4	25	300	200	20	1.7	100	100	1.7	B5	P
Pen428	045 231 600		4	12.0	250	250	7.2	8.5	250	200	7.0	B7	P
Pen453DD	216 590 830	G ₁	45	10	175	175	64	10.5	100	100	9	M08	DDP

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
Pen650	023 114 500	A	6	24	400	300	30	5	100	150	5	8SC	P
Pen1340	045 231 600		13	8-6	250	250	41	6-4	100	PenLF	6	B7	P
Pen2020	023 100 560	G ₁	20	19	200	100	40	3-1	100	60	3-1	8SC	P
Pen3520	045 231 600		35	8-0	200	200	40-0	7-3	100	100	7-0	B7	P
Pen3820	045 231 600		38	10	150	175	64	10-5	100	100	9	B7	P
PenA1	642 350 000		4	16-5	250	250	32	3	100	PenLF	3	B5	P
PenA4	045 231 600		4	5-8	250	250	36	9-5	100	PenLF	9	B7	P
PenA4	005 231 600	G ₁	4	5	250	250	40	9-1	100	100	8	B7	P
PenB1	642 350 000		2	4-5	150	150	8		100	100		B5	P
PenB4	045 231 600		4	14	250	275	72	8-5	100	PenLF	7	B7	P
PenDD61	869 231 500	G ₁	6	5-3	250	250	32-0	8-5	250	200	8-0	B7	DDP
PenDD1360	968 231 500	G ₁	13	5-3	250	250	32	8-2	100	PenLF	7	B7	DDP
PenDD2530	869 231 500	G ₁	25	7-75	250	250	43	7-8	100	150	7-8	B7	DDP
PenDD4020	968 231 500	G ₁	40	7-75	250	250	43	7-8	100	PenLF	6	B7	DDP
PenDD4021	968 231 500	G ₁	45	10	175	175	64	10-5	100	PenLF	8	B7	DDP
PF9	026 510 310	G ₁	6	3-5	250	100	7-5	1-65	100	100	1-6	A08	P
PF462	041 230 500	A	2	1	150	150	3	1-85	150	150	1-85	B7	P
PF472	041 230 500	A	2	0-5	150	150	2-5	1-7	150	150	1-7	B7	P
PL33	026 540 310		19	6	250	250	36	9-0	100	PenLF	8	A08	P
PL36	*2* 540 310	A ₁	25	21-0	170	170	100	11-0	No Data Available			A08	P
PL38	120 540 310	A	30	5-5	200	200	75	13-5	100	PenLF	10	A08	P
PL81	041 231 551	A	21-5	28	200	200	40	6-0	100	100	6-0	B9A	P
PL82	041 230 605		16	14-2	200	200	45-0	8-2	100	100	7-0	B9A	P
PL83	541 231 600		15	2-3	175	175	36	10	100	100	9	B9A	P
PL84	*41 23* 6*5		15	12-5	175	175	70	10	100	100	9	B9A	P
PL820	041 231 551	A	21-5	22-0	175	175	45-0	6-2	100	100	6-0	B9A	P
PMO4	412 365 100		6-3	1-2	250	100	11	4-4	100	100	4	B7G	P
PMO5	412 365 100		6-3	2-3	150	150	7	4-3	100	100	4	B7G	P
PMO7	412 361 500		6-3	2	250	250	10	7-5	100	150	5	B7G	P
PM1A	642 300 000		2	0	100		1	1-2	100		1-2	B4	T
PM1HF	642 300 000		2	3	150		1-5	0-8	100		0-8	B4	T
PM1HL	642 300 000		2	1-5	150		2-3	1-2	150		1-2	B4	T
PM1LF	642 300 000		2	6	125		3	0-9	100		0-9	B4	T
PM2	642 300 000		2	7	100		4	0-9	100		0-9	B4	T
PM2A	642 300 000		2	6	150		5	2	100		2	B4	T
PM2B	446 230 700		2	1	125		3	2-5	100		2-5	B7	TT
PM2BA	446 230 700		2	1	100			2-1	100		2-1	B7	TT
PM2DL	642 300 000		2	4-5	150		2	1-5	100		1-5	B4	T
PM2DX	642 300 000		2	5	150		2-3	1-05	100		1	B4	T
PM2HL	642 300 000		2	1-5	150		2-2	1-4	150		1-4	B4	T
PM3	642 300 000		4	0	100		2	1-05	100		1-0	B4	T
PM4DX	642 300 000		4	0	100		1-5	2	100		2	B4	T
PM12	542 300 000	A	2		150	75	4-25	1-1	100	75	1-1	B4	P
PM12A	542 300 000	A	2	1	150	75	2	1-5	100	75	1-5	B4	P
PM12M	542 300 000	A	2	1	150	90	1-4	1-4	150	90	1-4	B4	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
PM12V	542 300 000	A	2	0	150	90		0.75	100	90	0.7	B4	P
PM14	542 300 000	A	4	0	150	75	2.75	0.87	100	75	0.8	B4	P
PM22	642 350 000		2	10	150	150	15	1.3	100	100	1.3	B5	P
PM22A	642 350 000		2	4.5	150	150	5.6	2.2	100	100	2.2	B5	P
PM22C	642 350 000		2	16	150	150	23	3	100	100	3	B5	P
PM22D	642 350 000		2	3	150	150	5	3	100	100	3	B5	P
PM24	642 350 000		4	11	150	150	20	1.75	100	100	1.7	B5	P
PM24	642 310 000	S	4	11	150	150	20	1.75	100	100	1.7	B5	P
PM24A	642 350 000		4	22.5	300	200	20	2	100	100	2	B5	P
PM24B	642 350 000		4	40	400	300	30	2.1	100	100	2.1	B5	P
PM24C	642 350 000		4	28	400	200	30		100	100		B5	P
PM24D	642 350 000		4	35	400	200	50	4	100	100	4	B5	P
PM24E	642 350 000		4	40	300	300	83	3.9	100	150	3.9	B5	P
PM24M	642 350 000		4	17	250	250	30	3	100	PenLF	3	B5	P
PM202	642 300 000		2	12	150		14	2.5	100		2.5	B4	T
PM252	642 300 000		2	15	125		10		100			B4	T
PM254	642 300 000		4	21	200		15		100			B4	T
PM256	642 300 000		6	27	250		20		100			B4	T
PN2	642 350 000		2	7.5	150	150	6		100	100		B5	P
PP2	642 300 000	S	2	5	150	150	7	2.1	100	100	2.1	B4	P
PP2	642 350 000		2	5	150	150	7	2.1	100	100	2.1	B5	P
PP2s	023 004 560		2	5	150	150	7	2.1	100	100	2.1	8SC	P
PP3/250	642 300 000		4	37	300		48	5.2	100		5.2	B4	T
PP4	642 350 000		4	15	250	250	36		100	PenLF		B4	P
PP4s	032 004 560		4	15	250	250	36		100	PenLF		8SC	P
PP4s	642 350 000		4	15	250	250	36		100	PenLF		B5	P
PP5/400	642 300 000		4	32	400		62	8	100		7	B4	T
PP6As	023 104 560		6	18	250	250	32	2.85	100	PenLF	2.8	8SC	P
PP6B	265 413 000		6		250	250	36	10	100	PenLF	9	UX6	P
PP6BG	026 540 310		6	6	250	250	36	10	100	PenLF	9	A08	P
PP6BS	026 540 310		6	6.0	250	250	36.0	9.0	100	PenLF	9	A08	P
PP6C	026 540 310		6	12	250	200	36	10	100	PenLF	9	A08	P
PP6E	045 231 600		6	17	400	275	72	8.5	100	PenLF	8	B7	P
PP13A	045 231 600		13	12	200	200	40	2.65	100	100	2.5	B7	P
PP13s	023 100 560	G ₁	13	14	200	200	25	3.5	100	100	3.5	8SC	P
PP24	005 231 600	G ₁	24	19	200	100	40	3	100	75	3	B7	P
PP24S	023 100 560	G ₁	24	19	200	100	40	3	100	75	3	8SC	P
PP34	005 231 600	G ₁	35	6.5	200	200	45	8.5	100	100	8	B7	P
PP34S	023 100 560	G ₁	35	6.5	200	200	45	8.5	100	100	8	8SC	P
PP35	045 231 600		35	6.5	200	200	45	8.5	100	100	8	B7	P
PP36	145 231 600		35	6.5	200	200	45	8.5	100	100	8	B7	P
PP37	005 231 600	G ₁	35	9.5	200	100	45	8.5	100	75	8	B7	P
PP60	026 540 310		6	15	250	250	85	6.3	100	150	6.3	A08	P
PP21S	642 350 000		2	4.5	90	90	8		80	75		B5	P
PP215S	032 004 560		2	4.5	90	90	8		80	75		8SC	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
PP220	642 300 000		2	12	150		12.5	3	100		3	B4	T
PP222	642 350 000		2	6	150	150	9		100	100		B5	P
PP222	642 300 000	S	2	6	150	150	9		100	100		B4	P
PP225	642 350 000		2	12	150	150	18	2	100	100	2	B5	P
PP225s	023 004 560		2	12	150	125	18	2	100	100	2	8SC	P
PP415	642 350 000		4	12	200	200	12	1.8	100	150	1.8	B5	P
PP416	642 350 000		4	12	200	75	10	2	100	60	2	B5	P
PP430	642 350 000		4	25	200	200	20	2	100	100	2	B5	P
PP431	642 350 000		4	20	250	250	22	1.9	100	150	1.9	B5	P
PP2018	642 310 000	S	20	18	200	200	20	2.5	100	100	2.5	B5	P
PP2018	045 231 600		20	18	200	200	20	2.5	100	100	2.5	B7	P
PP2101	364 520 000		2	3	150	150	7	2.1	100	100	2.1	UX5	P
PP3521	040 231 600		35	25	200		70	6.3	100		6	B7	T
PP4100	642 350 000		4	40	400	300	30	3	100	PenLF	3	B5	P
PP4101	642 350 000		4	14	250	250	36	3.5	100	PenLF	3.5	B5	P
PP4118	160 452 300		40	10	175	175	35	6.5	100	100	6	C7	P
PT	045 231 600		4	6	250	250	32.5	7.5	100	PenLF	7	B7	P
PT2	642 350 000		2	4.5	125	125	5.3	2.6	100	100	2.6	B5	P
PT2	642 300 000	G ₂	2	4.5	150	150	6.5	2.5	100	100	2	B4	P
PT2A	642 350 000		2	10.5	150	150	18		100	100		B5	P
PT4(M-O)	642 350 000		4		250	250	30	3.0	100	PenLF	2.85	B5	P
PT4/D	968 231 500	G ₁	4	6	250	250	32.5	7.5	100	PenLF	7	B7	DDP
PT5	045 231 600		26	7	250	250	36	9	No Data Available			B7	P
PT10	045 231 600		4	7.5	250	250	40	9	100	PenLF	8	B7	P
PT12	204 531 102	A	10	15	250	250	62	6	100	PenLF	6	B9	P
PT15	542 310 000	A	6	25.0	300	300	2.8		No Data Available			B5	P
PT16	642 350 000		4	15	300	300	55	4.8	100	PenLF	4.8	B5	P
PT25	642 350 000		4	22	400	200	62	4	100	100	4	B5	P
PT25H	642 350 000		4	16	400	300	62.5	6.5	100	PenLF	5	B5	P
PT41	642 350 000		4	12.5	250	200	30	3	100	100	3	B5	P
PT41B	642 350 000		4	40	400	300	30	2.25	100	PenLF	2	B5	P
PT225	642 350 000		2	6	150	150	8		100	100		B5	P
PT225	642 300 000	S	2	6	150	150	8		100	100		B4	P
PT240	642 350 000		2	10.5	200	150	16		100	100		B5	P
PT250	642 350 000		2	15	250	250	40		100	PenLF		B5	P
PT425	642 350 000		4		150	150	15	2	100	100	2	B5	P
PTAD	968 231 500	G ₁	4	6	250	250	7	7	100	PenLF	7	B7	DDP
PTA	045 231 600		13	10	250	250	32	4	100	PenLF	4	B7	P
PTS	005 231 600	G ₁	26	5.5	250	250	40	6	100	PenLF	6	B7	P
PTS	045 231 600		26	8.2	250	250	32	6	100	PenLF	5	B7	P
PTSA	869 231 500	G ₁	26	5.5	200	200	40		100	PenLF		B7	DDP
PTSD	968 231 500	G ₁	26	5	250	200	40	6	100	PenLF	6	B7	DDP
PTZ	005 231 600	G ₁	40	5.5	250	200	40	7.5	100	PenLF	7	B7	P
PVO6-20	400 235 100	A	6	40	200	300	40	4	100	100	4	B7	P
PVO6-25	401 235 100	A	6	40	200	300	40	4	100	100	4	B7	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
PV1-35	401 235 100	A	12	25	250	200	40	2	100	100	2	B7	P
PV4	892 300 000		4				60		REC		20mA	B4	RR
PV25	091 231 800		25				60		REC		20mA	B7	RR
PV29	091 231 800		30				60		REC		20mA	B7	RR
PV29s	123 180 090		30				60		REC		20mA	8SC	RR
PV30	091 231 800		30				30		REC		15mA	B7	RR
PV30a	123 180 090		30				30		REC		15mA	8SC	RR
PV75/1000	892 300 000		4				30		REC		17mA	B4	RR
PV100/2000	892 300 000		4				60		REC		18mA	B4	RR
PV200/600	892 300 000		4				120		REC		28mA	B4	RR
PV400	802 300 000		4				30		REC		15mA	B4	R
PV430	892 300 000		4				15		REC		9mA	B4	RR
PV475	892 300 000		4				15		REC		11mA	B4	RR
PV480	802 300 000		4				30		REC		16mA	B4	R
PV495	892 300 000		4				30		REC		17mA	B4	RR
PV3018	190 812 300		30				60		REC		20mA	C7	RR
PV4100	892 300 000		4				30		REC		15mA	B4	RR
PV4200	892 300 000		4				60		REC		27mA	B4	RR
PV4201	892 300 000		4				60		REC		27mA	B4	RR
PV4300	892 300 000		4				60		REC		20mA	B4	RR
PVB6	892 310 000		6				60		REC		20mA	B5	RR
PX2	642 300 000		2	22	150		22	1.5	100		1.5	B4	T
PX4	642 300 000		4	43	300		43	6	100		6	B4	T
PX5	642 300 000		4	34	400		62.5	6.5	100		6.5	B4	T
PX25	642 300 000		4	31	400		40	7.5	100		7	B4	T
PX25A	642 300 000		4	100	400		62.5	6.9	100		6.9	B4	T
PX41	642 300 000		4	40	250		49	6	100		6	B4	T
PX230	642 300 000		2	15	150		17.5	3.5	100		3.5	B4	T
PX230SW	602 300 000	G ₁	2	15	150		18	3.5	100		3.5	B4	T
PX240	642 300 000		2	32	200		25	3	100		3	B4	T
PX2100	642 300 000		7.5	30	400		18	1.6	100		1.6	Sm4	T
PY31	020 080 310		17				120		REC		30mA	A08	R
PY32	028 08* 310		29				180		REC			A08	R
PY71	200 800 030	C	21				120		REC		30mA	B8B	R
PY80	001 230 008		19				120		REC		35mA	B9A	R
PY81	*** 23* **8	C	17				120		REC		35mA	B9A	R
PY82	**1 23* **8		19				120		REC		36mA	B9A	R
PY83	*** 23* **8	C	20				120		REC		35mA	B9A	R
PZ	264 530 000		2.5	16.5	250	250	31	2.5	100	PenLF	2.5	UX5	P
PZ03-3	401 235 000	A	4	25	300	125	25	1.4	100	100	1.4	B7	P
PZ05-15	401 235 000	A	4		400	150	40	1.25	100	100	1.2	B7	P
PZ30	029 183 210		26				120		REC		30mA	A08	RR
PZH	265 413 000		2.5	16.5	250	250	34	2.2	100	PenLF	2.2	UX6	P
QA2400	412 361 500		6	2.5	200	200	8.0	2.5	100	150	2.5	B7G	P
QA2401	6*2 364 100		6	8.5	250		10.5	2.2	100		2.22	B7G	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
QA2402	412 36* 500		6	13.5	250	250	16.0	2.6	100	150	2.6	B7G	P
QA2403	412 361 500		6	2.0	250	250	10.0	7.5	100	150	5.0	B7G	P
QA2404	192 310 800		6				3.0		D			B7G	DD
QA2405	241 657 143		6	14	250	150	30	3.9	100	100	3.9	B9G	PP
QA2406	471 226 413		6	2.0	250		10.0	5.5	100		5.0	B9A	TT
QA2407	802 309 100		6				30		REC		15mA	B7G	RR
QA2408	481 461 230		6	8.0	250		9.0	2.6	100		2.6	A08	TT
QPT2	476 235 700		2	9	150	150	3.3		100	100		B7	PP
QP2I	446 235 700		2	9.8	150	150	3.5	2.3	100	100	2.3	B7	PP
QP22A	465 230 574		2	12	150	150	3	4	150	150	4	B9	PP
QP22B	446 235 700		2	11.7	150	150	3.8		100	100		B7	PP
QP25	207 544 630		2	6	125	125	10	3	100	100	3	M08	PP
QP230	446 235 700		2	9.6	125	125	4.65	3	100	100	3	B7	PP
QP240	465 230 574		2	11.5	150	150	4	4	100	100	4	B9	PP
QQ03-12	601 235 144		6		300	250	45	7	No Data Available			B9A	P
QQE06-40	245 134 200	A ₁ A ₂	6		400	250	30	3.4	No Data Available			B7A	PP
QQV03-10	414 226 573		6	60	200	150	30.0	3.3	No Data Available			B9A	PP
QV03-12	601 235 144		6	7.5	250	250	45.0	7.0	100	150	7.0	B9A	P
QV04-7	265 511 413		6	30	300	250	25	1.9	100	100	1.9	B9G	P
QV04-12	601 235 144		6	7.5	250	250	45	7	100	150	7	B9A	P
QV04-20	241 531 420	A ₁ A ₂	6	22	400	200	25	4	100	100	4	A08	PP
QV05-25	254 130 000	A	6	12.5	300	250	83	6.5	100	150	6	UX5	P
QV06-20	125 141 130	A	6	30	200	200	100	7	No Data Available			A08	P
QQV06-40	245 134 200	A ₁ A ₂	6		400	250	30	3.4	No Data Available			B7A	PP
QQZ04-15	273 624 540		3	10	300	200	20	2	100	100	2	B8B	PP
R1	892 300 000		4				30		REC		15mA	B4	RR
R2	892 300 000		4				60		REC		20mA	B4	RR
R3	892 300 000		4				60		REC		20mA	B4	RR
R4	892 300 000		4				60		REC		20mA	B4	RR
R4a	892 300 000		4				60		REC		20mA	B4	RR
R4B	802 300 000		4				60		REC		21mA	B4	R
R10	112 311 100	D ₁	4				5		D			B7G	R
R11	002 300 000	D ₁	4				60		REC		20mA	B4	R
R12	023 000 000	D ₁	6						D			B3G	D
R14	028 193 210		26				120		REC		20mA	A08	RR
R16	123 000 000		1.4						D			B3G	D
R17	**I 23* ***	D ₁	6				120		REC		30mA	B9A	R
R18	**I 23* ***	D ₁	6				120		REC		36mA	B9A	R
R19	230 232 032	D ₁	1.25						D			B9A	D
R41	892 300 000		4				60		REC		20mA	B4	RR
R42	892 300 000		4				60		REC		20mA	B4	RR
R43	892 300 000		4				180		REC		40mA	B4	RR
R52	030 809 020		5				60		REC		20mA	A08	RR
R80	264 300 000		4	24	250		20	4	100		4	UX4	T
R236	026 510 300	G ₁	1.4	2	100	100	1	0.55	100	100	0.5	A08	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
R2018	642 310 000		20	2.5	200		2.5	3	100		3	B5	T
RA	892 310 000		13				30		REC			B5	RR
RAI	364 200 000		15	4.5	90		4.5	1.185	80		1.1	UX4	T
RB350/80	892 300 000		4				30		REC		15mA	B4	RR
RB500/120	892 300 000		4				60		REC		20mA	B4	RR
RB650/250	892 300 000		4				120		REC		30mA	B4	RR
RE034	642 300 000		4	3	200		2	1.2	100		1	B4	T
RE074	642 300 000		4	9	150		3.5	0.9	100		0.9	B4	T
RE074N	642 300 000		4	9	150		3.5	0.9	100		0.9	B4	T
RE084	642 300 000		4	4	150		4	1.5	100		1.5	B4	T
RE114	642 300 000		4	15	150		13	1.3	100		1.3	B4	T
RE134	642 300 000		4	17	250		12	2.0	100		1.9	B4	T
RE144	642 300 000		4	9	125		2	0.65	125		0.65	B4	T
RE304	642 300 000		4	32	250		20	1.9	100		1.6	B4	T
RE404	642 300 000		3.5		200			0.6	100		0.6	B4	T
RE604	642 300 000		4	45	250		40	2.5	No Data Available			B4	T
REN704	652 310 000	G ₁	4		100		2	1.1	100		1.1	B5	P
REN904	642 310 000		4	3.5	200		6	2.4	100		2.4	B5	T
REN914	642 310 000		4	1.5	200		0.2		100			B5	T
REN924	642 310 000	D ₁	4	3	200		6	2	100		2	B5	DT
REN1004	642 310 000		4		200			1.5	100		1.4	B5	T
REN1814	642 310 000		20	1.6	200		0.2	1.0	100		1.0	B5	T
REN1817D	652 310 000	G ₁	20		100	100		1.1	100	90	1.1	B5	P
REN1821	642 310 000		20	3	200		6	2.3	100		2.3	B5	T
REN1826	642 310 000	D ₁	20	3	200		6	1.8	100		1.8	B5	DT
RENS1204	542 310 000	A	4	2	200	60	4	1.0	100	60		B5	P
RENS1214	542 310 000	A	4	2.2	200	100	6	1.0	100	100		B5	P
RENS1264	542 310 000	A	4	2	200	100	3	2	100	100		B5	P
RENS1264BI	542 300 000	A	4	2	200	100	3	2	100	100		B4	P
RENS1274	542 310 000	A	4		200	100	3	2	100	100		B5	P
RENS1284	542 310 000	A	4	2	200	100	3	2.5	100	100		B5	P
RENS1294	542 310 000	A	4	2	200	100	4.5	2	100	100		B5	P
RENS1374D	642 310 000	G ₂	4	18	250	250	24	2.5	100	100		B5	P
RENS1818	542 310 000	A	20	2	200	100	3	2	100	100		B5	P
RENS1819	542 310 000	A	20		200	60	4	1	100	60		B5	P
RENS1820	542 310 000	A	20	2	200	60	4	1	100	60		B5	P
RENS1823D	642 310 000	G ₂	20	18	200	200	20	1.7	100	100		B5	P
RENS1884	642 310 000	G ₂	20	2	200	100	3	2.4	100	100		B5	P
RENS1894	642 310 000	G ₂	20	2.2	200	100	4	1.8	100	100		B5	P
RES094	542 300 000	A	4	2	200	75	4	7	100	75		B5	P
RES164	642 350 000		4	11.5	250	75	12	1.4	100	75		B5	P
RES174D	642 300 000	G ₂	4	19	250	150	12	1.3	100	100		B4	P
RES364	642 350 000		4	2.5	300	200	20	1.7	100	100		B5	P
RES374	642 350 000		4	42	300	200	20	1.5	No Data Available			B5	P
RES964	642 350 000		4	15	250	250	36	2.8	No Data Available			B5	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
RFP8/14	041 231 500	A ₁	4	20	400	250	35	4	100	PenLF	4	B7	P
RFP8/14	542 310 000	A ₁	4	20	400	250	35	4	100	PenLF	4	B5	P
RG250/1000	002 300 000	D ₁	4				120		REC		30mA	B4	R
RG250/3000	280 300 000		2.5				120		REC		30mA	UX4	R
RGN354	802 300 000		4				15		D			B4	R
RGN504	892 300 000		4				15		D			B4	RR
RGN564	802 300 000		4				30		REC		15mA	B4	RR
RGNI054	892 300 000		4				30		REC		15mA	B4	RR
RGNI064	892 300 000		4				30		REC		15mA	B4	RR
RGNI074	892 300 000		4				60		REC		20mA	B4	RR
RGNI304	802 300 000		4				60		REC		20mA	B4	R
RGNI503	892 300 000		2.5				30		REC		15mA	B4	RR
RGN2004	892 300 000		4				60		REC		20mA	B4	RR
RGN2504	892 300 000		4				60		REC		20mA	B4	RR
RH	061 231 500	G ₁	4	1.7	250	100	7.9	7	200	100	7.4	B7	P
RK10	264 300 000		7.5	100	350		50		100			UX4	T
RK15	264 300 000		2.5	33	250		22	2.35	100		2.3	UX4	T
RK16	264 130 000		2.5	28	250		26	2.6	100		2.6	UX5	T
RK19	200 300 000	D ₁ D ₂	7.5				120		REC		30mA	UX4	RR
RK21	200 300 000	D ₁	2.5				120		REC		30mA	UX4	R
RK24	364 200 000		2	13.5	175		8	1.6	100		1.6	UX4	T
RK60	200 300 000	D ₁ D ₂	5				120		REC		30mA	UX4	RR
RL7	265 114 113		6	1.7	250	250	10.0	7.7	100	150	7.0	B9G	P
RL16	241 600 003		6	2.5	250		10	6.5	100		5	B9G	T
RL18	241 600 003		6	2.6	250		10.0	6.5	100		6.4	B9G	T
RL37	244 664 413		6	1.5	250		10	9	100		7	B9G	T
RO337	892 300 000		2.5				30		REC		15mA	B4	RR
RO423	892 300 000		2.5				30		REC		15mA	B4	RR
RO431	892 300 000		4				60		REC		20mA	B4	RR
RO443	892 300 000		4				60		REC		20mA	B4	RR
RO446	892 300 000		4				30		REC		15mA	B4	RR
RO452	892 300 000		4				60		REC		20mA	B4	RR
RO457	892 300 000		4				60		REC		20mA	B4	RR
RO481	802 300 000		4				120		REC		30mA	B4	R
RO534	892 300 000		5				60		REC		20mA	B4	RR
RO771	802 300 000		7.5				120		REC		30mA	B4	R
RS	802 310 000		3				60		REC		20mA	B5	R
RRAF	642 300 000		4	2	125		4	1.45	100		1.4	B4	T
RRBF	642 300 000		4	2.5	125		10	1.25	100		1.2	B4	T
RSAF	542 300 000	A	4	1	150	75	4.5	1.25	150	75	1.25	B4	T
RT1-2	642 300 000		4	2.6	125		26	2.5	100		2.5	B4	T
RT2	642 300 000		4	4	200		18	1.75	150		1.75	B4	T
RT3	642 300 000		4	2.3	300		15	2.85	100		2.8	B4	T
RTR434I	061 231 500	G ₁	21	2.2	125	125	8	8	100	125	8	B4	P
RTR4342	005 231 600	G ₁	21	5.8	125	125	48	9	100	125	8	B7	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
RV120/250	892 300 000		4				60		REC		20mA	B4	RR
RV120/350	892 300 000		4				60		REC		20mA	B4	RR
RV120/350S	023 080 090		4				60		REC		20mA	8SC	RR
RV120/500	892 300 000		4				60		REC		20mA	B4	RR
RV120/500S	023 080 090		4				60		REC		20mA	8SC	RR
RV200/600	892 300 000		4				120		REC		30mA	B4	RR
RV210	042 310 000	A ₁	4	53	400		70	5-8	No Data Available			B5	T
RX21	200 030 000	D ₁	2-5				120		REC		30mA	UX5	R
RX215	389 200 000		2-5				5		D			UX4	RR
RZ	023 100 080		20				60		REC		20mA	8SC	R
SO1	264 300 000		15	40-5	175		21	1-5	100		1-5	UX4	T
SO2	264 300 000		7-4	88	400		55	2-1	100		2-1	UX4	T
S2	542 300 000	A	2	1	125	60	2-25	1-1	125	60	1-1	B4	P
S4V	542 310 000	A	4	1	200	75	1-5	1-15	100	75	1-1	B5	P
S4VA	542 310 000	A	4	1-5	200	100	2-75	2	100	100	2	B5	P
S4VB	542 310 000	A	4	1-5	200	125	4-6	2-5	100	100	2-5	B5	P
S11A	892 300 000		4				30		REC		15mA	B4	RR
S11D	892 300 000		4				60		REC		20mA	B4	RR
S12	542 300 000	A	2	1	100	30	2-5	0-7	No Data Available			Sm4	P
S21	542 300 000	A	2	0	125	75	3-6	1-1	100	75	1-1	B4	P
S22	542 300 000	A	2	0	125	75	4	1-75	125	75	1-75	B4	P
S23	542 300 000	A	2	1	150	75	2-8	1-1	150	75	1-1	B4	P
S24	542 300 000	A	2	1	150	75	3-2	1-4	150	75	1-4	B4	P
S30C	642 300 000		4	38	300		50	5	100		5	B4	T
S30D	642 300 000		2	38	300		50	5	100		5	B4	T
S207	542 300 000	A	2	1-5	200	100	3	0-7	100	100	0-7	B4	P
S208	542 300 000	A	2	0	200	100	2	0-8	100	100	0-8	B4	P
S209	023 010 560	G ₁	2	0-5	125	125	2-4	0-7	125	125	0-7	8SC	P
S210	642 300 000	G ₂	2	1-5	150	90	3	1-2	100	90	1-0	B4	P
S213	542 300 000	A	2	0-5	150	90	3	1-3	100	90	1-3	B4	P
S215	542 300 000	A	1	1-5	150	90	2-75	1-5	100	90	1-5	B4	P
S215A	542 300 000	A	2	1	150	60	2	1-1	150	60	1-1	B4	P
S215B	542 300 000	A	2	1	150	60	1-5	1-2	150	60	1-2	B4	P
S215VM	542 300 000	A	2	1-4	150	60	1-0	0-8	100	60	0-8	B4	P
S217	542 300 000	A	2	0-5	150	150	2-3	1-7	100	150	1-7	B4	P
S218	041 230 500	A	2	0-5	150	150	3	1-85	100	150	1-8	B7	P
S220	542 300 000	A	2		150	75	4	1-1	150	75	1-1	B4	P
S310A	265 113 000	G ₁	10	3	125	150	5-5	1-9	100	100	1-9	UX6	P
S311A	265 130 000	G ₁	10	15	125	150	30	2-8	100	100	2-8	UX5	P
S328A	265 113 000	G ₁	7-5	3	125	150	5-5	1-9	100	100	1-9	UX6	P
S329A	265 130 000	G ₁	7-5	15	125	150	30	2-8	100	100	2-8	UX5	P
S329L	265 113 000	G ₁	7-5	15	125	125	30	2-8	No Data Available			UX6	P
S406/7	542 300 000	A	4	2	200	100	1-5	1	100	100	1	B4	P
S408	542 300 000	A	4	1-5	175	75	4	0-8	100	75		B4	P
S409	542 300 000	A	4	1-5	175	75	4	0-8	100	75		B4	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
S410	542 300 000	A	4	1.5	175	75	4	1.0	100	75		B4	P
S415N	542 310 000	A	4	2	200	100	6	1	100	100	1	B5	P
S420	061 231 500	G ₁	4	3	250	250	11.5		100	200		B7	P
S430N	542 300 000	A	4		200	100	4	3	100	100	3	B5	P
S431N	542 310 000	A	4	2.5	225	100	3.5	2.0	100	100		B5	P
S432N	023 110 560	G ₁	4	3	225	100	2.5	2.2	100	100		8SC	P
S435n	542 310 000	A	4	2	200	100	3.0	2.3	100	100	2.3	B5	P
S440	061 231 500	G ₁	4	2.35	250	250	4.1	3.45	100	200	3.4	B7	P
S493	542 310 000	A	4	2	200	100	4		100	100		B5	P
S495	542 310 000	A	4	2	200	100	6	2.5	100	100	2.5	B5	P
S617	023 110 560	G ₁	6.3	3	225	100	2.5	2.2	100	100		8SC	P
S620	023 110 560	G ₁	6.3	2.5	225	100	3.5	2.0	100	100		8SC	P
S629	023 110 560	G ₁	6.3	2.5	225	100	3.5	2.0	100	100		8SC	P
S1323	061 231 500	G ₁	13	3	200	100	8	1.85	100	100	1.85	B7	P
S1323	023 110 560	G ₁	13	3	200	100	8	1.85	100	100	1.85	8SC	P
S1324	061 231 500	G ₁	13	2	200	100	3	2.37	100	100	2.3	B7	P
S1327	023 110 560	G ₁	13	2.5	250	100	3.5	2.0	100	100		8SC	P
S1328	023 110 560	G ₁	13	2	200	100	3	2.37	100	100	2.3	8SC	P
S2018	041 231 500	A	20	3	200	60	4	1.2	100	60	1.2	B7	P
S2018	542 310 000	A	20	3	200	60	4	1.2	100	60	1.2	B5	P
S2035N	542 310 000	A	20	2.5	225	100	3.5	2.0	100	100		B5	P
S2043	542 310 000	A	20	2.5	250	100	5	2.0	100	100		B5	P
S4020A	254 300 000		2	1	125		1.3	0.6	100		0.6	UX4	T
S4020B	642 300 000		2	1	125		1.3	0.6	100		0.6	UX4	T
S4021A	264 300 000		4	8	125		20	3	100		3	UX4	T
S4021B	642 300 000		4	8	125		20	3	100		3	B4	T
S4022AR	236 400 000		4	4.5	125		5	2.2	100		2.2	UX4	T
S4022B	642 300 000		4	4.5	125		5	2.2	100		2.2	B4	T
S4045A	642 350 000		5	70	250	75	45	1.45		60	1.45	B5	P
SD	892 310 000		5						D			B5	DD
SD2	642 300 000		2	1.5	150		2.2	1.4	150		1.4	B4	T
SD6	*82 310 *00		6				5		D			B7G	R
SD61	123 000 000	D ₁	6						D			B3G	D
SD917A	402 013 060		6.3	3.6	100		1.4	2.7	100		2.7	B8A	T
SE211	542 300 000	A	2	1	150	75	1	1.5	150	75	1.5	B4	P
SE211C	542 300 000	A	2		150	75	1	1.5	150	75	1.5	B4	P
SE2018	542 310 000	A	20	3	200	60	4	1.2	100	60	1.2	B5	P
SE2118	542 310 000	A	20	24	200	100	3	3	100	60	3	B5	P
SG2	542 300 000	A	2		150	75	2.5	1	100	75	1	B4	P
SG215	542 300 000	A	2	1.5	150	75	2.7	1	100	75	1	B4	P
SG220	542 300 000	A	2	1.5	150	75	2.4	1.5	100	75	1.5	B4	P
SG220SW	652 300 000	G ₁	2	1.5	150	75	2.4	1.5	150	75	1.5	B4	P
SGA1	542 310 000	A	4		200	100	6	3	100	100	3	B5	P
SN954	082 813 080		6.3				30		REC		15mA	B8A	R
SN1039A	412 365 100		6.3		175	125	7.7	5.1	100	100	4	B7G	P

VALVE	SELECTOR SWITCH No.	T.C.	Vr	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
SP2	041 230 500	A	2	1	150	150	3	1.8	150	150	1.8	B7	P
SP2B	061 230 500	G ₁	2	1	150	150	2.6	0.8	150	150	0.8	B7	P
SP2B(S)	032 004 560		2	1	150	150	2.6	0.8	150	150	0.8	8SC	P
SP2D	061 230 500	G ₁	2	1	150	150	1.4	1.7	150	150	1.7	B7	P
SP2D	542 300 000	A	2	1	125	125	1.45	1.7	125	100	1.7	B4	P
SP2V	041 230 500	A	2	0	150	75	2.9	1.1	100	75	1	B7	P
(TUNG) SP4	061 231 500	G ₁	4	2	200	100	3	2.3	100	100	2.3	B7	P
SP4	542 310 000	A	4	2	200	100	3	2.3	100	100	2.3	B5	P
SP4A	041 231 500	A	4	2	250	100	3	2.4	100	100	2.4	B7	P
(MUL)SP4	041 231 500	A	4	2	200	100	3	2.3	100	100	2	B7	P
SP4B	061 231 500	G ₁	4	2.4	250	250	4	3.4	100	100	3.4	B7	P
SP4C	023 110 560	G ₁	4	2.4	250	250	4	3.4	100	100	3.4	B7	P
SP4S	023 110 560	G ₁	4	2	250	100	3	3.5	100	PenLF	3.5	8SC	P
SP6	412 361 500		6	2	250	250	10	7.5	100	PenLF	7	B7G	P
SP6S	023 110 560	G ₁	6	2	250	100	3	2	100	100	2	8SC	P
SP13	061 231 500	A	13	2	200	100	3.3	2.2	100	100	2.2	B7	P
SP13	023 110 560	G ₁	13	2	200	100	3.3	2.2	100	100	2.2	8SC	P
SP13B	061 231 500	G ₁	13	1.5	200	200	2	4	100	150	4	B7	P
SP13C	061 231 500	G ₁	13	2.2	200	200	2.5	2.8	100	150	2.8	B7	P
SP13S	023 110 560	G ₁	13	2	150	100	3	2.4	100	100	2.4	8SC	P
SP20	542 310 000	A	20		200	100	4.5	3.5	100	100	3.5	B5	P
SP22	206 510 030	G ₁	2	1	125	125	1.1	1.2	125	100	1.2	M08	P
SP35	023 110 560	G ₁	35	8	200	200	41	7	100	PenLF	7	8SC	P
SP41	216 510 030	G ₁	4	1.5	200	200	10.9	8.5	100	150	8	M08	P
SP42	216 510 030	G ₁	4	1.3	200	125	20	8.4	100	100	8	M08	P
SP61	216 510 030	G ₁	6	1.5	200	200	10.9	8.5	100	150	8	M08	P
SP62	216 510 030	G ₁	6	1.25	200	100	16	9	200	100	8	M08	P
SP65	023 110 560	G ₁	6	2	250	100	3	2.1	100	100	2.1	8SC	P
SP141	206 500 030	G ₁	1.4	1	90	90	1.3	0.75	80	90	0.75	M08	P
SP181	216 510 030	G ₁	18	1.5	200	200	10.9	8.5	100	PenLF	8	M08	P
SP210	041 230 500	A	2	1	125	125	1.1	1.2	125	100	1.2	B7	P
SP215	041 230 500	A	2	1.5	150	80	2.1	1.6	100	75	1.6	B7	P
SP220	642 300 000		2	12	150		14	3	100		3	B4	T
SP1320	041 231 500	A	13	1.5	250	100	4.4	2.0	100	100	2	B7	P
SP2220	041 231 500	A	22	3	250	200	4.9	2.65	100	150	2.6	B7	P
SPT2	041 230 500	A	2	1	125	125	2.8	1.5	125	100	1.5	B7	P
SPT4A	041 231 500	A	4	1.5	250	100	2	2.3	200	100	2.3	B7	P
SPTA	061 231 500		13	2.5	200	100	2.2	1.4	100	100		B7	P
SPTS	041 231 500	A	13	1.5	250	100	2	3	100	100	3	B7	P
SR2	642 300 000		2	16	200		10	3	100		3	B4	T
SR4	642 310 000		4	20	250		20	4	100		4	B5	T
SS210	542 300 000	A	2	1	150	75	0.6	1.4	150	75	1.4	B4	P
SS210C	542 300 000	A	2	1	150	75		1.4	150	75	1.4	B5	T
SS210DDT	682 390 000	G ₁	2	5.5	150		2.4	1.4	100		1.4	B5	DDT
SS210D	642 300 000		2	4.5	150		2	1.6	100		1.6	B4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
SS210HF	642 300 000		2	4	150		1	0.75	100		0.75	B4	T
SS210HL	642 300 000		2	1.5	150		2	1.4	125		1.4	B4	T
SS220PA	642 300 000		2	6	150		8	3.5	100		3.5	B4	T
SS220P	642 300 000		2	12	150		6	1.5	100		1.5	B4	T
SS220SP	642 300 000		2	12	150		14	3.5	100		3.5	B4	T
SS240SP	642 300 000		2	12	150		15	3.5	100		3.5	B4	T
SS2018	542 310 000	A	20	3	200	100	3	3	100	90	3	B5	P
SU25	*2* 0** 3*0	D ₁	2						D			A08	D
SU45	112 311 100	D ₁	4				30		REC		15mA	B7G	R
SU61	023 000 000	D ₁	6						D			B3G	D
SU2130	002 300 000	D ₁	2				2		D			B4	R
SU2150	002 300 000	D ₁	2				2		D			B4	R
SU2150A	002 300 000	D ₁	2				5		D			B4	R
SU3130	002 300 000	D ₁	2						D			B4	D
SWG2	652 300 000	G ₁	2		150	75		1.5	100	75	1.5	B4	P
SW1	802 300 000		4				30		REC		15mA	B4	R
T4D	123 000 000	D ₁	4						D			B3G	D
T6D	123 000 000	D ₁	6						D			B3G	D
T13U	023 100 060	G ₁	13	4	200		5.9	2.6	100		2.6	8SC	T
T41(MAZDA)	216 040 030		4		100		30	2KΩ	No Data Available			M08	Thyratron
T134	542 300 000	A	4	1	150	75	5	1.3	100	75		B4	P
T136	642 300 000		4	8	200		6	1.6	100		1.6	B4	T
T151	642 300 000	G ₂	4	15	200	150	12	1.8	100	100		B4	P
T204	023 004 060		2	1	125		1.8	0.6	125		0.6	8SC	T
T435	023 100 060	G ₁	4	5	225		6	2.5	100		2.4	8SC	T
T635	023 100 060	G ₁	6.3	16	250		20	3.2	100		3	8SC	T
T1335	023 100 060	G ₁	13	5	225		6	2.5	100		2.4	8SC	T
TB13	802 310 000		13						D			B5	D
TB032	642 300 000		2	30	150		12	1.5	100		1.5	B4	T
TB052	642 300 000		2	15	150		7	1.2	100		1.2	B4	T
TB062	642 300 000		2	10.5	150		13	2	100		2	B4	T
TB102	642 300 000		2	4	150		5	1.25	100		1.2	B4	T
TB122	642 300 000		2	4.5	150		6	3.5	100		3.5	B4	T
TB172	642 300 000		2	4.5	150		4	1.4	100		1.4	B4	T
TB282	642 300 000		2	1.5	150		2	1.3	125		1.3	B4	T
TB402	446 230 700		2	0	150		6		150			B7	TT
TB452	542 300 000	A	2	0	150	75	2	1.5	150	75	1.5	B4	P
TB552	542 300 000	A	2	0	150	75	4	1.5	150	75	1.5	B4	P
TB622	542 300 000	A	2		150	90	2	1.4	100	90	1.4	B4	P
TB9920	642 310 000		20	1.5	200		0.2	4	150		4	B5	T
TBC14	809 231 600	G ₁	4	7	250		4	2	100		2	B7	DDT
TBC113	809 231 600	G ₁	13	5	200		4	3.6	100		3.6	B7	DDT
TC432	642 300 000	S	2	4.5	150	150	9.5		100	100		B4	P
TC432	642 350 000		2	4.5	150	150	9.5		100	100		B5	P
TD044	642 300 000		4	40	250		40	3	100		3	B4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
TDD1C	023 189 060		13	5-0	200		4-0	2-0	100		2-0	B7	DDT
TDD2	682 390 000	G ₁	2	5-5	150		2-5	1-4	100		1-4	B5	DDT
TDD2A	682 390 000	G ₁	2	1-5	150		1-95	1-2	125		1-2	B5	DDT
TDD4	908 231 600	G ₁	4	7	250		4	2	100		2	B7	DDT
TDD13C	809 231 600	G ₁	13	5	200		4	2	100		2	B7	DDT
TDD25	809 231 600	G ₁	25	1	100		4	2	100		2	B7	DDT
TE2	028 090 310		26				30		REC		15mA	A08	RR
TE3	028 090 310		12				30		REC		15mA	A08	RR
TE5	028 090 310		6-3				30		REC		15mA	A08	RR
TE094	642 310 000		4	16	200		12	1-3	100		1-3	B5	T
TE104	642 300 000		4	36	400		61	4	100		4	B4	T
TE244	642 310 000		4	3-5	200		6	2-4	150		2-4	B5	T
TE384	642 310 000		4	2	200		3	1-5	150		1-5	B5	T
TE424	542 310 000	A	4		200	100	3	2	100	100	2	B5	P
TE434	642 350 000		4	14	250	250	36		100	PenLF		B5	P
TE464	041 231 500	A	4		200	100	3	2-5	100	100	2-5	B7	P
TE474	041 231 500	A	4	1-5	200	100	4-5	2	100	100	2	B7	P
TE534	642 310 000	S	4	15	250	250	24		100	PenLF		B5	P
TE564	041 231 500	A	4	1-5	200	100	4-5	3-2	100	100	3-2	B7	P
TE634	045 231 600		4	22	250	250	36		100	100		B7	P
TE994	642 310 000		4	1-6	250		4	4	200		4	B5	T
TF64	061 231 500	G ₁	4	2-75	250	250	11	2	200	150	2	B7	P
TF104	642 300 000		4	36	400		61	4	100		4	B4	T
TH1	276 454 300		6-3	{ 4	250				100	60		B8B	TH
				{ 4	250				100	100			
TH2	645 230 700	G ₁	2	{ 1-5	150		0-95	1-2	150	60	1-2	B7	TH
				{ 1-5	250	75	4		150	60			
TH4	645 231 700	G ₁	4	{ 2	150		6	1-2	150		1-2	B7	TH
				{ 2	200	100	3-5		200	75			
TH4A	645 231 700	G ₁	4	{ 2	125		5	6	125	60	6	B7	TH
				{ 2	250	100	3-5		100	100			
TH4B	645 231 700	G ₁	4	{ 3	100		9	3-8	100	60	5-5	B7	TH
				{ 2-5	250	100	3-25		100	100			
TH13C	645 231 700	G ₁	13	{ 2	150		6	1-2	150	60	1-2	B7	TH
				{ 1-5	250	75	4-0	1-8	100	75			
TH21C	645 231 700	G ₁	21	{ 2	125		6	1-2	125	60	1-2	B7	TH
				{ 1-5	250	75	4	1-8	100	75			
TH22C	645 231 700	G ₁	29	{ 2	125		5	6	125	60	6	B7	TH
				{ 2	250	100	3-5		100	100			
TH29	645 231 700	G ₁	29	{ 2	125				125	60		B7	TH
				{ 2	250	100	3-5		100	100			
TH30C	645 231 700	G ₁	29	{ 2-5	100		9-5	5-5	100	60	5-5	B7	TH
				{ 2-5	250	100	3-25		100	100			
TH31	217 640 530	G ₁	4	{ 3	100		10-2	4	100	60	5-3	M08	TH
				{ 3	250	100	3	3	100	90	3		
TH41	217 640 530	G ₁	4	{ 3	100		10-2	4	100	60	5-3	M08	TH
				{ 3	250	100	3	3-1	100	100	3-1		

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
TH62	027 546 310	G ₁	6	$\begin{Bmatrix} 2 \\ 2 \end{Bmatrix}$	100 250	100	4.4 3	2.4	100 200	60 100	2.2 1.2	A08	TH
TH233	217 640 530	G ₁	23	$\begin{Bmatrix} 0 \\ 2 \end{Bmatrix}$	100 150	100	4 2.6	5.3 3	100 100	60 90	5.3 3	M08	TH
TH2320	645 231 700	G ₁	23	$\begin{Bmatrix} 3 \\ 3 \end{Bmatrix}$	90 150	100	4.5 3		80 100	60 90		B7	TH
TH2321	645 231 700	G ₁	23	$\begin{Bmatrix} 3 \\ 3 \end{Bmatrix}$	90 150	100	4.5 3		80 100	60 90		B7	TH
TL54	045 231 600		4	12.5	250	250	70		100	PenLF		B7	P
TM12	412 344 600		6.3	1.5	150		15	12	100		12	B7A	T
TP22	571 230 640	G ₁	2	$\begin{Bmatrix} 1 \\ 1 \end{Bmatrix}$	100 125		0.8 1.2	1.2 1.0	100 150	60 60	1.4 1.3	B9	TP
TP23	645 230 700	G ₁	2	$\begin{Bmatrix} 1.0 \\ 1.5 \end{Bmatrix}$	100 125	60	1.0 1.0	2.1 1.0	100 125	60 60	2.1 1.2	B7	TP
TP25	207 640 530	G ₁	2	$\begin{Bmatrix} 1.0 \\ 1.5 \end{Bmatrix}$	100 125	0 60	3.7 1.0	1.6 1.0	100 125	60 60	1.7 1.0	M08	TP
TP26	207 640 530	G ₁	2	$\begin{Bmatrix} 1.0 \\ 1.0 \end{Bmatrix}$	125 125		2.2 1.5	1.5 1.5	125 125	60 75	1.3 1.5	M08	TP
TP230	561 230 740	G ₁	2	$\begin{Bmatrix} 0 \\ 0 \end{Bmatrix}$	100 150	75	2.0 4.3	1.3	100 150	60 75		B9	TP
TP443	642 350 000		4	22	250	250	36	5	100	PenLF	5	B5	P
TP1340	571 231 640	G ₁	13	$\begin{Bmatrix} 5.0 \\ 2.5 \end{Bmatrix}$	200 200		2.0 6.5	1.4	150 100	60 100	0.14	B9	TP
PT2620	571 231 640	G ₁	26	$\begin{Bmatrix} 2.5 \\ 4.0 \end{Bmatrix}$	250 250	200	1.5 6.5	1.4 3.4	150 100	60 150	1.4 3.4	B9	TP
TSE4	061 231 500		4	2.5	250	150	8	14.5	100	100		B7	P
TSP4	061 231 500	G ₁	4	2.5	200	200	8.0	4.7	100	150	4.7	B7	P
TT4	642 310 000		4	16	250		20	3.2	100		3.2	B5	T
TT4A	642 310 000		4	9	250		20	4.1	100		4.1	B5	T
TT11	020 450 310	A	6	11	250	150	30	3.5	100	100	3.5	A08	P
TT12	204 531 102	A	19	13	250	250	72	6	100	100	6	B9G	P
TT14	204 051 103	A	6	13	250	250	72	6	100	100	6	B9G	P
TT15	241 657 143		6	14	250	150	30	3.9	100	100	3.9	B9G	PP
TT19	241 657 143		19	16.5	250	150	30	3.9	100	100	3.9	B9G	PP
TV03-10	442 310 000	A ₁ A ₂	6	17	300		17	3.2	100		3	B5	TT
TW1	802 310 000		20				60		REC		20mA	B5	R
TW2	892 310 000		30				60		REC		20mA	B5	RR
TX4	645 231 700	G ₁	4	$\begin{Bmatrix} 1.5 \\ 1.5 \end{Bmatrix}$	150 300	90	4 5.5		150 200	60 90		B7	TH
TX21	645 231 700	G ₁	21	$\begin{Bmatrix} 1.5 \\ 3 \end{Bmatrix}$	150 250	90	4 5.5		150 100	60 90		B7	TH
TX41	645 231 700	G ₁	4	$\begin{Bmatrix} 2.5 \\ 2.5 \end{Bmatrix}$	100 250	100	9 3.25	3.8	100 250	60 100	5	B7	TH
U4C	642 300 000		4	12	200		35	3.2	100		3.2	B4	T
U4E	642 300 000		4	40	400		45	4	No Data Available			B4	T
U4F	642 300 000		4	40	400		45	4	No Data Available			B4	T
U5	892 300 000		5				15		REC		12mA	B4	RR

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
U8	892 300 000		7.5				60		REC		20mA	B4	RR
U9	892 300 000		4				30		REC		15mA	B4	RR
U10	892 300 000		4				30		REC		15mA	B4	RR
U12	892 300 000		4				60		REC		20mA	B4	RR
U12/14	892 300 000		4				60		REC		20mA	B4	RR
U14	892 300 000		4				60		REC		20mA	B4	RR
U15	802 300 000		6				120		REC		30mA	B4	R
U16	002 300 000	D ₁	2				5		REC		5mA	B4	R
U17	002 300 000	D ₁	4				30		REC		15mA	B4	R
U18	892 300 000		4				120		REC		30mA	B4	RR
U18/20	892 300 000		4				120		REC		30mA	B4	RR
U19	002 300 000	D ₁	4				120		REC		40mA	B4	R
U19/23	002 300 000	D ₁	4				120		REC		30mA	B4	R
U20	892 300 000		4				60		REC		20mA	B4	RR
U21	002 300 000	D ₁	2				5		REC		5mA	B4	R
U22	200 000 030	D ₁	2				5		D			M08	D
U22FH	200 000 030	D ₁	2						D			M08	D
U23	002 300 000	D ₁	4				120		REC		30mA	B4	R
U24	020 000 300	D ₁	2				1.0		REC		2mA	A08	R
U25	023 000 000	D ₁	2						D			B3G	D
U26	391 221 800		13				60		REC		20mA	B7	RR
U29	002 300 000	D ₁	2				15		REC		30mA	B5	R
U30	391 221 800		13				60		REC		20mA	B7	RR
U31	020 080 310		26				120		REC		40mA	A08	R
U33	002 300 000	D ₁	2				3		D			B4	R
U35	020 000 030	D ₁	1.4				2		D			A08	R
U37	023 000 000	D ₁	1.4				0.5		D			B2G	D
U41	*2* 0*0 3*0	D ₁	1.25				1		D			A08	D
U43	023 000 000		6				0.5		D			B2G	D
U50	020 908 030		5				60		REC		20mA	A08	RR
U51	030 908 020		5				120		REC		30mA	A08	RR
U52	030 908 020		5				120		REC		30mA	A08	RR
U52it	008 090 230		5				120		REC		30mA	A08	RR
U54	030 908 020		5				120		REC		30mA	A08	RR
U70	028 090 310		6				30		REC		15mA	A08	RR
U71	020 080 310		30				60		REC		20mA	A08	R
U74	020 080 310		30				120		REC		30mA	A08	R
U76	020 080 310		30				120		REC		30mA	A08	R
U78	802 309 100		6				30		REC		15mA	B7G	RR
U81	009 008 230		6				60		REC		20mA	B8B	RR
U82	209 008 130		6				30		REC		15mA	B8B	RR
U84	009 **8 230		4				30		REC		15mA	B8B	RR
U101	280 008 130		50				120		REC		30mA	B8B	R
U107	281 008 300		40				60		REC		20mA	B7G	R
U134	028 190 310		13				60		REC		20mA	A08	RR

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
U142	280 000 130		31				60		REC		20mA	B8A	R
U143	020 908 030		4				30		REC		15mA	A08	RR
U145	280 000 130		40				60		REC		20mA	B8A	R
U147	028 090 310		6				30		REC		15mA	A08	RR
U149	209 008 130		6				30		REC		15mA	B8B	RR
U150	280 009 130		6				30		REC		17mA	B8A	RR
U151	023 000 000	D ₁	6						D			B8G	D
U152	001 230 008		19				120		REC		35mA	B9A	R
U153	*** 23* **8	C	17				120		REC		35mA	B9A	R
U154	**1 23* **8		19				120		REC		35mA	B9A	R
U201	020 080 310		20				60		REC		20mA	A08	R
U251	*** 23* **8	C	25				120		REC		30mA	B9A	R
U281	020 080 310		28				120		REC		30mA	A08	R
U282	001 000 230	D ₁	28				120		REC		36mA	A08	R
U301	0** 080 230	C	30				120		REC		35mA	A08	R
U309	**1 23* **8		20				120		REC		38mA	B9A	R
U319	001 230 008		20				120		REC		40mA	B9A	R
U329	*** 23* **8	C	25				120		REC		35mA	B9A	R
U403	201 080 030		40				120		REC		30mA	M08	R
U404	280 *** 130		40				60		REC		20mA	B8A	R
U415	642 300 000		4	10-5	150		5	1-4	100		1-4	B4	T
U418	642 300 000		4	13	150		10	1-6	100		1-6	B4	T
U650	802 300 000		6				30		REC		15mA	B4	R
U709	8*1 23* 9**		6				60		REC		20mA	B9A	RR
U801	128 899 310		80				120		REC		30mA	A08	RR
U4020	802 310 000		40				120		REC		30mA	B5	R
UAA11	023 189 100		22				5		D			8SC	DD
UAA91	192 310 900		19				5		D			B7G	DD
UAA171	120 813 090		25				5		D			B8B	DD
UABC80	181 239 146		28	1-0	100		0-8	1-45	100		1-45	B9A	DDDT
UAF21	265 814 130		20	2	250	100	6	2-8	100	100		B8A	P
UAF41	268 154 130		13	2	200	90	5	2	100	100	1-9	B8A	DP
UAF42	268 154 130		13	2	200	90	5	2	100	100	1-9	B8A	DP
UB41	201 908 130		19				5		D			B8A	RR
UBCI	206 081 930	G ₁	13	1-7	200		3	2	150		2	A08	DDT
UBC41	264 098 130		14	1-6	175		1-5	1-65	150		1-65	B8A	DDT
UBC81	641 238 09*		14	3	250		1	1-2	100		0-9	B9A	DDT
UBF2	206 581 930	G ₁	12-5	2	250	100	5	1-8	100	150	1-8	A08	DDP
UBF11	892 361 450		20	2	200	75	5	1-8	200	75	1-8	F8	DDP
UBF15	892 361 450		27	2	250	100	12	5	200	100	5	F8	DDP
UBF80	541 236 891		17	2	200	125	5	2-2	100	100	2-0	B9A	DDP
UBF89	541 236 891		19	2	100	100	5-5	3-5	100	100	3-5	B9A	DDP
UBF171	892 541 360		20	3-2	250	75	6	1-8	100	75		B8B	DDP
UBL1	206 581 930	G ₁	55	11-5	200	200	55	8-5	100	100	8	A08	DDP
UBL3	023 189 560	G ₁	55	6	100	100	29	7-5	100	90	7	8SC	DDP

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
UBL21	264 598 130		55	13	200	200	55	8	100	100	7	B8B	DDP
UBL71	264 589 130		55	5.2	250	250	44	9.5	100	100	0.7	B8B	DDP
UC92	602 304 100		9.5	1.0	200		11.5	6.4	200		6.4	B7G	T
UCC84	147 234 116		22	1.5	90		12.0	6.0	100		6.0	B9A	TT
UCC85	641 237 410		26	2.1	200		10.0	5.8	100		5	B9A	TT
UCF12	642 371 450		20	{ 1.0 2.0 2.0	100 200 100		5.0 14.0 10.0	3.0 2.0 5.0	100 200 100	60 100 60	3.0 2.0 5.0	{ F8 B9A	TP
UCF80	645 237 114		19	{ 2.0 2.0	175 175		10.0 6.2	6.2 10.0	100 150	150 6.0	6.0	{ B9A	TP
UCH4	217 544 630	G ₁	20	{ 2 2	100 200		6 5.2	3 2.2	80 100	60 100	3.2 2.2	{ A08	TH
UCH5	123 614 570		20	{ 2 2 2	100 250 100		6.3 6.5 5	2.7 2.6 2.4	100 100 100	60 150 60	2.2 2.6 2.4	{ 8SC	TH
UCH11	264 371 450		20	{ 2 2	100 250		5 4.7	2.4 2.5	100 200	60 100	2.4 2.5	{ F8	TH
UCH21	276 454 131		20	{ 2 2	100 200		6.4 5.2	2.2 2.2	100 100	60 90	3.2 2.2	{ B8B	TH
UCH41	276 454 130		14	{ 2 2 2	100 200 200		6.4 2.7 5	2.2 1.5 2.0	100 100 100	60 75 60	2.8 1.5 2.0	{ B8A	TH
UCH42	276 454 130		14	{ 2.0 2.0	100 175		5 3	2.0 2.2	100 100	60 75	2.0 2.0	{ B8A	TH
UCH43	276 454 130		14	{ 2.0 2.0 2.0	100 175 175		5 3 3	2.0 2.2 2.2	100 100 100	60 75 75	2.0 2.0 2.0	{ B8A	TH
UCH71	276 454 131		20	{ 2.0 2.0	100 200		16.4 5.2	2.2 2.2	100 100	60 90	3.2 2.2	{ B8B	TH
UCH81	541 237 464		19	{ 0 2.6	100 200		13.5 7.6	3.7 2.4	100 100	60 100	3.7 2.4	{ B9A	TH
UCH171	642 544 370		20	{ 2.5 2.0	200 200		3 2.0		100 150	60		{ B8B	TH
UCL11	452 371 460		60	{ 2.0 8.5	200 200		2.0 45.0	2.1 9.0	150 100	60 100	2.0 7.0	{ F8	TP
UCL81	451 237 614		39	{ 1.5 7	200 200		0.5 30	1.2 8.7	100 100	60 100	1.2	{ B9A	TP
UCL82	414 237 516		50	{ 0 16	100 200		3.5 35	2.5 6.4	100 100	60 100	2.5 6.8	{ B9A	TP
UCL83	641 237 154		40	{ 1.5 9.5	200 175		2.4 30	2.5 5.5	150 100	60 100	2.0 5	{ B9A	TP
UD2	642 300 000		2	12.0	150		14.0	2.5	100		2.5	B4	T
UDDL71	023 189 560	G ₁	44	10	200	200	60	9	100	100		8SC	DDP
UDH	802 310 000		20				60		REC		20mA	B5	R
UDPI2	023 180 560	G ₁	40	10	200	200	60	9	No Data Available			8SC	DDP
UDPI3	026 580 310	G ₁	40	10	200	200	60	9	No Data Available			A08	DP
UDTI	023 189 060	G ₁	15	3	200		10.3	3	150		3	8SC	DDT
UE1	023 100 080		25				60		REC		20mA	S8C	R
UE2	123 180 090		50				60		REC		20mA	8SC	RR
UE13	020 080 310		25				60		REC		20mA	A08	R
UE100	208 0*0 130		50						REC			A08	R

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
UEL11	452 371 540		48	0	100	30	2.4	1.6	100	60	1.6	F8	PP
UF5	023 110 560	G ₁	12.5	6	200	200	22	5	100	100			P
UF6	023 110 560	G ₁	12.5	2.5	100	100	3.2	2.2	100	100	2.2		P
UF8	206 511 130	G ₁	12	20	100	100	3	1.8	100	100	1.8		P
UF9	206 501 130	G ₁	12.5	2	200	200		1.6	100	100			P
				2.5	200	100	6	2.2	100	100	2.2	A08	P
UF10	023 110 560	G ₁	12.5	2.4	200	100	5.5	2.35	100	100	2.3	85C	P
UF11	602 301 450		15	2	200	75	6	2.2	100	100	2	F8	P
UF14	612 350 140		25	5	200	200	12	7	100	100	7	F8	P
UF15	612 301 450		25	2	200	100	12	5.5	100	100	5.5	F8	P
UF21	265 104 130		12.5	2.5	200	100	6	2.2	100	100	2.2	B8B	P
UF41	26* *54 130		12.5	3	200	125	7.2	2.3	100	150	2.3	B8A	P
UF42	260 154 130		21	2	175	175	10	8.5	100	150	8	B8A	P
UF43	260 154 130		21	1.1	170	170	5.8		100	100		B8A	P
UF80	141 230 651		19	2.0	170	170	10.0	7.4	100	100		B8A	P
UF85	141 231 651		19	2.0	170	100	9.7	5.9	200	100	6.0	B9A	P
UF89	041 230 651		12.6	2.0	200	200	11.1	3.8	200	200	3.8	B9A	P
UF172	112 540 360		20	2	200	100	4.5	3	100	100		B8B	P
UF174	112 540 360		30	3	200	150	12	8	100	100		B8B	P
UF175	112 540 360		30	2	200	75	10	5.7	100	75		B8B	P
UH3	023 110 560		13	3	225	100	8	2.2	100	100		85C	P
UH4	893 200 000		4				5		D			B5	RR
UHP51	023 110 560		13	2.5	225	100	3.5	2	100	100		85C	P
UHP52	023 110 560		13	2.5	225	100	3.5	2	100	100		85C	P
UL1	206 540 130		60	11.5	200	200	55	8.5	100	PenLF	8	A08	P
UL2	023 104 560		35	5	200	200	20	7	100	PenLF	6	85C	P
UL11	602 301 450		25	2	200	75	6	2.2	100	75		F8	P
UL12	602 301 450		60	8	200	125	75	12	No Data Available			F8	P
UL21	265 004 130		45	13	200	200	55	8	100	PenLF	7	B8B	P
UL22	265 004 130		46	10.0	175	175	61.0	9.0	100	100	8.0	B8B	P
UL41	26* *54 130		45	9	175	175	54.5	9.5	100	100	7	B8A	P
UL44	200 154 130	A	45	13.5	175	175	28.5	7.0	100	100	6.5	B8A	P
UL46	261 054 130		45	9	175	175	54.5	9.5	100	100	7	B8A	P
UL71	264 500 130		45	5.2	200	200	22	6.5	100	100		B8B	P
UL84	*41 23* 6*5		45	12.5	175	175	70	10	100	100	9	B9A	P
UL171	102 541 360		55	8.5	200	200	45	9	100	100		B8B	P
ULP	642 310 000		13	20	250		27	4	100		4	B5	T
ULP51	623 145 000		40	17	250	250	36	2.5	No Data Available			85C	P
ULP61	023 100 560	G ₁	33	8	200	200	55	9	No Data Available			85C	P
UP6	023 100 560	G ₁	35	8	200	200	55	9	100	100		85C	P
UPI3	026 540 310		35	8	200	200	55	9	No Data Available			A08	P
UP35U	023 100 560	G ₁	35	8	200	200	55	9	No Data Available			85C	P
UPX	642 310 000		25	34	250		38	7	100		7	B5	T
UP2	023 140 560		25	19	200	100	40	3	100	75	3	85C	P
UQ80	541 236 114		12		170	20	28		No Data Available			B9A	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
UR1	023 100 080		20				120		REC		23mA	8SC	R
UR1C	802 310 000		20				60		REC		20mA	B5	R
UR2	123 180 090		30				60		REC		20mA	8SC	RR
UR3	123 180 090		30				60		REC		20mA		RR
UR3C	091 231 800		30				60		REC		20mA	B7	RR
UT2	023 100 060	G ₁	15	5	100		6	3	100		3	8SC	T
UTH4	423 164 570	G ₁	17	2.5	100		4	2.0	100	60	2.0	8SC	TH
UTH12	423 164 570	G ₁	17	2.5	200	90	3	0.75	100	90		8SC	TH
				2.5	100		4	2	100	60	2.0	8SC	TH
				2.5	225	30	3	0.65	No Data Available				
UU2	892 300 000		4				30		REC		15mA	B4	RR
UU3	892 300 000		4				30		REC		15mA	B4	RR
UU4	892 300 000		4				60		REC		20mA	B4	RR
UU5	892 300 000		4				60		REC		20mA	B4	RR
UU6	208 090 030		4				60		REC		20mA	M08	RR
UU7	208 090 030		4				60		REC		20mA	M08	RR
UU8	208 090 030		4				120		REC		30mA	M08	RR
UU9	290 008 130		6				30-0		REC		15mA	B8A	RR
UU10	892 300 000		4				60		REC		20mA	B4	RR
UU30/250	892 300 000		4				15		REC		10mA	B4	RR
UU60/250	892 300 000		4				30		REC		15mA	B4	RR
UU120/350	892 300 000		4				60		REC		20mA	B4	RR
UU120/500	892 300 000		4				60		REC		20mA	B4	RR
UVG51	123 190 080		30				60		REC		20mA	8SC	RR
UY1	388 028 120		50				120		REC		30mA	A08	R
UY1(N)	388 028 120		50				120		REC		30mA	A08	R
UY3	023 100 080		26				120		REC		30mA	8SC	R
UY4	023 100 080		35				30		REC		15mA	8SC	R
UY11	802 300 100		50				120		REC		35mA	F8	R
UY21	280 80* 130		50				120		REC		30mA	B8B	R
UY31	020 080 310		50				120		REC		30mA	A08	R
UY41	280 000 130		31				60		REC		20mA	B8A	R
UY42	280 20* 130		31				60		REC		20mA	B8A	R
UY82	**1 23* **8		55				180		REC		35mA	B9A	R
UY85	001 230 008		38				120		REC		25mA	B9A	R
UY92	**2 38* 100		26				60		REC		20mA	B7G	R
V2M70	802 309 100		6.3				30		REC		15mA	B7G	RR
V20s	023 100 080		20				60		REC		20mA	8SC	R
V20	802 310 000		20				60		REC		20mA	B5	R
V20/7000	002 300 000	D ₁	4				15		REC		10mA	B4	R
V22/7000	000 010 100	D ₁	6.3				5		D			B8B	D
V25	081 231 900		25				60		REC		20mA	B7	RR
V30	802 310 000		30				120		REC		30mA	B5	R
V30/I	002 300 000	D ₁	2						D			B4	D
V41	*8* **9 230		4				30		REC		15mA	B8B	RR

VALVE	SELECTOR SWITCH No.	T.C.	V _f	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	I _a mA	mA/V	Anode Volts	Screen Volts	mA/V		
V51	280 009 130		5				30		REC		15mA	B8A	RR
V61	28* *** 130		6.3				30		REC		15mA	B8A	RR
V99	263 400 000		3	4.5	90		2.5	0.42	580		0.4	UX4	T
V226	041 230 500	A	6	5	400	250	14	3	100	150	3	B7	P
V245	041 230 500	A	3		250	250	16	5	100	PenLF	5	B7	P
V248A	200 540 030	A	2	10	150	150	32	5.2	100	100	5	M08	P
V311	28* *** 130		31				60		REC		20mA	B8A	RR
V312	602 310 000	G ₁	4	4.8	250		6	2.3	100		2.3	B5	T
V339	000 231 600	G ₁	4		250			1.7	100		1.7	B7	T
V453	206 510 030	G ₁	4	1.75	250	100	4.5	2.0	100	100	2	M08	P
V503	642 300 000		4	85	400		100	4.5	100		4.5	B4	T
V872	216 510 030	G ₁	6	4	200	200	6.7	3.35	100	150	3.3	M08	P
V884	412 361 500		6.3	2.5	250	200	8	2.5	100	PenLF	2.5	B7G	P
V914	892 310 000		4						D			B5	DD
V960	002 300 000		4						D			B5	DD
V960	002 300 000	D ₁	4				60		REC		20mA	B4	R
V1120	045 231 000	A	6	9.75	200	200	40	8.7	100	100	7	B7	P
V1120B	040 231 500	A	4	9.75	200	200	40	8.7	100	100	7	B7	P
V1906	002 300 000	D ₁	4				60		REC		20mA	B4	R
V1907	002 300 000	D ₁	4				60		REC		20mA	B4	R
V2018	002 300 000	D ₁	20				30		REC		15mA	B4	R
V2118	802 310 000		20				60		REC		20mA	B5	R
V4200	802 300 000		4				120		REC		30mA	B4	R
VCI	023 100 060	G ₁	55		200		6	3	200		3	8SC	T
VCH11	642 371 450		40	{ 2.5	100		4	2.0	100	60	2.0	F8	TH
					225	90	3	0.65	100	90			
VCL11	452 371 460		90	{ 0.5	100		2	2.4	100	60	2.4	F8	TH
				{ 4.5	200	200	12	5	100	100			
VDSB	542 310 000	A	16		200	75		3	100	75	3	B5	P
VDS	542 310 000	A	16	2	200	5		1.6	100	75	1.6	B5	P
VEG51	026 100 080		20			30	60		REC		20mA	8SC	R
VEL11	452 371 560		90	{ 0	100	200	2.4	1.6	100			F8	PP
				{ 6	200	200	22	5	100				
VF3	023 110 560	G ₁	55	2.5	250	100	5	2	100	100		8SC	P
VF7	023 110 560	G ₁	55	2.5	250	100	3.5	2	100	150	6	8SC	P
VF14	612 350 140		60	4.5	250	250	12	7	100	100		F8	P
VG406	892 300 000		4				30		REC		15mA	B4	RR
VG410	892 300 000		4				30		REC		15mA	B4	RR
VG411	892 300 000		4				60		REC		20mA	B4	RR
VG420	892 300 000		4				60		REC		20mA	B4	RR
VG421	892 300 000		4				60		REC		20mA	B4	RR
VG2503	892 300 000		4				30		REC		15mA	B4	RR
VG2908	892 300 000		2.5				30		REC		15mA	B4	RR
VG3008	892 300 000		4				30		REC		15mA	B4	RR
VG3016	892 300 000		4				60		REC		20mA	B4	RR

VALVE	SELECTOR SWITCH No.	T.C.	V _f	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	I _a mA	mA/V	Anode Volts	Screen Volts	mA/V		
VG3630	892 300 000		4				120		REC		28mA	B4	RR
VG5006	892 300 000		4				60		REC		20mA	B4	RR
VG5007	023 080 090		4				60		REC		20mA	8SC	RR
VG5107	802 300 090		4				60		REC		20mA	F8	RR
VH2	812 380 100		6				5		D			B7G	D
VH3	142 364 100		6	4.5	125		13	5	100		5	B7G	T
VH5	412 365 100		6	2	175	125	7.7	5.1	100	100		B7G	P
VHP13	041 231 500	A	13	1.5	200	100	4	2	100	100	4	B7	P
VHT2	645 230 600	G ₁	2		125	75			100	75		B7	H
VHT2A	645 230 600	G ₁	2	0	125	50			100	60		B7	H
VHT4	545 231 600	G ₁	4	3	200	100	3.6		100	100		B7	H
VHTA	123 164 550	G ₁	13	1.5	250	100	3.2		100	100		8SC	H
VHTA	545 231 600	G ₁	13	1.5	200	100	3.2		100	100		B7	H
VHTS	645 231 500	G ₁	13	3	200	100	2.6		100	100		B7	H
VLI	023 100 560	G ₁	55	14	200	200	25	2.2	100	100		8SC	P
VL4	023 100 560	G ₁	110	8.5	200	200	45	8	100	100		8SC	P
VLS61	002 300 000	D ₁	2				3		D			B4	R
VM1	2** 00* 300	D ₁	1.4						D			B7G	D
VM4V	542 310 000	A	4	1	200	80	14	2.4	200	75	2.4	B5	P
VMP4	041 231 500	A	4	2	250	100	3	3.5	150	100	3.5	B7	P
VMP4	542 310 000	A	4	1	250	100		3.5	200	100	3.5	B5	P
VMP4G	041 231 500	A	4	2	250	100	8	2.7	100	100	2.7	B7	P
VMS4	542 310 000	A	4	1	200	80	14	2.4	200	75	2.4	B5	P
VMS4B	542 310 000	A	4	1	200	80	8	2.9	200	75	2.9	B5	P
V02	645 320 600	G ₁	2	0	150	90	1.8		150	90		B7	O
V02S	023 064 560	G ₁	2	0	150	50	2.0		No Data Available			8SC	O
V04	645 231 500	G ₁	4	1.5	250	75	1.6		100	75		B7	O
V04S	023 154 560	G ₁	4	1.5	250	75	1.6		100	75		8SC	O
V06	123 164 560	G ₁	6	3	100	100	4.6		100	100		8SC	O
V013	645 231 500	G ₁	13	1.5	250	75	1.6		100	75		B7	O
V013(S)	123 154 560	G ₁	13	1.5	250	75	1.6		100	75		8SC	O
VP2	041 230 500	A	2	1	150	150	3	1.5	150	150	1.5	B7	P
VP2B	061 230 500	G ₁	2	1.0	150	150	2.5	0.65	150	150	0.6	B7	P
(MUL)VP2B	065 231 500	G ₁	2	1.5	150	60	2	1.4	100	60	1.4	B7	H
VP2B	032 004 560		2	15	150	150	2.5	0.65	150	150	0.6	8SC	P
VP2BS	032 010 560	G ₁	2	1	150	150	2.5	0.65	150	150	0.6	8SC	P
VP2D	061 230 500	G ₁	2	1.5	150	75	1.3	2.0	150	75	2	B7	P
VP4	542 310 000	A	4	2	200	100	4.5	2.3	100	100	2.3	B5	P
VP4	041 231 500	A	4	2	200	100	4.5	2.3	100	100	2.3	B7	P
VP4A	542 310 000	A	4	2	200	100	4.25	2.5	100	100	2.5	B5	P
VP4A	041 231 500	A	4	2	200	100	4.25	2.5	100	100	2.5	B7	P
VP4B	061 231 500	G ₁	4	3	250	250	11.5	2	100	100	1.8	B7	P
VP4C	041 231 500	A	4	2	250	250	11.5	4	100	150	4	B7	P
VP4S	023 110 560	G ₁	4	2	250	100	8	1.8	100	90	1.8	8SC	P
VP4S	061 231 500	G ₁	4	3	250	100	8	1.8	100	90	1.8	B7	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
VP6	412 361 500		6	2.5	250	200	B	2.1	100	150	2.1	B7G	P
VP6	061 231 500	G ₁	6	3	250	100	7.5	1.7	200	100	1.7	B7	P
VP6S	023 110 560	G ₁	6	3	250	100	7.5	1.75	200	100	1.7	8SC	P
VPI2D	026 985 310	G ₁	13	3	250	125	9	1.1	100	100	1.1	A08	DDP
VPI3	041 231 500	A	13	1.5	200	100	6.3	3	100	100	3	B7	P
VPI3	061 231 500	G ₁	13	3	200	100	B	2.8	100	100	2.8	B7	P
VPI3A	023 110 560	G ₁	13	2	200	100	4	2.2	100	100	2.2	8SC	P
VPI3B	061 231 500	G ₁	13	2	200	200	9	2.2	200	200	2.2	B7	P
VPI3C	061 231 500	G ₁	13	2	200	200	9	2.2	200	200	2.2	B7	P
VPI3K	061 231 500	G ₁	13	3	200	100	B	2	100	100	2	B7	P
VPI3S	061 231 500	G ₁	13	3	200	100	8	2.8	100	100	2.8	B7	P
VPI3S	023 110 560	G ₁	13	3	200	100	B	2.8	100	100	2.8	8SC	P
VP20	542 310 000	A	20	2	200	100	4	2.2	200	100	2.2	B5	P
VP21	041 230 500	A	2	1	150	60	2.8	1.1	150	60	1.1	B7	P
VP22	206 510 030	G ₁	2	1.5	125	60	1.2	0.8	100	60	0.8	M08	P
VP23	206 510 030	G ₁	2	1.5	125	60	1.4	1.0	100	60	1.0	M08	P
VP41	216 510 030	G ₁	4	2.7	250	200	7.7	2.0	100	150	2	M08	P
VP41	061 231 500	G ₁	4	3.5	250	250	11	2.0	100	200	3.1	B7	P
VPI33	216 510 030	G ₁	13	2.7	150	150	8	2.1	100	100	2.1	M08	P
VP210	041 230 500	A	2	1.5	125	60	1.1	0.82	100	60	0.8	B7	P
VP210	542 300 000	A	2	1.5	125	60	1.1	0.82	125	60	0.82	B4	P
VP215	542 300 000	A	2	1	150	75	3.75	1.25	150	75	1.25	B4	P
VP215	041 230 500	A	2	1	150	75	3.75	1.25	150	75	1.25	B7	P
VP215B	061 230 500	G ₁	2	1	125	125	3.25	1.2	125	100	1.2	B7	P
VP215C	041 230 500	A	2	1	125	125	3.25	1.2	125	100	1.2	B7	P
VPI320	041 231 500	A	13	2.7	250	100	5	2	100	100	2	B7	P
VPI321	041 231 500	A	13	2.8	250	200	7.4	2	150	150	2	B7	P
VPI322	061 231 500	G ₁	13	2.8	250	200	7.4	2	100	100	2	B7	P
VPTA	041 231 500	A	13	2	250	100	4.2	2.9	100	100	2.9	B7	P
VPTS	041 231 500	A	13	3	200	100	5.5	2.6	100	90	2.6	B7	P
VPY2	542 300 000	A	2	1.5	125	60	1.5	1.1	125	60	1.1	B4	P
VPT2	041 230 500	A	2	1.5	125	60	1.5	1.1	125	60	1.1	B7	P
VPT4	542 310 000	A	4	3	250	100	5.5	2	100	90	2	B5	P
VPT4	041 231 500	A	4	3	250	100	5.5	2	100	90	2	B7	P
VPT4B	041 231 500	A	4	3	250	100	6	3.2	100	90	3.2	B7	P
VS2	542 300 000	A	2	2.5	125	60	2	1.4	100	60	1.4	B4	P
VS24	542 300 000	A	2	1	150	75	4.4	1.5	150	75	1.5	B4	P
VS24K	542 300 000	A	2	1	150	75	4.4	1.5	150	75	1.5	B4	P
VS210	542 300 000	A	2	2.5	125	60	2.0	1.4	100	60	1.4	B4	P
VS215	542 300 000	A	2	1	150	75	6	1.0	150	75	1.0	B4	P
VSGAI	542 310 000	A	4	1.5	200	100	7	6.15	100	100	6	B5	P
VT1	642 310 000		4	5	200		5	2	100		2	B5	T
VT2	642 310 000		4	2	200		3	1.9	150		1.9	B5	T
VTP4	542 310 000	A	4	3	200	100	5.5	2	100	100	2	B5	P
VX2	061 235 500	G ₁	2	1	150	60	1		150	60		B7	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
VX2S	023 015 560	G ₁	2	1	150	60	1		150	60		8SC	P
VX4	515 231 600	G ₁	4	2	250	75	1.8		100	75		B7	P
VX4S	023 115 560	G ₁	4	2	250	75	1.8		100	75		8SC	P
VX6S	023 115 560	G ₁	6	3	250	100	1.85	4	100	100	4	8SC	P
VX13	515 231 600	G ₁	13	2	250	75	1.8		100	75		B7	P
VX13S	023 115 560	G ₁	13	2	250	75	1.8		100	75		8SC	P
VY1	023 100 080		55				60		REC		20mA	8SC	R
W4	642 300 000		4	7.5	125		3	1.2	100		1.2	B4	T
W4-500	892 300 000		4				60		REC		20mA	B4	RR
W17	265 024 300		1.4	1	90	75	3.5	0.9	80	75	0.9	B7G	P
W21	041 230 500	A	2	1	150	125	3.6	1.4	150	100	1.4	B7	P
W21	542 300 000	A	2	1	150	125	3.6	1.4	150	100	1.4	B4	P
W30	041 231 500	A	13	1	250	250	12	4	250	250	4	B7	P
W31	041 231 500	A	13	3	250	100	8	2.7	100	90	2.7	B7	P
W42	061 231 500	G ₁	4	3	250	125	7.6	1.5	100	100	1.5	B7	P
W61	026 510 310	G ₁	6	3	250	75	8.5	2.9	100	75	2.9	A08	P
W63	026 510 310	G ₁	6	3	250	100	7.6	1.5	100	90	1.5	A08	P
W76	026 510 310	G ₁	13	3	250	100	7.6	1.5	200	100	1.5	A08	P
W77	412 361 500		6	2	200	200	8	2.5	100	150	2.5	B7G	P
W81	265 104 130		6	3.0	250	100	8	2.8	100	90	2.8	B8B	P
W101	265 104 130		19	3	250	100	8	2.8	100	90	2.8	B8B	P
W107	412 361 500		12.5	2.5	200	200	8	2.5	100	150	2.5	B7G	P
W142	261 154 130		12	3.0	250	250	7.2	2.2	100	150	2.2	B8A	P
W143	265 104 130		6	2.5	250	100	6	2.2	100	100	2.2	B8B	P
W145	260 154 130		13	2.5	175	100	7	2.3	100	100	2.3	B8A	P
W147	026 510 310	G ₁	6	2.5	250	100	6	2.2	100	100	2	A08	P
W148	265 104 130		6	2.5	250	150	9.5	3.8	100	150	3.8	B8B	P
W149	265 104 130		6	3	250	100	8.5	1.75	100	90	1.7	B8B	P
W150	261 154 130		6	2.5	250	100	6.0	2.2	100	150	2.2	B8A	P
W213	642 300 000		2	2.5	150		1	1.2	150		1.2	B4	T
W216	040 120 560		2	1.5	150	90	3	1.2	100	90	1.2	B7	P
W318	809 231 600	G ₁	4	2	100		3.5	2.5	100		2.5	B7	DDT
W406	642 300 000		4	7.5	125		3	1.2	100		1.2	B4	T
W411	642 300 000		4	2.5	125		3	2.2	100		2.2	B4	T
W412	642 300 000		4	7.5	125		3	1.2	100		1.2	B4	T
W415N	642 310 000		4	2.5	200		2.5	1.0	100		1.0	B5	T
W420	642 300 000		4	4	125		4	1.3	100		1.2	B4	T
W719	141 230 651		6	2.0	250	100	10.0	6.0	150	100	5.0	B9A	P
W4080	642 310 000		4	2.5	200		2.5	1.0	100		1.0	B5	T
W4110	642 310 000		4	1.5	200		1.0	3	100		2.5	B5	T
W727	412 365 100		6	1.0	250	100	11.0	4.4	100	100	4.4	B7G	P
WD30	560 231 890	G ₁	13	1	250	100	7	2.6	250	100	2.6	B9	DDP
WD40	560 231 890	G ₁	4	1	250	100	7	3.5	100	100	3.5	B9	DDP
WD70	541 236 891		6	2.0	250	90	5.0	2.2	100	90	2.2	B9A	DDP
WD142	268 154 130		13	2	175	90	5	2.1	100	100	1.9	B8A	DP

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
WD150	268 154 130	A ₁	6	2	250	100	5	2-1	100	100	2	B8A	DP
WD709	541 236 891		6	2	250	90	5	2-2	100	90	2-2	B9A	DDP
WE23	542 310 000		4	2	200	100	3	2-5	100	100		B5	P
WE24	542 310 000		4		200	100	3	2-5	100	100		B5	P
WE27	642 310 000	A ₁	4	3-5	200		6	2-4	100		2-2	B5	T
WE28	642 310 000	D ₁	4	1-5	200		1	2-5	100		2-2	B5	T
WE29	642 310 000		4	3	200		6	2	100		2-0	B5	DT
WE30	642 350 000		4	15	250	250	36	2-8	No Data Available			B5	P
WE51	892 300 000		4				30		REC		15mA	B4	RR
WE52	892 300 000		2				60		REC		20mA	B4	RR
W210-0007	026 540 310		6	18	350	250	54	5-2	100	PenLF	5-2	A08	P
WT210-006	029 180 310		6						D			A08	DD
WT210-0042	030 809 020		5				60		REC		20mA	A08	RR
WT210-0048	020 809 030		5				120		REC		30mA	A08	RR
WT210-0081	021 415 360		6	2	250	100	3	1-65	100	100	1-6	A08	P
WT210-0082	026 540 310	G ₁	6	12-5	250	250	45	4-1	100	PenLF	4-1	A08	P
WT210-0083	216 498 130		6	2	250		2-3	1-6	200		1-6	B8B	DDT
WT210-0084	027 446 310		6	5	250		3	1-6	100		1-6	A08	TT
WT210-0085	412 365 400		50	7-5	125	100	49	7-5	100	90	6	B7G	P
WT210-0087	027 546 310		6	{ 1 3	100 250		8 4	2-5 1-2	100 100	60 100	3 1-6	A08	TH
WT210-0089	026 540 310		6	9	175	175	15	2-3	100	100	2-3	A08	P
WT210-0090	265 113 000		6	3	250	100	2	1-22	100	100	1-2	UX6	P
WT210-0094	461 471 230		6	8	250		9	2-6	100		2-6	A08	TT
WT210-0108	461 471 230	G ₁	6	31-5	150		125	7	100		7	A08	TT
WT210-0148	029 080 310		6				60		REC		20mA	A08	RR
WT-T102	020 809 030		5				60		REC		20mA	A08	RR
WT-T122	021 415 360	G ₁	6	3	250	100	3	1-6	100	100	1-6	A08	P
WT-T123	026 540 310		6	12-5	250	250	45	4-1	100	PenLF	4-0	A08	P
WT-T124	216 498 130		6	2	250		2-3	1-6	200		1-6	B8B	DDT
WT-T125	027 446 310		6	5	250		3	1-6	100		1-6	A08	TT
WT-T126	412 365 400		50	7-5	125	100	49	7-5	100	90	6	B7G	P
WT-T128	027 546 310	G ₁	6	{ 1 3	100 250		8 4	2-5 1-2	100 100	60 100	3 1-6	A08	TH
WT-T130	026 540 310		6	9	175	175	15	2-3	100	100	2-3	A08	TH
WT-T131	265 113 000		6	3	250	100	2	1-22	100	100	1-2	UX6	P
WT-T135	020 809 030	G ₁	5				120		REC		30mA	A08	RR
X14	026 546 300	G ₁	1-4	0	90	50	1-8	0-5	80	60	0-5	A08	H
X17	266 424 300		1-4	4	75		4-5	1-2	80		1-4	B7G	H
X18	266 464 300		1-4	4	60		4	1-2	80		1-4	B7G	H
X21	645 230 600	G ₁	2	0	150	75			100	75		B7	H
X22	645 320 600	G ₁	2	0	150	75			100	75		B7	H
X23	645 231 700	G ₁	2	{ 1-5	100 150		2-1 0-7		100 100	60 60		B7	TH

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
X24	645 231 700	G ₁	2	{ 1.5	100		2.1		100	60		B7	TH
X30	645 231 600	G ₁	13	3	150	60	0.7		100	60			H
X31	645 231 700	G ₁	13	{	150		2.2		150	60		B7	TH
X32	645 231 600	G ₁	13	3	250	75	2.3		100	75			H
X41	645 231 700	G ₁	4	{ 6	150		5	1.4	150	60	1.8	B7	TH
				3	250	75	2.3	1.4	100	75	2.0		
X42	642 231 600	G ₁	4	3	250	100	7.0	2.0	100	100	2.0	B7	H
X61	027 546 310	G ₁	6	{ 2.0	100		5.4	2.2	100		2.2	A08	TH
X63	026 545 310	G ₁	6	3	250	100	3.0	0.65	150	100	0.65		H
X64	026 540 310	G ₁	6	3	250	100	6	1.6	100	100	1.6	A08	H
X65	027 546 310	G ₁	6	{ 1	100		8	2.5	100	60	1	A08	TH
				3	250	100	4	1.2	100	100	0.5		
X66	027 546 310	G ₁	6	{ 1	100		8	2.5	100	60	1.3	A08	TH
				3	250	100	4	1.2	100	100	1.0		
X71	027 546 310	G ₁	15	{ 3	100				100	60		A08	TH
X73	026 546 310	G ₁	6	3	250	100			150	100			H
X76	027 546 310	G ₁	13	{ 1.0	100		8.0	2.5	100	75		A08	TH
X77	412 366 100		6	3.0	250	100	4.0	1.2	100	60	3.0		H
				2	100		12	6.5	100	100	1.6	B7G	
X78	542 376 400		6	{ 2.0	100		5.0	2.2	100	60	2.8	B7G	TH
				1.0	125	75	5.3	2.2	100	75	2.0		
X79	541 237 46*		6	{ 2	100		5	2.2	100	60	2.8	B9A	TH
				3	250	75	2.9		100	75	2		
X81	276 454 130		6	{ 1.0	100		4.8	1.4	100	60	1.65	B8B	TH
X99	264 300 000		3	2.0	250	100	4.0	2.0	100	100	2.0		
X101	276 454 130	G ₁	19	{ 4.5	90		2.5	0.42	80		0.4	UX4	T
				2	100		3		100	60		B8B	TH
					250	100	3		100	100			
X107	412 365 400		19		100	250	4					B7G	O
X108	542 376 400		19	{ 2	100		5	2.2	100	60	2.2	B7G	TH
				1	250	75	5.3	2.2	100	75	1.6		
X109	541 237 46*		19	{ 2	100		5	2.2	100	60	2.8	B9A	TH
				3	250	75	2.9		100	75			
X142	276 454 130		14	{ 0	200		5.5	0.3	100	60	2.8	B8A	TH
				2.0	200	75	3.0	0.67	100	75	1.5		
X143	276 454 131		6	{ 2	100		6.25	2.4	100	60	3.2	B8B	TH
				2	250	90	5.3	2.2	100	100	2.2		
X145	276 454 130		28	{ 3.3	100		6.0	3.0	100	60	3	B8A	TH
				2.5	175	100	8.0	2.5	100	100	2.5		
X147	027 546 310	G ₁	6	{ 2	100		5.4	2.2	100	60	2.8	A08	TH
				2	250	100	5	2.4	100	100	1.2		
X148	276 454 130		6	{ 1	100		4.8	1.4	100	60	1.6	B8B	TH
				2	250	100	4.0	2.0	100	100	2.0		

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
X150	276 454 130		6	2	100		8	2.6	100	60	2.8	B8A	TH
				2	250	100	8	2.2	100	100	3.5		
X719	541 237 651		6	3.0	100		5.0	2.3	100	60	2.3	B9A	TH
				2.0	250	100	6.5	2.4	150	100	2.4		
X727	412 366 100		6	2	100		11.0	7	100		5	B7G	H
XD	642 300 000		2	1.5	75		0.65	0.75	80		0.7	Sm4	T
XD1.5	642 300 000		1.5	0.5	50		0.6	0.5	No Data Available			SM4	T
XD2.0V	642 300 000		2	1	50		0.45	0.56	No Data Available			Sm4	T
XH1.5	642 300 000		1.5	0.5	50		0.6	0.5	No Data Available			Sm4	T
XH2.0V	642 300 000		2	1	50		2.5	0.56	No Data Available			Sm4	T
XL	642 300 000		2	1.5	75		1.5	0.85	80		0.8	Sm4	T
XL01.5	642 300 000		1.5	15	50		0.6	0.5	No Data Available			Sm4	T
XL02.0V	642 300 000		2	1	50		1.1	0.92	No Data Available			Sm4	T
XL2.0V	642 300 000		2	1	50		1.0	0.84	No Data Available			Sm4	T
XP	642 300 000		2	4.5	75		4	1	80		1	Sm4	T
XPI.5	642 300 000		1.5	4	50		1.8	0.8	No Data Available			Sm4	T
XP2	642 300 000		2	4.5	75		4	1	80		1	Sm4	T
XP2.0V	642 300 000		2	3	50		2	1.0	No Data Available			Sm4	T
XSG	542 300 000	A	2		125	60	1.75	0.6	100	60	0.6	Sm4	P
XSG1.5	542 300 000	A ₁	1.5	0	50	30	0.6	0.3	No Data Available			Sm4	T
XSG2.0V	542 300 000	A	2	0	50	30	0.6	0.4	No Data Available			Sm4	P
XVS2.0V	542 300 000	A	2	1	50	30	0.4	0.33	No Data Available			Sm4	P
XW1.5	251 630 000	G ₁	1.5		50	30	0.6	0.5	No Data Available			Sm5	P
XW2.0V	251 630 000	G ₁	2	1	50	50	0.95	0.6	No Data Available			Sm5	P
XXB	206 447 320		1.4		90		4.5	1.3	90		1.3	B8B	TT
XXD	216 447 130		12.5	10	250		9	2.1	100		2.1	B8B	TT
XXFM	264 189 130		6.3	2	225		1.5	1.5	100		1.4	B8B	DDT
XXL	260 004 130		6	8	250		8	2.3	100		2.3	B8B	T
XY	254 630 000		2	3	75	75	2		80	60	1	Sm5	P
XY2.0V	246 530 000		2	2	50	50	1.75	2.4	No Data Available			Sm5	P
Y13	045 231 600		13	22	250	250	35		100	150		B7	P
Y220	642 300 000	S	2	4.5	150	150	10.5		100	100		B4	P
Y220	642 350 000		2	4.5	150	150	10.5		100	100		B5	P
Y230	642 350 000		2	3	150	150	7		100	100		B5	P
Z14	036 500 200	G ₁	1.4	1	90	90	1.2	0.75	80	90	0.7	A08	P
Z21	542 300 000	A	2	1	150	125	2.5	1.7	150	100	1.7	B4	P
Z22	041 230 500	A	2	1	150	125	2.5	1.7	150	100	1.7	B7	P
Z26	045 231 600		26	5.5	250	250	32		100	PenLF		B7	P
Z62	026 510 310	G ₁	6	2	300	150	10	7.5	100	100	7.5	A08	P
Z63	026 500 310	G ₁	6	2	250	100	1.0	1.23	100	100	1.2	A08	P
Z66	026 510 310	G ₁	6	1.5	200	200	10.9	8.5	100	150	8.0	A08	P
Z73	026 510 310	G ₁	6	3	250	100	6.5	1.7	100	90	1.7	A08	P
Z77	412 361 500		6	2	250	250	10	7.5	100	150	5.0	B7G	P
Z90	256 101 403		6	2	250	250	10	6.0	100	150	6.0	B9G	P
Z142	260 154 130		21	2	175	175	10	8.5	100	150	8	B8A	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
Z145	261 514 130		22	1-8	200	200	10	9	100	150	7	B8A	P
Z150	260 154 130		6	2	250	250	10	9-5	100	150	8	B8A	P
Z152	141 230 651		6	2-0	170	170	10-0	7-4	100	100	6-0	B9A	P
Z220	642 300 000	S	2	6	150	150	18		100	100		B4	P
Z220	642 350 000		2	6	150	150	18		100	100		B5	P
Z309	141 223 651		6	2	250	250	20	15	No Data Available			B9A	P
Z719	141 230 651		6	2	175	175	10	7-4	100	150	6	B9A	P
ZD	892 310 000		13						D			B5	DD
ZD17	208 564 300		1-4	1	90	90	2-7	0-63	80	90	0-6	B7G	DP
ZD152	541 236 891		6	2	250	90	5	2-2	100	90	2-2	B9A	DDP
Z319	141 321 615		6	10-4	350	250	15-5	1-9	100	100	6	B9A	P
Z359	141 230 651		12	2	250	250	20	15	100	100		B9A	P
Z759	141 023 651		6	2	250	250	20	15	100	100		B9A	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA FOR TUNING INDICATORS					BASE
				Neg. Grid Volts	Anode Volts	Target Volts	Ia mA	Ra MΩ	
2E5	264 513 000		2-5	8	250	250	0-24	1	A08
6AB5	264 513 000		6	15-5	150	150	0-13	1	UX6
6AF7	026 457 310		6	4-5	200	200	0-16	1	A08
6E5	264 513 000		6	15	200	200	0-15	1	
6G5	264 513 000		6	7-5	250	250	0-2	1	UX6
			6	22	250	250	0-24	1	UX6
6H5	264 513 000		6	22	250	250	0-24	1	UX6
6MI	026 540 310		6	22-5	250	250	0-23	1	A08
6N5	264 513 000		6	15-5	150	150	0-13	1	UX6
6T5	264 513 000		6	22	250	250		1	UX6
6U5	264 513 000		6	22	250	250	0-24	1	UX6
41ME	023 104 560		4	5	250	250		1	8SC
63ME	026 540 310		6	22	250	250	0-25	1	A08
64ME	026 457 310		6	16	250	250		1	A08
				2-5	250	250		1	
1629	026 540 310		12-5	8	250	250	0-24	1	A08
4678	023 104 560		6	5	250	250	0-095	2	8SC
AC/ME	045 231 600		4	22	250	250	0-24	1	B7
AM1	023 104 560		4	5	250	250	0-095	2	8SC
DM21	206 540 030		1-4		90	90	0-025	2	A08
E130	026 540 310		6	15	250	250		1	A08
E1320	026 540 310		6	11	250	250	4	1	A08
EMI	023 104 560		6	5	250	250	0-095	2	8SC

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA FOR TUNING INDICATORS					BASE
				Neg. Grid Volts	Anode Volts	Target Volts	Ia mA	Ra MΩ	
EM3	023 104 560		6	18	200	200	0.176	1	8SC
EM4	023 164 560		6	{ 4.2	200	200		1	8SC
EM31	026 540 310		6	{ 12.5	200	200		1	
EM34	026 456 310		6	{ 5	250	250		2	A08
EM35	026 540 310		6	{ 5	250	250		1	A08
				{ 16	250	250		1	
				22	250	250		1	A08
FT4	026 540 310		4	6	250	250		1	A08
ME4S	023 104 560		4	5	250	250		2	8SC
ME6S	023 104 560		6	5	250	250		2	8SC
ME41	216 040 530		4	22.5	250	250	0.23	1	M08
ME91	216 040 530		9	17	150	150	0.135	1	M08
ME920	045 231 600		9	19	175	175	0.18	1	B7
PM5	206 546 130		6	{ 15	200	200		1	A08
				{ 5	200	200		1	
TV4	023 104 560		4	5	250	250		1	8SC
UM34	025 465 310		12.5	{ 5	250	250		1	A08
				{ 16	250	250	1	1	
VFT4	026 540 310		4	20	250	250		1	A08
VME4	045 231 600		4	22	250	250		1	B7
VTF6	026 540 310		6	22	200	200		1	A08
Y61	026 540 310		6	22	250	250	0.24	1	A08
Y62	026 540 310		6	22	250	250		1	A08
Y63	026 540 310		6	22	250	250	0.24	1	A08
Y64	026 540 310		6	22	250	250		1	A08
Y65	026 540 310		6	11	250	250		1	A08

Test Data for High Voltage Rectifiers.

The following procedure should be adopted when testing high voltage rectifiers.

Make insulation checks with valve cold and hot as stated in paragraphs 1 and 2 of the Abbreviated Working Instructions.

Then set Anode and *Screen* Voltage switches to their minimum value (i.e. 20) and Anode Current Controls to figure shown in Data column. With Circuit Selector set to TEST and Anode Selector at A₁ increase Anode Volts setting until indicating meter reads in a forward direction.

The setting of the Anode Voltage switch for a good valve should not exceed the figure given in column headed Anode Volts.

When checking full wave or voltage doubler rectifiers, check second Anode with Anode Selector at A₂.

NOTE the valve should be heated to working temperature before setting Circuit Selector to position TEST and only left at this position for sufficient time to take a reading.

VALVE	SELECTOR SWITCH No.	T.C.	Vf.	Anode Volts (Max.)	Ia mA (Min.)	Valve Holder	Type	REMARKS
1B3	020 000 300	AI	1.25	200	6	A08	R	
1Z2	232 232 300	AI	1.4			B7G	R	
2V3	020 000 300	AI	2.5			A08	R	
2V3G	020 000 300	AI	2.5			A08	R	
2X2	200 300 000	AI	2.5	100	10	UX4	R	
3B24	320 200 000	AI	2.5	60	10	UX4	R	
225DU	072 323 600		2	40	20	B7	RR	Test A ₁ & A ₂
405BU	672 300 000		4	40	20	B4	RR	Test A ₁ & A ₂
1876	123 000 700		4			8SC	R	
EY51	230 000 000	AI	6	100	9	NIL	R	
HVR2	002 300 000	AI	4	100	10	B4	R	
HVR2A	002 300 000	AI	2	100	10	B4	R	
SU2150A	002 300 000	AI	2	200	50	B4	R	
U17	002 300 000	AI	4	40	35	B4	R	
U19	002 300 000	AI	4	40	70	B4	R	
U21	002 300 000	AI	2	60	4	B4	R	
U22	200 000 030	AI	2	60	4	M08	R	
U23	002 300 000	A ₁	4	40	100	B4	R	
U24	020 000 300	AI	2	20	0.5	A08	R	
V960	002 300 000	AI	4	80	90	B4	R	
VI906	002 300 000	AI	4	60	100	B4	R	
VI907	002 300 000	AI	4	150	70	B4	R	
VI913	002 300 000	AI	4	40	100	B4	R	
VI920	002 300 000	AI	4	100	90	B4	R	

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		

STOP PRESS DATA

1AS4	265 024 300	D	1.4	0	90	90	1.6	0.85	100	90		B7G	P	
1C8	240 236 540		1.25	0	30	30	0.3	0.1	No Data Available			B8B	H	
1E8	240 236 540		1.25	0	60	60	1.0	0.15	No Data Available			B8B	H	
1S2	230 232 032		1.4						D			B9A	D	
1W5	040 230 650		1.25	0	60	60	1.8	0.73	No Data Available			B8A	P	
1Z1	020 000 300	D	0.7						D			A08	D	
2E25	020 540 320		6	22.5	400	250	40		No Data Available			A08	P	
2T4	642 314 600		2.35		75		18	7	80		7	B7G	T	
3AF4A	642 314 600		3	4	100		15	6.6	80		6	B7G	T	
3BN4	142 361 400		2.8	2	150		9	6.8	100		6	B7G	T	
3CE5	412 365 100		3.1	1.0	125	125	11	7.6	125	125	7.6	B7G	P	
4BC5	412 365 100		4.2	1.3	250	150	7.5	5.7	100	150	5.7	B7G	P	
4BN6	142 354 600		4.2	1	60	60	0.25	1.0	80	60	1.0	B7G	P	
4BS8	641 237 410		4.2	4.4	150		10	7.2	100		7.0	B9A	TT	
4BU8	157 231 461		4.2	1.0	150	100	4	3.5	150	100	3.5	B9A	PP	
4BX8	641 237 410		4.5		125		11	7.5	125			B9A	TT	
4BZ8	641 237 410		4.2	2.0	125		10	8	125		8	B9A	TT	
4CB6	412 365 100		4.2	1.0	125	125	13	8	125	125	8	B7G	P	
4CE5	412 365 100		4.2	1.0	125	125	11	7.6	125	125	7.6	B7G	P	
4CX7	641 237 411		4.2	10	150		9	6.4	150			B9A	TT	
5A/137D	026 510 310		6.3	2	250	100		1.8	No Data Available			A08	P	
5A/170K	141 230 615		6.3	1.5	175	150	13	16.5	No Data Available			B9A	P	
5BQ7A	741 236 410		5.6	2	150		9	6.4	100		5	B9A	TT	
5BT8	891 236 541		4.7	2.2	200	150	9.5	6.2	100	100		B9A	DDP	
5BZ7	741 236 410		5.6	2.2	150		10	6.8	100		6	B9A	TT	
5CG8	461 237 514		4.7	{	0.85	100		8.5	5.8	100	60	5.8	} B9A	TP
					1.5	250	150	7.7	4.6	100	100			
5CL8	461 237 514		4.7		0.95	125		15	8	100	60	8		
					1.0	125	125	12	5.8	100	100	5.5		
5CM8	641 237 514		4.7	2.0	250		1.8	2.0	100	60		} B9A	TP	
				2.2	200	150	9.5		100	100				
5MK9	002 380 000		5				60		REC		20mA	B7G	R	
5V3	020 809 030		5				120		REC		30mA	A08	RR	
6AF4-A	642 314 600		6	3	100		20	7.5	100		7.5	B7G	T	
6AK4	402 013 060		6.3	2.5	200		9.5	3.8	100		3	B8D	T	
6AS4	001 080 230		6.3						REC			A08	R	
6AX8	645 237 114		6.3	{	1.0	150		18	8.5	100		8	} B9A	TP
					1.2	250	100	10	4.8	100	100			
6AY5	023 540 310		6	12.5	250	250	47	4.1	100	PenLF	4	A08	P	
6AZ5	810 230 190		6						D			B8A	DD	
6BA5	402 063 510		6	2	100	100	5.5	2.1	100	100	2	B8A	P	
6BE8	461 237 514		6	{	1	150		18	8.5	100	60	} B9A	TP	
					1	250	110	10	5.2	100	100			
6BG7	742 113 460		6	0.8	100		8	4.8	100		4.8	B8A	TT	

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		

STOP PRESS DATA (Cont.)

6BJ8	811 239 641		6	9	250		8	2.8	100			B9A	DDT
6BK8	501 236 014		6	250	150		3	1.8	100	100		B9A	P
6BS5	541 236 **1		6	7.5	250	250	50	7.0	100	100		B9A	P
6BS8	641 237 410		6	2.2	150		10	7.2	100		7	B9A	TT
6BT8	891 236 541		6	2.2	200	150	9.5	6.2	100	100		B9A	DDP
6BW4	800 230 901		6				30		REC		15mA	B9A	RR
6BX8	641 237 410		6	5	125		11	7.5	125		7	B9A	TT
6BZ8	641 237 410			1.0	125		10	8	125		8	B9A	TT
6CI1	276 454 130		6	{ 3	100		5	2.3	100	60		B9A	TH
				{ 3	125	125	5		100	100			
6CI2	541 237 164		8	{ 3	100		3	2	100	60	3	B9A	TH
				{ 2	250	100	6.5	2.4	100	100	2.4		
6CE5	412 365 100		6	1	125	125	11	7.6	125	125	7.6	B7G	P
6CF8	501 236 014		6	2	250	150	3	1.85	100	100		B9A	P
6CG8	461 237 514		6	{ 2.0	100		8.5	5.8	100	60	5.8	B9A	TP
				{ 2.0	250	150	7.7	4.6	100	150	7		
6CL5	521 441 350	A	6	40	175	175	90	6.5	100	100		A08	P
6CL8	461 237 514		6	{ 0.84	125		15	8	100		8	B9A	TP
				{ 1.0	125	125	12	5.8	100	100	5		
6CM5	026 540 310	A	6	7	250	250	72	14.5	100	PenLF		A08	P
6CM8	641 237 514		6	{ 2	250		1.8	2	100	60		B9A	TP
				{ 2	200	150	9.5	6.2	100	100			
6CS5	514 234 1*6		6	10.0	200	125	47	8	100	PenLF		B9A	P
6CS7	604 237 411		6	{ 8.5	250		10.5	2.2	100			B9A	TT
				{ 10.5	250		19	4.5	100				
6CX7	641 237 411		6	2	150		9	6.4	100		6	B9A	TT
6DG6	026 540 310		6	7.5	200	125	47	8	100	PenLF		A08	P
6DN6	021 040 350		6	18	200	125	70	9	100	100		A08	P
6DR6	*41 23* *51		6	23	175	175	45	6.5	No Data Available			B9A	P
6FI9	141 230 651		6	2	250	100	10	6	150	100	5	B9A	P
6FX4	902 309 100		6				30		REC		15mA	B7G	RR
6GG6	802 300 190		6				30		REC		15mA	F8	RR
6LI2	741 236 410		6	2.3	250		10	5.9	100		5	B9A	TT
6LD12	†91 239 146		6	3	250		1.0	1.2	100		1.3	B9A	DDDT
6M3	*28 0*0 *30		6						D			A08	R
6PI5	041 230 605		6	7.5	250	250	49	11.3	100	150	10	B9A	P
6R3	*** 23* **8		6				120		REC		15mA	B9A	R
6S2	*** 23* ***	D ₁	5						D			B9A	D
6V3P	000 230 009	C	6				120		REC		20mA	B9A	R
8AU8	146 231 457		8.4	{ .25	150		8.5	4.9	100	60	5	B9A	TP
				{ 1.5	200	125	15	7	100	100	7		
8BQ7A	641 237 410		8.4	2	150		9	6.4	100		6	B9A	TT
8CG7	741 236 410		8.4	8	250		9	2.6	100		3	B9A	TT
8CM7	701 236 441		8.4	{ 8	250		20	4.4	100			B9A	TT
				{ 7	200		5	2.0	100				

VALVE	SELECTOR SWITCH No.	T.C.	Vr	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		

STOP PRESS DATA (Cont.)

8CN7	891 221 643		4.2	3	250		1	1.2	100		1.3	B9A	DDT
9AB4	602 304 100		9	2	250		10	5.0	100		5.0	B7G	T
9AU7	741 226 413		4.7	3.5	250		10.5	2.2	100		2.2	B9A	TT
9BQ7A	641 237 410		8.4	2	150		9	6.4	100		6	B9A	TT
9D7	141 230 651		6	1.5	250	100	10	8.4	100	100		B9A	P
10C8	641 237 541		10.5	{ 2.7 1.5	250 125		7.3 11.5	4.4 8	100 125	60 125	5 8	B9A	TP
10L1	412 314 600		19	1.5	250		10	8.5	100		8	B7G	T
12AD7	641 227 413		6	2	250		1.25	1.6	100			B9A	TT
12AJ7	541 237 464		12	{	250 250		6.5 12.5		100 100	60 100		B9A	TH
12AJ8	541 237 464		12	{ 1.2	100	60	2.5 1.7		60 100	60 60		B9A	TH
12BR7	641 228 913		6	2	250		10	5.5	100		4.0	B9A	DDT
12BV7	141 223 651		6	2.2	250	150	27	13	100	100		B9A	P
12BW4	800 230 901		12				30		REC		15mA	B9A	RR
12CR6	182 365 400		12	2	250	100	9.6	2.2	100	100	2.0	B7G	DP
12CT8	641 237 541		12	{ 1.4 1.5	150 200	125	9 15	4.9 7	100 100	60 100		B9A	TP
12CU5	142 345 600		12	8	125	100	50	7.5	No Data Available			B7G	P
12D4	**1 *8* 230		12						D			A08	R
12DA6	041 230 651		12	1.0	175	100	12	4.4	100	100		B9A	P
12G4	602 364 100		12	8	250		10	3.0	100		3	B7G	T
12TE8	427 546 310		12	{	100 250		3.4 3.7		100 100	60 100		A08	TH
12TE9	651 237 440		12	{	100 250	100	3.4 3		100 100	60 100		B9A	TH
14AF4	216 447 130		12	10	250		9	2.1	100		2	B8B	TT
15A8	124 451 360	A ₂	15	{ 8 7.5	250 100	100	9 45	2.6 7.3	100 100	60 100	2 7.5	A08	TP
16CN8	414 237 516		15	{	100 200		3.3 35	3.6 6.4	100 100	60 100	3.6	B9A	TP
17AV5	421 060 350		16	22.5	250	150	57	5.9	100	100	5.8	A08	P
17AX4	001 080 230		16				120		REC		35mA	A08	R
17C5	142 345 600		16	7.5	125	100	49	7.5	100	90	6	B7G	P
17DQ6	020 540 310	A	16	22.5	250	150	75	6	125	100		A08	P
18A5	421 060 350		18	17	200	125	40	4.8	100	100		A08	P
19BD	**1 23* **8		19				60		REC		15mA	B9A	R
21B6	*41 23* *51	A	21	23	175	175	45	6.5	100	100		B9A	P
25BG6	021 040 350	A	25	22	125	125	69	5.0	No Data Available			A08	P
25DN6	021 040 350	A	25	18	125	125	70	9	No Data Available			A08	P
25F5	142 345 600		25	7.5	110	110	37	5.8	No Data Available			B7G	P
25MK15	002 380 100		25				60		REC		20mA	B7G	R

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		

STOP PRESS DATA (Cont.)

26AQ8	641 237 410	A	26	1.4	175		8.7	6	100			B9A	T
26BQ6	020 540 310		25	22.5	250	150	55	5.8	100	100		A08	P
26Z5W	801 229 013		13				30		REC		15m/A	B9A	RR
30A5	142 345 600		30	6.7	100	100	43	9.2	No Data Available			B7G	P
30F5	141 230 651		7.3	1.8	175	175	10	8.8	100	100		B9A	P
30FLI	641 237 541	A	9.4	{ 7.9 2.1	200 175		10 10	3.6 7.5	100 100	60 100		B9A	TP
30P4	*2* 540 310		25	21	175	175	100	11.0	No Data Available		A08		
30P12	*41 23* 6*5		12	10.3	175	175	31	6.7	100	100		B9A	P
30P14	026 540 310		13	9.4	175	175	42	7.2	100	100		A08	P
30PLI	641 237 154		13	{ 7.9 9.6	200 175		10 28	3.4 6.0	100 100	60 100		B9A	TP
33B/152M	421 342 134	A ₁ A ₂	6	1	300			18.5	No Data Available			B9G	TT
45B5	041 23* 6*5		45	12.5	175	175	70	10	100	100		B9A	P
50BK5	604 231 450		50	5	250	250	35	8.5	100	PenLF		B9A	P
63TI	641 237 154		6	{ 2.3 8.0	100 200		4 17.5	1.4 3.3	100 100	60 PenLF	1.4 3.0	UX5	P
68A	265 130 000		6	13.5	125	125	14	1.4	100	100			
163Pen	041 23* 6*5	A ₁ G ₁	16	10.4	175	175	53	9.5	No Data Available			B9A	P
21OHPT	642 350 000		2	4.5	150	150	7.5	2.5	100	100	2.5	B5	P
435A	402 106 053		6	10.0	175	150	13.1	16.5	No Data Available			B9A	P
437A	304 002 116		6	10	150		40		No Data Available			B9A	T
446A/B	021 000 310		6	3	250		15	4.5	100			A08	T
464A	020 010 310	A ₁ G ₁	6	2.5	250		25	7	100			A08	T
559	021 010 030	D ₁					5		D			A08	R
1625	254 130 000	A	12	12.5	400	250	83	6.5	100	PenLF	6	UX5	P
4300A	364 200 000		5	89	400		50		No Data Available			UX4	T
5635	442 *63 710		6	0.5	100		4.8	3.8	100		3.8	B8B	T
5639	412 163 510		6	2.6	150	100	21	9	100	100	9	B8D	P
5640	412 163 510		6	9	100	100	31	5	100	100	5	B8B	P
5656	544 231 671		6	2	150	125	15	5.8	100	100		B9A	PP
5721	641 227 413		6	2	250		1.2	1.6	100		1.6	B9A	TT
5844	672 344 100		6	2.3	100		4.8	3.4	100		3.4	B7G	TT
5845	802 290 300		6						D			B7G	DD
5871	026 540 310		6	13	325	225	34	3.7	100	100		A08	P
5933	254 130 000		6	14	300	250	83	6.5	100	PenLF	6	UX5	P
5947	222 833 380		4.4						D			A08	D
5998	461 471 230		6		100		100	15.5	No Data Available			A08	TT
6004	020 000 030	D ₁ D ₂	2.5				60		REC		20mA	A08	RR
6006	021 415 360		6	14	250	125	11	4.7	100	100		A08	P
6021	642 113 470		6	1.0	100		6.5	5.4	100		5.0	B8D	TT
6030	672 344 100		6	0.85	100		8.5	5.8	100		5.8	B7G	TT
6094	452 634 516		6	12.5	250	250	45	6	100	PenLF	6	B9A	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		

STOP PRESS DATA (Cont.)

6096	412 365 100		6	2	125	125	7.5	5	125	125	5	B7G	P		
6098	106 052 430		6	22.5	250	250	77	5.4	100	100		A08	P		
6099	762 344 100		6	0.85	100		8.5	5.3	100		5	B7G	TT		
6106	020 809 030		5				60		REC		20mA	A08	RR		
6118	026 890 310		6	3	250		1	1.2	150		1.2	A08	DDT		
6125	8*2 384 100		6	8.5	250		10.5	2.2	150		2.2	B7G	T		
6145	265 104 130		6		150	100	34	10	100	100		B7G	P		
6188	461 471 230		6	2	250		2.3	1.6	150		1.4	A08	TT		
6287	156 236 546		6	12.5	250	250	48	4.1	100	100		B9A	P		
6327	121 040 350		6	22.5	250	250	120	8	100	100		A08	P		
6360	414 226 573		6		200										
6386	214 607 413		6	2	100		9.6	4	100		4	B9A	TT		
6660	412 365 100		6	1.1	250	100	11	4.4	100	100	4.3	B7G	P		
6661	412 365 100		6	1.0	250	150	7.4	4.6	100	100		B7G	P		
6662	412 365 100		6	1.0	250	100	9.2	3.6	100	100	3.6	B7G	P		
6663	182 310 900		6						D			B7G	DD		
6669	412 365 400		6	12.5	250	250	47	4.1	100	PenLF	4	B7G	P		
6677	145 236 154		6	3	250	150	30	11	100	100		B9A	P		
6679	641 227 413		6												
6680	641 227 413		6	8.5	250		10.5	2.2	100		2.2	B9A	TT		
6681	641 227 413		6	2	250		1.2	1.6	150		1.6	B9A	TT		
6697	641 227 413		6	8.5	250		10	2.0	150			B9A	TT		
6760	641 236 510		18	7.5	125	125	70	12	No Data Available			B9A	P		
6761	641 236 510		6	7.5	125	125	70	13	No Data Available			B9A	P		
6829	641 227 413		6	2.2	150		10.7	8.1	150		8.1	B9A	TT		
6883	125 141 130	A	12	30	200	200	100	7	No Data Available			B9A	P		
6893	125 141 130	A	12	30	200	200	100	7	No Data Available			A08	P		
18043	541 236 **1		6	1.8	200	100	8.2	8.2	100	100	8	B9A	P		
ABC91	412 389 600		6	2	250		1.2	1.6	100		1.4	B7G	DDT		
ACPI	642 310 000		4	28	200		24	2.3	100			B5	T		
C36B	645 231 700	G ₁	29	{	100				100	60		}	B7	TH	
CF50	123 100 560	G ₁	30		2	250	150	3.4		100	100			8SC	P
CF51	123 100 560	G ₁	30		2	250	100	1.7	3.2	100	100			8SC	P
CK1028	202 322 200	D ₁	6		6			60		REC			20mA	B7G	R
CZ30	028 193 210		80				60		REC		20mA	A08	RR		
DA101	200 800 300		1.2						D			B7G	D		
DAFI	082 362 450		1.2		125	60	1.4		125	60		F8	P		
DBC25	208 904 630		1.4	1.5	125		1.6	0.9	125		0.9	B8B	DDT		
DC93	204 036 200		1.4	5	100		10	2.4	100		2.3	B7G	T		
DCHI	207 540 630	G ₁	1.4	{	60		2.1	1.4	60		1.4	}	A08	TH	
					125	125	1.0		100	100					
DD960	204 036 200		1.4	3	60		9	2.45	No Data Available			B7G	T		

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		

STOP PRESS DATA (Cont.)

DF61	652 430 000		1.25	0	60	60	1.7	0.95	No Data Available			B5A	P
DF62	652 430 000		1.25	0	40	40	3	2.0	No Data Available			B5A	P
DF92	265 024 300		1.4	0	90	90	4.5	0.10	80	75	0.1	B7G	P
DL66	653 420 000		1.2	1.4	20	20	0.3	0.35	No Data Available			B5A	P
DL69	652 430 000		1.2	2.5	90	90	1.7	0.85	80	75	0.8	B5A	P
DL82	264 *89 130		6	3	250		5	1.4	100			B8B	DDT
DL620	653 420 000		1.25	6.5	60	60	3.1	0.65	80	75	0.65	B5A	P
DW2X	892 300 000		4				30		REC		15mA	B4	RR
DY87	23* 232 *32	D ₁	1.4						D			B9A	D
E87L	041 230 651		6	6	250	150	36	10	100	100		B9A	P
EAA90I	182 310 900		6						D			B7G	DD
EBC5I	389 060 420		6	7.5	250		10	4.0	100		4	A08	DDT
EBC80	641 238 090		6	3	250		1.0	1.2	100		1.2	B9A	DDT
EC84	414 464 234		6	1.1	125		16	10	100		10	B9A	T
EC94	642 314 600		6	2.5	100		16	6.6	100		6.6	B7G	T
ECC180	641 237 410		6	2.0	150		9	6.4	100		6.3	B9A	TT
ECC80I	641 227 413		6		250		10	5.5	100			B9A	TT
ECH4G	127 546 310		6	2	100		6.3	2.7	100	60	2.2	A08	TH
				2	250	200	6.5	2.6	100	PenLF	2.6		
				1.5	200		0.5	1.2	100	60	1.2		
ECL8I	451 237 614		6	5.5	250	250	36	8.7	100	100		B9A	TH
EF87	501 236 014		6	2	250	100	3.3	1.9	100	100			
EF88	501 236 014		6	2	250	100	7	2.1	100	100		B9A	P
EF190	412 365 100		6	2	200	150	9.5	6.2	100	100		B7G	P
EL81F	*41 23* *51	A ₁	6	38.5	250	250	32	4.6	100	100	2.2	B9A	P
EL88	041 230 651		6	4.5	200	200	33	9.7	100	100		B9A	P
EL89	041 230 651		6	6	250	250	38	10.5	100	100		B9A	P
EL180	141 223 651		6	2	250	150	25	12	100	100		B9A	P
EY83	*** 23* **8	C	6						D			B9A	D
EY87	23* 232 *32	D ₁	6						D			B9A	D
EY92	002 360 100		6				60		REC		15mA	B7G	R
EYY13	230 238 090		82				120		REC.		30mA	F8	RR
EZ82	8*1 23* 8**		6				30		REC		15mA	B9A	RR
G/25L6	026 540 310		25	8.25	200	125	46	8	100	90	8	A08	P
G/50C5	142 345 600		50	7.5	125	100	49	7.5	100	90	6	B7G	P
GY11	333 022 200	D ₁	2.5				30		No Data Available			F8	R
H2D	682 390 000	G ₁	2		100		3.5	1.3	100		1.3	B5	T
HAA9I	182 310 900		12						D			B7G	DD
HL84	*41 23* 6*5		30	12.5	175	175	70	10	100	100		B9A	P
HR9	0** 080 230	D ₁	4						D			A08	D
HY6I	254 130 000	A ₁	6	14	300	250	83	6.5	No Data Available			UX5	P
KK2G	026 546 300	G ₁	2	1.0	90	50	2		80	60		A08	O
KT88	026 540 310		6	30	250	250	57	10	No Data Available			A08	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		

STOP PRESS DATA (Cont.)

LG6	218 090 130		12				30		REC		15mA	B8B	RR
M8136	741 226 413		6	8.5	250		8.5	2.2	100		2	B9A	TT
MCI	423 060 000		1.9	1.5	100		4	0.8	100		0.8	85C	T
OM5C	026 510 310		6	2	250	100	3	1.8				A08	P
PL81F	*41 23* *51	A ₁	21.5	28	200	200	40	6.0	100	100	6	B9A	P
PM24DC	642 350 000		4	42	300	200	20	1.5	100	100	2	B5	P
PT2-K	642 350 000		2	4.5	150	150	9.5	2.5	100	100	2.5	B5	P
PT4	045 231 600		4	6	250	250	36	9.5	100	PenLF	7	B7	P
(FERRANTI)													
QB65	461 471 230		6	8	250		9	2.6	100		2.6	A08	TT
QB309	641 227 413		6	2	250		10	5.5	100		5	B9A	TT
QD77	182 310 900		6						D			B7G	DD
QEO6-50	254 130 000	A ₁	6	14	300	250	83	6.5	100	100		UX5	P
QL77	6*2 364 100		6	8.5	250		10.5	2.2	100		2	B7G	T
QN77	412 360 400		6	12.5	250	250	16	2.6	100	PenLF		B7G	P
QW77	412 361 500		6	2.5	200	200	8	2.5	100	100		B7G	P
QZ77	412 361 500		6	2.0	250	250	10	7.6	100	100		B7G	P
R13A	028 090 310		13				30		REC		15mA	A08	RR
RFG5	003 200 000	D ₁	6						D			F8	R
RK39	254 130 000	A ₁	6	14	300	250	83	6.5	100	PenLF		UX5	P
T2MO5	672 344 100		6	0.85	100		8.5	5.3	100		5.3	B7G	TT
TH30	645 231 700	G ₁	30	{ 2 3 5	125 250 130				100 100 100	60 100 60		} B7	TH
TP4	571 231 640	G ₁	4		250	200	3.5 1.5 5.5	1.4 1.6	200	PenLF	1.4 1.5		TP
U75/300	802 300 000		4				60		REC		20mA	B5	R
U191	0** 080 230	D ₁	19						D			A08	R
UB91	182 310 900		18.9						D			B7G	DD
UL43	260 154 130		50	2.6	250	250	36	10	100	100		B8A	P
UY2	023 180 000		26				30		REC		15mA	F8	R
UY22	280 808 130		26				60		REC		20mA	B8B	R
UY91	812 380 800		26				60		REC		20mA	B7G	R
VBF11	892 361 450		35	2	200	75	5	1.8	100	75		F8	DDP
VHT5	545 231 600	G ₁	13	3	200	100			100	100		B7	H
VY2	023 180 000		30				15		D			85C	R
VY2N	023 100 080		30				15		D			85C	R
W729	141 230 651		6	2	175	175	8	5.7	100	100		B9A	P
X62	027 546 310	G ₁	6	{	150 250	125	5.5 4		100 100	60 100		} A08	TH
X75	026 546 310	G ₁	15		150	75			100	75		A08	H
X6030	020 880 300		3						D			B8B	D
XFY10	653 420 000		1.25	1.25	20	20	0.05	0.35	No Data Available			B5A	P
XFY11	653 420 000		1.25		20	20	0.3	0.42	No Data Available			B5A	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		

STOP PRESS DATA (Cont.)

XFY12	653 420 000		1.25	0.5	20	20	0.25	0.37	No Data Available			B5A	P
XFY21	653 420 000		1.25	0.5	20	20	0.25		No Data Available			B5A	P
XLI-5	642 300 000		1.5	1.0	50		0.45	0.6	No Data Available			Sm4	T
XW075A	653 420 000		0.75		30	30	0.3	0.18	No Data Available			B5A	P
XY1-5	246 530 000		1.5	1.5	40	40	1.75	1.0	No Data Available			Sm5	P
XY14B	653 420 000		1.25	4.5	40	40	0.3	0.6	No Data Available			B5A	P
XY14CC	653 420 000		1.25	1.5	40	40	0.5	0.5	No Data Available			B5A	P
4BA6	412 365 100		4	1.0	250	100	11	4.4	100	100	4.4	B7G	P
4BE6	412 366 114		4	2	100		11	7	100		5	B7G	H
4KI00	642 300 000		4	3	30	200	50	4	No Data Available			B4	T
30P16	041 230 605		16	14.2	200	200	45	8.2	100	100	7	B9A	P
42	264 300 000		1.5	13.5	175		3.9	0.8	100			UX4	T
403A	413 265 100		6	2.3	150	150	7	4.3	100	100	4	B7G	P
815	241 531 420	A ₁ A ₂	6	23	400	200	25	4.0	No Data Available			A08	PP
5897	402 013 060		6	2.3	150		13	6.5	100		5.8	B8A	T
5898	402 013 060		5	2	150		1.8	2.3	100		1.7	B8A	T
5902	412 163 510		6	3.5	100	100	30	4.4	No Data Available			B8A	P
6189	741 226 413		6	8.5	250		10.5	2.2	100		2.2	B9A	TT
LS6A	642 300 000		6	91	400		63	2.3	No Data Available			B4	T
LS7	642 300 000		4	4	150		21	2.4	100			B5	T
LS8	642 300 000		4	8	125			1.27	No Data Available			B4	T
LS8A	642 300 000		4	8	125		26	3	No Data Available			B4	T
LS9B	642 300 000		2	1.5	150		8	0.6	100		0.6	B4	T
P425	642 300 000		4	16.5	150		17	1.9	No Data Available			B4	T
QQE04-20	245 104 300	A ₁ A ₂	12		400		30	3	No Data Available			B7A	PP
QQV04-20	245 104 300	A ₁ A ₂	12		400		30	3	No Data Available			B7A	PP
TM05	672 344 100		6	0.85	100		8.5	5.3	100		5.3	B7G	TT
WT210-0012	298 300 000		5				60		REC		20mA	UX4	RR
WT210-0013	289 300 000		5				120		REC		30mA	UX4	RR
WT210-0019	289 300 000		5				120		REC		30mA	UX4	RR
WT210-0021	028 090 310		6				30		REC		15mA	A08	RR
WT210-0025	029 180 310		117				60		REC		20mA	A08	RR
WT210-0029	026 040 310		6	8	250		8	2	100		2	A08	T
WT210-0037	126 458 310		117	{ 5.2			60		REC		20mA	A08	RP
WT210-0040	802 309 100		6		100	100	43	5.3	100	90	5.3		
							30		REC		15mA	B7A	RR
K1678	542 310 000	A	7	25	400	225	50	3.2	No Data Available			B5	P
SR54451	245 134 200	A ₁ A ₂	6		400	250	30	3.4	No Data Available			B7A	PP
RS1009	245 134 200	A ₁ A ₂	6		400	250	30	3.4	No Data Available			B7A	PP
5894	245 134 200	A ₁ A ₂	6		400	250	30	3.4	No Data Available			B7A	PP
AC701	103 060 020	G ₁	4	1.6	40		0.5	0.7	No Data Available			B8D	T
DL651	653 420 000		1.25	0	20	20	0.4	0.45	No Data Available			B5A	P
IAD4	652 430 000		1.25	1.6	90	90	5.7	2.3	80	75	2	B5A	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		

STOP PRESS DATA (Cont.)

5672	653 420 000		1-25	6-5	60	60	3-1	0-65	No Data Available			B5A	P
5676	624 300 000		1-25	5	125		4	1-6	125		1-6	B5A	P
EH900	412 365 100		6-3	0	150	80	1	1-1	No Data Available			B7G	H
5755	471 461 230		6	2	250		2-3	1-6	200		1-6	A08	DDT
5844	762 344 100		6	3	150		5	4-5	100		5-3	B7G	TT
5871	026 540 310		6	12-5	250	250	45	4-1	100	PenLF	4	A08	P
5933	254 130 000	A	6	12-6	400	250	83	6-5	100	PenLF	6	UX5	P
6006	021 415 360		6	1	250	125	11-8	4-7	100	100	4-7	A08	P
6021	642 113 470		6		100		8	4-8	100		4-8	B8D	TT
6080	471 461 230		6	31-5	150		125	7	100		7	A08	TT
6094	412 365 400		6	12-5	250	250	45	4-1	100	PenLF	4	B7G	P
6095	412 365 400		6	12-6	250	250	45	4-1	100	PenLF	4	B7G	P
5905	412 163 510		26		20	20	2-3	2-8	No Data Available			B8A	P
5907	412 163 510		26		20	20	2-7	3-0	No Data Available			B8A	P
5908	412 163 310		26		20	20	2-3	1-7	No Data Available			B8A	P
6189	641 227 413		6	8-5	250		10-5	2-2	100		3	B9A	TT
2C25	264 300 000		7	100	350		50		No Data Available			UX4	T
6870	141 223 651		6	3-5	250	250	25	8-5	100	100	8	B9A	P
2CY5	412 365 100		2-5	1-0	125	80	10	8	125	75	8	B7G	P
4CY5	412 365 100		4-5	1-0	125	80	10	8	125	75	8	B7G	P
26E6	026 540 310		26	14	200	125	61	7-1	100	100	7	A08	P
6688	141 23* 615		6	1-0	200	150	13-1	16-5	No Data Available			B9A	P
AL860	502 331 406		2-4	7	200	150	35	6	100	100	6	B9A	P
DF167	653 420 000		0-625	0	20	20	0-01		No Data Available			B5A	P
DK192	265 450 300		1-4		60	60			No Data Available			B7G	H
DL167	653 420 000		1-25		20	20	0-5	1-5	No Data Available			B5A	P
K1658	542 310 000	A	7	25	400	220	50	3-2	No Data Available			B5	P
K1668	542 310 000	A	7	25	400	220	50	3-2	No Data Available			B5	P
IAD4	652 430 000		1-25	1-6	125	125	5-7	2-3	100	100	2	B5A	P
CK546	653 420 000		1-25	0	20	20	0-4	0-45	No Data Available			B5A	P
UL11	501 623 140		45	14	200	200	45	9	100	100		F8	P
DL73	*40 230 650		1-25	9	100	100	15	2-5	100	90	3	B8D	P
6096	412 365 100		6	2-3	150	150	7	4-3	100	100	4	B7G	P
6097	192 310 800		6						D			B7G	RR
6098	106 052 430		6	36	300	300	58	4-3	100	PenLF	4-3	A08	P
6099	762 344 100		6	3	150		5	4-5	100		5-2	B7G	TT
6106	030 809 020		5				60		REC		20mA	A08	RR
6188	471 461 230		6	2	250		2-3	1-6	200		1-6	A08	TT
6189	741 226 413		6	8-5	250		10-6	2-2	100		2-2	B9A	TT
6336	471 461 230		6	31-5	150		125	7	100		7	A08	TT
6660	412 365 100		6	1	250	100	11	4-4	100	100	4-4	B7G	P
6661	412 365 100		6	1	250	150	7-4	4-6	100	PenLF	4-6	B7G	P
6662	412 365 100		6	1	250	100	9-2	3-6	100	100	3-6	B7G	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	VALVE CHARACTERISTIC METER DATA					A.V.T. DATA			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		

STOP PRESS DATA (Cont.)

6663	192 310 800		6						D			B7G	RR
2E31	652 430 000		1-25	0	20	20	0-4	0-5	No Data Available			B5A	P
2E32	652 430 000		1-25	0	20	20	0-4	0-5	No Data Available			B5A	P
2E35	652 430 000		1-25	0	20	20	0-27	0-38	No Data Available			B5A	P
2E36	652 430 000		1-25	0	20	20	0-27	0-38	No Data Available			B5A	P
2E41	658 243 000		1-25	0	20	20	0-35	0-37	No Data Available				P
2E42	658 243 000		1-25	0	20	20	0-35	0-37	No Data Available				P
VI928	112 311 100	D ₁	4				5		D			B7G	R
EL804	041 230 005	A	6	12	175	175	70	10	100	100		B9A	P
6BM8	414 237 516		6	{ 0 16	100 200	200	3-5 35	2-5 6-4	100 100	60 6	2-5	B9A	TP
6CW5	*41 23* 6*5		6	12-5	175	175	70	10	100	100	9	B9A	P
30P16	041 230 605		16	14-2	200	200	45	8-2	100	100	7	B9A	P
UU12	8*1 23* 9**		6				60		REC		25mA	B9A	RR
QQV04-20	241 531 420		6	23	400	200	25	4	No Data Available			A08	PP
815	241 531 420		6	23	400	200	25	4	No Data Available			A08	PP
PC05/15	023 014 500	A	4				40	1-25	No Data Available			8SC	P
PE04/10P	023 114 500	A	12				27	7-5	No Data Available			8SC	P
PE05/15	023 114 500	A	12				40	1-5	No Data Available			8SC	P
PE06/40P	023 114 500	A	6	40	400	300	40	4	No Data Available			8SC	P
PE1/80	023 114 500	A	12				40	2-5	No Data Available			8SC	P
PE1/100	245 611 300		12-6	33	400	250	40	6	No Data Available			B7A	P
QE04/10	265 511 413		6-3	12	300	150	25	1-9	No Data Available			B9G	P
QQC04/15	263 724 540		6	14	300	200	20	2-0	No Data Available			B8B	PP
QQE03/20	245 134 200	A ₁ A ₂	6	22	400	250	20	2-5	No Data Available			B7A	PP
TC05/25	642 300 000		4				65	2-2	No Data Available			B4	T
6870	141 223 651		6	3-5	250	250	25	8-5	100	100	9	B9A	P
6CH8	175 321 446		6	{ 6 2-2	200 200	150	13 9-5	3-3 6-3	100 100	150	4-9 5	B9A	TP
6524	542 134 500	A ₁ A ₂	6	2-0	200	200	50	4-5	100	100		B7A	PP
6850	542 134 500	A ₁ A ₂	12	210	200	200	50	4-5	100	100		B7A	PP
Z729	501 236 014		6	1	250	100	3	1-85	100	100	1-8		
QE05/40	125 141 300	A	6		200	200	100	7	No Data Available			A08	P
PCC88	641 237 410		7	1-2	90		15	12-5	No Data Available			B9A	TT
WE350A	254 130 000	A	6	12-5	400	250	83	6-5	100	PenLF	6	UX5	P
WT377	029 180 310		117				60		REC		20mA	A08	RR
WT389	036 540 320		1-4	4-6	90	90	8	2-0	80	75	2-0	A08	P
WT390	026 040 310		6	8	250		8	2-0	100		2-0	A08	T
WE403A	412 365 100		6	2-3	150	150	7	4-3	100	100	4-0	B7G	P
DF60	652 430 000		1-25	0	60	60	1-8	1-1	No Data Available			B5A	P
EF74	412 653 160		6-3	1-4	100	100	7	3-1	100	100	3-5	B8D	P
6/30L2	741 236 410		6-3	7-9	200		10	3-4	100			B9A	TT

