




VALVE DATA MANUAL



AVO LTD

AVOCET HOUSE

**92-96 VAUXHALL BRIDGE ROAD
LONDON, S.W.1 ENGLAND**

THE
AVO
VALVE DATA
MANUAL

SIXTEENTH EDITION, 1964

Compiled by: A. I. WILLIAMS

Edited by: C. E. BULL



Published by

AVO LTD

"AVOCET HOUSE," 92-96 VAUXHALL BRIDGE ROAD, LONDON, S.W.1

Telephone: VICTORIA 3404 (12 lines)



FOREWORD

This data manual is primarily intended for use with the "AVO" Valve Characteristic Meter, the "AVO" Valve Tester Type 160, and "AVO" Valve Tester, but once the Selector Switch code is understood, the manual also forms a quick and convenient guide for general use.

The Instruction Book which accompanies the instrument should be thoroughly studied before the data contained in this manual is used.

It is our intention to issue revised copies of this manual from time to time and dates of publication will be given in our advertisements in the Trade Press.

The return of the enclosed postcard will enable us to inform you when new issues become available.

WATCH OUR ADVERTISEMENTS FOR FURTHER ANNOUNCEMENTS.

IMPORTANT—In the interests of accuracy, it is not recommended that these instruments should be used with a constant voltage transformer, unless it is known that the 3rd and 5th harmonic content is of a negligible proportion.



THE AVO VALVE TESTER TYPE 160



THE AVO VALVE CHARACTERISTIC METER Mk. IV

Contents

Foreword	3
Diagram of Standard Pin Connections	7
Diagram of Special Valve Holders fitted to Valve Tester Type 160 only	8
Commercial Valve Index and Cross Reference to Service Types	1-37
Service Valve Index and Cross Reference to Commercial Types	38-55
American Army V.T. Series Index and Cross Reference to British Service Types ..	56-57
British Post Office V.T. Series Index and Cross Reference to British Service Types	58-59
B.V.A. Utility Equivalents	59
Test Data for Receiving and Small Transmitting Valves	1-148
Additional Information	122-150
Data for Tuning Indicators (Magic Eyes)	Appendix I
Test Data for High Voltage Rectifiers	Appendix II
Test Data for use with "AVO " Valve Tester Type 160 only	Appendix III
Test Data for Russian Valves	Appendix IV
Stop Press	155

Accessories.

If the valve base required does not appear on the Valve Holder Panel it is necessary to use an adaptor which plugs into an existing valve holder. These are supplied as follows:

No. 1. B7G and B8A.	No. 7. B9A.
No. 2. B9G.	No. 8. Continental 8 pin (F8).
No. 3. B8B.	No. 9. B7A.
No. 4. B3G. Hivac D.A.4 and 5 pin.	No. 9/1 B7A for use with Valve Tester Type 160.
No. 5. Blank.	No. 10 5AA & 7AA (Acorn Valves).
No. 6. Sm7 (6A7 Base).	No. 11 B5A.
	No. 12 B9D.

Whilst every care has been taken in the preparation of this manual to ensure that the data given is correct, the Company cannot accept any responsibility for damage caused to a valve under test, or the instrument, due to the inclusion of incorrect information.

NOTES

TESTING WIRE ENDED (FLYING LEAD) VALVES. Wire-ended (flying lead) valves may be tested by inserting individual wires into appropriate electrode connections of a suitable valve holder in correct sequence.

BACK EMISSION. Alternative test figures are given for use when valve shows signs of back emission from anode to G3. This phenomenon can be recognised by the anode current apparently decreasing as the valve heats up. Data to which this note refers is indicated thus 'ξ'

GRID BIAS. When using AVO Characteristic Meter Marks I and II, to check valves requiring a bias of less than 1 volt, erroneous readings may be obtained due to the valve drawing grid current, which has the effect of reducing the grid bias voltage thus producing low mutual conductance readings. Users of these instruments are, therefore, advised to use the alternative data which has been supplied, which is indicated thus φ.

INTERNAL CONNECTION (*) When the symbol * appears among the Selector Switch set up figures, it indicates that an unknown electrode may be connected to this pin internally. To obtain the complete Selector Switch coding, test with an ohmmeter between pin marked * and all others. (The ohmmeter should be on a sufficiently low range to discriminate between a dead short and filament resistance). Dependant upon the electrode to which this pin is internally connected the correct code can be set up and normal test procedure followed.

Where the pin marked *	is O.C. to all others	Set Roller to	0
„ „ „	„ „ „	connected to Cathode	Set Roller to
„ „ „	„ „ „	„ „	Heater— „ „ „
„ „ „	„ „ „	„ „	Heater+ „ „ „
„ „ „	„ „ „	„ „	Grid „ „ „
„ „ „	„ „ „	„ „	Screen „ „ „
„ „ „	„ „ „	„ „	Anode 1 „ „ „
„ „ „	„ „ „	„ „	Anode 2 „ „ „
„ „ „	„ „ „	„ „	Diode Anode 1
„ „ „	„ „ „	„ „	Diode Anode 2 „ „ „
„ „ „	„ „ „	„ „	Set Roller to
„ „ „	„ „ „	„ „	Diode Anode 2 „ „ „

INSULATION TESTING. The manufacturers of certain specialised types of valve e.g. VHF types, thyratrons etc., limit the maximum applied inter-electrode voltage to very low values, these restrictions apply with the valve either hot or cold.

In the Avo Valve Characteristic Meter, the peak value of the applied insulation potential is 150V, whilst this is perfectly satisfactory for the vast majority of valves listed, users are advised to check with the manufacturers' data sheets when special types are to be tested.

The majority of valves listed in the Avo Valve Data Manual are not subject to this limitation, but where valve data is not given, care should be exercised. Where valves are subject to this limitation they are indicated thus □.

LOW ANODE IMPEDANCE TRIODES. It has come to our notice that a number of valves included in the Valve Data Manual which, when tested, produce low anode currents, a typical example being the 6080 valve.

These valves have a moderately high mutual conductance coupled with a very low R_a . In the case of the 6080 this is in the order of 250 ohms. Ideally, when testing this type of valve, the source impedance should be negligible. Unfortunately, with the Valve Characteristic Meter, the source impedance is in the order of 200 ohms, most of which is due to the anode current measuring circuit. Under normal conditions this impedance is negligible when compared with the anode impedance of the valve under test ; when these low impedance types are being tested, the valve is effectively being tested under dynamic conditions. Whilst we appreciate the difficulties with this drawback, we feel it is still acceptable, bearing in mind that the instrument will adequately test some 5000 ordinary valve types.

One suggestion for easing this difficulty is that a valve is selected which, when tested under dc conditions, meets the manufacturers' specifications. This valve should then be used under the same conditions in the Valve Characteristic Meter and the variation in anode currents and mutual conductance should then be noted, and used as a guide when testing valves of the same type.

Since only manufacturers' data is included in this publication anode current and mutual conductance figures have been omitted and the valve has been indicated thus Δ .

ABBREVIATIONS

D, DD, DDD.-Diodes and multiple diodes.

DT, DDT, DP, DDP.-Valve with another electrode assembly in addition to the diode.

H.- Heptode or Hexode.

N.- Nonode.

O.- Octode.

P.- Pentode or Tetrode, PP-Double Pentode or Double Tetrode.

T.- Triode, TT.-Double Triode, TH.-Triode Heptode, or Triode Hexode.

TP.- Triode Pentode.


R.- Rectifier, RR.- Full-wave Rectifier.

TI.- Tuning Indicator (magic eye).

CCR.- Cold Cathode Rectifier.

‡ Appearing among ROLLER SELECTOR switch numbers, refers to third diodes in triple diodes. Refer to Working Instructions, Chapter 3, Section headed " Instruction for Testing Specific Valve Types " for full test procedure.

() Where brackets appear around stated heater voltage thus (5) it indicates that heater voltage given in Data columns has been uprated to allow for voltage drop at valve base, due to higher current taken by the particular valve.

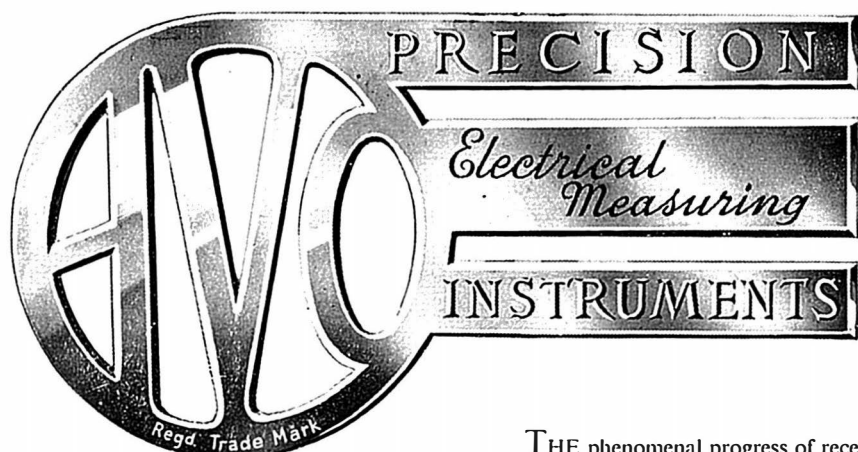

Model 7 Universal AVOMETER MK. II

A multi-range a.c./d.c. instrument providing 50 ranges of readings on a 5-in. hand calibrated scale. Range selection is by means of two rotary switches, for A.C. and D.C. respectively. A press button provides an additional range for each value of current and voltage shown on the switch knobs. Current consumption at full scale deflection is 1mA or 2mA, according to whether press button is used or not. Total resistance is 500,000 ohms. By means of an external accessory (the Universal AvoMeter Power Factor and Wattage Unit) power factor and power can be measured in a.c. circuits. An automatic cut-out provides protection against damage through overload.

Current: a.c. and d.c. 0 to 10A.
Voltage: a.c. and d.c. 0 to 1,000V.
Resistance: Up to 40 megohms.
Capacity: 0.01 to 20 MF.
Audio-Frequency Power Output: 0-2W.
Decibels: -25db to +16db.
Size: 8 x 7½ x 4½ ins. **Weight:** 6½ lb.

Model 40 Universal AVOMETER MK. II

A similar instrument to the Model 7 AvoMeter described above, but providing 40 ranges of current voltage and resistance. Total resistance is 200,000 ohms.

Current: a.c. and d.c. 0 to 12 amps.
Voltage: a.c. and d.c. 0 to 1,200 volts.
Resistance: Up to 1 megohm.
Size: 8 x 7½ x 4½ ins. **Weight:** 6½ lb.

THE phenomenal progress of recent years in electrical engineering owes much to the contemporary advances in the design of electrical measuring instruments.

The equipment of a laboratory for making electrical measurements and tests can involve an expenditure of hundreds of pounds. Likewise the test gear essential to the work of the radio service engineer can also be a source of considerable expense.

This difficulty is largely surmounted, and other advantages are conferred, by the use of modern multi-range testing instruments, which afford maximum usefulness with a reasonable initial outlay.

"AVO" Instruments are scientifically designed on sound principles, being the outcome of many years of successful experience by the pioneers and leading manufacturers of multi-range instruments. Before leaving our factory, every "Avo" Instrument is tested and adjusted to give a high degree of accuracy and constancy of performance.

All AvoMeters conform where applicable, with the limits of accuracy laid down in Section 6 of the British Standard Specification 89/1954, for Industrial Portable Instruments.

Model 8 Universal AVOMETER

A recent version of the Universal AvoMeter having a sensitivity of 20,000 ohms per volt on all d.c. ranges, and 1,000 ohms per volt on a.c. ranges from 100V. upwards. In addition to the many well-known AvoMeter features, such as the automatic overload protection device, dual knob range selection, etc., it has a push button for reversing the polarity of the movement to obviate the inconvenience of changing over the leads when encountering opposite potentials in respect to a common reference point.

ACCURACY
 a.c. Ranges and d.c. Current ranges to Section 6, BS 89/1954.
 d.c. Volts 2% of indication full to half scale; 1% full scale value below half scale.

Voltage: a.c. and d.c. 0 to 2,500 volts.
Current: a.c. and d.c. 0 to 10 amps.
Resistance: 0-20 megohms with internal batteries.
 0-200 megohms with external d.c. supply.
Decibels: -15db to +15db.
Size: 8½ x 7½ x 4½ ins. **Weight:** 6½ lb.





Electrical TESTING INSTRUMENTS.



'AVO' ELECTRONIC TESTMETER

A highly stable thermionic d.c. Millivoltmeter with subsidiary circuit switching giving 56 ranges of readings as follows:—

D.C. Volts: 5.0mV. to 10,000V. Max Input Resistance 110 megohms.

D.C. Current: 0.5μA. to 1A. (250mV. drop on all ranges).

A.C. Volts: 0.1V. to 2,500V. r.m.s. up to 2 Mc/s. With diode probe external 0.1V. to 250V. r.m.s. usable to 200 Mc/s.

A.C. Output Power: 5mW. to 5 watts in 6 different load resistances from 5 to 5,000 ohms.

Decibels: -10db to +20db Zero level 50mW.

Capacity: 0.001μF to 50μF.

Resistance: 0.2 ohm to 10 megohms.

Insulation: 0.1 megohms to 1,000 megohms.

Power Supply: 100-130V. and 200-260V., 50-60 c/s. a.c.

Size: 12½ × 9 × 5½ ins. **Weight:** 12½ lb.

PANCLIMATIC AVOMETERS

The standard AvoMeters can be relied upon to give excellent service in any climate. However, where extremes of climatic conditions are experienced, special protection is desirable for certain components.

In affording this protection, advantage has been taken of the latest developments in panclimatic techniques—for example, the use of new moulding powders in the manufacture of the cases and the "potting" of certain components to render them completely impervious to extremes of humidity and resistant to fungus growth.

These special instruments are now available at a small additional charge and are known as:—

The Model 7X AvoMeter
The Model 8X AvoMeter
The Model 8(S)X AvoMeter



AVO' UNIVERSAL MEASURING BRIDGE

Type I

A self-contained mains driven instrument, covering 24 calibrated ranges for the measurement of resistance capacity and inductance.


Resistance Ranges: 6 calibrated ranges covering 0.1Ω-1,000MΩ. (Accuracy ±1% at mid-scale).

Capacity: 6 calibrated ranges covering a nominal 1μF-1,000μF. (Accuracy ±1% at mid-scale).

Inductance: 6 calibrated ranges covering 1mH-1,000H. (Accuracy ±2% at mid-scale).

The instrument is fitted with a ±10% production comparator scale.


Size: 15¼ × 10½ × 10 ins. **Weight:** 16 lb. approx.

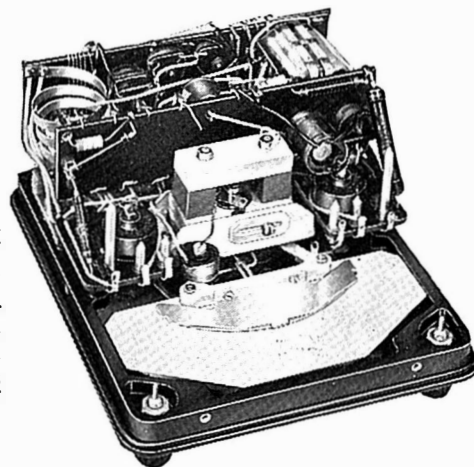

This shows the internal construction of a typical Panclimatic AvoMeter



Electrical TESTING INSTRUMENTS

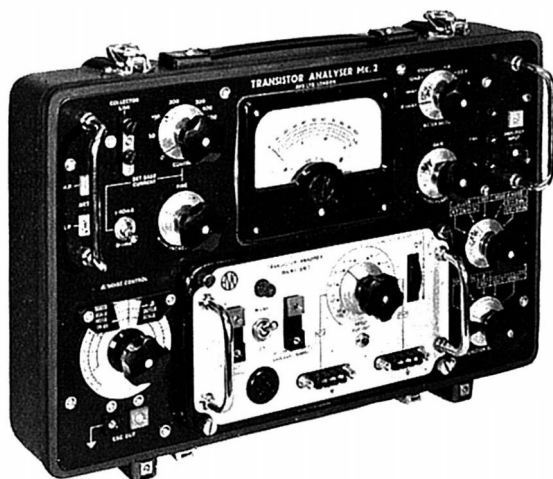

'AVO' TRANSISTOR ANALYSER Mk.2

A Portable, self-contained instrument for checking signal or medium power transistors. A circuit has been developed which enables noise to be expressed in terms of an equivalent 1000c/s input, thus giving a quantitative expression of noise.

I'co. This can be checked by depressing a button.

Beta. 0-25 and 0-250, measured at 1,000c/s.

Noise. Peak a.f. noise can be measured, the range being 1-40db with a bandwidth of 10kc/s.

Collector Voltage : 0-12V, or external.

Base Current : 0-1mA, or 1-40mA.

Collector Current : 0-100 μ A, 0-1mA, 0-10mA, 0-100mA 0-1A.

Turnover Voltage : Means are provided for checking turnover voltage utilising the internal movement, the high collector voltage being applied from an external source.



'AVO' SIGNAL GENERATOR

Type III

An inexpensive a.m. Signal Generator of entirely new design for the Radio Engineer. Operates on Fundamentals and provides six frequency bands covering 150 kc/s - 220 Mc/s. Accuracy $\pm 1\%$.

150 kc/s—500 kc/s	} Continuous wave, or modulated at 1,000c/s. i.f. signal available for test purposes.
500 kc/s—1.6 Mc/s	
1.6 Mc/s—5.5 Mc/s	
5.5 Mc/s—18 Mc/s	
18 Mc/s—70 Mc/s	
70 Mc/s—220 Mc/s	

A new type of attenuator ensures close adherence of the output to the attenuator calibration. The instrument provides a force output of 250 mV., whilst the following outputs are available via the attenuator:—

Minimum to 100 μ V., x 1, x 10, x 100, x 1000.
Output impedances—80 Ω , 200 Ω and 400 Ω

Size: 12 x 8 $\frac{1}{2}$ x 5 $\frac{1}{2}$ ins. approx.

Weight: 7 $\frac{1}{2}$ lb. approx.

This Signal Generator operates on 100-120, 200-260V., 50-60 c/s. a.c. mains. It is light and compact, and employs double screening to ensure minimum radiation.

HEAVY DUTY AVOMETER

An a.c./d.c. moving coil meter specially designed for use under conditions where an exceptionally robust and portable instrument is required; 18 ranges of direct readings on a 3 $\frac{1}{4}$ -in. scale.

Current: a.c. and d.c. 10mA., 100mA., 1A., 10A.

Voltage: a.c. and d.c. 10, 25, 250, 1,000V.

Resistance: 0-500 ohms. (Midscale 12.5 ohms).
0-50,000 ohms. (Midscale 1,250 ohms).

Sensitivity: d.c. voltage ranges, 1,000 ohms per volt.

a.c. voltage ranges except 10-volt range, 500 ohms per volt.

10-volt a.c. range, 200 ohms per volt.

Size: 7 $\frac{3}{8}$ x 5 $\frac{3}{8}$ x 4 ins. Weight: 5 $\frac{1}{2}$ lb.



Electrical TESTING INSTRUMENTS

MULTIMINOR MODEL 4

A compact pancalmatic moving coil/rectifier instrument for the measurement of a.c. and d.c. voltage, d.c. current and resistance.

Ranges: a.c. and d.c. Voltage 0-1000V. d.c. Current 0-1A.
Resistance: 0-20,000Ω, 0-2 Megohms (using 1½V cell).

Accuracy: d.c. $\pm 2.25\%$ a.c. $\pm 2.75\%$

Sensitivity: 10,000Ω/V.d.c. 1,000Ω/V.a.c.

Weight: 16 oz. (0.45kg.)

Size: 5½ × 3½ × 1½ ins. (14.3 cm. × 9.2 cm. × 3.5 cm.)

Supplied complete with leads, interchangeable crocodile clips and prods together with an instruction booklet, all contained in an attractive P.V.C. case.



Power, Power Factor and kVAR can now be measured on the AvoMeter by means of the AVO Power Factor and Wattage Unit. Send for free illustrated leaflet.

The following **ACCESSORIES** are available for 'Avo' Testing Instruments.

AvoMeter Voltage Multipliers.

AvoMeter Transformers for a.c.
Current Measurements.

AvoMeter Resistance Range
Extension Units.

25kV. d.c. Voltage multipliers can be supplied for the 'AVO' Electronic Testmeter, the 'AVO' Electronic Multiplier and the Model 8, 8X and 8(S)X AvoMeters.

AvoMeter Shunts for d.c. Current.


Multiminor Voltage Multipliers.

Prodclips.

Multiminor Shunts.

Leather Cases are available for most Instruments.

● A Comprehensive Guide to the complete range of 'Avo' Instruments is available upon request.

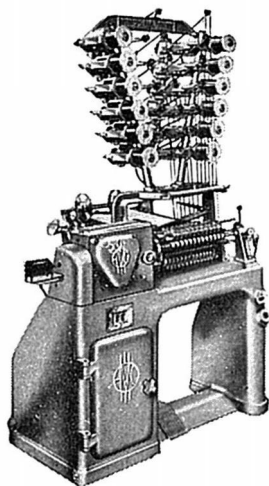

DOUGLAS and MACADIE COIL WINDERS

The Machine illustrated is the "Douglas" Fully Automatic Multi-Winder, for the high-speed production of large quantities of coils with or without paper interleaving. It will produce round, square or rectangular coils up to 6 in. each in length, and up to 4½ in. diameter. As many as 12 smaller coils can be wound simultaneously within the total available winding length of 15 inches, at headstock speeds of between 600 and 2,000 r.p.m.

Our complete catalogue illustrates twenty-seven different machines, ranging from a simple Hand-Winder to the large Multi-Winder capable of producing 12 coils simultaneously, also Taping Machines and a Cotton Inserter Attachment.


AVO LTD.

LONDON, S.W.1., ENGLAND.


Telephone Victoria 3404 (12 lines).

Telegrams Avocet, London, S.W.1


DIAGRAM OF STANDARD PIN CONNECTIONS *(viewed from underside of base)*




BRITISH NINE PIN (B9)




BRITISH SEVEN PIN (B7)




B9C




'P' TYPE BASE (B5C)




INTERNATIONAL OCTAL (AO8)




AMERICAN SIX PIN (UX6)




BRITISH 4/5 PIN (B5&B4)




AMERICAN FIVE PIN (UX5)




MAZDA OCTAL (MO8)




B7A




AMERICAN SMALL SEVEN PIN (SM7)




AMERICAN FOUR PIN (UX4)




AMERICAN OCTAL (B8B or B8G)




B9D




SUB MINIATURE 8 PIN (B8D)




HIVAC FOUR PIN (SM4)




HIVAC FIVE PIN (SM5)




AMERICAN SEVEN PIN (UX7)




**5AA & 7AA
(ACORN VALVES)**




B8A




B7G




B9A



B3G




B5B



B5A

COLOURED
SPOT →

**DIAGRAM OF SPECIAL VALVE HOLDERS FITTED TO
 THE AVO VALVE TESTER TYPE 160**
(bases are viewed from top of valve panel)

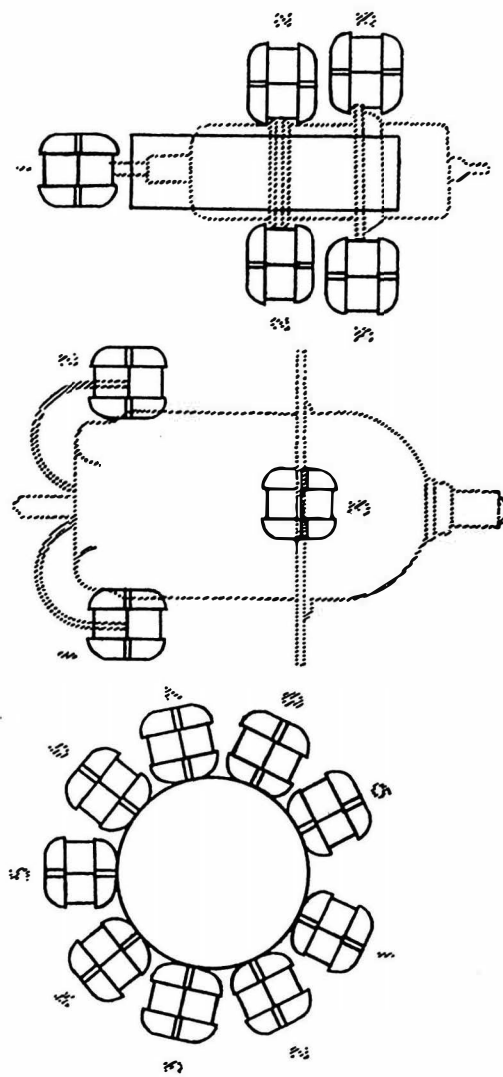

Commercial Valve Index and Cross Reference to British Service Types

NOTE.—Many of the commercial equivalents listed in the following pages will have different CV. numbers, this is due to special service requirements which do not affect the radio engineer, e.g. Interelectrode capacitance, bulb size, life test etc. It should also be noted that test data given in this manual may differ between equivalent valves, due to different sets of potentials having been selected for the test.

VALVE	C.V.N.O.	EQUIVALENTS	VALVE	C.V.N.O.	EQUIVALENTS	1
01A	750		1B35A	3628		
02DF	2260		1B38	3549		
09	2725		1B40	2914		
09D	1596		1B41	3550		
09J	1518		1B49	508		
0517		PL5557	1B58	3745		
0A2	1832	STV150/30 150CL	1B63A	2826		
0A2WA	4020	M8223	1C1	782	X17 1R5 DK91	
0A3	3798	VR75/30 QS75/40	1C2		DK92 X18 1AC6 X20	
0A70		1N87	1C3		DK96	
0A73	442	1N616	1C3		X25	
0A79		1N541	1C5G	1803	DL35 N14	
0A85	1354		1C5GT	1805	40SUA	
0A86		1N480	1C21	762	G1502D	
0A87		1N490	1CP1	2302	DH3-91	
0A91		1N617	1D5	764	U4024 40SUA RZUR1C	
0A95	7041	1N618	1D5GP	705		
0A202	7040		1D5GT	1806		
0B2	1833	STV108/30 108C1	1D7	765		
0B2WA	4028	M/8224	1D8GT	1811		
0B3	3799		1E5GP	766		
0C3	686	VR105/30	1D13	75	DA90 CL753 1A3	
0C16	7010	2N115	1E7	1812		
2-0C16		2N116	1F1		DF96 1AJA	
0C44	7003		1F2	1758	DF92 1L4	
0C70		2N279	1F3	785	DF91 1T4 W/17	
0C71	7005	2N280	1F4	767		
0C72	7006	2N281	1F5	768		
2-0C72		2N282	1FC	769		
0C73		2N283	1F7GV	770		
0C76		2N284	1FD1		DAF96 ZD25 1AH5	
0C77		2N284A	1FD9	784	DAF91 1B5 ZD17	
0CF71	7007	2N577	1G3	1817		
0D3	216	QS150/40 VR150/30 150C3	1G5	771		
0E3	431	85A1	1G6G	772		
0G3	449	STV85/10 85A2	1G6GT	773		
0Z4	692		1G8	7026		
0Z4A	517	1003	1G35		4C35 X8H-100 CV1787	
1A3	573	DA90 1D13	1G50	2050		
1A4P	754		1H4G	774		
1A5G	755		1H5G	1818	DAC32 HD14	
1A5GT	756		1H5GT	1820	DAC32	
1A6	757		1L4	1758	DF92 1F2	
1A7GT	1802	DK32	1LA6	775		
1A7G	1800	X14	1LB4	776		
1AB6		DK96 1C3	1LC5	777		
1AC6		DK92 X18 1C2	1LC6	778		
1AD4	2237	DF62	1LD5	779		
1AF4		DF96	1LH4	780		
1AHS		DAF96 1FD1	1LM5	781		
1AM4		1T4SF	1LN5E	781		
1ANS		DF97	1M1	2980	DM70	
1AQS		1R5SF	1M3	2980	1M3 DM70	
1B3/8106	514	U41	1N3		DM71	
1B3GT	1830	U41	1N5G	821	Z14	
1B4P	758		1N5GT	1823	DF33	
1B5/25	759		1N21	727		
1B7GT	760		1N21B	367		
1B21A	3586		1N21C	3525		
1B22	761		1N23	5012		
1B23	539		1N23A	749		
1B24	725		1N23B	2856		
1B26	576		1N23BM	2857		
1B24A	3548		1N23CR	5013		
1B27	713	TRC1	1N25	2916		
1B32/532A	2648		1N26	1785		
1B35	369		1N28	2918		

VALVE	C.V.NO	EQUIVALENTS	VALVE	C.V.NO.	EQUIVALENTS
1N31	3509		2B32	788	832A QQV04-15
1N32	5016		2B36	1078	
1N34	2829		2B52	2789	QQV03-20A
1N34	1354		2B94	2797	QQV06-40A
1N38	3551		2BP1	3678	
1N43	2919		2C21	875	
1N47	3729		2C22	792	
1N53	5015		2C26	802	
1N54	1354	0A85	2C26A	1759	
1N54A	2961		2C33	793	
1N58	1354		2C34	18	4074A
1N60		0A159	2C39A	2516	TD1-100A
1N64		0A160	2C40	2643	
1N69	2923		2C42	2932	TD3-12
1N72	2974		2C43	688	TD3.5-12
1N75		0A161	2C45	596	
1N78	5014		2C46	2933	TD05-12
1N81	2928		2C51	2831	
1N87		0A70 1N87/A	2C51W	2866	
1N87/A		0A70	2C53	3559	
1N198	5076		2D2	794	
1N476	1353	0A81	2D4A	795	D41 D400 DDL4
1N478	1354	0A85	2D13C	796	10D1
1N480		0A86	2D21	797	EN91 20A3
1N490		0A87	2D21W	2876	M8204
1N541		0A79	2D21Wa	4018	M8204
1N542		2-0A79	2DP1	1813	
1N616	442	0A73	2E22	798	2P22
1N617		0A91	2E26	3990	QV01-10
1N618	7047	0A95	2E30	2517	
1P5	728		2G	1842	
1P11	2983	DL94 N19 3V4	2G8	7027	
1P21	337		2G/402A	1835	3B28 ESU103 RR3-250
1P23	2680		2G/472B	2518	4B32 RR3-1250
1P28		27M3 MS-9ST	2G/473C	2399	GXU3 RR3-1250A
1P30	1764		2H28	1835	3B28 RR3-250
1P31	3812		2H66	32	866A RG3 250A
1P32	405		2J21	2778	
1Q5G	1824		2J21A	719	
1Q22	3555		2J22	800	
1R4	2709		2J26	1760	
1R5	782	DK91 X17	2J31	1807	
1S2		DY86	2J32	1808	
1S2A		DL87	2J33	1809	
1S4	783	DL91	2J34	1810	
1S5	784	DAF91 ZD17 1FD9	2J36	514	
1T2		R16 U37	2J42	3676	JP9-7 MAG3
1T4	785	DP91 W17 1F3	2J42A	3997	MAG4 JP9-15
1T5GT	1829		2J48	1822	
1U4	2507	DP904	2J49	3687	JP9-50B
1U5	3912		2J50	2793	JP9-50C
1V	1999		2J51	3560	
1V2	3994		2J51A	2360	JPT9-60
1X2A	5032	DY80	2J54	801	
1Z2	2510		2J56	2852	JP9-50
2-25A		AZ35	2J58	997	
2-150D	3878		2K28	1892	
2A3	1831		2K33	1786	
2A5	1834		2K41	3904	
2A6	1769		2K48	3669	
2A7	787		2N115	7010	OC16
2A/100A		D/1	2N280	7005	OC71
2AF1	790	DX4-1	2N281	7006	OC72
2AF1A	790		2N284A	7077	OC77
2B4	648	885	2S/140G	469	
2B7	1837		2S/141G	4504	
2B21	597	2X2A	2T/270K	261	HR2 R10 6305
2B22	2931		2T/450E	3587	705A
2B29	2666	829B QQV07-40	2V3	803	

VALVE	C.V.NO.	EQUIVALENTS	VALVE	C.V.NO.	EQUIVALENTS
2V3G	804		3C24	789	2T24
2V/400A	32	886A DQ2 ESU886	3C31/C1B	1765	
2V/401C	1446	4017B	3C34	941	
2V/470C	1355	4049C	3C45	372	XH3-045 1G45P
2V/471A	1449	872A	3C/250A	1034	
2V/500C	5	4049D RG4-1250	3C/270A	1252	4212E V1505 NY3-275
2V/531E	1420		3C/350E	30	4270A
2W/540E	1601	4222B	3C/351H	27	4357A
2X2	3748		3D6/1299	815	
2X2A	597	1K22	3BLP31		DH7-10
2X2/8907	3748		3BLP7		DP7-10
2X/105G	448		3W21A	2659	
2X/106G	425		3W22	2851	
2Y2	597		3W/100A	1422	
3/02AM	2230	965K	3W/150G	3735	4015A
3A	3812		3W1	816	
3A5	808	DCC90	3E29	3599	QQV5-P10
3A/105B	809		3EG1	1526	701D
3A/107A	249		3EP1	817	
3A/107B	1655		3FP7	1761	
3A/108A	1653		3G15		C1A
3A/108B	1657		3G/501A	2215	TK2/6 XR1-6400
3A/109A	1671		3GP1	516	
3A/109B	1663		3GRK	442	
3A/110B	1659		3H/151J	2516	2C39A
3A/135A	2598		3J1	1788	
3A/141A	1639		3J/121E	28	ACT9
3A/142A	1641		3J/160E	2245	
3A/144A	1694		3J/170E	2905	
3A/145/J	16		3J/195E	5071	
3A/146J	53		3J/260E	2908	
3A/147J	82		3JP1	2945	
3A/148J	88		3JP7	2869	
3A/167H	5112	437A	3JP12	2816	
3AE	3812		3KP1	3733	
3ALP1	2175	DG7-5	3NP4	1737	MW6-2
3AMP1	2431	1XG7-32	3P/270B	2950	
3AP1/9061P1	602		3Q4	818	N18 DL95
3B4	2240	DL98	3Q5GT	819	DL33 N16 N15
3B7/1291	811		3Q84E		4220C
3B21	2959		3Q/120E	1605	4013C
3B22	3815		3Q/150E	1450	4228A
3B24	812		3Q/180E	1603	4014A
3B24W	2858	1K24	3Q/181E	1600	4006A
3H24WA	4021		3Q/191E	570	
3B26	3575		3Q/195E	570	
3B28		RR3/250 ESU130 2H28 GXU1	3Q/211E	1604	SS1971
3B29	3698	1K29	3Q/212E	1797	4081A
3B/100B	1689		3Q/213E	1734	
3B/102B	84		3Q/220E		4009B
3B/151A	1648		3Q/260E	446	
3B/200B	1047		3Q/293E	1447	4030D
3B/240H	2214		3Q/310E	3873	
3B/241H	5160		3RP1	3941	
3B/252B	1688	4033L	3S4	820	N17 DL92 1P10
3B/254D		6BD4A	3V4	2983	1PL DL94 N19
3B/351A	1468	4043C	3V/280B		VLS342A
3B/400A	1452	4300A	3V/281B		4039A
3B/401J	127		3V/290A		57
3B/501A	449		3V/390A	5027	PL5559 XG1-2500
3B/504B	1288	4304CB	3V/390B	5828	FG57
3B/850A	25	4242A ES85	3V/390E	5207	
3B/851A	1620		3V/420B	2126	
3BP1	814		3V/500A		EST102
3BP1A	2934		3V/530E	477	
3C4		DL96 1P1 N25	3V/531E	477	
3C6		XXB	3W4		3S4SF
3C22	999		3WP1	3946	DG7-36
3C23		PL3C23 TQ1/2	3WP11		DB7-36

VALVE	C.V.N.O.	EQUIVALENTS	VALVE	C.V.N.O.	EQUIVALENTS
4-65A	1905	QY3-65 3P65	4SH	1126	
4/100BK	1264	FW4-500 U18	4SHA	825	
4-125A	2963	4P21 QY3-125 4D21 Q160-1	4T16		100TL
4-240A	2131		4T17		100TH
4-250A	2964	QY4-2505D22 Q400/1 5P22	4T100		813
4-400A	3879	QY4-400 5P23	4THA	826	
4-1000	3880	7P25	4TPB	828	
4A1	821		4TPP	829	
4A/137B	243	4M15A	4TSP	830	
4B13	26	813 QY2-100	4X150A	2519	QV1-150A 4F15R
4B22	2936		4X150G	3893	QV1-150G
4B24	822		4X150D	3991	QV10150D 4F20R
4B25		WL670A	4X250B	2487	4H/160M
4B26	1836	1163	4X500A		QBL4/800 QY4/500A
4B28	2777		4XP	1168	ACO44 PP3/250 FX4
4B30	934		5/62CM		5BHP1
4B31	3510		5/62FM		5BHP11
4B32	2518	RR3-1250 DQ4 GX1/2	5A6	2360	
4B35	926		5A/102A	3784	
4B36	2779		5A/102D	1724	329A
4C21	2576		5A/105	1726	
4C22	2987		5A/128B	244	4046A
4C27	92		5A/136A	2619	4328A
4C30	933		5A/136D	245	4328D
4C35	1787	XI18-100	5A/150A		QV05-25 807 4310A
4C/100A	2756		5A/156M	1136	EF54
4C/800E		4278A	5A/157D	350	
4CS1A	1267		5A/159N	2000	
4D1	1109		5A/163K	1635	
4D21	2963	Q160/1 4-125A	5A/164K	3536	
4D32	3543		5A/170K	3998	E180F
4E27	824		5A/172G	4501	
4EP1		DH10-94	5A/173G	4502	
4FR15R	2519	4X150A QV1-150A	5A/174G	4503	
4G23		3C23	5A/175G	4506	
4FP7		5087	5ADP1	5035	DG13-34
4G8	7028		5ADP7		DP13-34
4G63		5563	5ADP11		DB13-34
4G93		393A	5AL5	1377	GZ34
4G/280K	797	2D21 20A3 EN91	5AP1	832	
4G/401A		3D22	5B1	1018	Z21
4H22		4B32 3B22	5B21		1164
4H72		872A	5B/100A	1369	
4H73		673	5B/151A	1080	
4H88		8008	5B/152D	2659	3D21A
4H/135M	2519	4X150A QV1-150A	5B/250A	124	QV05-25
4H/136M	3991	4X150D QV1-150D	5B/251M	428	
4H/182E	1883		5B/252M	391	
4J/26	3779		5B/253M	499	
4J27	3780		5B/254M	428	
4J28	3781		5B/255M	391	
4J29	3782		5B/256M	499	
4J30	3783		5B/257M	2220	
4J31	1914		5B/258M	2347	
4J33	1916		5B/300B	834	
4J34	1897		5B/502A	1096	
4J35	1898		5B/600A	1081	4052A
4J50	2284	JP9-520	5B/700A	631	828
4J52	3569	JP9-80	5BKP1		DH13-97
4J52A	5018	JP9-80A	5BP1	601	
4J53	513		5BP4/1802P4	836	
4J54	3947		5C22	2520	XI16-200 HT415
4J55	3948		5C/100A	26	813 QY2-100
4J56	3949		5C/450A	1506	ESP450
4J57	3950		5C/500		P300-1
4J58	3951		5CP1	600	
4J78	3953	JP9-250A	5CP1A	2191	DG13-2
4PR60A	252	QV20-P18	5CP7	838	
			5D21	2814	P552/1E Q160-1 4-250A

VALVE	C.V.NO.	EQUIVALENTS	VALVE	C.V.NO.	EQUIVALENTS
5D22	2964	Q400-1	6AF6G	847	
5D/100A	1627		6AG6	1438	EL33 KT61 6M6
5F22A	2131	6156 QY4-250	6AG7	1882	
5FP4A		MW13-35	6AH6	2521	
5FP7(Special)	1789		6AJ5	995	
5FP7	718		6AJ7	849	6AG7
5FP7A	3959	MF13-1	6AJ8	2128	ECH81 6C12
5FP11	5070	MW13-1	6AK5	850	EP95
5B4	840		6AK5W	2877	M8100
5H69A		869B	6AK6	1762	
5HP1	3583		6AK7	1784	
5HP1A	3583		6AK8		EABC80 6LD12
5J23	542		6AL5	283	EB91 6D2 D77
5J26	3602	JNT1-500W	6AL5W	2882	M8212 5726
5J29	3842		6AL7	3708	
5J30	3843		6AM4	5073	
5J31	5844		6AM5	136	EL91 N144 7D9 6P17
5J32	1538		6AM6	138	EP91 6F12 Z77
5J59	3952		6AN4	3989	
5J/180E	445		6AN5	2854	
5JP1	1791		6AN7		ECH80
5JP2A	3918		6AQ4	417	EC91
5L/444	311		6AQ5	1862	EL90 N727
5LP1	741		6AQ5W	2883	M8245
5MP1	740		6AQ6	2937	
5R4GY	717		6AQ8		ECC85 6L12
5R4WGY	2835		6AR6	3613	
5TO1A	1868		6AS6	2522	
5T4	1846		6AS6W	2884	M8196
5T21		250TH	6AS7G	2523	A1834 6080
5T33	635	833A TY4-350	6AT6	452	EB090 DH77
SU4G	575	U52	6AU6	2524	EP94
5U4GT	841		6AU6WA	4023	
5UP1		DG13-22	6AU7	5052	
5UP7	2840		6AV6	2526	EBC91
5V4	729	GZ32	6B4		6A3
5W4	1849		6B4G	851	
5W4G	842		6B5	1885	
5WGT	503		6B7	1891	
5X4	1852		6B8	1893	
5X4G	1851		6BA6	454	EP93 W727
5Y3GT	1854	U50	6BA6W	5037	
5Y3GT	1856	U50	6AB7	2527	
5Y3WGT A	4027		6BC4	5038	
5Y4GT	1857		6BD7		EBC80
5Z3	1861	U50 A274A	6BD7A		EBC81
5Z4	1864	GZ30 R52U50 GZ30	6BE6	453	EK90 X77 X727
5Z4G	1863		6BE7		EQ80
5Z4GT	2748	GZ30	6BG6	1887	
6/02K		1652M	6BH6	3909	
6/30L2		B729	6BJ5		N78
6A3	730		6BJ6	3909	
6A6	1867	HLA2 41MTL 354V ACHL	6BK8	2901	EP86
6A7	1870		6BL6	3614	
6A8	579		6BL7	5039	
6A8G	578	X63	6BL8	5215	ECP80
6A8GT	580		6EM6A	3939	
6AB4		EC92	6EM8		ECL82
6AB5/6NS	843		6BN5	3526	EL85
6AB7	873		6EM6	3616	
6AB8		ECL80 LN152	6BQ5	2975	EL84 N709 6P15
6AC5G	844		6BQ6	5040	
6AC5GT	845		6BR5	1352	EM80 65ME
6AC7	660		6BR7	2135	8B5
6AD7	1878		6BS4		EC93
6AD8		EEF81	6BS7	5086	
6AE8		X79	6BT4	3891	EZ40 UU9 66KU
6AF4	5036	EC93	6BW4		EZ81
6AP4A	5074		6BW6	2136	

6

VALVE	C.V.NO.	EQUIVALENTS	VALVE	C.V.NO.	EQUIVALENTS
6BX6	1376	EF80 Z719	6F8G	1917	
6BY7	1375	EF85 W719 6F26	6F11	1901	
6C4	133	ECH90 L77	6F13	1829	
6C4V	2842	EC90	6F14	1919	
6C4VA	4058	M8080	6F15		EF41
6C5	582	L63 6J5	6F16	3886	EF41 W150
6C5G	581		6F17	416	
6C5GT	583		6F18		W739
6C6	585		6F12	138	6AM6 8D3 EF91 Z77
6C7	584		6F19	1375	6BY7 EF85
6C8G	1896		6F20		N79 W729
6C10	3888	ECH42 X150	6F21	131	EF92
6C12	2128	ECH81	6F22		EF86
6C16		ECH80	6F32	1116	
6C21	855		6F33	329	
6C31	1581	ECH35 X65 6K8	6F33Special	2209	
6CA4	5072	EZ81 UU12	6F5OR		4X500A QY4-500A
6CA7	1741	EL34	6F6		EM84
6CB6	3995		6G5		6U5 6M1
6CD7	394	EM34	6G8	7029	
6CF8		EF86	6G6G	1926	
6CH6	2127	EL821	6G8G	856	
6CJ5	3886	EF41	6G10		FG105 XGQ2-6400
6CJ6	2721	EL81	6G45	2215	5545 XR1-6400
6CK5	3889	EL41	6H1	132	
6CK6	2726	EL83	6H5		6U5
6CL6	5041		6H6	1930	D63 EB34
6CM5	2940	EL36	6H6G	1929	D63
6CN6	450	EL38	6H6GT	1931	
6CQ6	2937	9D6 EF92	6J4	1763	
6CS6	453	EH90	6J4VA	5029	M8232
6CT7	3883	EAF42	6J5	1933	L63
6CU7	3888	ECH42 6C10	6J5G	1932	L63
6CV7	3882	EBC41	6J5GT	1934	
6CV5	5094	EL86	6J6	858	ECC91
6CW7		ECC84	6J6V	2843	
6D1	1092	EAF50	6J6VA	4031	M8081 M8212
6D2	383	6AL5 EB91 B77	6J7	1936	Z63
6D4	1949	EN93	6J7G	1935	Z63
6D6	1900		6J7GT	1937	
6D7	1776		6J8G	859	
6D8	1992		6K4	2955	EC70
6DA5	5055	EM81	6K65	860	
6DA6	5156	EF89	6K5GT	861	
6DC8		ERF89 6FD12	6K6G	1938	
6DG7		EM85	6K6GT	1940	
6DJ8		ECC88	6K7	1942	W63
6DL5		EL95	6K7G	1941	
6DR8		ERF83	6K7GT	1943	
6DS8		ECH83	6K8	1945	X61
6DU6		EF89F	6K8G	1944	X65
6DX8		ECL84	6K8GT	1946	
6E5	1906		6K25	2217	
6E8		X61	6L5G	862	
6ES6		EF97	6L6	1948	KT66
6ET6		EF98	6L6G	1947	
6EH7		EF183	6L6GA	2817	
6EJ7		EF184	6L6WGA	3618	
6F1	3841		6L6WGB	2796	5881
6F1	2939		6L7	1951	
6F5	1909	H63	6L6G	1950	KT66
6F5G	1908	H63	6L12		ECC85
6F5GT	1910		6L13	492	12AX7 ECC83
6F6	1912		6L16		ECC84
6F6G	1911	KT63	6L18	1899	
6F6G		EM84	6L19	1850	
6F6GT	731	KT63	6L34	417	EC91
6F7	9015		6LD3	3882	EBC41 DH150 DH718
6F8	1819		6LD12		EABC80

VALVE	C.V.N.O.	EQUIVALENTS	VALVE	C.V.N.O.	EQUIVALENTS
6LD13		EBC81	6V4	1535	EZ80
6LD20	1920		6V6	510	
6LY1		1652M	6V6G	509	
6M1	2747	6U5	6V6GT	511	
6M2	394	EM34	6V7G	870	
6M6		EL33 6AG6	6W2		6X2 EY51 R12 R12A
6N3		EY82	6W7G	512	
6N5	843		6X2	426	EY51 R12 R12A 6W2 U43
6N6	1954		6X4	493	EZ90 U78
6N6G	1953		6X4W	4005	
6N7	1957		6X5	573	U70
6N7G	1956		6X5G	572	
6N7GT	1958		6X5GT	574	U70 EZ35
6N8		EHF80 WD709	6X5WGT	3734	
6P5	1819		6Y3	1816	
6P7	864		6Y6G	515	
6P8		OM10	6Z4	619	84
6P15	2975	EL84	6Z5	871	
6P17	136	EL91	6ZY5G	873	
6P25	1853	KT61 6A96	6Z73	872	
6Q4	1886		7	874	
6Q5	1815	884	7A	823	
6Q7	588		7A2	1174	Pen4VA AC/Pen
6Q7GT	587	DH63	7A3	1181	PenA4 AC2/Pen KT41
6R3		EY81	7A4	1770	
6R4	1865	EC81	7A6	876	
6R6G	1960		7A7	877	
6R7	1963	DL63	7A7LM	877	
6R7GT	1964		7A8	878	
6S2	2966	EY86	7AH7		PCC84
6S2A		EY87	7AHP1	2352	DG16-22
6S7	1975		7AHP7	2498	DP16-22
6S7G	1974		7AHP11		DB16-22
6SA7	1966		7AN7	5192	PCC84 B319
6SA7GT	1967		7B	824	
6SC7	1969		7B4	884	
6SC7GT	1970		7B5	880	
6SD7GT	865		7B5E	880	
6SE5	1972		7B5LT	881	
6SF5GT	1973		7B6	882	DH81
6SG7	1978		7B6LM	882	
6SH7	594		7B7	522	W149
6SH7GT	595		7B8	883	
6SH7L	5067		7B8LM	883	
6SJ7	591		7BP7	884	
6SJ7G	590		7BP7A	3637	
6SJ7GT	592		7C4/1203A	2706	
6SJ7WGT	3619		7C5	885	N148
6SJ7Y	866		7C5LT	886	
6SK7	1981		7C6	887	DH149
6SK7GT	1982		7C6	1777	
6SL7GT	1985		7D5	1425	
6SN7	278	B65	7D6	1672	
6SN7GT	1988	B65	7D8	889	
6SN7WGT	3627		7D8S	1328	
6SQ7	1990		7D9	136	EL91 6AM5 N144
6SQ7GT	1991		7D10	2127	EL821
6SR7	867		7DJ8		PCC88
6SS7	1993		7E5/1201	2704	
6ST7	1996		7E6	891	
6ST7G	1995		7E7	892	
6T4	3808		7F7	893	
6T7G	500		7F8	2968	
6T8		EABC80 DH719	7F16	3886	EF41
6U5/6G5	504	6M1	7F25A		4-1000A
6U5G	2747	Y61 Y63	7G7	894	
6U7G	706	W63 KTW63	7H7	895	W148
6U8	5065	ECF82 6678	7H57		857B
6V3A	5021		7J7	897	

8

VALVE	C.V.NO.	EQUIVALENTS	VALVE	C.V.NO.	EQUIVALENTS
7K7	896		10FL12		UCL82
7MB1A	1880		10Y	603	
7N7	898		11E1	2798	QQV03-10
7Q7	899		11A2	2813	AC/HL/DD MHD4
7R7	900		11E2	276	
7S7		X81 X148	11E3	73	
7UP7	3639		12A/112A	1714	
7W7	902		12A5	908	
7YA	901	U82 U149	12A6	525	
7YP2	5061		12A6GT	526	
7Z4	1790	U82	12A7	909	
8A1	1124	SP4 MSP4	12A8GT	910	
8A1	1282	DG7-36	12AC5		UF41 W142
8A3	3813		12AEP6	429	
8A8		30C1 PCF80 LZ319	12AH7GT	529	
8D2	1108	SP13C	12AT6		HBC90
8D3	138	EP91 6AM6 6F12	12AT7	455	B309 ECC81
8D5	2135	6BR7	12AT7WA	4024	M8162
8D6		6BW7	12AU7	491	B329 ECC82
8D7		6BS7	12AV6		HBC91
8F66R		6166	12AX7	492	ECC83 6L13 B339
8G7	7030		12AX7	3650	
8HG8		PCF86	12B8GT	911	
8T21		9C21	12BA6	1928	HF93
8T21R		9C22	12BE6		HK90
8T71R		5671	12C8	531	
8T92		892	12C8GT	3827	
8T92R		892-R	12DP7	913	
9/01	254		12DP8	914	
9-3	368		12E1	345	
9A1	1172	VMP4G	12E12	398	
9A8		PCF80 LZ319 30C1	12FP7	915	
9AB4		UC92	12H6	916	
9AK8		PABC80	12J5	534	
9AQ8		PC85	12J5GT	535	
9D2	1106	VP1322	12J7GT	917	
9D5	1053		12K7GT	918	W76
9D6	131	EP92 6F21 W77	12K8	703	X76
9HP7	905		12K8GT	3927	
9JP1	1783		12L01A	2162	
9LD1	254		12MW3		C12D
9LO1A	464		12MW3A		C12B
9LP7	2789		12Q7GT	547	
9MD6	262		12S7		UAP42
9MO6A	2108		12SA7	537	
9MW5AX	2127		12SA7GT	538	
9PK5	109		12SC7	540	
9T71		5770	12SF5	919	
9U8		PCF82	12SF5GT	920	
10	603		12SF7	921	
10Special	906		12SG7	694	
10C1		X145 X118	12SH7	922	
10C14		UCH81 X119	12SH7GT	3651	
10D1	1300	DD620	12SJ7	697	
10D2		UAA91	12SJ7GT	698	
10D3	1419		12SK7	543	
10F1		Z145	12SK7GT	544	
10F9		W118 W145	12SL7GT	924	
10F18		UF89 W119	12SN7GT	925	B36
10FD12		UBF89	12SQ7	546	DH76
10KP7	3693		12SQ7GT	547	
10L14		B109 UCC85	12SP7	3655	
10LD3		DH118 DH142 UBC41	12SR7	700	
10LD11		DL145	12SW7	3666	
10LD12		UABC80 DH109	12SX7	3697	
10LD13		DH119 UBC81	12SY7	3668	
10M2		UM4 UMD5	12T01A	1869	
10P13	1977	N118 N145 UL41	12T03A	2328	
10P18		N119 UL84	12XB25		68510

VALVE	C.V.NO.	EQUIVALENTS	VALVE	C.V.NO.	EQUIVALENTS
12XPR4A		MW31-74	24A	936	
12Y4	523		24B1	6008	
12Z3	927		24B2	339	
13D1	423	25SN7GT	24C3	125	
13D2		6SN7GT	24G		3G24
13D3	2212		25A6	549	
13DHA		11D3	25A6G	550	
13E1	2377		25A7GT	937	
13PGA		15D1	25B6	939	
13SPA	929	8D2	25B8GT	940	
13VPA	706	2D2	25E5		FL36
14A7	3935	12B7	25L6	552	
14AF7		XXD	25LG6	551	
14AHP4A		AW36-80	25L6GT	553	KT32
14F7	930		25SN7GT	423	
14K7		UCH42	25T	941	
14KP4		MW36-24	25TG	789	
14L	1087		25Y5	942	
14L7		UBC41	25Z4		U31
14LP4		MW36-24	25Z5	555	
14R7	3937		25Z6	558	
14S7	3936		25Z6GT	559	
15	391		26	943	
15A	986		26A7GT	3577	
15A2	3576	MX40 41MPG A8QA	26AE6		PY86
15A6		FL83	26D	2727	
15B	326		26J	2786	
15CW5		FL84	27	944	
15D1	2956		27M1	337	
15D2	1107		28D7	945	
15DQ8		PCL84	28D7GT	946	
15E	933		29C1	430	
15LO1A	1744		29D	2728	
15MW3A		C15B	30	604	
15R	934		30TWIN	1780	
16A5		PL82 30P16	30C1		PCF80
16A8		PCL82	30CA	987	
17(tby)		PL5557	30C12P1	1746	
17BQP4		MW43-69	30D5	1860	
17BTP4		AW43-80	30E7/P1	400	
17C8		URP80	30E8P1	2216	
17Z3		PY81	30HM/HD	1140	
18GV8		PCL85	30L1		PCC84 B319 7AN7
19BR5		UM80	30P16		PL82
19FL8		9BP89	30P18		PL84
19D3		UCH81	31	947	
19D8		UCH81	31A3		UY41 U142
19E2	265		31C2	2965	
19G3	277		32	711	
19G6	371		32A	951	
19H1	121		32E	957	
19H4	2180		32G	953	
19H5	490		32J	958	
19SU		PY82	32L7GT	984	
19X3		PY80 U309	33	949	
19Y3		PY82	33A/100A	1750	
20A1	1424	TH4B	33A/138M	18	7074A
20A2	1848		33A/158M	1884	
20A3	797	2D21	33B/152M	1540	
20CV	5120		34	1751	
20D3		12AH8	34E	1751	
20K	1379		35/51	1752	
21/2	3584		35A5LT	1753	
21A6		N152 N359 PL81	35L6	561	
21CJP4		MW53-20	35L6GT	562	
21CLP4		AWJ3-80	35T	668	DET18
22/11MKA	439		35TG	1754	
22S/200A	1451	4724A	35Z3	564	
23D	1588		35Z3LT	726	

10

VALVE	C.V.N.O.	EQUIVALENTS	VALVE	C.V.N.O.	EQUIVALENTS
35Z4GT	2500	U76	57	612	
35Z5	568		58	613	
36	1775		59	2538	
37	606		59A3	2962	
38	712		59A4	2692	918
38A	712		59D		WL928
38A3		UY85	59TAV3		WL917
39/44	1771		60A3		WL920
40	2501		61A3		WL930
40PPA		7D3	61BC	1979	
40SUA	1276	1D5	61DV3		WL929
40Z5	2530		61P	2539	
40Z5GT	2530		62BT	1745	
41	608		62DBT		EBC41 6LD3
41DS	1131		62TH		ECH42 6C10
41FP	2520	ML4	62VP		EP41
41MH	2503	MH41	63D	2540	
41MFI	1037	354V	63ME	2747	6M1 6U5G
41MIL	2504	354V	63DS	2731	
41MLF	1038		63SPT	1091	
41MP	1458	ML4	63TP		ECL80
41MFG	2505	MX40 FC4 15A2 X42	64SPT		EP80
41MPT	2506		64SU	135	
41NRC		AC2HL	65ME		EM80
41MSG		NS4B	66KU		EZ40
41MTL	1117	354V	67PT		EL41
41MMSG		SP4	70B1	470	
41MXP	1122	PA1	71A	2541	
41STH	2508	AC/TH1	71A3	1764	
42	609		72	709	
42E	609		72R	709	
42MP/Pen	1181	PenA4 7A3 PT4 KT41	73	2543	
42MPT	1325		73R	2543	
42OT	2511	PenA4 7A3 PT4	75	614	
42OTDD	2521	AC2 PenDD DDP4B	75B1	824	QS75/20
42SPT	1444		75C1	4084	
43	2514		76	615	
43E	2514		77	616	
43IU	1039	R2 UU5	78	2544	
44A/160M	415	TT15	78DS	1328	
45	610		79	2545	
45A5	1977	UL41	80	617	
45B5		UL84	81	2546	
45DS	2528		82	1773	
45IU	2529		82AV4		WL919
45SP	596		83	618	
45Z5GT	2530		83V	2547	
46	2531		84	2548	
47	1772		84/6Z4	619	
49	2532		84A3		WL923
50	2533		85	2549	
50BH8		UCL82	85A1	431	OE3
50C5	1959	HL92	85A2	449	QS83/3
50L6G	2534	KT71	85A4		WL928
50L6GT	571		88D	2185	
50Y6GT	805		89	833	
52KU	1863	5V4	89D	2193	
51	487		89J	2750	
51A3		WL927	89Y	833	
52CG	2986		90AG	2270	
53	2535		90AV	2132	
53A	2536		90CG	2133	
53KU	378	U54	90CV	2134	
54KU	729	GZ32	90EG4	1587	901A
54NCP11	2885		95A1	286	
55	2537		100B1	1199	
55CG	405	927	100R	2967	8020
55N3		UY82	100TH	2552	
56	611		101D	1778	3A/141A

VALVE	C.V.NO.	EQUIVALENTS	VALVE	C.V.NO.	EQUIVALENTS
101P	2553		220LP	1313	
102D	1779	3A/142A	220LPT	1195	
104D		3A/144A	220OT	1118	PM2A
104V	1161		220P	1020	PL2
105		PL105	220PA	1022	LP2
108C1	1833	OB2	220PT	1051	
111A	2554		220RC	1312	
112	1774		220SG	1018	Z21
116Pen	1337		220TH	1082	H24
117L7GT	2556		220VS	2582	PM12M
117N7GT	2557		220VSG	1028	PM12M
117Z6GT	2558		225DU	1454	
120A		4120A	228A	734	4228A
121A	2560	4121A	230XP	1023	P2
121K		C12FM NW53-80	231D	2584	
121VP		UF41	238B		PL5555
122A	2561		239	1771	
129B	2950		240B	2586	
141DDT		UBC41 10LD3	240QP	1035	QP230
141TH		UCH42	242A		ES85
143D	557		242B		4242A
150B2	2225	6354	242C	2587	4242A
150B3	287	QS150/15	244A	2588	
150C2	1832	OA2	244V	1038	354V
150C3	216	OD3	249A		2V/400A
150C4	1832	OA2	250TH	2589	
152RA	3878		250TL		WL806
154V	1037	MHL4	250TL		WL806
161	708		256B	2592	
164V	2562	MHL4	257A	2593	
171DDP		UBF80	258B	2594	
173K		NW43-69	259A	2595	
185BT	1980		262A	2597	
200	2988		264A	2598	
202	1200		264C	2599	
202STH		TH2321	267B	2600	
203A		4242A	270A	30	4270A
203B	2986		271A	2601	
204A	2563		272		PL5557
205D	1749	3B/151A	272A	2602	
205E	2566	3B/151A	274A	2602	4274A
205F	2567		274B	684	
210DET	2569	HL2	275A	2604	
210DDT	1044	TDD2A	278A	4278A	
210HF	2570	PM2HL	279A	669	
141K		MW36-24	282A	2065	
172K		MW43-69	293A	3829	
210HL	2571	PM2HL	296A		WL849
210HPT		KTS Pen220	300A	2608	4300A
210LP	1021		300B	2609	
210PG	1043	FC2	302THA		TH2321
210RC	2977	HL2	303	2610	
210SPG		FC2 X22	303A	2986	
210SPT	1049	Z22	304	1202	
210VPA	2574	W21	304TH	2611	
210VPT	1083	W21	304TL	3580	
210VPT	171		305D		WL801A
211	620		307A	2612	
211	2576		310A	2613	
211H		T100-1	310B	1781	
212E	2577	4212E MX3-275	311		4242A 242B 203J
212K		MW53-80	311A	2614	
215P	1019	PL15	311CH		T100-1 211H
215SG	1018	PM12M	311SU		UY41
218	2579		313C	2615	4313C
220B	1032	B21	314A	2616	
220IPT	1333		316A	683	
220C	2580		322A	623	
220HPT	1118	PM22A	323A	2617	

12

VALVE	C.V.N.O.	EQUIVALENTS	VALVE	C.V.N.O.	EQUIVALENTS
327A	2618		610XP	1154	
327A	926		615	3506	
328A	2619		616		KT66
329A	2620		635P	1208	
330B	2621		644	670	
331A	2622		648P1	746	
332A	2623		651		PL5552A
332Pen	1401	CL33	652		PL5551A
337A	2624		653B	666	
338A	2625		657		PL5551A 652
340A	1782		672		3V/390A
346A	2626		676		3V/490A
349A	2726		700A	689	
349B	2628		700B	695	
350A	2629		700C	696	
350B	621		700D	699	
351A	2630		701A	677	
354B	1173	244V A30D AC/HL	702A	678	
351B	2630		703A	679	
352A	2631		705A	3587	
354A	2632		706A	3588	
357A	691	4357A	707A	3589	
357B		3C24	707B	1768	
362A	2633		708A	3590	
367	2634		709A	2652	
368A	710		710A	62	
371B	3511		713A	3593	
375A	2636		714AY	2653	
388A	2637		715A	2654	
393A	2638		715B	2655	P535/1E
394A	2639		715C	598	
400TDD	2521		717A	2594	
401A	967		719A	3596	
401CAHA	389		720C	3907	
402Pen	1672		721A	3595	
405BU	2640		722A	3596	
408A	2205		723A	720	
408BU		DW2	723A/B	1795	KS9-20
408C	2211		724A	2656	
410LP	1152		724B	1793	
410PT	1167		725A	722	
415XP	1154		726A	676	
417A	2642		726B	3597	
420T	2511		726C	3644	
420XP	1040		729A	539	
428T	812		731A	850	
431U		R3	732A	812	
436A		A2674	800	2657	
437A		3A/167M	801	621	
441U		R3	801A	621	
442BU	1796	R2 DW4-350	802	622	
446	3725		803	623	
446A	932		804	624	4052A
446B	687		805	625	T100-1
446C	2272		806	2658	
450TH	2572		807	124	QV05-25
451PT		UL41	807W	3809	
460BU	2644	R3 DW4-500	808	626	
464A	688		809	2660	
471A	3586		810	627	
484V	1678		811	628	
506BU	2645	DW2 U10	812	2661	
522	999		813	215	QY2-100
532	2647		814	629	
532A	2648		815	2663	
541U		UL41	816	724	
560BU	2645		822	264	
576	3749		825	2665	
578	2967		826	630	

VALVE	C.V.N.O.	EQUIVALENTS	VALVE	C.V.N.O.	EQUIVALENTS
828	631		946A	1521	
829A	3599		953	738	
829B	2666	QQV07-40	954	1095	
830B	702		956	649	
832	1088		957	2700	
832A	788	QQV04-15	958	650	
833	635		958A	2601	
833A	635	TY4-350	959	1794	
836	636		965K	2230	
837	637		966		DG4/1000G
838	638		966A		DQ2
841	906		967		PL5557 TQ2
843	639		972	642	TQ4
845	735	T100-1	972A		DQ4
845W	3646		973		TQ4 873
846	2668		992	651	
849	2669		1000UHF		WL1000T
849H	2670		1005	2874	
851	2671		1043	1097	
852	2672		1048		68530
857		DQ7	1163		68506
857B	2673	DQ7	1164		68508
859	2779		1201	2704	
860	640		1201A	2704	
861	641		1203	2705	
863	2674		1229	711	
864	2675		1231	2707	
865	2676		1252W	2464	
866	32		1257		FL5559
866A	32	RG3-250A	1267	1992	Z300T
866JR	2679		1282	902	
868	2680		1294	2709	
869B	2723	DQ6 ESU111	1295		WL632B
872	642		1299	815	
872A	1449	DQ4	1378X	761	
872AX		DGC5/5000GB	1500T	2711	
873		TQ4	1547	1289	
874	643		1561	1064	DW4-500
875A	644		1601A	1385	
876	645		1601ABC	440	
878	2683		1601E	440	
879	597	2X2	1603	652	
880	2685	565R	1608A	1391	
884	647		1609	2712	
885	648		1610	2713	
889	2686	ESW5000	1611	653	
889R	2687	ESA5000	1612	654	
891	2688	ESW891	1613	655	
892R	904		1614	2714	
893R	2689		1616	656	
901A	1587		1619	723	
902A	2310		1620	657	
902M	2244		1622	658	
902P1	3600		1625	659	
904V	2690	M141	1626	1755	
905	736		1629	1756	
906	737		1630	2715	
906P1	602		1637	1052	
908A	2310		1642	875	
913	2691		1646	966	
918	2692		1652M	1530	
919M	420		1655	2716	
927	405	550G	1658M	307	
929	2693		1672		WL172
930	2694		1701		PL5557
930B	702		1729	2717	
931	2695		1754	3618	5948
931A	2696	27M1	1805P1	832	
935	2697		1806P1	817	

14

VALVE	C.V.NO.	EQUIVALENTS	VALVE	C.V.NO.	EQUIVALENTS
1908P1	1783		4030D	1447	
1813P7	884		4033A	1220	
1814P1	790		4033AF	2743	
1821	1443	DW2	4033L	1688	
1851	599		4043C	1448	
1852	660		4045A	243	
1853	1873		4046A	244	
1861	1039	IW4-500	4047B	1600	
1867		IW-1-350 R2	4049C	1355	
1876	2718		4049D	5	AH221
1877		HVR2	4050AG	2745	
1904		3V/390A	4052A	1081	
1907	3521	XH25-500	4053	950	
1909A	2291		4053A	967	
1924	2719		4056A	1025	
1960	1792		4059A	1611	
1971		WL207	4060A	1030	
2000		68506 1163	4061A	1369	
2000T	998		4062A	1568	
2050	2565	EN32 20A2	4064A	2746	DQ4A
2051	1798	20A2	4064B	1449	872A DQ4
2100A		WL8020	4066A	1181	
2211BRA	439		4069A	1372	RK28
2218BRA	439		4074A	18	
2269Y	2463		4074B	1573	
2501A3	602		4077A	33	
2505A5	740		4078A	1420	
2511A5	741		4078GA	447	
2529A5	1791		4081	2749	
3025	2722		4081A	1797	
3069		866A DCG4/1000G	4313C	75	
3070		872A DCG5/5000GB	4316A	683	
3071	2723	869B	4317	1201	
3072		WL857B	4328A	2619	
3078		DCG9/20 6508	4328D	245	
3209	2725		4357A	27	357
3220K	954		4378	1254	
3226D	2727		4407	1084	
3226J	2786		4409	995	
3229D	2728		4410	1087	
3263DS	2731		4412E		V1505
3530	405		4502	1086	
3572		866A DCG4/1000G	4602	956	
3861B		QEI.150	4605	1085	
3874A		QB2-250 813	4606	2764	
3885		DCX4/1000	4607	690	
3945		845	4608	1511	
3951	2733		4671	1059	
3982	2680		4672	4695	
4003A	2743		4673	2765	
4004B	2329		4687	2766	
4006A	1600		4690	2767	
4008A	1601		4710A	677	
4011A	1415		4702A	678	
4012A	1445		4703A	679	
4013C	1605		4705A	3587	
4014A	1603		4706	3588	
4015A	2735		4707A	3589	
4017B	1446		4708A	3590	
4018G	1733		4713A	3593	
4019A	249		4717A	3594	
4019B	1655		4717A	3594	
4020A	1653		4712A	3595	
4020B	1657		4722A	3596	
4021A	1671		4726A	676	
4021B	1663		5215A	1081	
4022AR	1664		5517	2609	CK1013
4022B	1659		5544	2210	XR1-3200
4030A	1447		5545	2215	XR1-6400 5686
			5556	2640	

VALVE	C.V.N.O.	EQUIVALENTS	VALVE	C.V.N.O.	EQUIVALENTS
5557	2957	XG5-500	5866	1924	TB2.5-300 TY2-125
5559		XG1-2500 571	5867	1350	TB3-750 TY30250
5586	3611		5868	1351	TB4-1250 TY4-500
5620		4004B	5870		DCG12/30
5626	298		5876	2972	
5628	2952		5886	495	
5629	2662		5894	2797	QQV06-40A
5632		FL5632 C3J	5894A	2797	
5636	3928		5895	1835	QQC04-15 QQZ04-15
5641	473		5896	2698	
5642	2241		5902	4029	
5643	474	EM70	5915		EH900
5644	3987		5920		E90CC
5647	3916		5923		TBW6/6000
5651	2573	QS1209	5924		TBL6/6000
5651WA	4008		5932	3899	
5654	4010	6AK5WA	5933	3517	
5656	2970		5939	3545	
5657	3958		5948	3518	
5663	3610		5949	3521	XH25-500
5664	1765		5962	2383	
5667	2687		5963	3900	
5670	4013		5976		KST-85A
5672	2238	DL620	6002	3902	
5675	2971		6005	4019	M8245 6AQ5W
5676	2239		6007		DL67
5678	2254	DF60	6008		DF67
5683	2574	6014	6021	3986	
5684/C3J/A	2753	6011	6024	3539	
5685/C3JA	2574		6027	3997	JP9-15
5686	3612		6038	3628	
5687	2578		6057	4004	
5691	3705		6058	4025	
5692	3942		6059	4006	
5693	3699		6060	4024	M8126
5696	3512	EN92	6061	4043	
5702	3895		6062	4039	
5704	2874		6063	4005	
5718	3930		6064	4014	
5719	4008		6065	4015	
5725	4011	M8196	6067	4003	M8136
5726	4007	EAA901S 6AL5W	6073	2903	
5727	4018	2D21	6074	4028	
5749	4009	6BA6W	6075		KFW5/3500
5750	4012	6BE6W	6076		KS7-85A QB15/3500 CR1100
5751	4017		6077		TBW12/100 TY12-50A
5755	3755		6079	3522	QY5-500
5762	BTU2-1		6080	2984	
5763	2129	QV03-12	6083		FE1/100
5771		BW165	6084	2729	E80F
5783	3933		6085		E80CC
5783WA	4066	M8190	6088	2699	
5784	3986		6095	4019	
5787	3897		6096	4010	
5796	3706	XR1-1600	6097	4007	
5799	2678		6100	4022	
5799	2678		6101	4031	6J6WA
5800	2730		6106	2996	
5814	4016		6111	3961	
5814WA	4032		6117	3906	
5823	5122	Z900T	6130	3629	3C45
5829	3998		6131	3632	
5840	3929		6132	4055	
5842	3789		6135	4022	
5846	2859		6146	3523	QV06-20
5847	3905		6155	2130	QY3-125
5852	3943		6156	2131	QY4-250
5855		XR1-12	6158	4068	
5861	273	ED03-10	6161	3901	
			6187	4011	M8196

VALVE	C.V.NO.	EQUIVALENTS	VALVE	C.V.NO.	EQUIVALENTS
6189		12AUTWA	7457	1070	
6199		150AVP	8001	824	
6201	3508	ECC801S	8003	2768	T100-1
6205	2432		8008		DCG5/5000GS
6218		E80T	8008AX		DCG5/5000GS
6227	E80L		8011	62	
6252	2799	QQV03-20A TT20	8012	662	
6261	2901	EF86 Z729	8013A	716	
6268	1787	4C35	8016	541	
6279	2520	5C22	8020	2967	RY12-100
6291		150AVP 6199	8021	3587	
6305		2T/270K	8022	944	
6354	2225	150B2 QS1200	8023	933	
6360	2798	QQV03-10	8025	663	
6370	5106	E1T	8025A	3915	
6373	2105	DL70	8026	92	
6374	2235	ET84	9001	1757	
6375	2295	DC70	9002	664	
6391	476	EF74	9003	665	
6410	3903		9004	666	
6488	466	EF73	9005	667	
6489	469	EA76	9006	2967	
6516	4063		9901		5867
6538	2236	Z800U	9903		5894 B1135
6539	2255	X801U	13077	2770	
6550		EL34 KY88	38116		1163
6574		EN32	38166		DCG4/1000G
6617		TBW12/25 TY12-25W	38217		FL5557
6618		TBL12/25 TY12-25A	68503	2773	
6627		QB2WA	68504	2774	
6686		E81L	68506	2775	1163
6687		E91H	68508		1164
6688	3988	E180P	68510	2776	
6689		E83F	68530/U600	3756	
6693		DCG6/18 RG4-3000	178148		1163 68506 38116
6700		ET51	180238		1164 68508
6778	468	EC70	189048	2777	1163
6779	2434	Z803U	189049		1163 68506
6866		ET02	217283		1164 180238 68508
6870	5121		289414		1163 189049 38116
6922		E88CC	289416		1163 289414 189049 38116
6923	5140	EA52	766766		1164 217283 180238 68508
6939	2466	QBE02-5 QQV02-6	859483	2779	
6960		QBW7/800 TY7-600W			
6961		QBL7/800 TY7-6000A			
6972		JP9-75			
6977		DM160			
7001		M8167			
7004		TBL2/300 TDD2-300A			
7028		JP9-2.5			
7034	2519	QV1-150A			
7035		4X150D			
7036		5915A			
7062		E18CC			
7090		JP2-0.2D			
7091		JP2-2.5A			
7092		TB5/2500 TY6-800			
7118		E181CC			
7119		E182CC			
7125		EF89			
7136		DCG6/18GB			
7292		JN2-2.5W			
7432	4501				
7433	4502				
7434	4503				
7435	4504				
7436	4505				
7437	4057				
7438	4508				

VALVE	C.V.NO.	EQUIVALENTS	VALVE	C.V.NO.	EQUIVALENTS
A11B		1W4-35 R2	AC/Q	1326	
A11C		1W4-500 R3	AC1S	2819	
A11D		1W4-350 R2	AC/S2	1677	SP4
A20B		2D4A	AC/S2Pen	1282	HP4101/7
A23A		TDD4	AC/SG	2822	8A1
A27D		Pen4DD	AC/SG	1190	
A30D		354V	AC/SGVM	1165	AS5124
A36B		TH4B	ACSH	1677	
A36C		TH4B	AC/SL		SP4
A40	2800		AC/SP1	2820	
A40/N3	2801		AC/SP3	2923	
A41	1175		AC/SP3RH	1430	
A50A		SP4 8A1	AC/S1VM	1165	
A50B		SP4B	AC/TP	1718	
A50M		9A1	ACT6	2825	
A50P		VP4B	ACT9	28	
A70B		Pen4VA 7A2	ACT10	2827	
A70C		PenA4	ACT14		BR140
A70D		PenA4	ACT16	1431	
P70E		PenB4	ACT17	225	
A80A		FC4 15A2	ACT19	379	
A207		ESU77	ACT22	257	
A373	1184		ACT23	288	
A800	412		ACT24	240	
A819	1698		ACT25	436	
A901	1722		ACT27	2163	
A915	1462		ACT28	2163	
A915Met	2803		ACT29	28	BR1138
A915AMet	2804		ACT30	2383	5762
A924	2805		AC/TH1	2830	TH4B
A1065M	1343		AC/VH	3788	
A1320	51		AC/VP	2269	
A1714	408		AC/VFB	2823	VP4B
A1820	409		AC/VP1	518	VP4A/5
A1834	2523		AC/VP2	2832	VP4B
A2087	2171		AC/VS	1165	
A2134	2179		AC/Y	1174	
A2272	2318		AC/YY	1326	
A2293	4079	11C1	AC/Z	1181	PenA4
A2426	4082		AD/P4	1198	
A2521	2453		AF3	2833	
A2688	4081		AF350	1252	
A4501		QE06-50	AFH202	12	
A4229	824		AFX203	2868	
ACO44	1168	P12/250	AFX212	1949	
AC2/HL	2806		AFX234	5023	
AC2/HLMet	2807		AG866A		DCG4/1000G
AC2/Pen	2808	PenA4 7A3	AG872A		DCG5/5000GB
AC2PenDD	519	PT4D DN41	AG8008		DCG5/5000GS
AC/4Pen	1326	Pen4B	AGR9950		5869
AC/5Pen	2809	PT10 N41	AGR9951		5870 DCG12/30
AC/5PenDD	1196		AH200	2168	
AC/Pen	1189		AH201	32	ESU866
AC/7	1683		AH205	532	857B
AC104	1161		AH211	532	GU24
AC/DD	1170	SD41	AH213	2732	869B
AC/DDT	2813	TDD4	AH217		DCG5/5000GB
AC/HL	2811		AH221	5	
AC/HLMet	2812	354V	AH238	1629	
AC/HL/DDD	2813		AL1	159	
AC/HL/DD		TDD4	AL22-10		2273P
AC/HP	1282	SP4	AL60	9	
AC/L	1732		AN1	1128	
ACP	2815		AP4	175	
AC/P	1179		APP4A	1683	7A2
AC/Pen	1174	P4BA 7A2	APP4B	1181	7A3 PenA4
ACPT	2818		APP4C	1684	
AC/P4	207		APP4G	2836	
ACPT8	2818		APP4G	2837	

18 VALVE	C.V.NO.	EQUIVALENTS	VALVE	C.V.NO.	EQUIVALENTS
APP4E		PenB4	B204R		X2818
APV4	1039	1W4-350 R3	B2049		X2918
APV4100		1561	BA9-20	2393	
AR63	3710		BD78	2125	
AR300	2839		BLC/1C	433	
AS4120		SP4	BK24		PL5552A
ASGO4A		ML1267 Z300T	BK34		PL5553B
ASG5017		PL3557 TQ2	BK42		PL5551A
ASG5023		PLJC23	BK44	1742	
ASG5025		PL3C23	BK46		PL5555
ASG5121		PL2D21	BL63	1102	
ASG6011		PL5684 C3JA	BOLO14	984	
AT4	1171		BPM04		6AQ5
AW43-80		17BTP4	BR1	692	
AW53-80		21CLP4	BR29	2687	
AX4/125A		6155 QB3/300	BR152	28	ACT9
AX105		PL105	BR153	2159	
AX224	1835	DCX4/1000 3B28 GX11	BR161	2322	
AX230	2518	DCX4/5000 4B32 GXU2	BR175	904	ESA892
AX9900		5866 TB25/300 T350-1	BR179	2323	
AX9902		5868 TB4/1250	BR191	383	
AX9903		5894 QQE06-40	BR191B		5762
AX9904		5923 TBW6/6000	BR1130		5736
AX9904R		5924 TBL/6000	BS4	189	
AX9906		5895 QQC04/15	BS4A	1859	
AX9905		6077 TBW12/100	BS5	233	
AX9906R		6078 TBL12/100	BS48	460	
AX9907		6075 QBW5/3500	BS52	1841	
AX9907R		6076 QBL5/3500	BS60	527	
AX9908		6079 QB5/1750	BS62	1858	
AX9909		6083 PF1/100	BS64	1743	
AX9910		6252 QQE03/20	BS82	463	
AX9911		6268 4C35	BS84	462	
AX9912		6269 5V22	BS92	461	
AZ1	2860		BS100	1219	DA100
AZ2	2861		BT5	1147	
AZ31	2862	11143	BT9	1145	
AZ32	2861		BT9A	1146	
AZ41	3892		BT9B	13	
B1C/1C	2734		BT19	1144	
B1C/1E	433		BT25	1147	
B2A	2565	2050	BT45	22	
B4B/1C	536		BT69		6786 DCG7/100B
B6	2140		BT75	489	
B6E	2141		BT79	372	
B12	494		BT83	1120	
B12E	2142		BT91		PL5544
B21	2864		BTR32	458	
B24	2143		BTR34	459	
B24E	2144		BU100/6	2867	
B30	2865		BW	1600	
B36	925	12SN7	BW129		ESW5000
B63	278		BW140	2871	CAT6
B65	278	6SN7GT	BW153	2872	CAT9
B109		UCC85	BW175		ESW892
B142	1927		C1A	2868	
B152		12AT7 B309 ECC81	C1B	1765	
B217	1021		C1C	1400	
B228	1673	PM2HL	C1K	2790	
B230	1032		C3J		PL5632
B240	1032		C3JA		PL5684
B262	1018		C6A	714	
B309	455	ECC81 B152	C9A		CRN92
B319		PCC84	C10B		UR1C V20 1D5
B329	491	ECC82	C10SS/2G	2794	
B339	492	12AX7 ECC83	C12B	2315	
B719		ECC85	C12A		CRN121
B1109	2736		C12FM		NW31-14
B1135		5867 9901	C12R	429	

VALVE	C.V.NO.	EQUIVALENTS	VALVE	C.V.NO.	EQUIVALENTS
C14HM	3535		CE91		1P37
C16GS/2G	2745		CE225		1163
C17-1A		MW43-69	CE226		1163
C17-2A		MW43-69	CE230	819	
C17-4A		MW43-80	CE235		1164
C20C		10D1	CEE305		3V/340B
C21-1A		MW53-80	CE309		FL5557 TQ2
C21KM		MW53-80	CE311		FL3C23 TQ1/2
C30B		HL13C 4D	CE866		DCG4/1000G
C36A		TH21C	CE872A		DCG5/5000GB
C50B		SP13C 8D2	CE927		3546FW/02
C50N		9D2	CF1		SP13
C70D		7D6	CF2		VP13A
C80B		FC13C 15D1	CF7		SP13
C143	26	813	CG1-C	425	
C144	2666		CG1-E	425	
C178A		5894	CG4E		2X105G
C180	788		CG14	496	
C200	2988		CK1		FC13
C203A	2986		CK502AX	385	
C243N	1118		CK505AX	443	
C866		DCG4/1000G	CK506AX	387	
C866C		DCG4/1000G	CK546DX		DL651
C872		DCG5/5000G	CK549DX		DF651
C1108	2130		CK707	2848	
C1111	427		CK1005	2874	
C1112	2131		CK5672		5672
C1123	3543	4D32	CK5704	2847	
C1133		4FR60	CK5726		5726
C7501	2869		CK5886		DF703
C17AA		AW43-88	CL4	2875	
C21AA		AW53-88	CL33	1401	
C36-24		MW36-24	CMG8	1432	
CAA322	1904		CMG22	1473	
CAR1	1601		CMG25	242	
CAR4	1602		CMG25	250	
CAT1	1600		CMG25	1472	
CAT2	1606		CTR139		872R
CAT6	2871		CR1100		6076 QBL5/3500
CAT9	2872		CR1101		6181
CAT17	533		CRM91		C9A
CAT20C	421		CRM92		C9A
CBL31	1463		CRM121		C12A
CG2		HL13	CRT4/1	2880	
CC3D	2870		CRT5/1	487	
CC3L	2266		CR176	2324	
CC81E		6201	CS2-A	103	
CC82E		6067	CS2-C	1907	
CE1		918	CS3-A	253	
CE1C	2692	918	CS3-B	1844	
CE1D	2680		CS4B	2258	
CE1E	2680		CT1-500		3V/340B
CE2	1764	1P30	CT1/2500		FL5559/57
CE3		1P31	CWS24A	1968	
CE4		1P36	CW25	1766	
CE5		1P35	CX1113	2851	
CE11V		917	CXT1	2389	
CE20	1474		CXT2	2400	
CE21		920	CY1		G2080
CE23		923	CY1C		UR1C V20
CE25	405	1P32 927	CY31	1402	
CE26		1P33	D1	1078	
CE29		1P39 929	D2	2778	
CE31V		919	D4	1037	354V
CE34		934	D41	1187	2D4A
CE59		5581	D42	557	
CE72	709		D61	1092	

20

VALVE	C.V.N.O.	EQUIVALENTS	VALVE	C.V.N.O.	EQUIVALENTS
DET18	419		DET19	18	
D63	554	6H6G	DET20	6	
D77	140	EB91 6AL5	DET22	273	
D143		12	DET23	354	
D152		EB91 6AL5	DET24	397	
D210	1021		DET25	1025	
D400	1170	SD4A	DET29	2397	
D418	1686		DF1	2907	
DA	1109	4D1	DF33	1823	1N5GT
DA30	563		DF60	2254	5678
DA41	1076		DF61	2371	
DA42		1D13	DF62	2237	1AD4
DA60	527		DF63	2433	
DA90	753	1A3	DF64	2260	
DA100	1219	ES1102	DF66	2107	
DAC1	2887		DF67		6008
DAC32	8118	1H5GT	DF70	433	
DAF70	2104		DF72	2101	
DAF91	784	1FD9 1S5	DF73	2103	
DAF96		1AH5 1FD1	DF91	785	1T4 1F3
DAG1	2		DF92	1758	1L4 1F2
DB7-36		3WP11	DF96		1AJ4 1F1
DB13/14		5ADP11	DF97		1AN5
DB13/134		5ADP11	DF904		1U4
DB16-22		7AMP11	DG4-1	5131	
DC2P	1735		DG7-5	2175	3ALP1
DC51	1		DG7-32	2431	3AMP1 5UP1
DC70	2275	6375	DG7-36	3946	3W01
DCC90	808	3A5	DG13-2	2191	
DCF60		1V6	DG1334	5035	5ADP1
DCG4/1000ED		DQ2A	DG16-22	2352	7AHP1
DCG4/1000G		DQ2	DG736		8A1
DCG5-5000GB		872A DQ4	DGP	1141	
DCG9/20		DQ6	DH	1665	
DCX4-1000		3B28 DX2	DH3-91	2302	1CP1
DCX4-5000		4B32	DH7-91		3AFP1
DDL	1691		DH110-94		4EP1
DD4	1170	2D4A	DH13-97		5BKP1
DD6	140	EB91 6AL5	DH30	1695	
DD6G	140		DH42		TDD4
DD41	1403		DH63	587	6Q7G
DD620	2889		DH63M	587	
DDA1		2D4A	DH73M	2909	
DDL4	1691	2D4A	DH76		12Q7GT
DDL13	1695		DH77	452	EBC90 6AT6
DDPP4EM	519		DH81	882	7B6
DDPP4M		Pen4DD	DH109		UABC80
DDPP6BS		EBL1	DH118		DH142 UBC4
DDPP6S		EBL1	DH142		UBC41
DDPP39S		CBL1	DH147		EBC33 6R7G
DDR2	173		DH149		7C6
DDT	2813		DH150		EBC41
DDT	2890		DH719		EABC80
DDT2		TDD2A	DH791		3AFP1
DDT4	2813	TDD4	DH817		DH150
DDT220		TDD2A	DK1	2910	
DDX52	2232		DK20		GC10D
DE5	2891		DK32	1802	1A7
DET5B	2892		DK91	782	1R5 1C1
DEQ	1156		DK2		1AC6 1C2
DER	1642		DK96		1AB6 1C3
DET1SW	2895		DL	1661	
DET3	1034		DL2	2911	
DET5	1223		DL29		3D6
DET6	1620		DL33	819	3Q5GT
DET9	2899		DL35	1805	1C5
DET10	2900		DL36		1Q5GT
DET12	1288	4304CB	DL63	2912	6R7
DET16	1363		DL64	2331	

VALVE	C.V.N.O.	EQUIVALENTS	VALVE	C.V.N.O.	EQUIVALENTS
DL66	2106		E81L		6686
DL68	2259		E83F		6689
DL69	2105		E88C		6922
DL70	2105	6373	E90CC		5920
DL71	385		E90F		6B46
DL72	387		E91AA		5726
DL73	2299		E91H		6687
DL74M		12Q7GT	E91N		PL5727
DL75	2102		E95F		5654
DL82		TB6	E99F		6662
DL91	783	1S4	E125A		6155 QB3/300
DL92	2370	3S4 1P10	E132	1643	
DL93	2390	3A4	E133	1645	
DL94	2983	3B4 1P1	E180CC		7062
DL95	818	N18 3Q4	E180F	3998	5A/170K 6688
DL96		3C4 1P1	E181CC		7118
DL98	2240	3B4	E182CC		7119
DL620	2238		E188CC		7308
DLS	190		E255		FM202
DLS10	979		E250A		6156 QB35/750
DLS19	342		E88CC		6922
DM6	2146		E130L		7534
DM70	2980	1M3	E446	1282	SP4
DM71		1M1	E707		LK7110
DM160		6977	E900		TB4/100
DN143		EBL21	E960	1058	
DO24		FX25	E960T	1098	
DO26	1178		E1024	1184	
DO30	1178	DA30	E1046	1090	
DO42		Pen4DD	E1097	1111	
DO60	1206		E1132	1111	
DP7-5	5171		E1143	1577	
DP7-91		3AFP1	E1148	6	
DP13-34		3ADP7	E1155	44	
DP16-22		3AHP7	E1161	1253	
DP61		EP95 6AK5	E1164	1091	
DP495/6		Pen4DD	E1180	1077	
DQZ		DCG4/1000G	E1189	1255	
DQ2A		DCG4/1000ED	E1190	55	
DQ4		DCG5/5000GB	E1191	12	
DQ4A		DCG5/5000EG	E1192	1501	
DQ6		DCG9/20 6508 869B	E1198	38	
DQ7		AN205	E1199	1405	
DQP	1121		E1200		TB3/1000G
DS103	94		E1209	7	
DT70	798		E1228	3	
DT436		TDD4	E1229	4	
DV32	88		E1231	52	
DV34	127		E1232	92	
DV40B	228	V246A/1K	E1235	29	
DV55	230		E1236	69	
DV56	234	V230A/1K	E1242	1510	
DW2	1443	RV120/350	E1248	8	
DW3		DW4-350 R2	E1255	40	
DW4		DW4-500 R3	E1267	41	
DW4/350	1796	RV120/350 R1	E1271	57	
DW4/500	1064	RV120/500	E1273	58	
DX144		EC56	E1287	23	
DX145		EC57	E1289	1148	
DX30		1B3GT	E1297	5	
DX70	2241	5642	E1320	51	
DX80		1X2A-B	E1323	63	
E1T	5106	6370	E1325	56	
E2D111		AL4	E1331	1510	
E80CC		6085	E1335	61	
E80F	2729	6084	E1337	78	
E80L		6227	E1342	64	
E80T		6218	E1355	1433	
E81CC		6201	E1359	76	
E82CC		6189	E1362	126	

22

VALVE	C.V.N.O.	EQUIVALENTS	VALVE	C.V.N.O.	EQUIVALENTS
E1365	114		E4412/M/9	1521	
E1368	90		E4504/B/16	1385	
E1371	105		E4504/C/16	1517	
E1373	99		E4504/E/16	1391	
E1379	79		E4504/M/16	966	
E1411	153		EA50	1092	
E1415	115		EA52	5140	6923
E1416	281		EA76	469	6489
E1417	117		EA91		6AL5
E1419	154		EAA901S		5726
E1423	406		EABC80		6AK8 6LD12 6TH
E1429	79		EAC91	137	
E1436	188		EAF42	3883	6CT7
E1453	1646		EB34	1054	6H6
E1457	257		EB41	3881	
E1458	168		EB91	140	6D2 6AL5
E1459	174		EBC3	1428	
E1465	236		EBC21	347	
E1468	172		EBC33	1055	
E1474	78		EBC41	3882	6CV7 6LD3
E1481	192		EBC81		6LD13
E1485	807		EBC90	452	6AT6
E1487	208		EBC91	2526	6AV6
E1494	191		EBF2	2925	
E1495	259		EBF32	2925	3CV01
E1496	240		EBF80		6N8
E1497	215		EBF83		6DR8
E1511	355		EBF89		6DC8 6DF12
E1516	221		EBL31	2926	
E1524	338		EBL131	2926	
E1525	290		EC31	1433	
E1531	214		EC50	2927	
E1532	1624		EC52	1137	
E1541	1716		EC53	1197	
E1563	1863		EC54	66	
E1591	181		EC55	273	
E1599	272		EC70	468	6778
E1606	278		EC71		5718
E1633	456		EC80	1886	
E1647	288		EC81	1565	6R4
E1648	135		EC90	133	6C4
E1659	543		EC91	417	6234 6AQ4
E1706	437		EC92		6AB4
E1714	408		ECC31	1285	
E1769	397		ECC32	181	6SN7GT
E1860	240		ECC33	2821	6SN7
E1935	415		ECC35	569	6SN7GT
E1938	493		ECC40	3884	
E1954	25	ES85	ECC81	455	12AT7
E1955	797	2D21	ECC82	491	12AU7
E1956	261	2T/270K	ECC83	492	12AX7 6U3
E1959	495		ECC84		6CW7
E1996	436		ECC85		6L12 6AQ8
E2204	2115		ECC88		16DJ8
E2016	1758		ECC91	858	6J6
E2018	454		ECC189	5331	
E2095	471		ECC801S		6201
E2133	2276		ECC802S		6067
E2134	2179		ECC962		E92CC
E2163	491		ECF82	5065	6U8
E2164	492		ECH3	2929	
E2221	2277		ECH22	302	
E4103/B/4	1522		ECH33	2930	
E4103/E/4	2205		ECH35	1347	6K8
E4205/B/7	1588		ECH42	2888	6CU7
E4025/C/7	1525		ECH81	2128	6AJ8
E4412/B/9	1587		ECH83		6DS8
E4412/C/9	2301		ECH113		ECH42
E4412/E/9	1529		ECL80		6AB8
			ECL82		6EH8

VALVE	C.V.N.O.	EQUIVALENTS	VALVE	C.V.NO.	EQUIVALENTS
ECL84		6DX8	EL37	586	6L6 KT66
ECR30	1588		EL38	450	6CN6
ECR35	1587	901A	EL41	3839	6CK5
ECR57	1587		EL42	3890	
ECR60	1097	1601A	EL50	2941	
ECR75	1787		EL70	471	
EE17		PL5557	EL71		5902
EE866		DOG4/1000G	EL81	2721	6C16
EE8020	2967		EL83	2726	6CK6
EF5		EF9	EL84	2975	6BQ5
EF8	1713	EF9	EL85	3526	6BN5
EF9	1427		EL90	1862	6AQ5
EF22	303	7B7	EL91	136	6AM5
EF36	1056		EL95		6DL5
EF37	358		EL360		EL36
EF37A	5080		EL821	2127	6CH6
EF39	1053	6K7GT	EL822	2382	
EF40	3885		EL861		E81L 6686
EF41	3886	6CJ5	ELC3J		TX2/3 5632
EF42	3887		ELC6J		5632
EF50	1578		ELC6J/A		TX2/6 5684
EF51	1035		EM1	2942	
EF53	1136		EM4	1434	
EF54	1136		EM31	1077	
EF55	173		EM34	394	6DC7
EF70	467	6487	EM35	1103	6U5G
EF71	475		EM80	1352	6BR5
EF72	465		EM81	5055	6DA5
EF73	466	6488	EM84		EM840
EF74	476	6391	EM840		EM84
EF80	1376	6BX6	EN30	2349	
EF85	1375	6BT7 6F19	EN32	2253	
EF86	2901	6267 6P22 6CP8 2729	EN70	474	5643
EF89	5156	6DA6	EN91	797	2D21 20A3
EF91	138	6AM6 6F12	EN92	3512	5696
EF92	131	6CQ6 6F12 9D6	EN93	1949	6D4
EF93	454	6BA6	EM91	797	
EF95	850	6AK5	EQ80		6BE7
EF96		6AG5	ES15	3853	
EF97		6ES6	ES85	25	4242A
EF98		6ET6	ES40A	2563	
EF183		6EH7	ES207	3850	
EF730		5636	E2S50M	1618	
EF731		5899	ES532	3851	
EF732		5840	ES357	27	
EF734		6205	ES450	1207	
EF861		E180P 6688	ES833	635	
EF960	5108		ES1500	1614	
EH90		6CS6	ES1500A	1614	
EHA5000	2687		ESA891	2688	
EHA2	2139		ESA892	701	
EHT1	19		ESA892C	904	
EHT15		ES1115	ESA5000	2687	
ENW3000	2686		ESG250	1031	
EK2	1426		ESP450	1506	
EK32	1057		ESU15		EHT15
EK90	453	6BE6	ESU74	74	
EL1-1C		3B22	ESU75	2943	
EL1C		3B22	ESU76	2945	
EL2	1429		ESU77	2160	
EL3C	822	4B24	ESU150	2946	
EL5B	2936		ESU200	5	4049D GU20/21
EL22	304		ESU208	1260	
EL31	2888		ESU300	2947	
EL32	1052		ESU450	1259	
EL33	2938	6AG6G	ESU866	32	DQ2
EL34	1741	6CA7	ESU872	642	DQ4
EL35	1269	6LG6	ESU1500	2944	
EL36	2940	6CM5	ESU8008		DOG5/5000S
			ESW501	1621	

24

VALVE	C.V.NO.	EQUIVALENTS	VALVE	C.V.NO.	EQUIVALENTS
ESW5000	2686		FZ9011G		90AG
ET3	541		FZ9011V		90AV
ET30	1030		FZ9012G		90CG
ET51		6700	FZ9012V		90CV
ET1000		TB4/800	G1/235G	3524	
EW2A	2139		G1/371K	2224	
EY51	426	6X R12	G5H	2247	
EY70	473		G-9		WL868 918
EY81		6R3	G10H	2173	
EY84	2235	6374 R18	G10HE	2287	
EY86	2966	6S2	G10/241E	2223	
EY91	135		G14		WL920
EZ22	346		G15F		WL927
EZ35	574	6X5GT	G20/5D		DQ6
EZ40	3891	6BT4	G24	411	
EZ80	1535	6V4	G24E	2148	
EZ81	5072	6CA4	G24H	2147	
EZ90	493	6X4	G48		1163
F2	2338		G49		1163
F60		1163	G50/1G	2208	
F123A	2949	T100-1	G60E	2149	
F129B	2950		G75/2D	3798	VR75/30
F28A	734		G75/3G	4030	
F353	642		G105/1D	686	VR105/30
F353A	642	872A DQ4	G108/1G	1833	OB2
F366A	32	866A	G120/1D	438	
F869B	2723		G120/1D	438	
F872A	642	DQ4	G150/1A	75	
F872B	642		G150/2D	216	
F892R	904		G150/4K	1832	OA2
F/2726	4049		G180/2D	2029	
F/2750	4037		G180/2M	395	QS150/45
F/5654	4050		G210/1C	212	
F/5750	4037		G240/2D	2174	
F/6057	4035		G400/1K	2194	
F/6060	4033		G400/2G	4047	
F/6061	4045		G431		DW2
F/6063	4001		G445B	1651	
F/6064	4002		G470		DW2
F/6067	4034		G2080		CY1 UR1C
F/6132	4056		G4120		DW4-500
F/6158	4069		G4120N		IW4-500
FA13	2952		GA5A	2647	
FA14	2953		GC10A	2199	
FA15	298		GC10B/S	2271	Z303C
FC2	1043		GC10/4B	1739	
FC2A	2954		GD86W/S	2321	
FC4	2955	15A2 V04	GD100A/S	188	
FC13C	2956	V013	GD100B/S	1070	
FG17	2957	5557 TQ2	GD120A/S	1110	
FG27A	2958	873	GD120A/S	45	
FG57		57	GD150A/S	216	OD3
FG67	742		GD150M/S	1832	
FG105		PL105	GDT4B	1141	
FG154		3V/390B	GD86W	2321	
FG235A		PL5552A	GET2	743	
FG238A		PL5553B	GEX406	2279	
FG271		PL5551A	GEX45/1	425	2X106G
FP54	2960		GEX54	448	
FVD7	404		GEX64	2310	
FW4/500	1254	RV200/600	GEX66	2290	
FW4/800	31		GEX402	2902	
FX215	2203	GHT1	GEX541	5104	
FX129	2520		GHT1	2203	FX215
FX225	1787		GHT2	2418	
FX227	372		GL446	3725	
FX229	3521		GL446A	932	
FX231	2993		GL446B	687	
FY		FM24M	GL455	2789	

VALVE	C.V.N.O	EQUIVALENTS	VALVE	C.V.N.O	EQUIVALENTS
GL464	3604		HED	1044	TDD2A
GL464A	688		H12	2978	
GL471A	3586		H30	2979	
GL532	2647		H42	1182	HL4G
GL572		2C39A	H45	372	
GL592	1903		H63	1073	6F5G
GL806	2658		H210	1673	FM2HL
GL868	2680		H410	2981	
GL889R	2687		H610	2982	
GL892R	904		HA1	1171	
GL918	2692		HA2	1059	
GL927		3546PW	HAA91		12AL5
GLE10000/25/1		DCG4/100ED	HAD	1419	11D3
GLE20000/2.5/10		6508 DCG9/2	HBC60		19T8
GL2050	2565		HBC90		12AT7
GL8020	2967		HBC91		12AV6
GL8023	933		HD14	1818	1H5G
GLY1		1652M	HD22		TDD2A
GM1B	2149		HD24	2985	TDD2A
GM4	2138		HD51	OA2	
GC10D		DK20	HD52		OB2
GM5	411		HD203A	2986	
GM5B	2148		HF93	1928	12BA6
GN24		DW2	HF94		12AU6
GR1		TV801	HF100	2987	
GS10C/S	2325	Z502S	HF130	638	
GS16S0(80-110)	2694		HF150		T100-1
GS16/160	248		HF175		T100-1
GS16(80-110)	1473		HG2		DQ2A
GS18	242		HF200	2988	3C150A
GS26	1432		HF300	693	
GS544X	1913		HK24	941	
GS46	584		HK24G	789	
GS47X	405	3546PW	HK54	707	
GS118	1801		HK90		12BE6
GS146	2692		HK357	824	
GT1	2969		HK254E	2989	
GT1A	1143		HL2	1673	FM2HL
GT1C	1128		HL2Met	2991	
GT1E	530		HL2K	1050	FM2HL
GT11	435		HL4	1173	
GTE20000/2.5/10		6508 DCG9/2	HL4X	1037	
GTR95M/S	286		HL13C	1109	4D1
GTR120A/S	45		HL21	1303	
GTR150M/S	287		HL21DD	1044	TDD2A
GU1	1262		HL23	1130	
GU5	1072		HL23DD	2995	
GU7	2973		HL41	24	
GU8	1628		HL41DD	2996	
GU11	532		HL92	1959	50C5
GU12	32	DQ2	HL133	2998	
GU18	1629		HL133DD	2999	
GU20	1435	AH211	HL210	3500	FM2HL
GU20/21	5		HL210A	1503	
GU21	5	4049D ESU200	HL610	3501	
GU50	1072	RG1-240A ESU101	HL1320	3502	HL13C 4D1
GX4W	4005		HLA2	1678	354V
GX402	2902		HLB1	1021	
GXU1	1825	3B28	HLDD/1320	3503	DDT13 11D3
GXU2	2518	4B32	HM04		6EE6
GXU3	2399	AX228 2G/473C	HN309		PCL82
GXU4/1000		DCX4/5000	HP2	1032	
GZ30	2748	5Z4GT	HP6	138	
GZ31		5U4G	HP13S		VP13A
GZ32	593	5V4	HP210	1322	
GZ33	378		HP215	1322	
GZ34	1377	5AR4	HP415	1169	
GZ37	378		HP4101	1124	
H2	2977	FM2HL	HP4101C	1282	SP4 8A1
			HP4106	1169	

VALVE	C.V.N.O	EQUIVALENTS	VALVE	C.V.N.O	EQUIVALENTS
HP4115	1169		KD24		OC3 VR105/30
HR1		R10	KD25		OD3 VR150/30
HR2	261	R10 2T/270K	KK2	3516	
HR7	404		KR3	218	
HR210	1673	PM2HL	KR6/1	116	
HT7		XG5-500	KR6/2	237	
HT415	3540	5C22	KR6/3	238	
HV18	2988		KR6/4	272	
HVR2	1290		KRN2	87	
HY51B	702		KRN3	217	
HY61	124	807	KS7-85		2K26
HY75	751		KS7-85A		5976
HY90		35W4	KS9-20	1795	723A/B
HY114B	3505		KS9-20A	2792	2K25
HY615	3506		KS9-20D		723A/B
IPW1	1039		KT2	1118	PM22A
IW2		R2	KT8	1079	
IW3	1039	IW4-350	KT8C	1079	
IW3-350	1039	APV4	KT9-150W		55395
IW4/500	1039	APV4 R3	KT24	1334	PM22A
J231AAA		1163	KT30	3519	
JN2-2.5A.5A		7091	KT31	3530	
JN2-2.5W		7292	KT32	1287	25L6
JP28-20.2		7090	KT33		25A6G
JP2-2		7091	KT33C	1503	
JP2.5		7028	KT38	1576	
JP9-2.5		6972	KT41	1181	7A3
JP9-7	3676	2142 MAG3	KT42	1175	7A2
JP9-7A	370		KT44	1577	
JP9-7D	1866		KT44T	1576	
JP9-15	3997	2142A MAG4	KT45	1825	
JP9-50	2852	2156	KT61	1438	6AG6 EL33
JP9-75		6972	KT63	1186	6R6G
JP9-80	3569	4J52A	KT66	1075	EL37 6L6G
JP9-80A	5018		KT67	437	
JP9-250	2284	4J50	KT71		50L6GT
JP9-250A	3955	4J78	KT81	885	7C5
JPT9-01	2420		KT88		12E13
JPT9-02	2421		KTW61	1100	
JPT9-60	3560	4J5A1	KTW62	1100	
K2		DOG4/1000ED	KTW63	1195	6K7 6U7
K3A	410		KTW73	1056	
K7RF4	1808		KTW73M	3527	
K23B		TDD2A	KTW74M	918	12K7
K30A		PM2HL	KTZ41	3529	
K30C		PM2HL	KTZ63	1074	617G
K30D		PM2HL	KTZ73M	3530	
K30K		PM2HL	KU25	2993	
K40N		PM12M	KU45	3875	
K50N		VP2B	L2	3531	PM2HL
K70B		PM22A	L2/B		PM2HL
K77B		QF22B	L9	328	
K80A		PC2	L21	3532	PM2HL
K80B		FC2A	L21DD	1308	TDD2A
K301	1261		L22DD	3533	
K302	2164		L30	3534	
K305	2263		L63	1067	6J5G
K307	1871		L77	133	EC90 6C4
K308	2283		L210	1021	PM2HL
K312	2273		L410	1152	
K322	2791		L600	3537	
K324	2304		L610	3538	
K335	2343		LD210	502	
K435-10		ACO44	LG210	1021	
K1051	2849		LL2	1732	PM2HL
K1105P2	3736		LN119		UCL82
K814024	3514		LN152		ECL80
KB2	3515		LN309		PCL83
KD21		OA3 VR75/30	LN319		30FL1

VALVE	C.V.N.O	EQUIVALENTS	VALVE	C.V.N.O	EQUIVALENTS
LP2	548		M8141	4036	
LP2	1023	PM202	M8142	4054	
LP2(Selected)	1304		M8144	4033	
LP4	1168	AC044	M8149	4034	
LP220	1166		M8157	483	
LS5	1637		M8161	4015	
LS5A	1637		M8162	4024	
LS5B	2846		M8167	4067	7001
LS5X	1667		M8179	4076	
LS6A	3541		M8180	4050	
LS7	1660		M8190	4066	
LS8	1656		M8196	4011	
LS9A	1676		M8204	4018	
LS9B	1676		M8122	4007	
LS408A	2536		M8124	4035	
LS532	3542		M8216	3987	
LS650	391		M8223	4020	0A2WA
LS731	273	PCF80	M8224	4028	0B2WA
LZ319		30C1 PCF80	M8225	4080	
LZ329			M8232	5029	6J4WA
M2H	2886		M8234	5082	
M6	2145		M8237	4049	
M215H	177		M8245	4019	6005/6AQJ
M500	353		MAG8	2380	
M501	76		MB13-1	5070	5FP11
M501A	3660		ME41	3565	
M502	2166		ME1001	273	
M502A	2373		ME1005	354	
M503	1866		ME1100	1795	
M505	1747		ME1101		2J42
M506A	3982		ME1101A		JP9-15
M507	69		ME1101D		JP9-7D
M508	370		ME1400	432	
M509	3976		ME1401	2269	
M510	1827		ME1402	2730	
M511	4J78		ME1403	2348	
M512	1828		ME1500	474	
M513	3528		ME1501	2253	
M518A	1997		ME1502	1128	
M519	1484		ME1503	1787	
M521	2376		MF13-1	3959	
M523	2412		MF22-22	3999	
M525	2365		MF22-75	2372	
M526	3676		MF31-55	429	
M528	1497		MF31-95	2328	
M529	2426		ME4	1037	354V
M536		4J43 4J44	ME4Met	399	
M537	2281		ME41	1505	
M539	2425		MED4	3546	DDT4
M541		5J26	MEL4	1038	
M542	3611		MELD6	1101	
M543		7182	MET4	2955	
M548	5031		MKT4	1683	Pen4VA 7A2
M549	2424		ML4	1732	
M551	3569		ML6	1105	
M8079	4025		ML5667	2687	
M8080	4058		MM4V	1165	
M8081	4031		MM13-1D	5164	
M8082	4063		MP31-55	2314	
M8083	4014		MP/Pen	1683	Pen4VA
M8091	4044		MPT4	1174	Pen4VA 7A2
M8096	4039		MPT4K	3552	
M8097	4059		MPT42	2554	
M8098	4048		ME4	1611	
M8099	4070		MR10	34	
M8100	4010		MR75	1142	
M8136	4003		MR300	3557	
M8137	4004		MR300E	3558	
M8140	4002		MS4	1164	

28

VALVE	C.V.N.O	EQUIVALENTS	VALVE	C.V.N.O	EQUIVALENTS
MS4B	3533	SP4	N19		DL94 3V4
MS4C		SP4	N25		DL96
MSG/HA		SP4	N30		7D5
MSG/LA	1677	SP4	N40		7A2
MS/Pen	3561	SP4 8A1	N41	1181	PenA4 7A3
MS/Pen(Clear)	1124		N43	1657	
MSPen(5Pin)	244		N66		EL37
MS/PenB	1125		N77	136	EL91 6P17 6AM5
MSP4	1282	SP4	N78	3711	
MSP41	3562		N118		N145
MS/Pen/T	1129		N119		UL84
MT4	1610		N142		UL41 45A5
MT9F	1439		N144		EL91 6AM5
MT9L	1440		N147		EL23 6AG6
MT11SW	3563		N148		7C5
MT12	3564		N150		EL41 6CK5
MT12A	1441		N152		FL81 21A6
MT13	1614		N153		FL83 15A6
MT14	1442		N154		FL82 16A5
MT16	1030		N308		30P4
MT17	2957		N309		PL83
MT57		FL5559	N329		FL82 16A5 30P16
MT105		FL105	N339		FL81
MT5544	2210		N359		FL81
MT5545	2215		N369		PCL82 16A8 30P12
MU1	3567		N379		FL84
MU2	1459		N709		EL84
MU12	1039	IW4-350	N727	1862	EL90 6AQ5
MU12/14	1039	IW4-500	NE2	2976	
MU4250	1072		NE16	651	
MV6-5	1976		NE17	359	
MVSG	1165		NE18	360	
MVSPen	3571		NE19	263	
MVSPenB	3572		NHP1	310	
MW6-2	1737	3NP4	NL715		FL5557
MW13-35		5FP4A	NO22M		6861
MW13-75		5FP4A	NP90	3607	
MW18-2		CRM71	NSP1	220	
MW22-3		CRM92 CRM92A	NSP2	2269	
MW22-22	3999		NT2	2213	
MW31-16		C12FM	NU1	2680	
MW31-74		12XP4A C12FM	NU20	1474	
MW43-69		17BQP4 C17/1A	NU40T2	1076	
MW50-23		21CJP4	NU75H	751	
MW53-80		C21/1A 212K 21CLP4	N151		EL42
MW100	25		NU114B	3505	
MX1	1515		NU200	2988	
MX2	418		NU615	3506	
MX40	3576	V04 15A2	O202		FC4
MX52	306		O406		FC4
MX57	209		O1307		FC13
MX103	2150		QA2	1832	
MX105	2151		QA2WA	4020	
MX107	2152		QA3	3798	
MX108	2153		QA4	752	
MX113		18513	QA70		1N87
MX114		18514	QA73	442	1N616
MY3-275	1252	212E V1505	QA79		1N541
MZ05-20	3573		2-OA79		1N542
MZ05-60	1206		OA81	448	
MZ1	25		OA85	1354	1N478
MZ1-75	444		OA86		1N480
MZ1-76	3574		OA87		1N490
MZ1-100	1219	DA100	OA91		1N617
MZ2-200	200		OA95		1N618
N14	1803	DL35 1C5	OB2	3799	
N16	819	DL33 3Q5	OB2WA	4028	
N17	820	DL92 3S4	OB3	3799	
N18	818	DL95 3Q4	OC2.5	1607	

VALVE	C.V.NO	EQUIVALENTS	VALVE	C.V.NO	EQUIVALENTS
OC3	686		PCL83	5144	
OC16		2N115	PCL84		15DQ8
OC45	5105		FD22A	1163	
OC70		2N279	FD220	1032	
OC71		2N280	FD220A	1696	
OC72		2N281	FE7	3624	
2-OC72		2N282	FE8	3625	
OC73		2N283	Pen40DD	519	DDFP4M
OC76		2N284	Pen4VA	1174	APP4A 7A2
OD3	216		Pen4VB		PenA4 7A3
OM1	1402	CT31	Pen13C	889	7D8
OM3	1054	EB34	Pen25	65	
OM4	1055	EB33 6R7	Pen36A	1672	
OM5	1056	EF36	Pen36C	1672	7D6
OM5B		EF37A	Pen40DD		DDFP39M
OM6	1063	EF39	Pen44	3630	
OM7		EF39	Pen45	1407	
OM9	1052	EL32	Pen45DD	3631	
OM10	1581	6K8GT	Pen46	1127	
OP41		PenB4	Pen220	1118	PM22A
OP42		PenA4	Pen220A	1051	
OZ4	517		Pen231	3633	PM22D
OZ4QA	692		Pen383	1456	7D6
P2	1246	PM202	Pen428	3634	
P2-12		QGED4/20 832A	Pen1340	3635	7D8
P2-40B		829B	Pen1346	3636	
P6		1163	Pen3520		7D6
P12/250	1168	AC044	PenA4	3638	APP4B 7A3
P15		1164	PenB1	1118	PM22A
P27/500	1040	FX25	PenB4	3624	DDFP39M
P41	1408		PenDD4020		
P57	1466		PJ8	3640	
P61	1066		PJ23	3680	
P215	1019		FK150	150	
P220	3620		FL17		TQ2
P220A	1023	PM202	FL21		TQ2 2D21
P240		PM202	FL36		25E5
P410	3621		FL81	5077	21A6
P415	1154		FL82		16A5 30P16
P425	1154		FL83		15A6
P435		PM24M	FL84		15CW5
P435/1E	398		FL522	2520	
P440N		Pen4VA	FL1265		Z300T
P441N		Pen4VA	FL5632		C3J
P460		EX4	FL5684		C3JA
P495	1181	PenA4	FL6011		C3JA
P535/1E	398	C1111 715B	PM04		6BA6
P552/1E	427	5D12 C1111	PM05		6AK5
P610	3622		PM07		6AM6
P625	1208		PM1A	2977	PMZHL
P807		7293	PM1HF	1673	PMZHL
P809		7294	PM1HL	3641	
P810		6198	PM1LF	3642	
P811		7295	PM2	1019	
P813		6332	PM2A	3643	
P816		5820	PM2B	1032	
P817		6474	PM2BA	1163	
P882		7389	PM2UL		PMZHL
PA1	1689		PM2UX	3645	PMZHL
PA20	1732		PMZHL	1050	
PA40	3623		PM3	1151	
PA5021		DOG4/1000G	PM4DX	1152	
PABC80		9AKB	PM12	1018	
PGC84		7AN7 30L1	PM12A	1018	
PGC85		9AQ8	PM12M	1041	
PGC88		7DJ8	PM12V	319	
PGF80		30C1 9A8	PM14	1159	
PGF82		9U8	PM22	3649	
PCL82		16A8	PM22A	3647	

30

VALVE	C.V.N.O	EQUIVALENTS	VALVE	C.V.N.O	EQUIVALENTS
PM22D	3578		QK283	3685	
PM24A	1167		QK284	3686	
PM24D	1237		QK338	3903	
PM24E	3648		QK353	3737	
PM202	185		QK533		N1034
PM254	1153		QK610		N1010
PM256	1208		QM159	2874	
PP2		PM22A	QP21	1035	
PP3/250	1168	AC044 FX4	QP22B	1035	
PP4		PM24M	QP25	556	
PP5/400	1040	P27/500	QP230	1035	QP22B
PP6/400		FX25	QPT2	1035	
PP6AS		EL2	QJ503-12	2798	
PP6BG		EL33	QJ506-40	424	
PP13A		TD5	QJ502-6		TT23
PP35		TD6	QQV03-10	2798	11E13 TT24
PP36	1672		QQV03-20	2799	
PP60	1075		QQV03-20A	2799	TT20
PP220		PM202	QQV04-15	788	
PP222	1118		QQV04-20	2663	
PT2	1118	PM22A	QQV06-40	424	
PT4	1181	7A3	QQV06-40A	2797	TT25
PP5	3652		QQV5-P10	2295	
PT5E	3579		QQZ04-15	1838	
PT6	3653		QS70/20	284	
PT11	3654		QS75/20	284	
PT15	1104		QS75/40	1895	6939 VR75/30 OA3
PT25	1046		QS75/60	434	
PT41		PM24M	QS83/3	449	85A2
PT425	3656		QS92/10	188	
PT425X	1167		QS95/10	286	
PTA	889	TD5	QS105/45	422	
PV05-15	3657		QS108/45	422	
PV1-35	3658		QS150/50	287	
PV4		DW4-350	QS150/30	216	
PV495	1443	DW2	QS150/40	216	VR150/30
PV4200		DW4-500	QS150/45	395	
FX4	1168	AC044	QS1200	2225	
FX5	1040		QS1202	4052	
FX25	1040	P27/500	QS1203	4053	
FX41	1168	AC044	QS1205	3798	VR75/30
FX230		PM202	QS1206	686	VR105/30
FX3-600	1373		QS1207	1832	OA2
FX80		19X3	QS1208	1833	OB2
FX81		17Z3	QS1209	449	
FX82		19Y3 U192	QS1210	4020	
FX88		30AE3	QS1212	4048	
PZ1-35	1240		QS1213	4054	
PZ1-75	1211		QV03-12	2129	5763
QA75/40	1895		QV04-7	309	
QA2400	4015		QV04-7R	483	
QA2401	133		QV05-25	124	807
QA2402	136		QV06-20	3523	
QA2403	4014		QV1-150	2519	
QA2404	4025		QV1-150A	2519	4X150A
QA2405	415		QV20-P18	2752	
QA2406	4024		QY2-100	26	C143 813
QA2407	4005		QY3-65	1905	
QB2-250		813	QY3-125	2130	
QB3-300		6155 C1108 Q160-1	QY4-250	2131	
QB3.3-750		6156 C1112 Q400-3	QY4-400		C1136
QB3-1750		6079	QY4-500A		QBL4/800
QBL5/3500		6076 ACS4 CR1110	QY5-300W		GW1100
QBW5/3500		6075 CW1100	QY5-500	3522	
QB03-10		5763	QY5-3000A	1098	ACS4
QB05/40H		6159	QYS50-P40	313	
QF196	1078		R1	1443	APV4
QK26	1768		R2		IV4-350
QK221	3902		R2/10	97	

VALVE	C.V.N.O	EQUIVALENTS	VALVE	C.V.N.O	EQUIVALENTS
R2/38	98		RL17		PL5557
R3	1039	IW4-500	RL18	1197	EC53
R3/10	95		RL21		RL2D21
R3/16	96		RL37	66	EC54
R4	1796	DW4-350 R2	RL57		PL5559
R4A	1074	DW4-500 R3	RL1267	PL1267	Z300T
R6A		1163	RR3-250	1835	3B28 ESU103 GXU1
R10	261	2T/270K	RR3-1250	2518	4B32 GXU2
R11	1111		RR3-1250A	2399	2G/473C GXU3
R12	426	EY51	RR3-1250B		GXU4
R14		PZ30	RS566		3Q/310E
R15A		1164	RS613		5866 TB2.5/300
R16		1T2	RS630		5867 TB3/750
R17	2218		RS631		5868 TB4/1250
R18	2235		RS685		6155 QB3/300
R19		1X2B	RS686		6156 QB3.5/750
R41		DW4-500	RS687		6079 QB5/1750
R42		IW4-350	RS1002		QB4/1100
R52	1863	5Z4G	RS1007		6155 QB3/300
R243		EC55 5861	RS103L1		TBL12/50
R290		K81A	RS1013W		TBW12/50
R612G	597	2X2A	RS1061		5868 TB4/1250
R4410	521		RSQ15/5		TQ6
R6010	2353		RV120/250	1064	
R6015	2354		RV120/350		DW4-350
RE614		LK4110	RV120/500		DW4-500
RENS1824		X2818	RV200/600		U18/20
RENS1834		X2918	RK3-120	1261	
RG1-204A	1072		RK120A		1164
RG1-240A		ESU101	RK233	3688	
RG1-125	1263		RK233A	793	
RG1-240	1626	GU50	RK2235	709	
RG1-250	3667	DCG1-250	RY12		8020
RG3-250	1625	DQ2A ESQ866	RZ		UR1C 1D5
RG3-250A	32	866A GU12 DQ2	RZ1-150	3690	
RG3-1250	1629	DCG4/5000	RZ1-250	2853	
RG3-1250A	5		S1M2	2134	
RG4-1000	3670		S1M5	2155	
RG4-1250	5	GU20/21	S1.5/80DV		PL5552A
RG5-500	1349		S2	1018	
RG5-126C		6786 DGG7/100B	S2A	984	
RG1000/3000		DCG5/5000GB DQ4	S3A	374	
RGN4004		G4004	S4V		SP4 AS4120
RHK6332		732A/B	S4VB	1677	
RK18		T50-1	S6P12	4041	
RK20		4052A	S6P17	4040	
RK28	704		S6P33	4064	
RK28	3672	4069A	S11A		DW2
RK28A	3673	803	S11D		DW4-350 R2
RK30	2657		S11E2	4060	
RK31	3674		S13A	3694	
RK33	875		S15/5D		TQ6
RK34	18	4074A	S23	3691	
RK38	2591		S23Met	3692	
RK47	3677		S24	1018	
RK48		813 P120-1	S25A	16	
RK48A	690		S26A	53	
RE51		T50-1	S27A	82	
RK49	3679	807	S28A	88	
RK57	625	805 T100-1	S30A	127	
RK60	3680		S30C		AC044
RK62	3681		S130	1110	
RK63	2589		S130P	45	
RK6112	2116		S213		PM12M
REK47	3683		S215	3695	
REK72	709		S215A	3696	
REK73	2543		S215B	1018	
RL7	1136	EF54	S215VM	1028	PM12M
RL16	1137	EC52	S218		SP2

VALVE	C.V.N.O	EQUIVALENTS	VALVE	C.V.N.O	EQUIVALENTS
S410	1159		SU41	1113	
S420		VP4B	SU44	261	2T/270K
S435N		SP4	SU45	371	
S610	3698		SU61		EY51 6X2 R12 R12A
S625	1317		SU150	128	
S856		OA2	SU2150A	1290	
S860		OB2	SU4150A	1134	
S1328		SP13	SV-OA2	1832	
SAL39	3876		SV-OB2	1833	
SC1/350	2456		SV2C39A	2516	
SC1/400	2457		SV4X/150A	2519	
SC1/600	2458		SV-2D21	797	
SC1/800	2549		SV-3B28	1835	
SC1/1000	2460		SV-3D21A	2659	
SC1/1200	2461		SV-3D22	2851	
SC1/1400	2462		SV-4B32	2518	
SD2		FMZHL	SV-4X150D	3991	
SD6	1989		SV-57	5027	
SD61		EA50	SV-705A	3587	
SDR		FL5555	SV-813	26	
SDS		FL5553B	SV-828	631	
SE211C		FM12M	SV-5545	2215	
SG215	3702		SV-75/30	3598	
SG215A		FM12M	SV-VR150/30	216	
SG220	1018		SV280/40	1068	
SG250	1031		SV280/80	1069	
S1M2	2154		SV813	26	
S1M5	2155		SV828	631	
SM95	286		SW5	3715	
SM150	287		SW7	3719	
SN94TD	471		SW7	1069	
SN954	473		SW35Pen	1370	
SN956B	2251		SW10H	1076	
SP2	1320		SW75Pen	1371	
SP4	1324		SX541	2384	
SP4	1324		SX542	2413	
SP4B	3703		SX643	4077	
SP6	136	EP91 8D3 6AM6	SX644	4078	
SP13C	3704	8D3	T2G9/10E	357	
SP40Pen	1104		T4D	3721	
SP41	1547		T6D		EA50
SP42	1336		T20	3772	
SP61	1065		T20G	1047	
SP210	1332	SP2	T21	3679	
SP215	1320		T40		T50-1
SP220		FM202	T41	3723	
SP1320		SP13C	T55		T50-1
SPT2	1049		T200	3727	
SPT4A	1282	8A1	T250	1030	
SRS4452		QOE03/20	T300/1		TB3/1000
SS22AF	39		T814	2658	
SS1971	1604		T2000	1121	
ST11	188		TB2.5/300		5866
ST90K		Z900T 5823	TB3/750		5867 T3501-1
STE1000/2.5/15		FL5559	TB4/1250		5868
STE1300/01/5		FL2D21	TB5/2500		7092
STE2500/6/40		FL105	TBL2/300		7004
STE15000/15/45		DOG7/100	TBL6/6000		5924
STR108/30		OB2	TBL7/8000		6961
STR150/30		OA2	TBL12/250		6618
STV70/20			TBL12/100		6078
STV70/60	284		TBW6/600		5923
STV85/10	1895		TBW7/800		6960
STV108/30		85A2 OG3	TBW12/25		6617
STV150/30		OB2	TBW12/100		6077
STV150/200	3709	OA2	TD1-100A	2516	
STV280/40	1068		TD2.5-12	688	
STV280/80	1069		TD3-12	2932	
STV280/80A	3712		TD4-10	2201	
			TD6		EA50 2B35

VALVE	C.V.N.O	EQUIVALENTS	VALVE	C.V.N.O	EQUIVALENTS
TDD2A	3726		TSW50A	1235	
TDD4	3727	DDT4 11D3	TSI4-500	1889	
TDD13C	1419	DDT13 11D3	TT4	1179	
TD03-5	345	DET23	TT10	26	
TD03-10	273	DET22	TT11	1501	
TD03-10F	2204		TT12	524	
TD04-20	397	DET24	TT15	415	44A/160M
TD05-12	2933		TT16	2963	C1108
TG30		3C45	TT17		FL5557
TG57		PL5557	TT18	2666	
TG200B		6268 4C35	TT20	2799	
TG1000		6278 5C22	TTR31	221	
TG3000		5949	TTR31MC	1748	
TGRB		872A	TTR21MR	3841	
TH2	1410		TTR31MR	1923	
TH4A	1194		TV03-10	1573	
TH4B	1194		TV03-10A	1089	
TH22C		TH29	TV4	1412	
TH41	1411		TV101		ESU151
TH225		2K25	TV102	1504	VU504
TH813		QB2-250	TV801		4303CB TY1-50
TH1249		2J49	TX2/3		FL5544
TH1250		2J50	TX2/6		FL5545
TH1450		4J50	TX3-200	3739	
TH1452		4J52	TX4	1194	
TH1478		4J78	TX5-400	3740	
TH1526		5J26	TX12-12		CAT6
TH1725A		725	TX41		TH4B
TH2200		K345	TXM100		FL2D21
TH2312		TH29	TY1-50	1288	
TH5021B		DCG4/1000G	TY2-125	1924	
TH5021V		DCG4/1000ED	TY3-250	1350	
TH5031		872A	TY4-350	635	
TH5031B		DCG5/5000GB	TY4-350	536	
TH5040		869B	TY4-500	1351	
TH5221		3B28	TY5-500		TB4/1500
TH5221V/B		DCX4/1000	TY6-800		TB5/2500
TH6011		FL5577	TY6-500A	3926	
TH6031		PL5559	TY6-5000W		5923 TBW6/6000
TH6120		PL105	TY7-6000A		TBL7/8000
TH6220		PL5545	TY7-6000W		TBW7/8000
TH6230		PL3C23	TY12-25		TBW12/25
TH6345		3C45	TY12-25A		TBW12/25
TH6435		6268 4C35	TY12-50A		6078 TBL12/100
TH6522		6276 5C22 HT415	TY12-50W		6077 TBW12/100
TH6907		5949	TY54-500	1889	
TH7020		PL5551A	TZ03-20	1047	
TH7030		PL5552A	TT23		QQV02-6
TH7040		PL5553B	TT24		QQV03-10
TMC15B	3730		TT25		QQV06-40A
TMC16B	3731		TZ2-250	1618	
TMC20B	3732		TZ2-300	3741	
TP22	1344		TZ4C		DA41
TP25	1345		TZ20	3742	
TP26	3735		TZ40	1076	
TQ1/2		3C23 ASG5023	U4	1608	
TQ2		PL17 TH6011 FG17 ASG5017	U5	3743	
TQ2-3	2210	5544 ASG5044A XR1-3200	U6	3744	
TQ2/6	2215	5545 C6J TH6020 XR1-6400	U10	1443	RV120/350 R1
TRP4	2378		U12	1064	
TRPS	2379		U14	1064	DW4-500
TRW1	2351		U15	3747	
TRW2	2303		U16	1290	
TRW5	2297		U17	1113	
TRW7	3539		U18	1264	
TS70	798		U18/20	31	
TSP4	560		U19	187	
TSW05	1288		U19/23	187	
TSW50		DET12	U20	31	

VALVE	C.V.N.O	EQUIVALENTS	VALVE	C.V.N.O	EQUIVALENTS
U21	3751		UP85		19BT7
U22	3750		UL41	1977	45A5
U23	235		UL84		10D18 45B5
U24	1927		UM80		Y119
U27	1111		UM85		10M2
U30	3752		UR1C	1267	V20 1D5
U31	3753	2524G	UR1		CT1
U37	2289	1T2	UR3C	3758	
U41	2115	1T2	UU2		R2
U43	246	EX51 R12A	U33		1W4-350 R2 R3 R1
U45		U25	UU4	3759	1W4-350 R3
U47		U26	UU5	1039	1W4-500 R3
U50	1268	5Y3GT 5Z4	UU6	1413	
U52	1071	5U4G	UU7	3761	
U54		53KU	UU9	1855	EZ40
U60	4075		UU10		RV200/600
U70		6X5GT EZ35	UU12		EZ81
U74		35Z4GT	UU60/250		1W4-350 R2
U76		35Z4GT	UU120/250		1W4-350 R2
U78	493	6X4 EZ90	UU120/350	1796	RV120/350 R2
U82	3919	Z724 7Y4	UU120/500	1064	APV4 R3
U118		U145	UV203A	2986	
U119		UY85	UX866		DCG4/1000GB
U142		UY41 31A3	UX6653	3592	
U143	2862	AZ31	UY41		31A3
U147		6X5 EZ35	UY85		U381 38A3
U149		7Y4	UY807		807
U150		EZ40 6BT4	V20	764	UR1C
U151		EX51 6X2 R12	V20S		CT1
U152		FX80 19X3	V40		8020
U153		FX81 17Z3	V54		K358
U154		FX82 19Y3	V70D		T50-1
U192		FX82	V120	3762	
U201		CY31	V123	3763	
U281		CY31	V154		K353
U291		FX32	V226	3765	
U301		CY31	V203A/1K	234	
U319		FX82 19Y3	V203C/LD	230	
U381		UY85	V230A/R	299	
U404		31A3	V233A/1K	2190	
U600	3756		V235A/1K	2221	
U709		EZ81	V239/1K	5048	
U718		UU9	V241C/1K	5049	
U4020	1267	V30 UR1C 1D5	V240C/2K	2189	
UABC80		DE109 10LD12	V245	1367	
UAP42		12S7	V246A/1K	228	
UBC41		14L7 10LD3	V248A	1366	
UBC81		10LD13	V257	1723	
UBP80		171DDP 17C8	V312	3766	
UBP89		10FD12	V339	3767	
UC92		9AB4	V503	3768	
UC85		B109 10L14	V625	93	
UCH42		14K7	V630	201	
UCH81		X119 10C14 19D8	V872	1116	
UCL82		50BM8	V877	3769	
UD2		FM202	V884	131	
UD143	2293		V885	132	
UD166C	2257		V887	136	
UE301	621		V914	1170	2D4A
UE311		424A	V994A	3797	
UE905	625		V995	3770	
UE938	638		V960	54	
UE945	735		V970	3772	
UE966		DCG/1000G 866A	V1010	3773	
UE966A		DCG4/1000G 866A	V1020	3774	
UE972A		DCG5/5000GB	V1021	3775	
UE1967		FL5557	V1023	3776	
UE972	642	872A	V1029	3777	
UP41		12AC5	V1040	987	
			V1042	275	

VALVE	C.V.N.O	EQUIVALENTS	VALVE	C.V.N.O	EQUIVALENTS
V1043	401		VP41	21	
V1047	961		VP133	1457	
V1052	441		VP210	3794	
V1063P1	400		VP1322	3796	VP13B 9D2
V1101	1361		VPT2		VP210
V1105	3778		VPT4	1083	
V1111	1127		VPT4	1169	
V1120	72		VPT4B	1169	
V1120B	73		VPT210	1083	
V1133	276		VR75/30	3798	QA3
V1135B	345		VR90-30	3799	
V1135C	277		VR90-ST		OB3
V1501	3581		VR105-30	686	OC3
V1505	1252	4212E	VR105-MT		OB2
V1507A	1504		VR105-ST		OC3
V1901	1504		VR150-30	216	OD3 QS150/40
V1904	1072		VR150-MT		QA2
V1906	20		VR150-ST		OD3
V1907	1111		VS2	3800	PM12M
V1913	1508		VS18B0	3625	
V1920	121		VS24	3802	PM12M
V1922	74		VS24/KMet	3803	PM12M
V1924	100		VS26	161	
V1928	261	2T/270K R10	VS210		PM12M
V1939	371		VS215		PM12M
V2024	125		VX2		VP2B
V2030F	349		VX550A		DCX4/1000
V2046A	486		VX7400		DCX4/5000
V2053	403		W7/1D	2358	
VA16	528		W7/2D	2188	
VA35	285		W17	785	DF91 1T4
VA50	2132		W21-4	171	
VA201B		K351	W21-7	3804	
VA220		K345	W25		DF96
VP01	80		W30K	3805	
VP03	81		W31	3806	
VPT6	2976	6U5G	W61	100	
VPT6	2747		W63	1183	6K7G 6UT
VG1	2976		W76		12K7GT
VH550		DCG4/1000ED	W77	131	EF92 9D6 6F21
VH550A		DCG4/1000G	W81		7H7
VH7400		DCG4/5000GB	W118	W145	
VH7400A		DCG4/5000GB	W142		UF41 12AC5
VHT2		FC2	W143		EF22 7H7
VHT2A	1043	FC2A	W147		EF39
VHT4	2955	FC4 15A2	W148		7H7
VHTA	2956	15D1	W149		7B7
VJ5552		FL552A5	W150		EF41 6C15
VLS452	3784		W719		EF85
VLS492AG	1527		W727	454	EF93 6BA6
VM4V		AS4125	W731D	2538	
VMP4	1169		W739		6F18
VMP4G	1169		WD30	3810	
VMP4Met	1169		WD119		URF89
VMS4	1165	AS4125	WD142		UAP42 12S7
VO2		FC2A	WD150		EAF42 6CT7
VO4	2955	FC4	WD709		ERF80
VO13		FC13C	WE12		EM4
VO13S		FC13	WE17		PL5551
VP2	3787		WE189		1163
VP2B	520		WL17		PL5551
VP4Met	3788		WL631		PL5559 3V/390A
VP4A	1169		WL651		PL5552A
VP4B	3582		WL652		PL5551A
VP6		EP92 9D6	WL653B		PL5555
VP13C	3790	9D2	WL655		PL5553B
VP21	1083		WL2899416D		1163 VE289
VP23	3792		WT210-0001		2D21
VP24Met	3793		WT210-0003		WL884

VALVE	C.V.N.O	EQUIVALENTS	VALVE	C.V.N.O	EQUIVALENTS
WT210-0004		WL2050	X31Met	3822	
WT210-0008		866A	X41	1460	
WT210-0011		OC3	X41Met	2833	
WT210-0016		OB3	X42	3576	MH4105 15A2
WT210-0038		WL172	X61M	281	6K39
WT210-0043		5796	X63	3825	6ABG
WT210-0044		575A	X64	1208	6L7G
WT210-0045		892	X65	3826	6KBG
WT210-0047		3C23	X66	1099	
WT210-0051		OA2	X71		12KB
WT210-0054		5830	X76		12KB
WT210-0056		FL5559	X77	132	EK90 6BE6
WT210-0057		632B	X81		7S7
WT210-0058		KU676	X117		5D22
WT210-0059		677	X118		X145
WT210-0063		5685	X119		UCH81
WT210-0066		5665	X142		UCH42 14K7
WT210-0069		5557	X143		ECH21
WT210-0070		5550	X147		ECH35 6KBG
WT210-0071		5551A	X148		7S7
WT210-0072		5552A	X150		ECH42
WT210-0073		5553B	X661	2183	
WT210-0074		WL105	X662	2234	
WT210-0075		5822	X719	2128	ECH81
WT210-0077		5727	X727	453	EK90 6BE6
WT210-0078		WL182	XB1	2293	
WT210-0079		105	XB875B		2051
WT210-0086		833A	XE1	495	
WT210-0091		OA4G	XE2	2202	
WT210-0093		5668	XG1-2500		FL5559
WT210-0100		5796	XG2-12		FL255
WT210-0116		632B	XG2-500	1144	
WT210-0120		KU610	XG5-500	2957	
WT210-0134		678	XG15/10		DOG7/100
WT210-0137		502A	XG15/12		DOG7/100B
WT210-0141		5796	XG25		FL260
WT210-0157		5552A	XGQ2-6400		FL105
WT262		2V/400A	XGR3	151	
WT269		VR105	XH1.5	3830	
WT272		FL5557 TQ2	XH3-045	372	
WT294		VR150	XH8-100	1787	
WT606		2D21	XH16-200	2520	
WT-T105		892	XH25-500	3521	
WT-T106		6011	XL02.0V	1701	
WT-T108		3C23	XL1.5	1720	
WT-T110		5830	XL2V	3831	
WT-T111		5559	XN	14	
WT-T112		632B	XP1.5	176	
WT-T113		KU676	XP2V	1702	
WT-T117		5557	XP4		PK4
WT-T118		105	XR1-12		5855
WT-T119		172	XR1-600	3706	
WT-T127		833A	XR1-3200	2210	
WT-T132		OA4G	XR1-6400	2215	
WT-T141		VR57 VR75/30	XR6	465	
X14		1A7	XR7	466	
X17	782	DK91 1R5	XR8	468	
X18		DK92 1AC6	XSG1.5V	175	
X20		DK92	XSG2V	3833	
X21	3816	PC2A	XV2V	1703	
X21Met	3817		Y25		1M1 DM70
X22	3818	PC2	Y61	1103	6U5G
X23	1082		Y63	1103	6U5G
X24	3819		Y65	51	
X24Met	3820		Y119		UM80
X25		DK96	Y220	1118	
X30		1501	Z14		1N5G
X31	3821	2002	Z21	3836	
			Z21	3837	

VALVE	C.V.N.O	EQUIVALENTS
Z62	3838	
Z63		6J7G
Z66	3839	
Z77	138	EF91 8D3 6AM6
Z90	1091	EF50
Z142		UF42
Z150		EF42
Z152		EF80 6BX6 6BW7
Z203C	2271	
Z225		DQ2
Z303C	2271	QC10B
Z239/1G	2187	
Z300T	1992	
Z319/1G	2187	
Z319	2276	
Z329		30F5
Z502S	2325	GC10C/S
Z719		6BX6 EF80 6BW7 Z152
Z729	2901	EF86 6F22
Z759	5060	
Z800U	2236	
Z801U	2255	
Z803U	2434	
Z900T		5823
Z5823		Z900T
ZA1	1175	
ZA2	1095	
ZD17	784	DAF91 1S5
ZD25		DAF96
ZD152		6N8 EBF80
ZG532	2647	
ZG547	372	
ZP455	2789	
ZP477	914	
ZP527	855	
ZP572		2C39A
ZP579	3842	
ZP584	3843	
ZP590	3844	

SERVICE VALVE INDEX & CROSS REFERENCE

38

SERVICE TYPE	COMMERCIAL EQUIVALENT	SERVICE TYPE	COMMERCIAL EQUIVALENT	SERVICE TYPE	COMMERCIAL EQUIVALENT
AD1	DLS10	AT20	MZ05/20	CV41	E1267
AR4	PM1HF	AT35	DET25	CV42	E1256
AR5	P220	AT37	ACT36	CV44	E1155
AR6	LP2	ATS25	807	CV45	E130P
AR7	4D1	ATP4	V248A	CV46	8011
AR8	HL23DD	ATP5	V245	CV49	3B/501A
AR9	PM1LF	ATP7	V266	CV51	A1320
AR10	TDD2A	ATP10	1062A	CV52	E1231
AR11	4019B	ATP35	FW1-35	CV53	3A/146J
AR12	4020A	ATP75	PT6	CV54	V960
AR13	B406	ATP100	4069A	CV55	E1190
AR14	220RC	ATS25A	807	CV56	E1325
AR15	220LF	ATS70	4282B	CV57	E1271
AR16	220B	AU1	U18	CV58	E1273
AR17	MH4	AU2	RG250	CV62	E1046
AR20	4021B	AU3	U12/14	CV63	E1323
AR21	EBC33	AU3A	1561	CV64	E1342
ARD2	D1	AU4	U17	CV65	Pen25
ARD4	D42	AU5	V1907	CV66	RL37
ARDD1	10D1	AU6	GU50	CV69	E1326
ARDD3	6H6	AU8	U22	CV71	ASGL1M
ARDD5	EB34	AU12	U15	CV72	V1120
ARH1	6L7	AU13	5Z4	CV73	11E3
ARP1	PT2	AW2	7475	CV74	ESU74
ARP2	SP2	AW3	S130	CV75	4313C
ARP3	9D2	AW4	STV280/40	CV76	E1359
ARP4	SP210	AW5	ME41	CV77	K TUBE
ARP5	VP2	AW6	EM31	CV78	E1379
ARP6	SP4	CV1	D051	CV80	VF01
ARP7	42MPT	CV2	E1228	CV81	VF08
ARP8	AC4Pen	CV3	APN202	CV82	3A/147J
ARP9	Pen1340	CV4	E1229	CV84	4033A
ARP9A	7D8	CV5	4049D	CV85	V2023
ARP10	PenA4	CV6	E1148	CV86	V1507
ARP11	TSP4	CV8	E1356	CV87	KRN2
ARP12	VF23	CV9	AL60	CV88	DV32
ARP13	VF210	CV12	E1191	CV90	E1368
ARP14	2201PT	CV13	BT9B	CV89	E1380
ARP15	KTW63	CV14	XN	CV92	E1332
ARP16	6J7	CV15	E1226	CV93	V625
ARP17	6F6	CV16	S25A	CV94	DS103
ARP18	KT24	CV18	DET19	CV95	R3/10
ARP19	SP41	CV19	EHT1	CV96	R3/16
ARP21	Z62	CV20	V1906	CV97	R2/10
ARP22	116/Pen	CV21	VP41	CV98	R2/38
ARP23	MS/Pen	CV22	BT45	CV99	E1373
ARP24	220VPT	CV24	HL41	CV100	V2D33B
ARP25	KT41	CV25	4242A	CV105	E1371
ARP26	KT44	CV26	813	CV108	EM313
ARP33	MSP4	CV27	4357A	CV109	9KP5
ARP34	EF39	CV29	E1235	CV110	VS68
ARP35	EF50	CV30	4270A	CV114	E1265
ARP36	SP61	CV31	U20	CV115	E1415
ARP37	QP25	CV32	RG3-250M	CV116	KR6/1
ARP38	KTZ73	CV33	4077A	CV117	E1417
ARS7	VS24	CV34	MR10	CV118	SP61
ARS8	PM12V	CV28	ACT9	CV119	XJ
ARTH2	ECH35	CV38	E1198	CV120	MP
ARTP1	TP22	CV39	S22AF	CV121	V1920
ARTP2	TP25	CV40	E1255	CV122	E1336

SERVICE TYPE	COMMERCIAL EQUIVALENT	SERVICE TYPE	COMMERCIAL EQUIVALENT	SERVICE TYPE	COMMERCIAL EQUIVALENT
CV123	E1330	CV192	E1481	CV273	5861
CV124	807	CV199	NT99	CV275	V1042
CV125	2043	CV200	MZ2-200	CV276	11E2
CV126	E1362	CV201	V630	CV277	19G3
CV127	S30A	CV202	YP	CV278	E1606
CV128	SU750	CV207	AC/P4	CV279	NG16
CV129	KRN2A	CV208	1487	CV281	X61
CV130	KRN3	CV209	MX57	CV283	6AL5
CV131	9D6	CV211	V2030B	CV284	STV30/20
CV132	V885	CV212	LS594	CV285	VA35
CV133	6C4	CV214	E1531	CV286	QS95/10
CV135	EX91	CV215	E1497	CV287	ACT23
CV136	7D9	CV216	VR150/30	CV288	ACT23
CV137	EAC91	CV217	KRN3	CV289	G400
CV138	EP91	CV218	KRN3	CV290	E1527
CV139	6L34	CV290	E1046	CV292	E1481
CV140	6AL5	CV220	631/P1	CV293	CV497
CV141	U4B	CV221	E1516	CV295	BS54
CV142	U2	CV222	E1489	CV296	DDR2
CV143	U3	CV223	KRN2A	CV298	FA15
CV144	U4	CV225	ACT17	CV299	V230A/1K
CV145	U5	CV228	DV40B	CV302	ECH22
CV147	U7	CV229	1336	CV303	EP22
CV148	U8	CV230	DV55	CV304	EL22
CV149	U7	CV232	MF	CV305	EP51
CV150	PK150	CV233	B55	CV306	MX52
CV152	GU21	CV234	DV56	CV307	QV04-7
CV153	E1411	CV235	U23	CV310	NHP1
CV154	E1419	CV236	E1465	CV311	54/444
CV155	E1190	CV237	KR6/2	CV312	ESU74
CV158	KR3	CV238	KK6/3	CV313	QST50-P40
CV159	AL1	CV240	ACT24	CV315	TY1-51
CV160	E1342	CV242	GS18	CV319	E1453
CV161	E1342	CV243	4045A	CV320	E4103/B/4
CV162	5Z094	CV244	AP2	CV321	KT66
CV163	5744WA	CV245	4328D	CV324	CV1628
CV164	CG3E	CV248	GS16	CV326	15B
CV165	CS36A	CV249	4019A	CV327	EP52
CV166	GEX54/3	CV250	CMG25RS	CV328	L9
CV167	TX4/500B	CV251	MX57	CV329	6R33
CV168	XD60	CV252	ACR22	CV335	VCR522B
CV169	XD61	CV253	CS3A	CV336	VCR522C
CV170	12SF7GT	CV254	9L01A	CV337	27M1
CV172	E1468	CV256	NS2	CV338	E1524
CV173	EP55	CV257	ACT22	CV339	24B2
CV174	E1459	CV258	E1273	CV342	DL519
CV175	XSG1.5	CV259	E1495	CV343	V894
CV176	XP1.5	CV260	SP61	CV344	E1323
CV177	813	CV261	R10	CV345	12E1
CV178	E1458	CV262	9MF6	CV346	E222
CV180	KR4	CV263	VX3026	CV347	EBC21
CV181	ECC32	CV264	AP1188	CV349	V2030E
CV182	E1488	CV265	19E2	CV352	EBC33
CV185	FM202	CV266	E1336	CV353	M500
CV186	E1342	CV267	E1336	CV354	ME1005
CV187	U19	CV268	E1330	CV355	E1511
CV188	7475	CV269	VCR97	CV356	E1511
CV189	BS4	CV271	V986	CV357	DL65747
CV190	DL510	CV272	KR6/4	CV358	EP37A
CV191	E1494				

SERVICE TYPE	COMMERCIAL EQUIVALENT	SERVICE TYPE	COMMERCIAL EQUIVALENT	SERVICE TYPE	COMMERCIAL EQUIVALENT
CV359	NE17	CV435	GT11	CV506	GL8023
CV360	NE18	CV436	ACT25	CV507	REL64
CV361	5B/700A	CV437	KT76	CV508	4B49
CV367	1N21B	CV438	G120/1B	CV509	6V6G
CV368	9-3	CV439	22/11BXA	CV510	6V6
CV369	1B35	CV440	1601ABC	CV511	6V6
CV370	2J42	CV441	V1052	CV512	6W7
CV371	19G6	CV442	GEX35	CV513	4J53
CV372	3C45	CV443	CK505AX	CV514	2J36
CV374	S3A	CV444	MZ1-75	CV515	6Y6
CV375	EA50	CV445	5J/180E	CV516	3GP1
CV377	V1135C	CV446	3Q/260E	CV517	OZ4A
CV378	53KU	CV447	4078GA	CV518	AC/VP1
CV379	ACT19	CV448	GEX54	CV519	Pen4DD
CV380	EF54	CV449	85A2	CV520	VP2B
CV382	T24/40JA	CV450	EL38	CV521	R4410
CV383	T24/40JB	CV451	ET3	CV522	7B7
CV384	DET5	CV452	6AT6	CV523	12Y4
CV385	DL71	CV453	6BX6	CV524	TT12
CV386	DF70	CV454	6BA6	CV525	12A6
CV387	DL72	CV455	12AT7	CV526	12A6
CV389	VCRN210	CV456	E1633	CV527	DA60
CV391	5B/255M	CV460	BS48	CV528	VA16
CV394	EM34	CV461	BS92	CV529	12AH7
CV395	QS150/45	CV462	BS84	CV531	12C8
CV397	DET24	CV463	BS82	CV532	GU11
CV398	715B	CV464	9LO1A	CV533	CAT17C
CV399	MH4	CV465	EF72	CV534	12J5
CV400	3E7	CV466	EF73	CV535	12J5
CV402	BS68	CV467	EF70	CV536	4120/AA
CV403	FVD7	CV468	EG70	CV537	12SA7
CV404	8R7	CV469	EA76	CV538	12SA7
CV405	927	CV471	EL70	CV539	G71E
CV406	E1423	CV472	EF74	CV540	12SC7
CV408	A1714	CV473	EY70	CV541	1B3
CV409	A1820	CV474	5643	CV542	5J23
CV410	K3A	CV475	EF71	CV543	12SK7
CV411	GM5	CV476	T921	CV544	12SK7
CV412	A800	CV477	5899	CV545	ACSP3
CV413	G150/2D	CV482	A237	CV546	12SQ7
CV415	TT15	CV483	QV04-7R	CV547	12SQ7
CV416	6F17	CV484	DL92	CV548	LP2
CV417	EC91	CV486	V2046A	CV549	25A6
CV418	MX2	CV488	BS90	CV550	25A6
CV419	EC91	CV489	BT75	CV551	26L6
CV420	VCRN277	CV490	19H5	CV552	25L6
CV421	CAT20C	CV491	12AU7	CV553	25L6
CV422	QS108/45	CV492	12AX7	CV554	D63
CV423	25SN7	CV493	6X4	CV555	25Z5
CV424	QQV06-40	CV494	B12	CV556	QF25
CV425	CG1-C	CV495	5802	CV557	D42
CV426	ET51	CV496	CG14	CV558	25Z6
CV427	5D21	CV498	NE17	CV559	25Z6
CV428	5B/254M	CV499	5B/256M	CV560	TSP4
CV429	12AEP6	CV500	6T7	CV561	35L6
CV430	29C1	CV501	EBF32	CV562	35L6
CV431	85A1	CV502	LD210	CV563	DA30
CV432	ME1400	CV503	5W4	CV564	35Z3
CV433	BC1CE	CV504	12BH7	CV565	35Z3
CV434	QS75/60	CV505	MT16	CV566	RG-2

SERVICE TYPE	COMMERCIAL EQUIVALENT	SERVICE TYPE	COMMERCIAL EQUIVALENT	SERVICE TYPE	COMMERCIAL EQUIVALENT
CV567	35Z5	CV629	814	CV700	12SR7
CV568	35Z5	CV630	826	CV701	ESA892
CV569	ECC35	CV631	828	CV702	830B
CV570	3Q/195E	CV632	829	CV703	12K8
CV571	50L6	CV633	829A	CV704	RK20A
CV572	6X5	CV634	832	CV705	1D5GP
CV573	6X5	CV635	833	CV706	6U7
CV574	EZ35	CV636	836	CV707	HK54
CV575	5U4	CV637	837	CV708	161
CV576	1B26	CV638	838	CV709	72
CV578	6A8	CV639	843	CV710	368A
CV579	6A8	CV640	860	CV711	32
CV580	6A8	CV641	861	CV712	38
CV581	6C5	CV642	872A	CV713	1B27
CV582	6C5	CV643	874	CV714	C6A
CV583	6C5	CV644	875A	CV716	8013A
CV584	GS146	CV645	876	CV717	5R4GY
CV585	6C6	CV646	879	CV718	5FP7
CV586	EL37	CV647	884	CV719	2J21A
CV587	6Q7	CV648	885	CV720	723A
CV588	6Q7	CV649	956	CV722	725A
CV589	6Q7	CV650	958	CV723	1619
CV590	6SJ7	CV651	991	CV724	816
CV591	6SJ7	CV652	1603	CV725	1B24
CV592	6SJ7	CV653	1611	CV726	35Z3
CV593	GZ32	CV654	1612	CV727	1N21
CV594	6SH7	CV655	1613	CV729	5V4
CV595	6SH7	CV656	1616	CV730	6A3
CV596	2C45	CV657	1620	CV731	6F6
CV597	2X2A	CV658	1622	CV732	6W4GT
CV598	715C	CV659	1625	CV733	REL8D
CV599	1851	CV660	6AC7	CV734	228A
CV600	5CP1	CV661	6AB7	CV735	845
CV601	5BP1	CV662	8012	CV736	905
CV602	3AP1	CV663	8025	CV737	906
CV603	10	CV664	9002	CV738	953
CV604	30	CV665	9003	CV739	3AP1
CV605	32	CV666	9004	CV740	5MP1
CV606	37	CV667	9005	CV741	5LP1
CV607	38	CV668	35T	CV742	RG67
CV608	41	CV669	279A	CV743	GET2
CV609	42	CV678	702A	CV744	GET4
CV610	45	CV679	703A	CV745	HK24
CV611	56	CV683	316A	CV746	468P1
CV612	57	CV684	274B	CV747	6AC7
CV613	58	CV685	VR150-30	CV748	725A
CV614	75	CV686	OC3	CV749	1N23A
CV615	76	CV687	446B	CV750	01A
CV616	77	CV688	2C43	CV751	HY75
CV617	80	CV689	700A	CV752	QA4
CV618	83	CV690	RK48A	CV753	1A3
CV619	84/6Z4	CV691	357A	CV754	1A4P
CV620	211	CV692	0Z4	CV755	1A5
CV621	801	CV693	HF300	CV756	1A5
CV622	802	CV694	12SG7	CV757	1A6
CV623	803	CV695	700B	CV758	1B4P
CV624	804	CV696	700C	CV759	1B5
CV625	805	CV697	12SJ7	CV760	1B7
CV626	808	CV698	12SJ7	CV761	1B22
CV627	810	CV699	700D	CV762	1C21
CV628	811				

SERVICE TYPE	COMMERCIAL EQUIVALENT	SERVICE TYPE	COMMERCIAL EQUIVALENT	SERVICE TYPE	COMMERCIAL EQUIVALENT
CV763	1CA4	CV826	4THA	CV891	7B6
CV764	1D4	CV828	4TPB	CV892	7E7
CV765	1D7	CV829	4TPB	CV893	7F7
CV766	1E5GP	CV830	4TSP	CV894	7G7
CV767	1F4	CV831	5AP1	CV895	7H7
CV768	1F5G	CV832	5AP1	CV896	7K7
CV769	1F6	CV833	89	CV897	7J7
CV770	1F7	CV834	5B/300B	CV898	7N7
CV771	1G5	CV836	5BP4	CV899	7Q7
CV772	1G6	CV837	12C8	CV900	7R7
CV773	1G6	CV838	5CP7	CV901	7Y4
CV774	1H4	CV839	5GP1	CV902	7W7
CV775	1LA6	CV840	5H4	CV904	892R
CV776	1LB4	CV841	5U4	CV905	9HP7
CV777	1LC5	CV842	5W4	CV906	1602
CV778	1LC6	CV843	6AB5	CV907	12A
CV779	1LD6	CV844	6AC5	CV908	12A5
CV780	1LH4	CV845	6AC5	CV909	12A7
CV781	1LN5	CV846	6AC7	CV910	12A8
CV782	1R5	CV847	6AF6G	CV911	12B8
CV783	1S4	CV848	6AG5	CV913	12DP7
CV784	1S5	CV849	6AC7	CV914	12DP7
CV785	1T4	CV850	6AK5	CV915	12FP7
CV786	1T5	CV851	6B4	CV916	12H6
CV787	2A7	CV852	6C4	CV917	12J7
CV788	832A	CV854	6C7	CV918	12K7
CV789	3C24	CV855	6C21	CV919	12SF5
CV790	2AP1	CV856	6G8	CV920	12SF5
CV791	2B7	CV857	6H7	CV921	12SF7
CV792	2C22	CV858	6J6	CV922	12SK7
CV793	2C33	CV859	6J8	CV923	12SJ7
CV794	2D2	CV860	6K5	CV924	12SL7
CV795	2D4A	CV861	6K5	CV925	12SN7
CV796	2D13C	CV862	6L5	CV926	4B35
CV797	2D21	CV864	6P7	CV927	1223
CV798	2E22	CV865	6SD7	CV928	13-4
CV800	2J22	CV866	6SJ7Y	CV929	13SPA
CV801	2J54	CV867	6SR7	CV930	14F7
CV802	2C26	CV869	6V5GT	CV931	15
CV803	2V3	CV870	6V7	CV932	446A
CV804	2V3	CV871	6Z5	CV933	15E
CV805	50Y6	CV872	6Z7	CV934	15R
CV807	3A4	CV873	6ZX5	CV936	24A
CV808	3A5	CV874	7	CV937	25A7
CV809	3A/105B	CV875	1642	CV938	25AC5
CV810	3AE	CV876	7A6	CV939	25B6
CV811	1291	CV877	7A7	CV940	25B8
CV812	3B24	CV878	7A8	CV941	HK24
CV813	959	CV879	7B4	CV942	25Y5
CV815	3D6	CV880	7B5	CV943	26
CV816	3DP1	CV881	7B5	CV944	27
CV817	3EP1	CV882	7B6	CV945	28D7
CV818	3Q4	CV883	7B8	CV946	28D7
CV819	3Q5	CV884	7EP7	CV947	31
CV820	354	CV885	7C5	CV948	32L7
CV821	4A1	CV886	7C5	CV949	33
CV822	4B24	CV887	7C6	CV951	32A
CV823	7A	CV888	7D7	CV952	4081
CV824	4E27	CV889	7D8	CV953	32
CV825	4SBA	CV890	7E5	CV954	20K

SERVICE TYPE	COMMERCIAL EQUIVALENT	SERVICE TYPE	COMMERCIAL EQUIVALENT	SERVICE TYPE	COMMERCIAL EQUIVALENT
CV955	4409	CV1057	EK32	CV1124	MS/Pen
CV956	4602	CV1058	EP60	CV1125	MS/PenB
CV957	32	CV1059	955	CV1126	4SH
CV958	26J	CV1060	807	CV1127	Pen46
CV959	20K	CV1061	DET19	CV1128	GT1C
CV960	E4504/B/16	CV1062	TT1-50	CV1129	MS/Pen
CV961	NC13	CV1064	U12/14	CV1130	HL23
CV962	E4504/E/16	CV1065	SP61	CV1131	41BS
CV963	CV1596	CV1066	P61	CV1133	V960
CV964	E4205-B	CV1067	6J5	CV1134	HVR2
CV966	E4504/M/16	CV1068	STV280/40	CV1135	E1148
CV967	E4103/B/4	CV1069	STV280/80	CV1136	EF54
CV979	DSL10	CV1070	7475	CV1137	EC52
CV984	S2A	CV1071	U52	CV1138	E4412/B/9
CV986	15A	CV1072	GU50	CV1140	12MD6
CV987	NC13A	CV1073	H63	CV1141	DPQ
CV995	6AJ5	CV1074	6J7	CV1142	MR75
CV996	EL32	CV1075	KT66	CV1143	GT1A
CV997	3092	CV1076	DA41	CV1144	BT19
CV998	2000T	CV1077	EM31	CV1145	BT9/A
CV999	3C22	CV1078	D1	CV1147	BT35
CV1000	4D1	CV1079	KT8	CV1148	E1289
CV1001	SU2150A	CV1080	4307A	CV1149	BT41
CV1002	E1192	CV1081	4052A	CV1151	FM3
CV1018	215SG	CV1082	220TH	CV1152	FM4DX
CV1019	PM2	CV1083	210VTP	CV1153	FM254
CV1020	220P	CV1087	14L	CV1155	DEQ
CV1021	210LP	CV1088	832	CV1156	DEQ
CV1022	220PA	CV1089	TV03-10A	CV1158	FM14
CV1023	230XP	CV1090	E1046	CV1159	FM14
CV1025	DET25	CV1091	EP50	CV1160	104V
CV1027	210LF	CV1092	EA50	CV1161	104V
CV1028	220VSG	CV1095	954	CV1163	FD220A
CV1029	ESU150	CV1096	5B/502A	CV1164	ACSG
CV1030	4060A	CV1097	ECR60	CV1165	VMS4
CV1031	ESG250	CV1098	E960T	CV1166	P220
CV1032	220B	CV1099	X66	CV1167	FM24A
CV1034	DET3	CV1100	KTW62	CV1168	PX4
CV1035	QP21	CV1101	MHL6	CV1169	VMP4G
CV1036	220PA	CV1102	BL63	CV1170	D41
CV1037	MH4	CV1103	Y63	CV1171	AT4
CV1038	MHL4	CV1104	PT15	CV1172	VMP4G
CV1039	1561	CV1105	ML6	CV1173	354V
CV1040	FM25	CV1106	9D2	CV1174	KT42
CV1041	PM12M	CV1107	15D2	CV1175	AP4
CV1042	210LF	CV1108	8D2	CV1176	AP4
CV1043	210RG	CV1109	4D1	CV1177	4D1
CV1044	210DDT	CV1110	S130	CV1178	DA30
CV1045	X56	CV1111	V1907	CV1179	ML4
CV1046	PT25H	CV1112	V1026	CV1180	244V
CV1047	T205-50	CV1113	U17	CV1181	RT41
CV1048	210SG	CV1114	E1024	CV1182	H42
CV1049	210SPT	CV1116	V872	CV1183	W42
CV1050	HL2	CV1117	41MTL	CV1184	A373
CV1051	Pen220A	CV1118	KT2	CV1186	6F6
CV1052	EL32	CV1119	MDL4	CV1187	D41
CV1053	EP39	CV1120	SU2150A	CV1188	N43
CV1054	EB34	CV1121	T41	CV1189	AC6Pen
CV1055	EB33	CV1122	41MXP	CV1190	ACP4
CV1056	EP36	CV1123	EP8	CV1191	KTZ41

SERVICE TYPE	COMMERCIAL EQUIVALENT	SERVICE TYPE	COMMERCIAL EQUIVALENT	SERVICE TYPE	COMMERCIAL EQUIVALENT
CV1192	Z62	CV1307	PM1LF	CV1375	EF85
CV1193	X65	CV1308	TDD2A	CV1376	EF80
CV1195	KTW63	CV1309	4019B	CV1377	GZ34
CV1196	AC5PenDD	CV1310	KC1	CV1379	20K
CV1197	EC53	CV1311	B406	CV1380	20K
CV1198	ACP4	CV1312	22ORC	CV1382	ACR10
CV1200	202	CV1314	DLS10	CV1384	41DS
CV1201	4317	CV1313	220LF	CV1385	E4504/B/16
CV1202	304	CV1316	4021B	CV1386	ACR3
CV1205	E1007	CV1317	5625	CV1387	ACR4
CV1206	D060	CV1318	VS24	CV1388	ACR5
CV1207	ES50	CV1319	PM12V	CV1389	ACR6
CV1208	PM256	CV1320	SP2	CV1391	E4504/E/16
CV1219	MZ1-100	CV1321	9D2	CV1393	ACR17
CV1220	4033L	CV1322	SP210	CV1394	ACR18
CV1221	PZ1-75	CV1323	VP2	CV1397	E4504/H/16
CV1222	ACT6	CV1324	SP4	CV1400	C1C
CV1223	DET5	CV1325	42MPT	CV1401	CL33
CV1235	DET12	CV1326	AC4Pen	CV1402	CT31
CV1237	PM24D	CV1327	Pen1340	CV1403	DD41
CV1238	PM24D	CV1328	7D8	CV1404	EF36
CV1240	PZ1-35	CV1329	PenA4	CV1405	E1199
CV1246	PM202	CV1330	TSP4	CV1406	HL41
CV1250	4279A	CV1331	VP23	CV1407	Pen45
CV1252	4212E	CV1332	VP21	CV1408	P41
CV1255	E1232	CV1333	220IPT	CV1409	SP2
CV1257	E1155	CV1334	KT24	CV1410	TH2
CV1259	ESU450	CV1335	SP41	CV1411	TH41
CV1260	ESU208	CV1336	SP42	CV1412	TV4
CV1261	RX3-120	CV1337	116Pen	CV1413	UU6
CV1262	GU1	CV1338	220VPT	CV1414	VP41
CV1263	RG1-125	CV1340	KT45	CV1415	4011A
CV1264	U18	CV1341	MSP4	CV1418	10D1
CV1265	U15	CV1342	QF25	CV1419	11D3
CV1266	U15	CV1343	KTZ73	CV1420	4078A
CV1267	U4020	CV1344	TF22	CV1422	3D/10A
CV1268	5Y3	CV1345	TF25	CV1423	9D2
CV1279	MU2	CV1347	EXH35	CV1424	20A1
CV1280	6L7	CV1349	RG5-500	CV1425	7D5
CV1281	KTW61	CV1351	TB4/1250	CV1426	EX2
CV1281	KTW61	CV1350	TB3/750	CV1427	EF9
CV1282	MSP4	CV1352	EM80	CV1428	EBC3
CV1283	SP4	CV1353	QA81	CV1429	EL2
CV1284	MS/Pen	CV1354	QA85	CV1430	ACSP3
CV1285	GN7	CV1355	ESU300	CV1431	ACT16
CV1286	6L6	CV1356	U22	CV1432	CMG8
CV1287	KT32	CV1359	ME41	CV1433	EC31
CV1288	244Y	CV1361	MZ05-20	CV1434	EM4
CV1289	1561	CV1363	DET16	CV1435	GU2
CV1290	SU2150A	CV1364	807	CV1436	HL2
CV1291	HVR2	CV1365	4282B	CV1437	E1143
CV1296	MU14	CV1366	V248A	CV1438	KT61
CV1300	10D1	CV1367	V245	CV1439	MT9F
CV1301	6H6	CV1368	V266	CV1440	MT9L
CV1302	D42	CV1369	4061A	CV1441	MT12A
CV1303	PM1HF	CV1370	PV1-35	CV1442	MT14
CV1304	LP2	CV1371	PZ1-35	CV1443	R1
CV1305	4D1	CV1372	4069A	CV1444	42SPT
CV1306	HL23DD	CV1373	FT3-600	CV1445	4012A
		CV1374	807	CV1446	4107B

SERVICE TYPE	COMMERCIAL EQUIVALENT	SERVICE TYPE	COMMERCIAL EQUIVALENT	SERVICE TYPE	COMMERCIAL EQUIVALENT
CV1449	4064B	CV1529	E4412/E/9	CV1633	3V4
CV1447	4030D	CV1530	6LX1	CV1634	XB2
CV1448	4043C	CV1535	EZ80	CV1635	5A/163K
CV1450	4227A	CV1536	1608ABA	CV1636	LS5
CV1451	4274A	CV1537	3ACP2	CV1637	LS5
CV1452	4300A	CV1538	5J32	CV1638	4101D
CV1453	4378	CV1539	D15	CV1639	4101E
CV1454	225DU	CV1540	33B/152M	CV1640	4002D
CV1455	411U	CV1543	12MD6	CV1641	4102E
CV1456	Pen383	CV1552	VX3B	CV1642	DER
CV1457	VP133	CV1553	ESU450X	CV1643	E132
CV1458	41MP	CV1565	230XP	CV1644	E1532
CV1459	MU2	CV1567	2C25	CV1645	E133
CV1460	X41	CV1568	4062A	CV1646	E1453
CV1461	U22	CV1569	R3	CV1647	LS5B
CV1462	A915	CV1570	EK32	CV1648	4205E
CV1463	CBL31	CV1572	807	CV1649	6C5
CV1464	EF39	CV1573	4074B	CV1650	LS5A
CV1466	P57	CV1574	SP41	CV1651	G455B
CV1467	PI3-600	CV1576	KT38	CV1652	P220A
CV1468	SP4	CV1577	E1143	CV1653	KC1
CV1469	Z22	CV1578	EF50	CV1655	4019B
CV1470	3P/270B	CV1579	954	CV1656	LS8
CV1471	4049A	CV1581	ECH35	CV1657	4020B
CV1472	CMG25	CV1582	S130	CV1658	LS9B
CV1473	CMG25	CV1585	T41	CV1659	4022B
CV1474	CE20	CV1586	HL23	CV1660	LS7
CV1475	M501	CV1587	ECR35	CV1661	DL
CV1476	M507	CV1588	ECR30	CV1662	P215
CV1477	M507	CV1592	E4504/C/16	CV1663	4021B
CV1478	M501	CV1596	O91	CV1664	B406
CV1479	M501	CV1597	E4103/B/4	CV1665	DI
CV1480	M501	CV1600	CAT1	CV1666	P610
CV1481	M501	CV1601	CAR1	CV1667	LS8A
CV1482	M501	CV1602	CAR4	CV1668	4033L
CV1483	M519	CV1603	4104A	CV1669	P625
CV1484	M519	CV1604	SS1971	CV1670	HL1320
CV1485	M519	CV1605	4013C	CV1671	4021A
CV1486	M519	CV1606	CAT2	CV1672	Pen36C
CV1495	M528	CV1607	OC2.5	CV1673	PM2HL
CV1496	M528	CV1608	U4	CV1674	AC/S2/Pen
CV1497	M528	CV1609	SW7	CV1675	N43
CV1498	M528	CV1610	MT4	CV1676	LS8A
CV1499	M528	CV1611	MR4	CV1677	AS52
CV1500	M528	CV1612	VT9B	CV1678	HLA2
CV1501	E1192	CV1614	ES1500A	CV1679	DA30
CV1502	KT32	CV1615	ESU1500	CV1680	PM202
CV1503	KT33C	CV1618	ES250M	CV1681	TSP4
CV1504	V1901	CV1619	4212E	CV1683	MKT4
CV1505	MH41	CV1620	DET6	CV1684	AFP4C
CV1506	ESP450	CV1621	ESW501	CV1685	AFP4C
CV1508	V1913	CV1622	4052A	CV1686	D418
CV1510	E1242	CV1623	RGL250	CV1687	D418
CV1517	E4504/C/16	CV1625	RG3-250	CV1688	4033L
CV1518	O9D	CV1626	RG1-240A	CV1689	PA1
CV1521	E4412/M/9	CV1627	5D/100A	CV1690	9A1
CV1522	E413-B4	CV1628	GUB	CV1691	DDL4
CV1525	E4205/C/7	CV1629	RG3-1250A	CV1692	AC/P
CV1527	VLS492AG	CV1630	ESP450	CV1694	3A/144A
CV1526	3BG1	CV1632	1N82	CV1695	DB30

SERVICE TYPE	COMMERCIAL EQUIVALENT	SERVICE TYPE	COMMERCIAL EQUIVALENT	SERVICE TYPE	COMMERCIAL EQUIVALENT
CV1696	B21	CV1761	3FF7	CV1824	1Q5
CV1697	X41	CV1762	6AK6	CV1825	KT45
CV1698	A819	CV1763	6J4	CV1826	1Q5
CV1699	SP41	CV1764	CE2	CV1827	M510
CV1700	SP41	CV1765	5664	CV1828	M512
CV1701	XLO	CV1766	CME5	CV1829	1T5
CV1702	XP	CV1768	7076	CV1830	1B3
CV1703	XV	CV1769	2A6	CV1831	2A3
CV1704	57	CV1770	7A4	CV1832	QA2
CV1705	58	CV1771	39/44	CV1833	OB2
CV1706	2B7	CV1772	47	CV1834	2A5
CV1707	2A5	CV1773	82	CV1835	3B28
CV1708	80	CV1774	112A/12A	CV1836	4B26
CV1709	6D6	CV1775	36	CV1837	2B7
CV1710	6C6	CV1776	6D7	CV1838	QQ204-15
CV1711	6B7	CV1777	7C7	CV1839	6P13
CV1712	42	CV1778	101D	CV1841	BS52
CV1713	EP8	CV1779	102D	CV1842	2G
CV1714	EP9	CV1780	30TWIN	CV1843	2Y2
CV1715	EBG3	CV1781	310B	CV1844	GS3/B
CV1716	E1541	CV1782	340A	CV1846	5T4
CV1717	4307A	CV1783	9JP1	CV1847	19H4
CV1718	ACTP	CV1784	6AK7	CV1848	20A2
CV1719	U22	CV1785	1N26	CV1849	5W4
CV1720	XL1.5	CV1786	3K33	CV1850	6L19
CV1721	XP1.5	CV1787	4C35	CV1851	5X4
CV1722	A901	CV1788	3J31	CV1852	5X4
CV1723	V257	CV1789	5FP14	CV1853	6P25
CV1724	5A/102D	CV1790	724	CV1854	5Y3
CV1726	5A/105A	CV7091	5LP1	CV1855	UU9
CV1727	Z22	CV1792	1960	CV1856	5Y3
CV1728	WE262B	CV1793	724B	CV1857	5Y4
CV1731	S130	CV1794	959	CV1858	BS62
CV1732	ML4	CV1795	723A/B	CV1859	BS4A
CV1733	4108AG	CV1796	DW4	CV1860	3OD5
CV1734	3Q/213E	CV1797	4081A	CV1861	523
CV1735	DC2P	CV1798	2051	CV1862	6AQ5
CV1737	MW6-2	CV1799	350B	CV1863	5Z4
CV1738	R5161	CV1800	1A7	CV1864	5Z4
CV1739	GC10/4B	CV1801	GS118	CV1865	6R4
CV1740	GS12C	CV1802	1A7	CV1866	M503
CV1741	EL34	CV1803	1C5	CV1867	6A6
CV1742	BK44	CV1805	DL35	CV1868	5T01A
CV1743	BS64	CV1806	1D5	CV1869	12T01A
CV1744	15L01A	CV1807	2J31	CV1870	6A7
CV1745	62BT	CV1808	2J32	CV1871	K307
CV1746	30C12P1	CV1809	2J33	CV1873	6AB7
CV1747	M505	CV1810	3J34	CV1876	1852
CV1748	TTR31MC	CV1811	1D8	CV1879	HP4101
CV1749	205D	CV1812	1E7	CV1878	6AD7
CV1750	33A/100A	CV1813	2DP1	CV1880	7EM1A
CV1751	34	CV1814	5LP1	CV1882	6AG7
CV1752	35	CV1815	6Q5	CV1883	4B/180E
CV1753	35A5	CV1816	6Y3	CV1884	33A/158M
CV1754	35TG	CV1817	1G4	CV1885	6B5
CV1755	1626	CV1818	1H5	CV1886	EC80
CV1756	1629	CV1819	6P5	CV1887	6B6
CV1757	9001	CV1820	1H5	CV1888	EC81
CV1758	1L4	CV1821	1N5	CV1889	TSX4-500
CV1759	2C26A	CV1822	2J48	CV1891	6B7
CV1760	2J26	CV1823	1N5	CV1892	2K28

SERVICE TYPE	COMMERCIAL EQUIVALENT	SERVICE TYPE	COMMERCIAL EQUIVALENT	SERVICE TYPE	COMMERCIAL EQUIVALENT
CV1894	6B8	CV1959	50C5	CV2139	BHM2
CV1895	STV/70/60	CV1960	6R6	CV2140	B6
CV1896	6C8	CV1961	12AU6	CV2141	B6E
CV1897	4J34	CV1962	6R7	CV2142	B12E
CV1898	4J35	CV1963	6R7	CV2143	B24
CV1899	6L18	CV1964	6R7	CV2144	B24E
CV1900	6D6	CV1966	6SA7	CV2145	M6
CV1901	6F11	CV1967	6SA7	CV2146	DM6
CV1902	6D8	CV1968	CWS24A	CV2147	G24H
CV1903	592	CV1969	6SC7	CV2148	GM5B
CV1904	CAA322	CV1970	6SC7	CV2149	GM1B
CV1905	4-65A	CV1971	1T4	CV2150	MX103
CV1906	6E5	CV1972	6SP5	CV2151	MX105
CV1907	CS2-C	CV1973	6SP5	CV2152	MX107
CV1908	6F5	CV1974	6S7	CV2153	MX108
CV1909	6F5	CV1975	6S7	CV2154	S1M2
CV1910	6F5	CV1976	MV6-5	CV2155	S1M5
CV1911	6F6	CV1977	UL41	CV2159	BR153
CV1912	6F6	CV1978	6SG7	CV2160	ESU77
CV1913	GS44X	CV1979	61BT	CV2161	K301
CV1914	4J31	CV1980	185BT	CV2166	4J50
CV1915	6F7	CV1981	6SK7	CV2171	A2087
CV1916	4J33	CV1982	6SK7	CV2173	G10H
CV1917	6F8	CV1984	6SC7	CV2174	G240/2D
CV1918	6F8	CV1985	6SL7	CV2175	DG7-5
CV1919	6F4	CV1986	6SN7	CV2179	A2134
CV1920	6LD20	CV1988	6SN7	CV2180	19H4
CV1921	U24	CV1989	SD6	CV2181	BS104
CV1924	TT2-125	CV1990	6SQ7	CV2183	X661
CV1926	6G6	CV1991	6SQ7	CV2185	88D
CV1927	B142	CV1992	1267	CV2187	Z239/1G
CV1928	12BA6	CV1993	6SS7	CV2188	W7/2D
CV1929	6R6	CV1995	6ST7	CV2189	V24C/2K
CV1930	6H6	CV1996	6ST7	CV2190	V233A/1K
CV1931	6H6	CV1999	1V	CV2191	DK13/2
CV1932	6J5	CV2006	EF55	CV2192	9MW5AX
CV1933	6J5	CV2029	G180/2G	CV2193	89D
CV1934	6J5	CV2102	DL75	CV2194	G400/1K
CV1935	6J7	CV2103	DF73	CV2195	EF91
CV1936	6J7	CV2104	DAF70	CV2199	GC10A
CV1937	6J7	CV2105	DF70	CV2201	E2043
CV1938	6K6	CV2106	DL66	CV2202	XE2
CV1939	37X50	CV2107	DR66	CV2203	GHT1
CV1940	6K6	CV2108	9MO6A	CV2204	TD03-10F
CV1941	6K7	CV2110	E2004	CV2205	E4103/E/34
CV1942	6K7	CV2115	U41	CV2208	G50/1G
CV1943	6K7	CV2124	BHE4	CV2209	6F33Special
CV1944	6K8	CV2125	BD78	CV2210	5544
CV1945	6K8	CV2126	3V/42DB	CV2212	13D3
CV1946	6K8	CV2127	6GH6	CV2213	NT2
CV1947	6L6	CV2128	6AJ8	CV2214	3B/240M
CV1948	6L6	CV2129	5763	CV2215	5545
CV1949	6D4	CV2130	TT16	CV2216	30E8/P1
CV1950	6L7	CV2131	5022	CV2217	6K25
CV1951	6L7	CV2132	90AV	CV2218	6157
CV1953	6N6	CV2133	90CG	CV2220	5B/257M
CV1954	6N6	CV2134	90CV	CV2221	V235A-1K
CV1955	EF91	CV2135	8D5	CV2223	G10/241/K
CV1956	6N7	CV2136	6BW6	CV2224	G1/371K
CV1957	6N7	CV2137	E4504/M/16	CV2225	150B2
CV1958	6N7	CV2138	GM4		

SERVICE TYPE	COMMERCIAL EQUIVALENT	SERVICE TYPE	COMMERCIAL EQUIVALENT	SERVICE TYPE	COMMERCIAL EQUIVALENT
CV2229	M502A	CV2322	BR161	CV2500	3524
CV2231	E2266	CV2323	BR179	CV2501	40
CV2232	DDX52	CV2325	Z502S	CV2502	41FP
CV2233	G5H	CV2328	MF31-35	CV2503	41MH
CV2234	X662	CV2329	4004B	CV2504	41MHL
CV2235	EY84	CV2331	DL64	CV2505	41MPG
CV2236	Z800U	CV2338	F2	CV2506	41MPT
CV2237	1AD4	CV2343	K335	CV2507	1U4
CV2238	5672	CV2347	5B/258M	CV2508	41STH
CV2239	5676	CV2348	5826	CV2509	41FP
CV2240	3B4	CV2349	EN30	CV2510	122
CV2241	DY70	CV2352	DG16-21	CV2511	420T
CV2245	3J/160E	CV2353	R61010	CV2512	420TDD
CV2247	G5H	CV2354	R6015	CV2514	43
CV2253	ME1501	CV2358	W7/1D	CV2516	2C39A
CV2254	5678	CV2360	5A6	CV2517	2E30
CV2255	Z801U	CV2361	DL69	CV2518	4B32
CV2256	X662	CV2362	M525	CV2519	4X150A
CV2257	UD166C	CV2363	M525	CV2520	5C22
CV2258	C43B	CV2364	M525	CV2521	6AH6
CV2259	DL68	CV2365	M525	CV2522	6AS6
CV2260	DF64	CV2367	M525	CV2523	6AS7G
CV2263	K305	CV2368	M525	CV2524	6AU6
CV2266	CC3L	CV2369	AA76	CV2525	6AV6
CV2269	ME1401	CV2370	3S4	CV2526	6AV6
CV2270	90AG	CV2371	DF61	CV2527	6BA7
CV2271	GC10B	CV2372	MF22-75	CV2528	45DS
CV2273	K312	CV2373	M502A	CV2529	451U
CV2274	BS114	CV2374	GD60	CV2530	45Z5
CV2275	DC70	CV2375	GD100	CV2531	46
CV2276	Z319	CV2376	M521	CV2532	49
CV2277	13E1	CV2382	EL822	CV2533	50
CV2281	M537	CV2383	BR191	CV2534	50L6
CV2282	K308	CV2384	ZS10C	CV2535	52
CV2283	VX7069	CV2389	CXT1	CV2537	55
CV2284	4J50	CV2390	3A4	CV2538	59
CV2286	E4412/E/9	CV2393	BA9-20	CV2539	61P
CV2287	G10H	CV2394	DA42	CV2540	63D
CV2288	DL66	CV2399	2G/473C	CV2541	71A
CV2289	U37	CV2400	CXT2	CV2542	72
CV2290	GEK36	CV2412	M253	CV2543	73
CV2291	1909A	CV2413	SX642	CV2544	78
CV2293	XB-1	CV2414	XC305/1	CV2545	79
CV2295	3E29	CV2416	C1133	CV2546	81
CV2296	NSP2	CV2418	GHT2	CV2547	83V
CV2299	DL73	CV2420	JPT9-01	CV2548	84
CV2300	3A4	CV2421	JPT9-02	CV2549	85
CV2301	E4412/C/9	CV2424	M549	CV2550	100T
CV2302	1CP1	CV2425	M539	CV2551	100TH
CV2304	K324	CV2426	M529	CV2552	100TH
CV2306	BS122	CV2428	25110	CV2553	101F
CV2307	BS120	CV2431	DG7-32	CV2554	111A
CV2308	BS116	CV2432	6025	CV2556	117L7
CV2309	BS118	CV2433	DF63	CV2557	117N7
CV2310	GEK64	CV2434	6779	CV2558	117Z6
CV2314	MP31-55	CV2449	7182	CV2560	2J51
CV2315	C12B	CV2450	7182	CV2561	122A
CV2316	6260B	CV2451	7182	CV2562	164W
CV2317	6260C	CV2452	7182	CV2563	204A
CV2321	GD86W/S	CV2486	XC18	CV2565	2050

SERVICE TYPE	COMMERCIAL EQUIVALENT	SERVICE TYPE	COMMERCIAL EQUIVALENT	SERVICE TYPE	COMMERCIAL EQUIVALENT
CV2566	205E	CV2630	351A	CV2699	6088
CV2567	205F	CV2631	352A	CV2700	957
CV2569	210DET	CV2632	354A	CV2701	958A
CV2570	210HF	CV2633	362A	CV2704	7E5
CV2571	210HL	CV2634	367	CV2705	1203
CV2572	450TH	CV2636	375A	CV2706	704
CV2573	5651	CV2637	388A	CV2707	1231
CV2574	210VPA	CV2638	393A	CV2709	1R4
CV2575	5670	CV2639	394A	CV2710	3D6
CV2576	211SP	CV2640	405BU	CV2711	1500T
CV2577	26A7	CV2642	417A	CV2712	1609
CV2578	5687	CV2643	2C40	CV2713	1610
CV2579	218	CV2644	460BU	CV2714	1614
CV2580	220C	CV2645	R1	CV2715	1630
CV2581	2200T	CV2647	532	CV2716	68C7
CV2582	220VS	CV2648	632A	CV2717	1729
CV2584	231D	CV2650	12A17	CV2718	1876
CV2585	39	CV2651	707B	CV2719	1924
CV2586	240B	CV2652	709A	CV2721	6GJ6
CV2587	242C	CV2653	714A	CV2722	3025
CV2588	244A	CV2654	715A	CV2723	869B
CV2589	250TH	CV2655	715B	CV2725	09
CV2591	100TH	CV2656	724A	CV2726	6CK6
CV2592	256B	CV2657	800	CV2727	26D
CV2593	257A	CV2658	806	CV2728	29D
CV2594	258B	CV2659	3D21A	CV2729	E80F
CV2595	259A	CV2660	809	CV2730	5800
CV2597	262A	CV2661	812	CV2731	63DS
CV2598	264A	CV2662	5639	CV2733	3951
CV2599	264C	CV2663	815	CV2734	4033A
CV2600	267B	CV2664	822	CV2735	4015A
CV2601	271A	CV2665	825	CV2736	3C24
CV2602	272A	CV2666	829B	CV2738	RG1-240
CV2603	274A	CV2668	846	CV2742	114
CV2604	275A	CV2669	849	CV2743	4033AF
CV2605	282A	CV2670	849H	CV2744	4J34
CV2606	284	CV2671	851	CV2745	4050AG
CV2607	284D	CV2672	852	CV2746	4064A
CV2608	300A	CV2673	852	CV2747	6U5G
CV2609	330A	CV2674	863	CV2748	5Z4
CV2610	3030	CV2675	864	CV2749	4081
CV2611	04TH	CV2676	865	CV2750	89J
CV2612	307A	CV2678	5799	CV2751	4096AB
CV2613	310A	CV2679	866J	CV2752	4FR60A
CV2614	311A	CV2680	868	CV2753	5684
CV2615	313C	CV2683	878	CV2754	5685
CV2616	314A	CV2685	880	CV2755	4251AX
CV2617	323A	CV2686	889	CV2756	4260A
CV2618	327A	CV2687	889R	CV2759	4304
CV2619	328A	CV2688	891R	CV2760	430B
CV2620	329A	CV2689	893R	CV2761	4304BB
CV2621	330B	CV2690	904V	CV2762	4316A
CV2622	331A	CV2691	913	CV2764	4606
CV2623	332A	CV2692	981	CV2765	4673
CV2624	337A	CV2693	10KP7	CV2766	4687
CV2625	338A	CV2694	930	CV2767	4960
CV2626	346A	CV2695	931	CV2768	8003
CV2627	349A	CV2696	931A	CV2769	9006
CV2628	349B	CV2697	935	CV2770	13077
CV2629	350A	CV2698	5896	CV2772	23043

SERVICE TYPE	COMMERCIAL EQUIVALENT	SERVICE TYPE	COMMERCIAL EQUIVALENT	SERVICE TYPE	COMMERCIAL EQUIVALENT
CV2773	68503	CV2844	6X4W	CV2913	DLS1
CV2774	68504	CV2845	LS5	CV2914	1B40
CV2775	68506	CV2846	LS5B	CV2916	1N25
CV2776	68510	CV2847	5704	CV2918	1N28
CV2777	4B28	CV2848	CK707	CV2919	1N43
CV2778	2J21A	CV2849	K1051	CV2920	E1148
CV2779	4B36	CV2850	AT200A	CV2923	1N69
CV2786	26J	CV2851	3D22	CV2924	1N70
CV2788	NT13	CV2852	2J56	CV2925	EBF2
CV2789	9LP7	CV2853	RZ1-250	CV2926	EBL31
CV2790	C1K	CV2854	6AN5	CV2927	EC50
CV2791	K332	CV2855	6K4	CV2928	1N81
CV2792	2K25	CV2856	1N23B	CV2929	ECH3
CV2793	2J50	CV2857	1N23EM	CV2930	ECH33
CV2794	C10SS/2G	CV2858	3B24W	CV2931	2B22
CV2795	1L4	CV2859	5846	CV2932	2C42
CV2796	6L6WGB	CV2860	AZ1	CV2933	2C46
CV2797	5894A	CV2861	AZ2	CV2934	3BP1A
CV2798	QQV03-12	CV2862	AZ31	CV2935	5JP1
CV2799	QQV03-20	CV2864	B21	CV2936	4B22
CV2800	A40	CV2865	B30	CV2937	6A05
CV2801	A40/N3	CV2866	2C51W	CV2938	EL33
CV2803	2915	CV2867	BU100/6	CV2941	EL50
CV2804	A915A	CV2868	C1A	CV2940	EL36
CV2805	A294	CV2869	3JP7	CV2939	6P4
CV2806	AC/2HL	CV2870	CC3D	CV2942	BM1
CV2807	AC2HL	CV2871	CAT6	CV2943	ESU76
CV2808	AC2Pen	CV2872	CAT9	CV2944	ESU1500
CV2809	AC5Pen	CV2874	1005	CV2945	ESU75
CV2810	E4504/M/16	CV2875	CL4	CV2946	ESU150
CV2811	AC/HL	CV2876	2D21W	CV2947	ESU300
CV2812	AC/HL	CV2877	6AK5W	CV2948	ESU450
CV2813	AC/HLDD	CV2878	CRT1	CV2949	F123A
CV2814	5D21	CV2879	CRT1	CV2950	129B
CV2815	ACP	CV2880	CRT4/1	CV2952	FA13
CV2816	3JP12	CV2882	6AL5W	CV2953	FA14
CV2817	6L6GA	CV2883	6A05W	CV2954	PC2A
CV2818	AC/PT8	CV2884	6AS6	CV2955	PC4
CV2819	AC/S	CV2885	54NCP11	CV2956	PC13C
CV2820	AC/SP1	CV2886	MZH	CV2957	FG17
CV2821	ECC33	CV2887	DAC1	CV2958	FG278
CV2822	AC/SG	CV2888	EL31	CV2959	3B21
CV2823	AC/SP3	CV2889	DD620	CV2960	FP54
CV2924	AC/SPen	CV2890	DDT	CV2961	1N54A
CV2825	ACT6	CV2891	DE5	CV2962	1N38A
CV2826	1B63A	CV2892	DE5B	CV2966	EY86
CV2827	ACT10	CV2895	DET1SW	CV2965	RL7076-2A
CV2829	293A	CV2896	52CG	CV2964	5D22
CV2830	AC/TH1	CV2897	7MB1A	CV2963	4D21
CV2831	2C51	CV2898	DET8	CV2967	8020
CV2832	AC/VP2	CV2899	DET10	CV2968	7F8
CV2833	AF3	CV2900	DET10	CV2969	GT1
CV2834	AGT1	CV2901	EF86	CV2970	5656
CV2835	5R4WGY	CV2903	0A2	CV2971	5675
CV2836	APP4G	CV2905	3J/17OE	CV2972	5876
CV2837	APP4G	CV2907	DF1	CV2973	GU7
CV2839	AR300	CV2908	3J/26OE	CV2974	1N72
CV2840	5UP7	CV2909	DH73	CV2975	6BQ5
CV2841	ARP12T	CV2910	DK1	CV2976	NE
CV2842	6C4W	CV2911	DL2	CV2977	H2
CV2843	6J6W	CV2912	DL63	CV2978	H12

SERVICE TYPE	COMMERCIAL EQUIVALENT	SERVICE TYPE	COMMERCIAL EQUIVALENT	SERVICE TYPE	COMMERCIAL EQUIVALENT
CV2979	H30	CV3543	4D32	CV3611	5586
CV2980	DM70	CV3545	5939	CV3612	5686
CV2981	H410	CV3546	MED4	CV3613	6AR6
CV2982	H610	CV3547	MH14	CV3614	6BL6
CV2983	DL94	CV3548	1B24A	CV3615	6BM6
CV2984	6080	CV3549	1B38	CV3616	6BN6
CV2985	HD24	CV3550	1B41	CV3618	6L6WGA
CV2986	HD203A	CV3551	1N38	CV3619	6SJ7WGT
CV2987	HF100	CV3552	MPT4	CV3620	P220
CV2988	HF200	CV3553	MS4B	CV3621	P410
CV2989	HK354E	CV3554	MPT42	CV3622	P610
CV2990	6136	CV3555	1Q22	CV3623	PA40
CV2991	HL2	CV3557	MR300	CV3624	PE7B
CV2992	6106	CV3558	MR300/E	CV3625	PE8
CV2993	KU25	CV3559	2C53	CV3626	PenB4
CV2994	HL23	CV3560	2151	CV3627	6SN7WGT
CV2995	HL23DD	CV3561	MS/Pen	CV3628	1B35A
CV2996	HLD41D	CV3562	MSP41	CV3629	6130
CV2997	HL63	CV3563	MT11SW	CV3630	Pen44
CV2998	HL133	CV3564	MT12	CV3631	Pen45DD
CV2999	HL133DD	CV3565	ME41	CV3632	6131
CV3500	HL210	CV3567	MU1	CV3633	Pen231
CV3501	HL610	CV3569	4J52	CV3634	Pen428
CV3502	HL1320	CV3570	MU4250	CV3635	Pen1340
CV3503	HLDD1320	CV3571	MVSPen	CV3636	Pen1346
CV3506	HY615	CV3572	MVSPenB	CV3637	7BP7A
CV3508	6208	CV3573	MZ05-20	CV3638	PenA4
CV3509	1N31	CV3574	MZ1/76	CV3639	6P4
CV3510	4B31	CV3575	3B26	CV3640	PJ8
CV3511	371B	CV3576	MX40	CV3641	PM1HL
CV3512	5696	CV3577	25A7GT	CV3642	PM1LP
CV3514	K8140824	CV3578	PM22D	CV3643	PM2A
CV3515	KB2	CV3579	PT5E	CV3644	726C
CV3516	KK2	CV3580	304TL	CV3645	PM2DX
CV3517	5933	CV3581	V1501	CV3646	845W
CV3518	5948/1754	CV3582	VP4B	CV3647	PM22A
CV3519	KT30	CV3583	5HP1	CV3648	PM24E
CV3520	KT31	CV3584	21/2	CV3649	PM22
CV3521	5949/1907	CV3586	471A	CV3650	12AY7
CV3522	6079	CV3587	705A	CV3651	12SH7GT
CV3523	6146	CV3588	706A	CV3652	PT5
CV3524	T1/236G	CV3589	707A/B	CV3653	PT6
CV3525	1N21C	CV3590	708A	CV3654	PT11
CV3526	EL85	CV3592	UX6653	CV3655	12SP7
CV3527	KTW73	CV3593	713A	CV3657	PV05-15
CV3528	M513	CV3594	717A	CV3658	PV1-35
CV3529	KT41	CV3595	721A	CV3659	M501A
CV3530	KTZ73	CV3596	726B	CV3660	M510A
CV3531	L2	CV3597	726V	CV3661	M501A
CV3532	L21	CV3599	829B	CV3662	M501A
CV3533	L22DD	CV3600	202P1	CV3666	12SW7
CV3534	L30	CV3601	7193	CV3667	RG1-250
CV3535	C14HM	CV3602	5J26	CV3668	12SY7
CV3536	LS408A	CV3604	GL464	CV3669	2K48
CV3537	L500	CV3605	GL464	CV3670	RG4-1000
CV3538	L610	CV3606	5J29	CV3671	RK25
CV3539	6024	CV3607	NP90	CV3672	RK28
CV3540	HT415	CV3608	5J30	CV3673	RK28A
CV3541	LS6A	CV3609	5517	CV3674	RK31
CV3542	LS532	CV3610	5663	CV3675	9004

SERVICE TYPE	COMMERCIAL EQUIVALENT	SERVICE TYPE	COMMERCIAL EQUIVALENT	SERVICE TYPE	COMMERCIAL EQUIVALENT
CV3676	2J42	CV3747	U15	CV3815	3B22
CV3677	RK47	CV3748	2X2	CV3816	X21
CV3678	2BP1	CV3749	576	CV3817	X21
CV3679	RK49	CV3750	U22	CV3818	X22
CV3680	RK60	CV3751	U21	CV3819	X24
CV3681	RK62	CV3752	U30	CV3820	X24
CV3683	RKR47	CV3753	U31	CV3821	X31
CV3685	QK283	CV3754	U50	CV3822	X31
CV3686	QK284	CV3755	5755	CV3823	X41
CV3687	4J49	CV3756	U600	CV3825	X63
CV3688	2C33	CV3758	UR3C	CV3826	X65
CV3689	3B29	CV3759	R2	CV3827	12C8GT
CV3690	RZ-150	CV3760	UU5	CV3828	X66
CV3691	S23	CV3761	UU7	CV3829	293A
CV3692	S23	CV3762	V120	CV3830	XH1.5
CV3693	10KP7	CV3763	V123B	CV3831	XL2
CV3694	S130A	CV3765	V226	CV3832	XP2
CV3695	S215	CV3766	V312	CV3833	XSG2.0V
CV3696	S215A	CV3767	V339	CV3834	XW2
CV3697	12SX7GT	CV3768	V503	CV3835	Z21
CV3698	S610	CV3769	V877	CV3836	Z21
CV3699	5693	CV3770	V955	CV3837	Z21
CV3702	SG215	CV3772	V970	CV3838	Z62
CV3703	SP4B	CV3773	V1010	CV3839	Z66
CV3704	SP13C	CV3774	V1020	CV3840	TTR31MR
CV3705	5691	CV3775	V1021	CV3841	6P1
CV3706	5796	CV3776	V1023	CV3842	5J29
CV3707	6AL7GT	CV3777	V1029	CV3843	5J30
CV3709	STV150/200	CV3778	V1105	CV3844	5J31
CV3710	AR63	CV3779	4J26	CV3845	RS366
CV3711	N78	CV3780	4J27	CV3846	RS261
CV3712	STV280/80A	CV3781	4J28	CV3847	RS250
CV3714	822Special	CV3782	4J29	CV3848	RS260
CV3715	SW5	CV3783	4J30	CV3849	RS217
CV3719	SW7	CV3784	5B/102A	CV3850	RS207
CV3721	T4D	CV3785	VMP4G	CV3851	RS253
CV3722	T20	CV3786	VMP4G	CV3852	RS285
CV3723	T41	CV3787	VP2	CV3853	RS15
CV3724	T200	CV3788	VP4	CV3854	RS47
CV3725	GL446	CV3789	5842	CV3855	RS329
CV3726	TDD2A	CV3790	VP13C	CV3856	RS330
CV3727	tDD4	CV3791	VP21	CV3857	RS283A
CV3729	1N47	CV3792	VP24	CV3858	RS18
CV3730	TMC15B	CV3794	BP210	CV3859	RW271A
CV3731	TMC16B	CV3795	VP215	CV3860	RS282
CV3732	TMC20B	CV3796	VP1322	CV3862	R555
CV3733	3KP1	CV3797	V944A	CV3863	RS289
CV3734	6X5WGT	CV3798	QA3	CV3864	RS389
CV3735	TF26	CV3799	OB3	CV3865	RS288
CV3736	K1105F2	CV3800	VS2	CV3866	RS203
CV3737	QK353	CV3802	VS24	CV3867	RSQ15/40
CV3738	VXR130	CV3803	VS24	CV3868	RSQ15/5
CV3739	TX3-200	CV3804	W21	CV3869	RSQ15/5
CV3740	TX5-400	CV3805	W30	CV3870	RGQ10/40
CV3741	TZ2-300	CV3806	W31	CV3871	RS254
CV3742	TZ20	CV3808	6T4	CV3872	RS255
CV3743	U5	CV3809	807W	CV3873	RS566
CV3744	U6	CV3810	WD30	CV3874	ATR388
CV3745	1B58	CV3812	1P31	CV3875	KU54
CV3746	U14	CV3813	8A	CV3876	SAL39

SERVICE
TYPE

COMMERCIAL
EQUIVALENT

CV3877 1B56
CV3878 2-150D
CV3879 4-400A
CV3880 4-100A
CV3881 EB41
CV3882 EBC41
CV3883 EAF42
CV3884 ECC40
CV3885 EF40
CV3886 EF41
CV3887 EF42
CV3888 ECH42
CV3889 EL41
CV3890 EL42
CV3891 EZ40
CV3892 AZ41
CV3893 4X150G
CV3894 6BF7
CV3895 5702
CV3896 5784
CV3897 5787
CV3898 5829
CV3899 5932
CV3900 5963
CV3901 6161
CV3902 6002
CV3903 QK338
CV3904 2K41
CV3905 5847
CV3906 6117
CV3907 720C
CV3908 6BH6
CV3909 6BJ6
CV3912 1U5
CV3915 8025A
CV3916 5647
CV3917 5703
CV3918 5JP2A
CV3919 U82
CV3920 A2196
CV3921 A2244
CV3923 1N21B
CV3924 6AC1W
CV3926 7C23
CV3927 12K8
CV3928 5636
CV3929 5840
CV3930 5718
CV3931 5906
CV3932 5977
CV3933 5783
CV3934 1N34A
CV3935 14R7
CV3936 14S7
CV3937 14R7
CV3938 12CS7GT
CV3939 6EM6A
CV3940 2C39
CV3941 3RP1
CV3942 5692

SERVICE
TYPE

COMMERCIAL
EQUIVALENT

CV3943 5852
CV3944 2J30
CV3945 2K45
CV3946 3WP1
CV3947 4J54
CV3948 4J55
CV3949 4J56
CV3950 4J57
CV3951 4J58
CV3952 4J59
CV3953 4J78
CV3954 5CP7
CV3955 5CP12
CV3956 719A
CV3957 1258
CV3958 5657
CV3959 5FP7A
CV3960 5783
CV3961 6111
CV3963 559
CV3964 354
CV3965 2C46
CV3966 QK428
CV3967 1N63
CV3968 3DP1A
CV3969 577
CV3970 5721
CV3971 89L
CV3972 6095
CV3973 6AC7Y
CV3974 6AS7Y
CV3975 6236
CV3976 M509
CV3977 1N35
CV3978 6AG7Y
CV3979 OD3W
CV3980 12SR7GT
CV3981 G5S3
CV3982 M506
CV3983 12SW7GT
CV3985 6SL7WGT
CV3986 6021
CV3987 5644
CV3988 6442
CV3989 6AN4
CV3990 2E26
CV3991 4X150D
CV3992 HD6002
CV3993 1N67A
CV3994 1V2
CV3995 6CB6
CV3996 U709
CV3997 JP9-15
CV3998 E180F
CV3999 MW22/22
CV4001 F/6063
CV4002 F/6064
CV4003 12AU7
CV4004 6057
CV4005 6X4

SERVICE
TYPE

COMMERCIAL
EQUIVALENT

CV4006 6059
CV4007 6AL5W
CV4008 6719
CV4009 6BA6W
CV4010 5654
CV4011 6AS6W
CV4012 5750
CV4013 5670
CV4014 6064
CV4015 6065
CV4016 5814
CV4017 5751
CV4018 2D21W
CV4019 6AQ5W
CV4020 OA2WA
CV4021 3B24WA
CV4022 6135
CV4023 6AU6WA
CV4024 12AT7WA
CV4025 6AL5
CV4026 6R4WGA
CV4027 5X3WGTA
CV4028 OB2WA
CV4029 5902
CV4030 G75/3G
CV4031 636WA
CV4032 6814A
CV4033 F/6060
CV4034 F/6067
CV4035 F/6057
CV4036 F/6443
CV4037 F/5750
CV4039 6062
CV4040 56F17
CV4041 56F17P
CV4042 19G6
CV4043 6061
CV4044 6443
CV4045 F/6061
CV4047 G400/2G
CV4048 QS1212
CV4049 F/5726
CV4050 F/5654
CV4051 F/6158
CV4052 QS1202
CV4053 QS1203
CV4054 F/5654
CV4055 6132
CV4056 F/6132
CV4058 6C4WA
CV4059 M8097
CV4060 S11E12
CV4063 6516
CV4066 M8190
CV4067 M8167
CV4068 6158
CV4069 F/6158
CV4070 M8099
CV4073 SX641
CV4074 SX642

SERVICE TYPE	COMMERCIAL EQUIVALENT	SERVICE TYPE	COMMERCIAL EQUIVALENT	SERVICE TYPE	COMMERCIAL EQUIVALENT
CV4076	M8179	CV5052	6AU7	CV5116	3B/241M
CV4077	SX643	CV5053	6098CT	CV5120	20CV
CV4078	SX644	CV5054	6390	CV6008	24B1
CV4080	M8225	CV5055	EM81	CV5121	6870
CV4501	5A/172G	CV5056	A2094	CV5144	PCL83
CV4502	5A/173G	CV5057	5702WA	CV5331	ECC189
CV4503	5A/174G	CV5058	578WA	CV5358	ECC88
CV4504	2S/141G	CV5059	5829WA	NGT1	DPQ
CV4506	5A/175G	CV5060	2759	NGT2	GT1C
CV5001	601C	CV5061	7XP2	NGT4	GT1A
CV5002	CS3A	CV5062	5841	NGT121	T41
CV5003	BU28/4	CV5063	1N70	NGT128	GT1C
CV5004	3JP2	CV5064	1N38A	NR15	PM3
CV5005	6110	CV5065	6U8	NR15A	PM4DX
CV5006	6021	CV5066	BL25	NR16	PM54
CV5007	6112	CV5067	6SH7L	NR16A	PM4DX
CV5008	6080WA	CV5068	ES75H	NR18	DEQ
CV5009	6203	CV5069	6621	NR22	PM14
CV5010	5644	CV5070	5FP11	NR23	PM14
CV5011	TH1657A	CV5071	3J/195E	NR26	HL4
CV5012	1N23C	CV5072	EZ81	NR27	104V
CV5013	1N23CR	CV5073	6AM4	NR27A	104V
CV5014	1N78	CV5074	6AP4A	NR28	PM2
CV5015	1N53	CV5075	622C	NR31	MH4
CV5016	1N32	CV5076	1N198	NR35	FD220A
CV5017	450TL	CV5077	PL81	NR37	ACSG
CV5018	4J52A	CV5078	XC17	NR38	VMS4
CV5019	QK387	CV5079	5643	NR39	PM22A
CV5020	QK388	CV5080	EF37A	NR40	PM24D
CV5021	6V3A	CV5081	61SPT	NR41	210VPT
CV5022	CS31A	CV5082	M8234	NR42	P220
CV5023	AEX212	CV5083	QS75-20	NR43	PM24A
CV5024	MX-408/U	CV5084	30B1P3	NR44	FX4
CV5025	XB2	CV5085	27M2	NR45	VMP4G
CV5026	1N320	CV5086	6BS7	NR46	D41
CV5027	3V/390A	CV5087	4EP7	NR47	PX25
CV5028	3V/390B	CV5088	XC15	NR48	EBC33
CV5029	6J4WA	CV5089	L3040	NR49	EP36
CV5030	26Z5V	CV5090	L4031	NR50	AT4
CV5031	M548	CV5092	EF800	NR51	VMP4G
CV5032	1X2A	CV5093	EL803	NR52	354V
CV5033	3-14	CV5094	EL86	NR53	KT42
CV5034	3JP11	CV5095	GK2261	NR54	AP4
CV5035	5ADP1	CV5096	GK2401	NR54A	AP4
CV5036	6AP4	CV5098	ZS21	NR55	4D1
CV5037	6BA6W	CV5099	ZS22	NR56	DA30
CV5038	6BC4	CV5100	GJ3M	NR57	ML4
CV5039	6BL7	CV5101	GJ5M	NR58	244V
CV5040	6BQ6	CV5102	GJ6M	NR59	KT41
CV5041	6CL6	CV5103	ZS20B	NR60	H42
CV5042	12BH7	CV5104	GEX541	NR61	W42
CV5043	811A	CV5105	OC45	NR64	KTW62
CV5044	5836	CV5106	E1T	NR65	MSP4
CV5045	5837	CV5107	KD63	NR66	D41
CV5046	5844	CV5108	EP60	NR67	6L7
CV5047	G7B	CV5109	GE10	NR68	6Q7
CV5048	V239C/1K	CV5112	3A/167M	NR69	Y63
CV5049	V241C/1K	CV5113	5787WA	NR70	MS/Pen
CV5050	212-G11A	CV5114	6260B	NR71	MS/PenT
CV5051	HD2016A	CV5115	X79	NR72	N43

**SERVICE
TYPE**

NR73 GN7
NR74 PV1-35
NR75 ACP4
NR76 KT241
NR77 6L6
NR78 6C5
NR78A L63
NR79 Z62
NR80 E1148
NR81 6K7
NR82 X65
NR83 6J7
NR84 20A1
NR85 6Z6
NR86 KTW63
NR87 AC5PenDD
NR94 ACP4
NS1 STW280/80
NS3 202
NS4 4713
NS5 304
NT18 D060
NT20 FM365
NT36 DA100
NT37 4033A
NT38A P21-75
NT39 ACT36
NT40 DET5
NT58 DET12
NT62 FM24D
NT62A FM24D
NT65A P21-35
NT82 PM202
NU3 U12/14
NU5 RX3-120
NU12 U18
NU13 U15
NU13A U15
NU15 U4020
NU16 GU5
NU17 U05
NU18 U17
NU20 U50
NU31 MU2
NU33 SU2150A
NU33A HVR2
NU34 HVR2
V177 EM31
V1103 Y63
VR18 2155G
VR19 PM2
VR21 210LF
VR22 220PA
VR27 210LF
VR28 220VSG
VR32 220B
VR35 QP21
VR37 MH4
VR38 MHL4

**COMMERCIAL
EQUIVALENT**

**SERVICE
TYPE**

VR40
VR41
VR43
VR44
VR45
VR46
VR47
VR49
VR53
VR54
VR55
VR56
VR57
VR57A
VR59
VR65
VR655A
VR66
VR67
VR78
VR82
VR83
VR91
VR91A
VR92
VR95
VR95A
VR99
VR99A
VR100
VR101
VR102
VR105
VR106
VR107
VR108
VR109
VR109A
VR116
VR117
VR117A
VR118
VR119
VR122
VR123
VR124
VR125
VR126
VR129
VR130
VR135
VR136
VR137
VR502
VR503
VR505
VS68
VS69

**COMMERCIAL
EQUIVALENT**

PK25
PM12M
210PG
210DDT
X56
PT25H
T205-20
210SPT
EF39
EB34
EB3C3
EF36
EK32
EK32
955
SP61
SP41
P61
6J5
D1
220TH
210VPT
EF50
EF50
EA50
954
954
X66
ECH35
KTW62
MHL6
BL63
ML6
9D2
15D2
8D2
4D1
4D1
V872
41MTL
41MTL
KT2
DDL4
41MKP
EP8
MS/Pen
MS/PenB
4SH
MS/Pen
HL23
E1148
EF54
EC52
KT32
KT33C
MH41
STV280/40
STV280/80

**SERVICE
TYPE**

VS70
VT20
VT23
VT23A
VT25
VT45
VT46
VT50
VT51
VT52
VT60
VT60A
VT61
VT61A
VT62
VT73
VU71A
VU72
VT74
VT75
VT75A/B
VT76
VT79
VT80
VT81
VT88
VT96
VT104
VT105
VT107A
VT107B
VT127
VT139
VT180
VT195
VT501
VT501A
VU29
VU39
VU64
VU71
VU111
VU113
VU120
VU120A
VU133
VU134
VU504
VU508
VW36
VW42
VW48

**COMMERCIAL
EQUIVALENT**

7475
220P
230XP
230XP
DET25
X56
PT25H
HL2
Pen220A
EL32
807
807
DET19
TV03-10
TY1-50
6F5
U52
GU5
6J7
KT66
KT44
DA41
KT8
4307A
4052A
832
5B/502A
PT15
ML6
6VGGT
6V6G
Pen46
MH4
EF39
5Z4G
E1192
E1192
ESU150
MU12/14
U12/14
U52
V1907
U17
SU2150A
SU2150A
V960
HVR2
V1901
V1913
220PA
210LF
2155G

American Army V.T. Series Index and Cross Reference to British Service Types

56

SERVICE TYPE	COMMERCIAL EQUIVALENT	SERVICE TYPE	COMMERCIAL EQUIVALENT	SERVICE TYPE	COMMERCIAL EQUIVALENT
VT1	203A	VT72	842	VT118	832
VT2	205B	VT73	843	VT119	2X2
VT4B/C	211	VT74	5Z4	VT120	954
VT5	215A	VT75	75	VT121	955
VT6	212A	VT76	76	VT122	530
VT7	WX12	VT77	77	VT123	5586
VT8	UV204	VT78	78	VT124	1A5
VT17	860	VT80	80	VT125	1C5
VT19	861	VT83	83	VT126	6X5
VT22	204A	VT84	84/6Z4	VT126A	6X5G
VT24	864	VT85	6K7	VT126B	6X5GT
VT25	10	VT86	6K7	VT127	Nil
VT25A	10	VT86A	6K7G	VT127A	Nil
VT26	22	VT86B	6K7GT	VT128	1630
VT27	30	VT87	6L7	VT129	304TL
VT28	24	VT87A	6L7G	VT130	250TL
VT29	27	VT88	6R7	VT131	12SK7
VT30	01A	VT88A	6R7G	VT132	12K8
VT31	31	VT88B	6RTGT	VT133	12SR7
VT33	33	VT89	89	VT134	12A6
VT34	207	VT90	6H6	VT135	12J5
VT35	35/51	VT90A	6H6GT	VT135A	12J5
VT36	36	VT91	6J7	VT136	1625
VT37	37	VT91A	6J7GT	VT137	1626
VT38	38	VT92	6Q7	VT138	1629
VT39	869	VT92A	6Q7G	VT139	VR150-30
VT39A	869A	VT93	6B8	VT140	1628
VT40	40	VT93A	6B8G	VT141	531
VT41	851	VT94	6J5	VT142	WE39DY
VT42	872	VT94A	6J5G	VT143	805
VT42A	872	VT94B	6J5	VT144	813
VT43	845	VT94C	6J5	VT145	5Z3
VT44	32	VT94D	6J5GT	VT146	1N5GT
VT45	45	VT95	2A3	VT147	1A7
VT46	866	VT96	6N7	VT148	1D8
VT46A	866A	VT96B	6N7	VT149	3A8
VT47	47	VT97	5W4	VT150	6SA7
VT48	41	VT98	6U5/6G5	VT150A	6SA7GT
VT49	39/44	VT99	6P8	VT151	6A8
VT50	50	VT100	807	VT151A	6ABGT
VT51	841	VT100A	807	VT152	6K6
VT52	2C45	VT101	837	VT152A	6K6GT
VT54	34	VT103	6SQ7	VT153	12C8
VT55	865	VT104	12SQ7	VT154	814
VT56	56	VT105	6SG7	VT158	3092
VT57	57	VT106	803	VT161	12SA7
VT58	58	VT107	6V6	VT162	12SJ7
VT60	850	VT108	450TH	VT163	6C8
VT62	801	VT109	2051	VT164	1619
VT63	42	VT111	5BP4/1802P4	VT165	1624
VT64	800	VT112	6AC7	VT166	371A
VT65	6C5	VT114	5T4	VT167	6K8
VT65A	6C5G	VT115	6L6	VT167A	6K8GT
VT66	6F6	VT115A	6L6GT	VT168A	6X6
VT66A	6F6G	VT116	6SL7	VT169	12C8
VT67	30	VT116A	6SJ7GT	VT170	1E5GP
VT68	6B7	VT116B	6SJ7Y	VT171	1R5
VT69	6D6	VT117	6SK7	VT171A	1R5
VT70	6F7	VT117A	6SK7GT	VT172	1S5

SERVICE TYPE	COMMERCIAL EQUIVALENT	SERVICE TYPE	COMMERCIAL EQUIVALENT	SERVICE TYPE	COMMERCIAL EQUIVALENT
VT173	1T4	VT208	7B8	VT243	7C4
VT174	385	VT209	12SG7	VT244	5U4
VT175	1613	VT210	184	VT245	2050
VT176	6AB7	VT211	6SG7	VT246	918
VT177	1LH4	VT212	958	VT247	6AG7
VT178	1LC5	VT213A	6L5	VT248	3CP1/180P1
VT179	1LN5	VT214	12H6	VT277	417
VT180	3LF4	VT215	6E5	VT279	GY2
VT181	7Z4	VT216	816	VT280	C7063
VT182	3B7	VT217	811	VT281	HY145ZT
VT183	1R4	VT218	100TH	VT282	2G489
VT184	VR90/30	VT220	250TH	VT283	QF-206
VT185	3D6	VT221	305	VT284	QF-197
VT187	575A	VT222	884	VT285	QF-200C
VT188	7E6	VT223	1H5	VT286	832A
VT189	7F7	VT224	REK34	VT287	815
VT190	7H7	VT225	307A	VT288	12SH7
VT191	316A	VT226	3EP1/1806P1	VT289	12SL7
VT192	7A4	VT227	7184	VT249	1006
VT193	7C7	VT228	8012	VT250	EP50
VT194	7J7	VT229	6SL7	VT251	WL441
VT195	1005	VT230	350A	VT252	923
VT196	6W5	VT231	6SN7	VT254	304TH
VT197A	5X3G	VT232	E1148	VT255	705A
VT198A	6G6	VT233	6SR7	VT256	GL486
VT199	6SS7	VT234	114B	VT257	K-7
VT200	VR105-30	VT235	615	VT259	829
VT201	25L6	VT236	836	VT260	0A3
VT201C	25L6GT	VT237	957	VT264	3Q4
VT203	9003	VT238	956	VT266	1616
VT204	HE24G	VT239	1LE3	VT267	WL578
VT205	6ST7	VT240	710A	VT268	12SC7
VT206A	5V4G	VT241	7E5	VT269	717A
VT207	12AH7				

British Post Office V.T. Series Index and Cross Reference to British Service Types

58 VALVE	C.V.N.O	EQUIVALENTS	VALVE	C.V.N.O	EQUIVALENTS
10	1610	MT4	105	1673	PM2HL
11	1611	MR4	106	1674	AC/S2Pen
16	1607	OC2.5	107	1675	N43
17	1608	U4	108	1676	LS8A
19	1612	VT9B	109	1677	AC52
20	1613		110	1678	MLA2
24	1636	LS5	111	1679	DA30
25	1637	LS5	112	1680	PM202
26	1600	CAT1	113	1681	TSP4
27	1601	CAR1	114	1682	
31	1638	4101D	115	1683	MKT4
32B	1640	4002D	116	1684	APP4C
32D	1641	4102E	116A	1685	APP4C
33	1642	DER	118A	1686	D418
35	1615	ESU1500	118B	1687	D418
34	1614	ES1500A	119	1169	VMP4G
36	1602	CAR4	120	1688	3B/252B
37B	1643	E132	121A	1288	3B/252B
37C	1644	E1532	122	244	AF2
38	1645	E133	125	1689	PA1
38A	1646	E1453	126	1690	9A1
40	1647	LS5B	127	1187	D41
46	1616		127A	1691	DDL4
47	1603	4104A	128	1692	AC/P
51	1617		130	1621	ESW501
52	1025	DET25	131	1168	FX4
53	1604	SS1971	132	1694	3A/144A
54	1618	ES250M	133	1695	DH30
56	1648	4205E	136	1118	KT2
57	25	ES85	137	1081	4502A
58	1619	4212E	138	1623	RG1-250
59	1620	DET6	139	399	MH4
60	1605	4013C	140	1166	P220
61	1609	SW7	142	1039	R3
62	1606	CAT7	143	1696	B21
65	1649	6C5	144	1371	P21-35
66	1650	LS5A	145	243	4045A
68	1651	G455B	146	1625	RG30250
69	1652	P220A	147	1697	X41
72	249	4019A	148	1689	A819
73A	1653	KC1	149	1349	RG5-500
74	1654		150	1699	SP41
75	1655	4109B	150A	1700	SP41
78	1656	LS8	151	1701	XLO
79A	1657	4020B	152	1702	XP
80A	1658	L29B	153	1703	XV
81	1659	4022B	154	1067	6J5
82	1660	LS7	155	1704	57
85	1661	DL	156	1705	58
86	1662	P215	157	1706	2B7
87	1663	4021B	158	1707	2A5
88	1664	B406	159	1708	80
89	1665	DH	160	1709	6D6
90	1732	ML4	161	1710	6C6
91	1038	MEL4	162	1711	6B7
92	1735	DC2P	163	1712	42
93	1666	P610	164	1713	EF8
94	1667	LS8A	165	1714	1F9
95	1668	4033L	166	1715	EBC3
98	1669	P625	167	1716	E1541
100	1670	HL1320	168	1626	RG10240A
100B	1670	H11320	169	1717	4307A
102	1671	4021A	170	1718	AC/TP
103B	1672	Pen36C	171	1719	U22

VALVE	C.V.N.O	EQUIVALENTS	VALVE	C.V.N.O	EQUIVALENTS
177	1720	XL1.5	194	587	6Q7
178	1721	XP1.5	195	1863	5Z4
179	1722	A901	196	509	6V6
180	1053	EF39	197	1629	RG3-1250A
181	1052	EL32	198	1075	KT66
182	1823	1N5	199	124	807
183	1724	5A/102D	200	1065	SP61
185	245	4328D	201	1056	EF36
186	1726	5A/105A	202	1054	EB34
187	1627	5D/100A	203	9	AL60
188	1727	Z22	204	18	DET19
189	1128	GT1C	205	1630	ESP450
190	1728	WE262B	206	1120	SU2150A
191	1628	GUB	207	1091	EF50
193	1100	KTW61			

B.V.A. UTILITY EQUIVALENTS

The last figure of this number denotes the manufacturer and can be disregarded.

E.g., all the 260 series are equivalent to an EL.33.

B.V.A. No.	Civilian No.	B.V.A. No.	Civilian No.	B.V.A. No.	Civilian No.
132	HL23DD	172	TP25	264	EL33
142	VP23	211	DW4/350	274	ECH35
162	Pen25	243	EF29		

TEST DATA FOR RECEIVING AND SMALL TRANSMITTING VALVES ¹

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE I60					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
OZ4	007 060 010		—		250		58	3kΩ	No Data Available			A08	CCR
00	364 200 000		5	0	40		1.0	0.66	No Data Available			UX4	T
00A	364 200 000		5	0	40		1.5	0.66	No Data Available			UX4	T
01	364 200 000		5	4.5	90		2.5		80			UX4	T
01A	364 200 000		5	9	150		3	0.8	80		0.7	UX4	T
01AA	364 200 000		5	4.5	90		3.2	0.9	90		0.8	UX4	T
01B	364 200 000		5	4.5	90		2.5	0.72	90		0.8	UX4	T
06F90	653 420 000		0.6	1.1	20	20	.05	0.1	No Data Available			B5A	P
054V	642 310 000		4		100			4	100		4	B5	T
084	642 300 000		4	2.0	150		4.0	1.4	125		1.4	B4	T
1	281 300 000		6				60		REC		20mA	UX4	R
1A3	281 008 300		1.4						D			B7G	D
1A4	365 200 000	G1	2	3	150	75	2.2	0.6	100	75	0.6	UX4	P
1A4E	365 200 000	G1	2	3	150	75	2.2	0.6	100	75	0.6	UX4	P
1A4P	365 200 000	G1	2	3	90	75	2.2	0.7	80	75	0.7	UX4	P
1A4T	265 300 000	G1	2	3	150	75	2.2	0.6	100	75	0.6	UX4	P
1A5	036 540 200		1.4	4.5	90	90	4	0.85	80	75	0.8	A08	P
1A6	266 453 000	G1	2	0	150	75	3	0.4	80	60	0.4	UX6	P
1A7	892 300 000		4				60		REC		20mA	B4	RR
1A7	026 546 300	G1	1.4	0	90	50	1.8	0.5	80	60	0.5	A08	H
1A8	327 546 280		1.4		90	90	1.2	0.7	80	90	0.7	A08	DTP
1AB5	365 004 220		1.2	1.5	150	150	6.8	1.35	100	100		B8B	P
1AB6	265 461 300		1.4	4.1	60	60	1.65	0.1	No Data Available			B7G	H
1AC5	*4* 23* 650		1.25	4.5	60	60	2.0	0.75	60	60	0.7	B8D	P
1AC6	266 464 300		1.4	4.0	60		4	2.2	80			B7G	H
1AD4	652 430 000		1.25	1.6	90	90	5.7	2.3	80	75	2.0	B5A	P
1AD5	*4* 23* 650		1.25	3.0	60	60	1.85	0.73	60	60	0.7	B8D	P
1AE4	265 024 300		1.25	0	90	90	3.5	1.55	90	80	1.5	B7G	P
1AE5	642 453 000		1.2		40	40	0.9	0.2	No Data Available			B5A	P
1AF4	265 024 300		1.4	0	90	90	1.65	0.95	80	90	0.9	B7G	P
1AF5	208 564 300		1.4	0	90	90	1.1	0.6	80	90	0.6	B7G	DP
1AF33	208 564 300		1.4		60	60	1.6	0.5	No Data Available			B7G	DP
1AF34	208 564 300		1.2		60	60	1.6	0.5	No Data Available			B7G	DP
1AG4	653 420 000		1.2	3.6	40	50	2.4	1	No Data Available			B5A	P
1AG5	658 243 000		1.2	2	40	40	0.2	0.2	No Data Available			B5A	P
1AH4	652 453 000		1.2		40	40	0.7	0.7	No Data Available			B5A	P
1AH5	208 564 300		1.4	1.5	60	60	0.17	0.17	60	60	0.1	B7G	DP
1AJ4	265 124 300		1.4	0.8	75	75	1.4	0.65	80	75	0.7	B7G	P
1AJ5	658 243 000		1.2		40	40	1	0.4	No Data Available			B5A	P
1AK4	652 430 000		1.2		40	40	0.7	0.7	No Data Available			B5A	P
1AM4	265 024 300		1.4		90	60	2.4	0.3	80	60	0.2	B7G	P
1AN5	265 224 300		1.4	0	60	60	1.0	0.7	80	75	0.8	B7G	P
1AQ5	266 424 300		1.4		90	40			No Data Available			B7G	H
1AR5	208 564 300		1.4		60	60	0.9	0.5	No Data Available			B7G	DP
1AS4	265 024 300		1.4	0	90	90	1.6	0.85	100	90		B7G	P
1AS5	265 804 300		1.4		60	60	0.9	0.5	No Data Available			B7G	DP
1AU3	030 000 200	D1	1.2						D			A08	D
1AX2	230 232 032	D1	1.4						D			B9A	D

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
1B3	020 000 300	D1	1.2						D			A08	R
1B4	364 200 000		2	3	200	60	1.7	0.6	100	60		UX4	P
1B4P	365 200 000	G1	2	3	90	75	1.6	0.6	80	60	0.6	UX4	P
1B4T(T)	265 300 000	G1	2	3	150	75	1.7	0.6	100	60	0.6	UX4	P
1B5	268 943 000		2	3	150		0.8	0.57	100		0.5	UX6	DDT
1B5L	368 942 000		2	3	100		0.8	0.5	100		0.5	UX6	DDT
1B6	265 406 300		1.4	1.5	90	75	1.5	0.75	80	75	0.7	B7G	P
1B7	026 546 300	G1	1.4	0	90	50	1.5	0.8	80	60	0.8	A08	H
1B8	037 546 280		1.4	{	90		0.1	0.3	80	60	0.1	A08	DTP
				6	90	90	6.3	1.1	80	75	1.1		
1C	289 300 000		6						D			UX4	D
1C1	266 424 300		1.4	4	75		4.5	1.2	80		1.4	B7G	H
1C2	266 464 300		1.4	4	60		4	1.2	80		1.4	B7G	H
1C3	260 406 300		1.4	3	90		1.4	0.76	80		0.7	B7G	T
1C3	266 464 300		1.4		60		3		No Data Available			B7G	H
1C4	365 200 000	G1	2	0	150	75	2.5	1	150	75	1	UX4	P
1C5	036 540 200		1.4	7.5	90	90	7.5	1.55	80	75	1.5	A08	P
1C6	366 452 000	G1	2	0	150	75		1	150	75	1	UX6	H
1C7	026 546 300	G1	2	0	150	75		1	150	75	1	A08	H
1C8	240 236 540		1.25	0	30	30	0.3		No Data Available			B8D	H
1C91	624 300 000		1.2	2.5	150		7		100			B5A	T
1C91	026 447 300		1.2	2.5	125		7		100			A08	T
1D3	402 306 060		1.2	5	90		12.5	3.4	100		3.4	B8A	T
1D4	264 530 000		2	6	150	150	9.5	2.4	100	100		UX5	P
1D5	802 310 000		40				120		REC		60mA	B5	R
1D5EG	026 500 300	G1	2	3	150	60	2.2	0.7	100	60	0.6	A08	P
1D5G	026 503 000	G1	2	3	200	75	2.3	0.7	100	75		A08	P
1D5GP	026 500 300	G1	2	3	90	75	2.2	0.7	80	60	0.7	A08	P
1D5GT	026 500 300	G1	2	3	150	75	2.2	0.6	100	60	0.6	A08	P
1D6	280 183 000		25				60		REC		60mA	UX6	R
1D7	036 546 200	G1	2	0	150	75	3	0.42	150	75	1.0	A08	P
1D8	037 546 280	G1	1.4	{	90		1.1	0.5	80	60	0.5	A08	DTP
				9	90	90	5	0.9	80	75	0.9		
1D13	281 0*8 300		1.4						D			B7G	D
1DN5	265 804 300		1.4		60	60	2.1	0.6	No Data Available			B7G	DP
1E3	402 203 060		1.2	0	150		20	3.5	100			B9A	T
1E4	026 040 300		1.4	3	90		1.4	0.76	80		0.7	A08	T
1E5GP	036 500 200	G1	2	3	90	75	1.6	0.6	80	60	0.6	A08	P
1E7	036 447 250		2	4.5	150	150	7.5	1.43	100	100	1.4	A08	PP
1E8	240 236 540		1.25	0	60	60	1.8	0.74	No Data Available			B8D	H
1F1	265 024 300		1.4	0.8	75	75	1.4	0.65	80	60	0.7	B7G	P
1F2	265 024 300		1.4	1.0	90	75	2.9	0.92	80	75	0.9	B7G	P
1F3	265 024 300		1.4	1.0	90	50	1.9	0.75	80	60	0.7	B7G	P
1F4	364 520 000		2	3	90	90	4	1.4	80	75	1.4	UX5	P
1F5	036 540 200		2	3	90	90	4	1.4	80	75	1.4	A08	P
1F6	365 892 000	G1	2	1.5	150	75	2.2	0.6	150	75	0.6	UX6	DDP
1F5	036 500 200	G1	2	3	150	75	1.7	0.6	100	60	0.6	A08	P
1F7	036 895 200	G1	2	1.5	150	75	2.2	0.6	150	75	0.6	A08	DDP
1F7GV	036 895 200	G1	2	1.5	150	75	2.2	0.6	150	75	0.6	A08	DDP
1F33	265 024 300		1.4		90	60	3.5	0.7	80	60		B7G	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
1F34	265 024 300		1.2		90	60	3.5	0.7	80	60		B7G	P
1F860	141 230 651		20		200	175	10	7.5	100	100	7	B9A	P
1FD1	2*8 564 300		1.4	1.5	60	60	0.17	0.17	80	60	0.1	B7G	DP
1FD9	208 564 300		1.4	1.0	75	75	1.6	0.63	80	75	0.6	B7G	DP
1G3	*2* 0*0 3*0	D1	1.2						D			A08	D
1G4	036 040 200		1.4	6	90		2.3	0.82	80		0.8	A08	T
1G5	036 540 200		2	6	90	90	8.5	1.5	80	75	1.5	A08	P
1G6	026 447 300		1.4	0	90		1.0	0.67	80		0.6	A08	TT
1H2	23* 232 *32	D1	1.4						D			B9A	D
1H3C	026 447 300		1.2	5.5	150		2.3	0.8	100			A08	TT
1H4	026 040 300		2	9	150		3	0.9	100		0.9	A08	T
1H5	036 080 200	G1	1.4	0.5	100		0.1	0.2	80		0.2	A08	DT
1H6	036 894 200		2	3	150		0.8	0.57	100		0.5	A08	DDT
1H33	265 424 300		1.4		90	60	1.6		80	60	0.3	B7G	H
1H34	265 424 300		1.2		90	60	1.6		80	60	0.3	B7G	H
1H35	265 454 300		1.4		90	40	0.6		No Data Available			B7G	H
1J3	020 000 300	D1	1.2						D			A08	D
1J5	036 540 200		2	16.5	150	150	7	0.95	100	100	0.9	A08	P
1J6	026 447 300		2	3	150		1.7		100			A08	TT
1J6GX	026 447 300		2	0	150		2		125			A08	TT
1K3	020 000 300	D1	1.2						D			A08	D
1K4	365 200 000	G1	2		150	75	2.5	1	150	75	1	UX4	P
1K5	026 500 300	G1	2		125	75	2.5	1	125	75	1	A08	P
1K5B	026 500 300	G1	2		125	75	1	1	125	75	1	A08	P
1K6	369 852 000	G1	2	3	150	90	0.9	0.6	100	75	0.6	UX6	DDP
1K7	026 895 300	G1	2	4.4	150	150	1.5	0.7	100	100	0.7	A08	DDP
1L4	265 024 300		1.4	0	90	75	2.9	0.92	80	75	0.9	B7G	P
1L5	026 540 300		2	6	200	200	10	2.4	100	150	2.4	A08	P
1L6	266 451 300		1.4	0	90	50	4	0.55	80	60		B7G	H
1L33	264 526 300		1.4	7	90	60	7.4	1.4	80	60		B7G	P
1L34	254 526 300		1.2	7	90	60	7.4	1.4	80	60		B7G	P
1L60	642 300 000		1		150		6.0	1.2	150		1.2	B4	T
1L84	365 004 020		1.4	4.5	90	90	4	0.85	80	70	0.8	B8B	P
1L91	652 430 000		1.2	4.5	40	40	1.2	0.5	No Data Available			B5A	P
1L861	041 230 651		20		200	200	15	9	100	100		B9A	P
1LA4E	365 004 020		1.4	4.5	90	90	3.5	0.8	80	75	0.8	B8B	P
1LA6	366 454 020		1.4	0	90	50	1.8	0.55	80	60	0.5	B8B	H
1LA6E	366 454 020		1.4	0	90	50	1.8	0.55	80	60	0.5	B8B	H
1LB4	365 004 020		1.4	9	90	90	5	0.9	80	75	0.9	B8B	P
1LB6	276 554 430		1.4	{	75		1.2		80			B8B	H
				0	90	75	0.4		80	75			
1LB7	265 104 130		1.4	3	40	40	1	0.3	No Data Available			A08	P
1LC5	365 124 020		1.4	0	90	50	1.15	0.77	80	60	0.7	B8B	P
1LC6	266 454 030		1.4	0	90	50	3	0.55	80	60	0.5	B8B	H
1LD5	365 804 020		1.4	0	90	50	0.6	0.57	80	60	0.5	B8B	DP
1LE3	350 0*4 020		1.4	3	90		1.4	0.76	80		0.76	B8B	T
1LF3	260 004 020		1.4	3	90		1.4	0.76	80		0.7	B8B	T
1LG5	365 124 020		1.4	1.5	90	90	3.7	1.15	80	90	1.1	B8B	P
1LH4	260 804 020		1.4	0	90		0.15	0.27	80		0.2	B8B	DT
1LN5	365 124 020		1.4	0	90	90	1.6	0.8	80	90	0.8	B8B	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
1LN5E	365 124 020		1.4	0	90	90	1.6	0.8	80	90	0.8	B8B	P
1M5G	036 500 200	G1	2		150	75	2.5	1	150	75	1	A08	P
1N2	*2* *** 3*0	D1	1.2						D			A08	D
1N5	036 500 200	G1	1.4		90	90	1.2	0.7	80	75	0.7	A08	P
1N6	036 548 200		1.4	4.5	90	90	3.4	0.8	80	75	0.8	A08	DP
1NA31	802 208 300		5				15		REC		10mA	B7G	R
1P1	365 024 300		1.4	5.2	90	90	5.0	1.4	80	75	1.4	B7G	P
1P5	036 500 200	G1	1.4		90	90	2.3	0.7	80	90	0.7	A08	P
1P10	264 536 200		1.4	7	90	75	7.4	1.57	80	60	1.5	B7G	P
1P11	365 024 300		1.4	4.5	90	90	9.5	2.15	80	75	2	B7G	P
1Q5	036 540 200		1.4	4.5	90	90	9.5	2.2	80	75	2.2	A08	P
1Q6	040 238 650		1.25	0	60	60	1.6	0.6	No Data Available			B8D	DP
1R	026 510 300	G1	1.4		90	90	1.2	0.7	80	90	0.7	A08	P
1R4	200 800 130		1.4						D			B8B	D
1R5	266 424 300		1.4	4	75		4.5	1.2	80		1.4	B7G	H
1R6	230 232 032	D1	1.2						D			B9A	D
1S2A	32* 323 *23	D1	1.4						D			B9A	D
1S4	264 526 300		1.4	7	90	75	7.4	1.57	80	60	1.5	B7G	P
1S4T	264 5*6 300		1.4	7	90	75	7.2	1.6	100	75		B7G	P
1S5	208 564 300		1.4	0	75	75	1.6	0.62	80	75	0.6	B7G	DP
1S5T	2*8 564 300		1.4		90	75	1.6	0.5	75	60		B7G	DP
1S6	604 238 050		1.2	0	60	60	1.6	0.6	No Data Available			B8D	DP
1SA6	021 405 360		1.4	0	90	75	2.45	0.97	80	75	0.9	A08	P
1SB6	036 580 240		1.4	0	90	75	1.45	0.66	80	75	0.6	A08	DP
1T	036 500 320	G1	1.4	4.5	90	90	0.9	2.1	80	75	2.1	A08	P
1T2	123 000 000	D1	1.4						D			B3G	D
1T4	365 200 000		2	0	150	75	2.5	1	150	75	1	UX4	P
1T4	265 024 300		1.4	0	90	75	3.5	0.9	80	75	0.9	B7G	P
1T4T	265 024 300		1.4		90	75			80	75		B7G	P
1T5	036 540 200		1.4	6	90	90	6.5	1.15	80	75	1.1	A08	P
1T6	604 238 050		1.2	0	60	60	1.6	0.6	No Data Available			B8D	DP
1U4	265 024 300		1.4	0	90	90	0.8	0.68	80	90	0.9	B7G	P
1U5	265 804 300		1.4	0	75	75	1.6	0.62	80	75	0.6	B7G	DP
1U6	266 541 300		1.4	0	75	50	1.7	0.3	No Data Available			B7G	H
1V	281 300 000		6				60		REC		20mA	UX4	R
1V2	8** 230 **8		0.625						D			B9A	D
1V4	260 *24 300		1.25	0	150	100	1.6		125	100		B7G	P
1V5	*4* 23* 650		1.2	4.5	60	60	2	0.75	No Data Available			B7G	P
1W4	892 300 000		4				30		REC		40mA	B4	RR
1W4	265 004 300		1.4	9	90	90	5	0.92	80	75	0.9	B7G	P
1W5	040 230 650		1.25	0	60	60	1.8	0.73	No Data Available			B8A	P
1W50	842 300 000		1.0						D			B4	D
1X2	230 232 032	D1	1.2						D			B9A	R
1X2B	*2* *** **3	D1	1.2						D			B9A	D
1Y2	200 300 000	D1	1.4									UX4	R
1Y32	232 232 300	D1	1.4						D			B7G	D
1Y32T	232 232 300	D1	1.4						D			B7G	D
1Z1	020 000 300	D1	0.7						D			A08	D
1Z2	232 232 300	D1	1.2						D			B7G	D

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
1Z2S	2** *** 300	D1	1.2						D			B7G	D
2	642 300 000		2	4	150		1.5		100			B4	T
2/25A	200 300 000	D1	6				30		REC		18mA	UX4	R
2/50A	200 300 000	D1	5				60		REC		20mA	UX4	R
2A3	264 300 000		2.5	45	250		60	5.2	100		5.2	UX4	T
2A1M	026 546 300	G1	2		150	75	2.2		100	80		A08	H
2A3H	364 200 000		2.5	62	300		40	5.25	100		5.2	UX4	T
2A3W	264 300 000		2.5	45	250		60	5.2	100		5.2	UX4	T
2A5	265 413 000		2.3(3)	16.5	250	250	34	2.5	100	150	2.5	UX6	P
2A6	269 813 000	G1	2.5	2	250		0.9	1.1	150		1.1	UX6	DDT
2A6S	269 813 000	G1	2.5	2	250		0.9	1.1	150		1.1	UX6	DDT
2A7	265 541 300	G1	2.5	8	250	100	3.5	1.1	150	100	1.1	Sm7	H
2A7F4	642 314 600		2.5	4.0	100		15	6.6	80		6.0	B7G	T
2B3	*20 000 3*0	D1	1.7						D			A08	D
2B5	267 413 000		2.5		300		9		No Data Available			UX6	TT
2B5	634 224 370		1.2	1	90		2.6	1.1	80		1.1	B8A	TT
2B7	265 891 300	G1	2.5	3	250	125	9	1.1	100	100	1.1	UX7	DDP
2B7S	265 891 300	G1	2.5	3	250	100	6	1	100	100	1	UX7	DDP
2B21	300 200 000	D1	2.5				5		D			UX4	R
2B22	021 010 310	D1	6						D			A08	D
2B25	200 800 300		1.4						D			B7G	D
2B26	280 300 000		2.5				120		REC		30mA	UX4	R
2B35	123 000 000	D1	6						D			B3G	D
2B36	123 000 000	D1	4						D			B3G	D
2BN4	142 361 400		2	1.5	150		9	6.8	100		7	B7G	T
2BN4A	142 361 400		2	1.5	150		9	6.8	100		7	B7G	T
2C21	217 461 300	G1	6	16.5	250		8.3	1.3	100		1.3	UX7	TT
2C22	020 000 310	A1/G1	6	10.5	300		11	3	100		3	A08	T
2C23	264 300 000		7.5	32	350		16	1.55	100		1.5	UX4	T
2C26	264 300 000		7	100	350		50		No Data Available			UX4	T
2C26	020 000 310	A1/G1	6	15	350		16		100			A08	T
2C40	*21 010 310	A1/G1	6	5	250		20		100			A08	T
2C43	*21 010 310	A1/G1	6.3		400		38		100			A08	T
2C45	364 200 000		7	40	250		29		100			UX4	T
2C48	265 004 130		6	15	250	250	70		100	150		B8B	P
2C50	461 471 230		12.6		200		18	2.9	100			A08	TT
2C50	265 004 130		12	15	250	250	70		100	150		B8B	P
2C51	214 607 413		6	2	150		8.2	5.5	125		5.5	B9A	TT
2C51L	214 607 413		6		150		8.2	5.5	100			B9G	TT
2C52	461 471 230		12.5	2	250		1.3	1.9	200		1.9	A08	TT
2CY5	412 365 100		2.5	1	150	80	10	8	125	75	8	B7G	P
2D1	289 130 000		2.5						D			UX5	DD
2D2	892 310 000		2						D			B5	DD
2D4	892 310 000		4						D			B5	DD
2D4A	892 310 000		4						D			B5	DD
2D4B	091 231 800		4						D			B7	DD
2D13	023 180 000	D2	13						D			B5	DD
2D13A	823 190 000		13						D			B5	DD

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
2D13C	892 310 000		13						D			B5	DD
2D21	412 316 100		6		400		50	61Ω	No Data Available			B7G	THY
2DL4	414 234 464		2		150		12.5	14	No Data Available			B9A	T
2E22	254 130 000	A1	6	15	400	250	60	5.5	100	150		UX5	P
2E24	235 242 300	A1	3	18.5	400	200	16	3.2	200	100	3.2	A08	P
2E25	020 540 320		6	22.5	400	250	40		No Data Available			A08	P
2E26	125 141 300	A1	6	20	200	200	20	3.5	100	75	3.5	A08	P
2E30	413 365 200		3	20	250	250	40	3.7	100	100	3.7	B7G	P
2E31	652 430 000		1.25	0	20	20	0.4	0.5	No Data Available			B5A	P
2E32	652 430 000		1.25	0	20	20	0.4	0.5	No Data Available			B5A	P
2E35	652 430 000		1.25	0	20	20	0.27	0.38	No Data Available			B5A	P
2E36	652 430 000		1.25	0	20	20	0.27	0.38	No Data Available			B5A	P
2E41	658 243 000		1.25	0	20	20	0.36	0.37	No Data Available				P
2E42	658 243 000		1.25	0	20	20	0.35	0.37	No Data Available			B5A	P
2E50	412 265 300		6	20	250	250	10	3.4	100	100		B7G	P
2EA5	412 365 100		2.3	1	250	150	10	8	100	100		B7G	P
2EM5	092 310 800		2.1						D			B7G	DD
2ER5	142 360 100		2.3	1.2	200		10		100			B7G	T
2ES5	142 360 100		2.3	1	200		15	9.5	100		9.5	B7G	T
2EV5	265 424 300		2.4		250	75	11.5	8.8	100	80		B7G	P
2F7	275 641 300	G1	2.5	{ 3	100		4		100	3.8		UX7	TP
				3	250	100	2.8		100	100			
2FH5	142 360 100		2.3	1	150		11	9	100			B7G	T
2FQ5	142 360 100		2.3	1.2	150		11.5	11	100			B7G	T
2FQ5A	142 360 100		2.3	1.2	150		11	12	100			B7G	T
2FS5	412 365 100		2.4	0.2	275	150	10	10	100	100		B7G	P
2FV6	265 424 300		2.4	1	150	75	10	8	100	80		B7G	P
2FY5	142 360 100		2.4	1.2	150		11	12	100			B7G	T
2GK5	142 360 100		2.3	1.2	150		11	15	No Data Available			B7G	T
2H1	026 447 300		2.1		150		3.2	2.1	100		2.1	A08	TT
2H1M	026 447 300		2	2	150		1.2	1	100		1	A08	TT
2HMD	452 310 000	A1A2	4		200	100	3.8	1.1	100	100	1.1	B5	PP
2HR8	501 236 014		2.1		250	150	3	1.8	100	100		B9A	P
2J2	230 232 032	D1	2						D			B9A	D
2K2	026 500 300	G1	2	2	100	100	2.5	0.9	100	100	0.9	A08	P
2L32	264 536 200		1.4	7	60	60	7	1.5	60	60		B7G	P
2L33	265 436 200		1.4	8.4	150	90	14.1	1.9	100	80		B7G	P
2L34	264 536 200		1.4	7	60	60	7	1.5	60	60		B7G	P
2L35	265 242 300		1.2		150	90	14.8	2.1	100	90		B7G	P
2L35	265 143 200		1.2	8.8	150	90	14.2	2.1	100	100		B7G	P
2M2M	264 536 200		1.2	3.5	60	60	3.7	1.1	80	60		B7G	P
2-O1C	2** *** 300	D1	5						D			B7G	D
2P	642 300 000		2	22	250		40	7	100		7	B4	T
2S	289 130 000		2.5				15		REC		10mA	UX5	RR
2S/140G	208 130 800		6.3				5		D			B7G	R
2SC10	642 300 000		2.5	1	250		15	2.4	100			B4	T
2T4	642 310 600		2.3	2.7	75		18	7	75		7	B7G	T
2T/270K	112 311 100	D1	4						REC		5mA	B7G	R
2U14	642 300 000		2		150		2	0.6	125		0.6	B4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE I60					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
2U15	642 300 000		2		150		4	0.8	100		0.8	B4	T
2V2	020 000 03*	D1	2.5						D			A08	D
2V3	020 000 300	D1	2.5(3)						D			A08	R
2W3	020 800 030		2.5				60		REC		20mA	A08	R
2X2	300 200 000	D1	2.5(3)						D			UX4	R
2X2A	300 200 000	D1	2.5(3)						D			UX4	R
2X3	020 800 030		2.5				120		REC		30mA	A08	R
2XP	642 300 000		2	36	300		50	7	100		7	B4	T
2Y2	200 300 000	D1	2.5				5		D			UX4	R
2Z2	280 300 000		2.5				60		REC		20mA	UX4	R
2.5C9	642 300 000		2.5	4	250		8	2.2	100			B4	T
3	642 300 000		2	7.5	150		3.4	0.9	100		0.9	B4	T
3A2	230 232 032	D1	3						D			B9A	D
3A3	*2* 0*0 3*0	D1	3						D			A08	D
3A4	365 426 300		1.4	8.4	150	90	13.3	1.9	100	75	1.9	B7G	P
3A5	264 347 200		1.4	2.5	90		3.7	1.8	80		1.8	B7G	TT
3A8	237 546 380	G1	1.4	0	90		0.2	0.3	80		0.3	A08	DTP
3A/107A	264 300 000		4	8	150	90	12	0.7	80	60			
3A/107B	642 300 000		4	8	150		6.5	1.6	100		1.6	UX4	T
3A/108A	264 300 000		2	1.5	150		0.9	0.5	100		0.5	B4	T
3A/108B	642 300 000		2	1.5	150		0.9	0.5	100		0.5	B4	T
3A/109A	264 300 000		4	8	150		19	1.2	100		1.2	UX4	T
3A/109B	642 300 000		4	8	150		19	1.2	100		1.2	B4	T
3A/154M	260 0*4 130		6	2	250		12	3	100		3	B8B	T
3A/167M	2*0 61* 430		6.3	3.5	200		10	30	No Data Available			B8G	T
3AB4	602 304 100		3.1	2	250		10	5.5	100			B7G	T
3AE4	365 004 230		1.4	9	90	90	1.8	1.6	80	75	1.6	A08	P
3AF4A	642 314 600		3	4	100		15	6.6	100		7.5	B7G	T
3AL5	192 310 800		3				5		D			B7G	DD
3AT4A	602 304 100		3.1	1	200		11.5	6.7	100			B7G	T
3AU6	412 365 100		3	1.0	250	150	10	5.2	100	150	5	B7G	P
3AV6	412 398 600		3	2	250		1.2	1.6	200		1.6	B7G	DDT
3AW3	*2* 0*0 1*0	D1	3.1						D			A08	D
3AZ6	412 389 600		3	2	250		1.2	1.6	200		1.6	B7G	DDT
3AZ4	020 809 030		5				60		REC		15mA	A08	RR
3B2	*2* 0** 3*0	D1	3						D			B8A	D
3B4	524 332 600		1.25	7.5	150	125		1.7	No Data Available			B7G	P
3B5	036 540 320		1.4	7	75	75	6.7	1.5	80	60	1.5	A08	P
3B7	364 204 730		1.4	0	90		5.2	1.85	80		1.8	B8B	TT
3B21	289 300 000		2.5				120		REC		30mA	UX4	RR
3B22	289 300 000		2.5				120		REC		30mA	UX4	RR
3B24	320 200 000	D1	2.5				30		REC		15mA	UX4	R

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	T-TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
3B23	200 300 000	D1D2	2.5				120		REC	30mA	UX4	RR	
3B25	200 300 000	D1	2.5				120		REC	15mA	UX4	R	
3B26	020 000 300	D1	2.5				15		REC	10mA	A08	R	
3B27	280 300 000		2.5				120		REC	30mA	UX4	R	
3B/102B	643 210 000		6		400		100	6	No Data Available			B5	T
3B/240M	214 444 130	A1	6	1	300		50	27	No Data Available			B8B	T
3B/241M	214 444 130	A1	19	1	300		50	27	No Data Available			B8B	T
3B/252B	642 310 000		6	20	400		60	10	100	8	B5	T	
3BA6	412 365 100		3	1	250	100	11	4.4	100	100	1.4	B7G	P
3BC5	412 365 100		3	1.3	250	150	7.5	5.7	100	150	5.8	B7G	P
3BF6	142 360 100		3.1	9	250		9.5	1.9	100			B7G	T
3BN4	142 361 400		2.8	2	150		9	6.8	100	6		B7G	T
3BN6	412 354 600		3	1	60	60	0.25	1	80	60	1	B7G	P
3BU8	157 231 461		3	1	100	60	1	1.5	100	60	1.5	B9A	PP
3BY6	412 365 400		3	2.5	250	100	6.5	2.4	100	100	2.0	B7G	H
3BY7	141 230 651		3.2	1.8	250	75	8	5.7	100	75		B9A	P
3BX6	141 230 651		3.4	2	200	175	10	7.2	100	100	6	B9A	P
3BZ6	412 365 100		3	1.0	150	125	14	8	200	150	6	B7G	P
3C2	020 *3* 2*0		1.5						D			A08	D
3C4	365 *24 300		1.4	5.2	90	90	5.0	1.4	80	75	0.7	B7G	P
3C5	036 540 320		1.4	9	90	90	6	1.4	80	75	1.4	A08	P
3C6	206 447 320		1.4	0	90		4.5	1.3	80		1.3	B8D	TT
3C36	412 365 100		3	2.2	200	150	9.5	6.2	100	150	6	B7G	P
3CB6	412 365 100		3	1.0	150	125	13	8.0	100	150	6.0	B7G	P
3CE5	412 365 100		3.1	2.1	200	150	9.5	6.2	100	100		B7G	P
3CF5	402 365 100		3.1		150	125	11	7.6	100	100		B7G	P
3CF6	412 365 100		3	1.0	150	125	12	7.8	100	150	6	B7G	P
3CS6	412 365 100		3	1.0	100	30	1.0	1.1	100		1.1	B7G	H
3CY5	412 365 100		2.9	1	150	75	10	9	100	80	8	B7G	F
3D6	365 004 230		1.4	4.5	150	90	10.2	2.4	100	75	2.4	B8B	P
3D21A	320 504 210	A1	6.3	30	400	300		5.5	No Data Available			A08	P
3DG4	414 234 464		2.6		150		12.5	14	No Data Available			B9A	T
3DG4	1*1 080 900		3.3				120		REC	30mA	A08	RR	
3DK6	412 365 100		3.1	0.9	150	125	12	9.8	100	100	9.5	B7G	P
3D'6	412 365 100		3	2.2	150	100	1.1	0.8	150	100	2.0	B7G	P
3E5	365 024 300		1.4	8	90	90	6	1.2	80	75	1.2	B7G	P
3E6	265 134 020		1.4	0	90	90	2.5	1.8	90	90	1.8	A08	P
3EA5	402 365 100		3	1	250	100	10	8	100	100		B7G	P
3EH7	141 230 651		3.4	2	200	90	12	12.5	No Data Available			B9A	P
3EJ7	141 230 510		3.4	2.5	200	200	10	15	No Data Available			B9A	P
3ER5	142 360 100		3.6	1.2	250		10	10.5	100			B7G	T
3ES5	142 360 100		3	1	200		15	9.5	100			B7G	T
3EV5	265 424 300		2.9		250	75	11.5	8.5	100	80		B7G	P
3FH5	142 360 100		3	1	150		11	9	100			B7G	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
3FQ5	142 360 100		2.8	1.2	150		11.5	11	100			B7G	T
3FQ5A	142 360 100		2.8	1.2	150		11	12	No Data Available			B7G	T
3FY5	142 360 100		3.1	1	150		11	13	No Data Available			B7G	T
3G10	892 300 000		2.5				30		REC	15mA		B4	RR
3G130	892 300 000		2.5				30		REC	15mA		B4	RR
3GK5	142 360 100		2.8	1	150		11.5	15	No Data Available			B7G	T
3GS8	156 231 471		3.1		100	75	2	1.2	100	75		B9A	PP
3L31	265 436 200		1.4	8.7	150	90	14.2	2.1	100	90		B7G	P
3L35	265 243 200		1.4		150	125	18.5		100	100		B7G	P
3LE4	365 004 230		1.4	9	90	90	1.8	1.6	80	75	1.6	A08	P
3LF4	365 004 230		1.4	4.5	90	90	8	2	80	75	2	B8B	P
3Q4	364 526 300		1.4	5	90	90	6.9	1.97	80	75	1.9	B7G	P
3Q5	036 540 320		1.4	4.6	90	90	9	2	80	75	2	A08	P
3S4	364 526 300		1.4	7	90	75	7.4	1.57	80	60	1.5	B7G	P
3V4	365 024 300		1.4	4.5	90	90	7.7	2	80	75	2	B7G	P
3S4T	264 526 300		1.4	7	90	60	7.4	1.4	80	60	1.4	B7G	P
3SB6	036 540 200		1.4		90	60	1.4	0.6	80	60		A08	P
3W4	264 536 200		1.4	5.2	90	90	6.8	1.7	80	75	1.5	B7G	P
3Y4	264 536 200		1.4	5.4	60	60	5	1.2	80	60		B7G	P
3Y6A1	023 104 560		6.3		400	300		2	No Data Available			F8	P
3Z4	264 536 200		1.4	7	60	60	6.5	1.4	No Data Available			B7G	P
4	642 300 000		2	1	150		1	0.9	150		0.9	B4	T
4/100BU	892 300 000		4				120		REC		30mA	B4	RR
4A6G	026 447 230		2	1.5	90		1.2	0.9	80		0.9	A08	TT
4A07	642 300 000		4	2	100		1.4	1.2	100		1.2	B4	T
4A08N	642 300 000		4		200		6	2.4	100			B4	T
4A10	642 300 000		4	2.5	150		6	1.8	125		1.8	B4	T
4A15	642 300 000		4		100		7	2.2	100		2.2	B4	T
4A80	642 310 000		4		150		6	2	150		2	B5	T
4A90	642 310 000		4		200		8	3.5	100		3	B5	T
4A120	642 310 000		4		150			1.4	125		1.4	B5	T
4AU6	412 365 100		4	1	250	150	10	5.2	100	60	5.2	B7G	P
4A80N	642 310 000		4		200		6	2.4	100			B5	T
4AV6	412 389 600		4.2	2	250		1.2	1.6	100		1.2	B7G	DDT
4BA6	412 365 100		4.2	1	250	100	11	4.4	100	100	4.4	B7G	P
4BC5	412 365 100		4.2	1.3	250	150	7.5	5.7	100	150	5.7	B7G	P
4BC8	741 236 410		4.2	2.2	150		10	6.2	150		5	B9A	TT
4BE6	412 366 100		4.2	2	100		11	7	100		5	B7G	H
4BL8	645 237 114		4.5	2	100		14	5	100		5	B9A	TP
4BN4	142 361 400		4	2.2	150	175	10	6.2	100	100		B7G	T
4BN6	142 354 600		4.2	1	60	60	0.25	1.0	80	60	1.0	B7G	P
4BQ7A	741 236 410		4	2	150		9	6.4	100		6	B9A	TT
4BS8	641 237 410		4.2	4.4	150		10	7.2	100		7	B9A	TT
4BU8	157 231 461		4.2	1	150	100	4	3.5	150	100	3.5	B9A	PP
4BZ8	641 237 410		4.2	2	150		10	8	125		8	B9A	TT
4BX8	641 237 410		4.2		150		11	7.5	125			B9A	TT
4BZ11	741 236 410		4	2.2	150		10	6.8	100		6	B9A	TT
4C1	264 300 000		3	3	90		5	1	80		1	UX4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
4C1A	264 300 000		3	3	90	5	1	80		1	UX4	T	
4C2	642 310 000		4	5	150		11	2.5	125		2.5	B5	T
4C3	642 310 000		4	3.5	200		6	2.4	100		2	B5	T
4C4	642 310 000		4	3.5	200		6	2.4	100		2	B5	T
4C5	642 300 000		4	10	400		30	4	No Data Available			B4	T
4C101	023 004 060		4	45	250		60	6	100			F8	T
4C102	642 300 000		4	45	250		40	2	No Data Available			B4	T
4C103	642 300 000		4	35	250		45	3.5	No Data Available			B4	T
4CB6	412 365 100		4.2	1	150	125	13	8	125	125	8	B7G	P
4CE5	412 365 100		4.2	1	150	125	11	7.6	125	125	7.6	B7G	P
4CF6	412 365 100		4.2	2	200	150	9.5	6.2	100	100		B7G	P
4CF8	501 236 014		4.5	2	250	150	3	2	100	100		B9A	P
4CM4	641 234 146		3.6	1.5	200		12	14	No Data Available			B9A	T
4CS6	412 365 100		4	1	100	30	1	11	No Data Available			B7G	P
4CX7	641 237 410		4.2	10	150		9	6.4	150			B9A	TT
4CY5	412 365 100		4.2	1	150	80	10	8	125	75	8	B7G	P
4D80	642 310 000		4		100		2	1	100		1	B5	T
4DE6	412 365 100		4.2	1.1	150	125	15.5	8	100	100		B7G	P
4DK6	412 365 100		4.2	0.9	150	125	12	9.7	100	100	9.5	B7G	P
4DT6	412 365 100		4.2	2.2	150	100	11	0.8	150	100	2	B7G	P
4DT6A	412 365 100		4.2	2.2	150	100	1.1	0.8	150	100	2	B7G	P
4E2	023 189 560	G1	4	14	250	275	72		100	100		8SC	DDP
4E4	023 110 560	G1	4	2	250	100	3	2.1	100	100		8SC	P
4E104	265 004 130		4	6	250	250	36	9	100	100	B8G	P	
4E201	023 110 560		4	3	250	100	8	1.8	100	100		F8	P
4EH7	141 230 651		4.4	2	200	100	12	12.5	100	100		B9A	P
4EJ7	141 230 651		4.4	2.5	200	200	10	15	No Data Available			B9A	P
4ER5	142 360 100		4.2	1.2	200		10	10.5	100			B9A	T
4ES8	741 236 410		4	1.2	90		15	12.5	No Data Available			B9A	TT
4EW6	412 365 100		4.2	0.8	150	125	11	14	No Data Available			B7G	P
4FC7	146 234 117		3.8	1.2	90		15	12.3	80			B9A	T
4FS7	141 234 675		4.6	3	100		14	5.5	100	60		B9A	TP
4G30	892 300 000		4	1.2	200	150	10	1.2	100	100		B4	RR
4G105	892 300 000		4				15		D			B4	RR
4G200	892 300 000		4				30		REC		15mA	B4	RR
							60		REC		20mA	B4	RR
4G5000	023 000 000	D1	4						D			F8	R
4GG1	892 300 000		4				30		REC		15mA	B4	RR
4GG2	892 300 000		4				60		REC		20mA	B4	RR
4GG3	892 300 000		4				120		REC		30mA	B4	RR
4GG4	023 080 090		4				30		REC		15mA	F8	RR
4GM6	412 365 100		4.2		150	125	14	13	No Data Available			B7G	P
4GS8	156 231 471		4.2		100	75	2	1.2	100	75		B9A	PP
4GZ5	142 345 600		4		250	250	16	8.5	100	100		B7G	P
4HO7	642 300 000		4		150		3	1.1	100		1	B4	T
4HO7N	642 300 000		4		150		3	1.1	100			B4	T
4H80	642 300 000		4		150		3	1.1	100		1	B4	T
4K30	642 300 000		4	10	150		20	3.6	100		3	B4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
4K32	642 300 000		4	15	200		30	3.6	100		3.0	B4	T
4K50	642 300 000		4	20	200		60	5	No Data Available			B4	T
4K60	642 300 000		4	20	300		60	3.5	No Data Available			B4	T
4K61	642 300 000		4		300			3	No Data Available			B4	T
4K100	642 300 000		4	3	300	200	50	4	No Data Available			B4	T
4L11	642 300 000		4		150		7	1.4	100		1.0	B4	T
4L12	642 300 000		4		150		9	2	100		1.5	B4	T
4L13	642 300 000		4		200		8	2	100		2	B4	T
4L13A	642 300 000		4	11	200		14	2.5	100			B4	T
4L14	642 300 000		4		200		10	2.2	No Data Available			B4	T
4L15	642 300 000		4		100			2.2	100		2.2	B4	T
4L16	642 300 000		4	8	150		100	2.2	100		2.0	B4	T
4L20	642 300 000		2		100			1.4	100		1.4	B4	T
4L28	642 300 000		4	4	150		10.5	4	100		3	B4	T
4L29	642 300 000		4	8	150		20	3.6	100			B4	T
4LMBT	642 310 000		4	1	200		3.4	2.6	100		2	B5	T
4MBT	642 310 000		4	1	200		3.4	2.6	100		2.6	B5	T
4MP12	412 365 400		4	6	200	175	25	5.5	100	100		B7G	P
4N08	642 300 000		4		100		8	1.2	100		1.2	B4	T
4N100	642 310 000		4		150			3.5	100		3	B5	T
4N110	642 310 000		4		200		5	1.5	100		1.3	B5	T
4NG	892 300 000		4				30		REC		15mA	B4	RR
4P25	642 300 000	G2	4	19	250	150	12	1.3	100	100		B4	P
4R-III2	741 236 410		4.2	1	90		8.5	8	80		8	B9A	TT
4R-III8	641 237 410		4.2	1	100		16	16	No Data Available			B9A	TT
4R-III9	641 237 410		4.2		90		16	16	No Data Available			B9A	TT
4S	289 130 000		2.5						D			UX5	DD
4S09	542 300 000	A1	4		200		1	0.6	100			B4	P
4S120	542 310 000	A1	4		200		2	0.7	100	100		B5	P
4S121	542 310 000	A1	4		200	100	6	1	100	100		B5	P
4S126	542 310 000	A1	4	2	200	100	3	2	100	100		B5	P
4T1	642 314 600		4.7		75		16	6.6	75			B7G	T
4THA	645 231 700	G1	4	5	100		1.5	1.5	80	60	1.5	B7	TH
4TP	446 231 500	A2	4	2	250	100	3.5	2.5	100	100	2.2	B7	TP
4TPB	061 321 500	G1	4	5	150	150	16	4.5	150	100	4.5	B7	TP
			4	3	250	150	12	8	100	100	7	B7	P
4TSA	045 231 600	A1	4		250	100	5	1.6	250	100	1.6	B7	P
4TSP	041 231 500	A1	4	3	250	150	12	8	100	100	7	B7	P
4U130	643 210 000		3.5		100			2.8	100			B5	T
4W03	642 300 000		4		80		0.04	1.1	80		1.1	B4	T
4W03N	642 300 000		4		200		0.4	1.1	100		1.0	B4	T
4W08	642 300 000		4		150				100			B4	T
4W100	642 310 000		4		200		1.5	3.5	100		3	B5	T
4W120	642 310 000		4		200		2	0.7	100			B5	T
4W200	642 310 000		4		150			3.3	100		3	B5	T
4XP	642 300 000		4	28.5	250		48	5	100		7	B4	T
4Z60A	023 080 090		4				30		REC		15mA	F8	RR
5A6	601 225 413		2.5	15	150	150	20		100	100		B9A	P

VALVE	SELECTOR SWITCH No.	T.C.	Vr	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
5A/102D	026 510 310	G1	7.5	18	200	150	42	2.5	100	100	2.5	A08	P
5A/136D	026 510 310	G1	7.5	5.5	250	150	5.2	2	100	100	2	A08	P
5A/137D	026 510 310		6.3	2	250	100	1.8		100	100		A08	P
5A/150A	265 113 00	G1	10	5.5	250	150	5.2	2	100	100	2	UX6	P
5A/152M	265 104 130		6	2	250	150	10	7.5	100	100	5	B8B	P
5A/155M	256 101 403		6	2	250	250		6.5	100	100	5	B9G	P
5A/156M	265 114 113		6	1.7	250	250	10	7.7	100	150	6	B9G	P
5A/157D	026 510 310	G1	6	2	250	100		1.8	100	100	1.8	A08	P
5A/163K	141 236 115		6	1.5	200	200	15	15	No Data Available			B9A	P
5A/170K	141 230 615		6.3	1.5	200	150	13	16.3	No Data Available			B9A	P
5A/171G	102 513 410	A1	6	5	100	100	20	2.7	100	100	2.5	B8D	P
5A/180M	412 365 400		6.3		200	150	26	32	No Data Available			B8G	P
5ANR	145 236 181		5	1.7	200	150	11.5	7.0	100	150	7.0	B9A	DP
5AN8	641 237 541		5	{ 6	200		13	3.3	100	60	3	B9A	TP
				{ 2.2	200	150	9.5	6.2	100	150	6		
5AQ5	412 365 400		5	12.5	250	250	45.0	4.1	100	150	4.0	B7G	P
5AR4	*30 809 020		5				120		REC		30mA	A08	RR
5AS4	030 908 020		5				120		REC		30mA	A08	RR
5AS4A	020 908 030		5				120		REC		40mA	A08	RR
5AS8	451 238 116		5	2.2	200	150	9.5	6.2	100	150	6.0	B9A	DP
5AT8	461 237 514		5	{ 1	100		8.5	5.8	100	60	5	B9A	TP
				{ 1.8	250	150	7.7	4.6	100	150	4		
5AU4	020 809 030		5				180		REC		40mA	A08	R
5AV8	146 234 157		5	{ 6	200		13	3.3	100	60		B9A	TP
				{ 2.2	200	150	9.5	6.2	100	100			
5AW4	020 809 030		5				120		REC		40mA	A08	RR
5AW8	641 237 541		4.7	{ 6	200		13	3.3	100	60	3	B9A	TP
				{ 2.1	200	150	9.5	6.2	100	150	6		
5AX4	020 809 030		5				60		REC		20mA	A08	RR
5AZ4	020 809 030		5				60		REC		20mA	B8B	RR
5B1	542 300 000	A1	2	1	150	90	2	1.4	150	90	1.3	B9A	P
5B8	146 234 157		5	{ 6	200		13	3.3	100	60	3	B9A	TP
				{ 1.8	200	150	9.5	6.3	100	150	6		
5B/110M	265 104 130		6	6	250	150	38	6.5	100	100	5	B8B	P
5B/250A	254 130 000	A1	6	12.5	400	250	83	6.3	100	150	6	UX5	P
5B/251M	215 044 130	A1	6	15	250	250	72	6	100	100	5	B8B	P
5B/252M	265 044 130		6	15	250	250	72	6	100	100	5	B8B	P
5B/253M	265 044 130		19	15	250	250	72	6	100	100	5	B8B	P
5B/254M	215 144 130	A1	6	20	300	250	50	5.6	100	100	5	B8B	P
5B/255M	265 144 130		6	20	300	250	50	5.6	100	100	5	B8B	P
5B/256M	215 144 130	A1	19	20	300	250	50	5.6	100	100	5	B8B	P
5B/257M	265 144 130		12	20	300	250	50	5.6	100	100	5	B8B	P
5B/258M	215 144 130		19	14	250	250	72	6	No Data Available			B8B	P
5BE8	461 237 414		4	{ 1	150		18	8.5	100	60	7	B9A	TP
				{ 1	250	100	10	5.2	150	100	5		
5BC3	2*3 *9* **8		5				120		REC		40mA	B9A	RR
5BK7A	741 236 411		5	2	150		10.7	9.3	100		9	B9A	TT
5BQ7A	741 236 410		5.6	2	150		150	6.4	100		5	B9A	TT
5BR8	461 237 514		5	{ 1	150		18	8.5	100	60	8	B9A	TP
				{ 0.9	250	100	10	5.2	100	100			

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
5BS8	641 237 410		5.6		150		10	7.2	100			B9A	TT
5BT8	981 236 541		4.7	2.2	200	150	9.5	6.2	100	100		B9A	DDP
5BW8	918 234 156		4.7	1.1	250	100	10	5.2	100	100		B9A	DDP
5BX7	641 237 410		5.6		150		10	6.8	100		6.8	B9A	TT
5BZ7	741 236 410		5.6	2.2	150		10	6.8	100		6	B9A	TT
5C10	264 147 300		4	80	400	200	40		No Data Available			UX7	TT
5CG4	030 809 020		5				60		REC		20mA	A08	RR
5CQ8	645 237 114		4.2	0.8	150	125	15	8	100		8	B7G	TP
5CM6	504 234 106		4.7	12.5	250	250	45	4.1	100	100	4	B9A	P
5CM8	641 237 514		4.7	2	250		1.8	2	100	60		B9A	TP
				2.2	200	150	9.5	6.2	100	100			
5CL8	461 237 514		4.7	0.9	150		15	8	100		0.8	B9A	TP
				1	150	125	12	5.8	100	100	5.5		
5CR8	641 237 514		4.7	2	125		12	4	100	60	4	B9A	TP
					125	125	13	7.7	100	100	7		
5CU4	120 809 030		5				180		REC		60mA	A08	RR
5CZ5	504 234 1*6		45	6.7	100	100	43	9	100	100		B9A	P
5DH8	461 237 514		5.2	2.5	250		7	4.4	100	60	4	B9A	TP
				1	150	125	13	8.6	125	125	8.6		
5DN4	228 899 330		5				120		REC		40mA	A08	RR
5EA8	645 237 114		4.7	1	150		18	8.5	100		8.5	B9A	TP
				1	150	125	12	6.4	100	100	6.4		
5E255	642 350 000		2	4.5	150	150	9.5	2.5	100	100	2.5	B5	P
5E415	642 350 000		4	25	300	200	20	1.7	100	150	1.7	B5	P
5EH8	146 231 457		4.7	1	150		13.5	7.5	100	60		B9A	TP
				1	150	125	12	6	100	100			
5ES8	641 237 410		5.6	1.2	90		15	12.5	100			B9A	TT
5EU8	741 231 415		4.7	1	150		18	8.5	100	60		B9A	TP
				1	150	125	12	6.4	100	100			
5EW6	412 365 100		5.6	0.8	150	125	11	14	No Data Available			B7G	P
5FC7	146 234 117		5.1	1.2	100		15	12.3	No Data Available			B9A	TT
5FG7	461 237 514		4.7	1	150		13	7.5	100	60	7	B9A	TP
				1	150	125	11	6	100	100	6		
5FV8	461 237 514		4.7	1	150		14	8	100	60	8	B9A	TP
				1	150	125	12	6.5	100	100	6.5		
5GK18	020 809 030		5						REC			A08	RR
5GK22	030 809 020		5						REC			A08	RR
5GK24	030 809 020		5				120		REC		30mA	A08	RR
5GH8	645 237 114		4.7	1	150		13	8.5	100	60		B9A	TP
				1	150	125	12	7.5	100	100			
5GM6	412 365 000		5.6	56	150	150	14	13	No Data Available			B7G	P
5GX6	412 365 100		4.7		150	100	3.7	3.7	100	100		B7G	P
φ 5J6	672 344 100		5	0.8	100		8.5	5.3	100		5.3	B7G	TT
				3	150		5	4.5	100		5.3		
5MK9	002 380 000		5				60		REC		20mA	B7G	R
5MH13	672 344 100		4.7	1	100		11	7.5	100		7.5	B7G	TT
5M-HH13	142 360 100		4.7	1	100		11	7.5	100		7.5	B7G	T
5P29	120 540 310	A1	6	7	250	250	100	14.3	No Data Available			A08	P
5Q5	036 540 320		1.4	4.6	90	90	4.5	2	80	75	2	A08	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
5R4	020 809 030		5(5.7)				60		REC		25mA	A08	RR
5R4GY	020 809 030		5(5.7)				60		REC		20mA	A08	RR
5R-DDH1	911 238 641		4.7	2	250		1.6	1.6	10C		1.6	B9A	DDT
5RK16	800 230 090		5				120		REC		30mA	B9A	RR
5T4	020 809 030		5				120		REC		30mA	A08	RR
5T4A	041 231 500	A1	4	4.5	250	150	4.5	1.7	100	100		B7	P
5T8	†91 238 146		5	3	250		1.0	1.2	150		1.3	B9A	DDDT
5U4	020 809 030		5(5.7)				120		REC		70mA	A08	RR
5U8	645 237 114		5	{ 1	150		18	8.5	100	60	7	B9A	TP
5V3	020 809 030		5	{ 1	250	100	10	5.2	100	100	5		
							120		REC		30mA	A08	RR
5V4	030 809 020		5(5.7)				60		REC		60mA	A08	RR
5V6	026 540 310		4.7	12.5	250	250	45	4.1	100	150	4	A08	P
5W4	020 809 030		5				60		REC		20mA	A08	RR
5X3	289 300 000		5				15		REC		10mA	A08	RR
5X4	008 090 230		5				120		REC		30mA	A08	RR
5X8	146 231 457		5	{ 1	100		8.5	5.8	100	60	5	B9A	TP
				{ 1.8	250	150	7.7	4.6	100	150	4		
5Y3GB	030 809 020		5(5.7)				60		REC		20mA	A08	RR
5Y3GR	020 809 030		5(5.7)				60		REC		20mA	A08	RR
5Y3GT	020 809 030		5(5.7)				60		REC		20mA	A08	RR
5Y4	008 090 230		5				60		REC		30mA	A08	RR
5Y4SG	008 090 230		5				60		REC		20mA	A08	RR
5Z3	289 300 000		5(5.7)				120		REC		30mA	UX4	RR
5Z4	030 809 020		5(5.7)				60		REC		40mA	A08	RR
5Z4G	030 809 020		5(5.7)				60		REC		40mA	A08	RR
5Z10	020 908 030		5				120		REC		30mA	B8A	RR
6/301.2	741 236 410		6.3	7.9	200		10	3.4	100	100	3	B9A	TT
6A3	264 300 000		6	36	250		60	5.25	100		5	UX4	T
6A4	264 530 000		6	9	150	150	14	1.9	100	100	1.9	UX5	P
6A5	026 040 310		6	45	250		60	5.25	100		5	A08	T
6A6	274 146 300		6	5	250		3.0	1.6	100		3.1	UX7	TT
6A7	265 541 300	G1	6	8	250	100	3.5	1.1	100	100	1.1	Sm7	II
6A7E	265 541 300	G1	6	8	250	100	3.5	1.1	100	100	1.1	Sm7	II
6A7S	265 541 300	G1	6	8	250	100	3.5	1.1	100	100	1.1	Sm7	H
6A8GT	026 545 310	G1	6	8	250	100	3.5	1.1	100	100	1.1	A08	II
6A10C	026 541 340		6		250	100	3.5		100	100		A08	H
6AB4	602 304 100		6	2	250		10	5.5	100		5.5	B7G	T
6AB6	026 740 310		6.3	{	250		34	1.8	100		1.8	A08	TT
					250		5		100				
6AB7	021 415 360		6	3	300	200	12.5	5	100	150	5	A08	P
6AB8	641 237 154		6	{ 2	100		4	1.4	100	60	1.4	B9A	TP
				{ 8	200	200	17.5	3.5	100	150	3.5		
6AC5	026 040 310		6	0	250		2.5		No Data Available			A08	T
6AC6	026 740 310		6		200		45	2	100		2	A08	TT
6AC7	021 315 360		6	2	300	150	10	9	100	100	8	A08	P
6AD4	402 013 080		6	11.5	100		1.4	2	100		2	B8B	T
6AD5	026 040 310		6	1	250		0.9	1.5	200		1.5	A08	T
6AD7	427 546 310		6	{ 25	250		4	0.3	100	60	0.3	A08	TP
				{ 16.5	250	250	34	2.5	100	150	2.5		

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6AD8	541 236 891		6	2.0	250	90	6.7	1.1	100	90		B9A	DDP
6AE5	026 040 310		6	15	100		7	1.2	80		1.2	A08	T
6AE6	026 740 310		6	1.5	250		6.5	1	200		1	A08	TT
6AE7	026 414 310		6	13.5	250		10	3	100		3	A08	TT
6AE8	541 237 46*		6	{ 2	100		5.2	2.2	100	60	2.8	B9A	TH
				{ 2	250	90	3.5		150	90			
6AF3	*** 23* **8	C	6				120		REC		40mA	B9A	R
6AF4	542 314 600		6	4	100		15	6.6	80		6	B7G	T
6AF4A	642 314 600		6	3	100		20	7.5	100		7.5	B7G	T
6AF5	026 040 310		6	18	200		7	1.5	100		1.5	A08	T
6AG5	412 365 100		6	1.5	250	150	6.5	5	100	100	5	B7G	P
6AG6	026 540 310		6	6	250	250	32	10	100	150	9	A08	P
6AG7	120 415 360		6	3	300	150	30	11	100	100	410	A08	P
6AH4	420 060 310		6	23	250		30	4.5	100			A08	T
6AH5	520 604 310		6	18	350	250	54	5.2	100	150	5	A08	P
6AH6	412 365 100		6	2	300	150	10	9	100	100	8	B7G	P
6AH7	461 471 230		6	16	250		10	2.2	100		2.2	A08	TT
6AH7GT	417 146 230		6	9	250		12	2.4	100		2.4	A08	TT
6AJ4	414 464 234		6	2	125		8	7	100		10	B9A	T
6AJ5	412 365 100		6	7.5	200	75	2.9	2.7	100	75		B7G	P
6AJ7	020 415 360		6		300	150	10	9	150	150	7.5	A08	P
6AJ8	541 237 164		6	{ 3	100		5	2.3	100	60	2.3	B9A	TH
				{ 2	250	100	6.5	2.4	150	100	2.4		
6AK4	402 013 060		6	2.5	250		9.5	3.8	100		3	B8D	T
6AK5	412 365 100		6	2.3	150	150	7	4.3	100	100	4	B7G	P
6AK6	412 365 100		6	9	200	175	15	2.3	100	100	2.3	B7G	P
6AK7	120 415 360		6	3	300	150	30	11	100	100	9	A08	P
6AK8	†91 238 146		6	3	250		1.0	1.2	100		1.3	B9A	DDDT
6AL5	192 310 800		6						D		6.0	B7G	DD
6AL6	020 540 310	A1	6	14	250	250	72	6	100	150	6	A08	P
6AL7	426 89* 310		6	6	300				100			A08	DDDT
6AM4	414 464 234		6	1	200		10	9.8	100		6	B9A	T
6AM5	412 360 500		6	13.5	250	250	16	2.6	100	150	2.6	B7G	P
6AM6	412 361 500		6	{ 2	250	250	10	7.5	100	150	5	B7G	P
				{ 1.5	200	150	4	6.4	100	150	5		
6AM8	145 236 181		6	1.7	200	150	11.5	7	100	150	7	B9A	DP
6AM8A	145 236 181		6	1.7	200	150	9.5	5.8	100	150	7	B9A	P
6AN4	642 314 600		6	1.3	200		13	10	100			B7G	T
6AN5	412 365 100		6	6	150	125	35	8	100	100	7	B7G	P
6AN6	289 ††1 300		6						D			B7G	DDDD
6AN7	541 230 764		6	{ 2	100		5	2	100	60	2.8	B9A	TP
				{ 2	250	100	3	0.7	100	100			
6AN8	641 237 541		6	{ 6	200		13	3.3	100	60	3	B9A	TP
				{ 2.2	200	150	9.5	6.2	100	150	6		
6AN8A	641 237 541		6.3	{ 6	200		13	3.3	100	60	3	B9A	TP
				{ 2.2	200	150	9.5	6.2	100	100	6		
6AQ4	412 314 600		6	2	250		6	8.5	200		8	B7G	T
6AQ5	412 365 400		6	12.5	250	250	45	4.1	100	150	4	B7G	P
6AQ5A	412 365 400		6.3	12.5	250	250	45	4.1	100	150	4	B7G	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6AQ6	412 398 600		6.	3	250		1.0	1.2	150		1.2	B7G	DDT
6AQ7	918 461 230		6	2	250		2.3	1.6	100		1.6	A08	DDT
6AQ8	741 236 410		6	2.3	250		10	5.5	100		5	B9A	TT
6AR5	412 365 000		6	16	250	250	34	2.4	100	150	2.4	B7G	P
6AR6	106 052 430		6	36	300	300	58	4.3	100	150	4.3	A08	P
6AR7	461 891 230		6	2	250		1.3	1	200	1	A08	DDT	
6AR7GT	206 598 130		6	2	250	100	7	2.5	100	100	2.5	A08	DDP
6AS4	001 080 230		6						REC			A08	R
6AS5	142 345 600		6	8.5	150	125	35	5.6	100	100	5	B7G	P
6AS6	412 365 100		6	2	150	125	5.5	3.5	100	100	3.5	B7G	P
Δ6AS7	471 461 230		6	40	100				No Data Available			A08	TT
6AS8	541 238 116		6	2.2	200	150	9.5	6.2	100	150	6	B9A	DP
6AT6	412 389 600		6	3	250		1	1.2	100		1.2	B7G	DDT
6AT7	641 237 410		6	{	2	250	10	5.5	100	60	5	B9A	TT
					1	100	3.7	4	100		4		
6AT8	461 237 514		6	{	1	100	8.5	5.8	100	60	5.8	B9A	TP
					1.8	250	7.7	4.6	100	150	4		
6AT8A	461 237 514		6	{	1	100	8.5	5.8	100	60	5.8	B9A	TP
					1.8	250	7.7	4.6	100	100	4		
6AU4	001 080 230		6				120		REC		40mA	A08	R
6AU5	421 060 350		6	20	200	150	50	5.6	80	60	6	A08	P
6AU6	412 365 100		6	1	250	150	10	5.2	100	100	3.9	B7G	P
6AU6A	412 365 100		6.3	1	250	150	10	5.2	100	100	3.9	B7G	P
6AU7	641 227 413		3	8.5	250		10	2.2	100		2	B9A	TT
6AU8	146 231 457		6	{	1.2	150	8.5	4.8	100	60	5	B9A	TP
					1.5	200	15	7	100	100	7		
6AU8A	146 231 457		6	{	1.2	150	8.5	4.9	100	60	5	B9A	TP
					1.5	200	15	7	100	100	7		
6AV4	802 309 100		6				30		REC		15mA	B7G	RR
6AV5	421 060 350		6	22.5	250	150	57	5.9	100	100	5.8	A08	P
6AV6	412 389 600		6	2	250		1.2	1.6	100		1.2	B7G	DDT
6AV8	464 231 751		6	6	200		13	3.3	100	60	3	B9A	TP
				2.2	200	150	9.5	6.2	100	150	6		
6AW4	289 130 000		6				30		REC		15mA	1X5	RR
6AW5	208 190 310		6				30		REC		15mA	A08	RR
6AW6	412 365 100		6	1.8	250	150	7	5	100	150	5	B7G	P
6AW7	149 816 230		6	0	100		1.4	1.2	100		1.2	A08	DDT
6AW8	146 231 457		6	{	2	200	4	4	100	60	4	B9A	TP
					3	200	13	9	100	100	9		
6AX2	23* 232 *32	D1	6				120		REC		30mA	B9A	R
6AX4	001 080 230		6				120		REC		35mA	A08	RR
6AX5	029 080 310		6				60		REC		20mA	A08	RR
6AX6	028 190 310		6				120		REC		30mA	A08	RR
6AX7	641 227 413		3	2	250		1.2	1.6	100		1.2	B9A	TT
6AX8	546 237 114		6	{	1	150	18	8.5	100	60	8	B9A	TP
					1.2	250	10	4.8	100	100			
6AY3	*8* 23* 810		6.3				120		REC		30mA	B9A	R
6AY5	023 540 310	A1	6	12.5	250	250	47	4.1	100	150	4	A08	P
6AY8	026 589 310	G1	6	5	250	100	52	9.5	100	90	9	A08	DDP

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
6AZ5	810 230 190		6						D			B8A	DD
6AZ8	751 324 164		6	{ 6	200		13	3.3	100	60	3	{ B9A	TP
6B3	080 230 808		6.3	2.3	200	150	9.5	6	100	100	6	{ B9A	R
6B4	026 040 300	C	6	45	250		60	5.2	100		5	A08	T
6B4	036 040 200		6.3	45	250		60	5.2	No Data Available			B8A	T
6B6	026 890 310	G1	6	2	250		0.9	1.1	100		1.1	A08	DDT
6B7	265 891 300	G1	6	3	250	150	9	1.1	100	100	1.1	Sm7	DDP
6B7E	265 891 300	G1	6	3	250	150	9	1.1	100	100	1.1	Sm7	DDP
6B7S	265 891 300	G1	6	3	250	150	9	1.1	100	100	1.1	Sm7	DDP
6B8	026 985 310	G1	6	3	250	150	10	1.3	100	100	1.3	A08	DDP
6B8G	026 985 310	G1	6	3	250	150	9	1.1	100	100	1.3	A08	DDT
6B8SG	026 985 310	G1	6	3	250	150	9	1.1	100	100	1.2	A08	DDP
6B11	276 454 130		6	{ 3	100		5	2.3	100	60	2.3	{ B9A	TH
6B31	821 013 900		6.3		150	125	5		D	100		B7G	DD
6BA6	412 365 100		6	1	250	100	11	4.4	100	100	4.4	B7G	P
6BA7	641 231 106		6	2	100		18	7.0	100		7	B9A	H
6BA8	146 231 457		6	{ 8	200		8	2.7	100	60	5	{ B9A	TP
6BA8A	146 231 457		6	{ 2.5	200	150	13	9	100	100	9	{ B9A	TP
6BC4	644 231 446		6	{ 8	200		8	2.7	100	60	2.5	{ B9A	TP
6BC5	412 365 100		6		200	150	13	9	100	100			
6BC7	180 239 111		6	1.5	150		14.5	10	100		10.0	B8A	T
6BC8	741 236 410		6	1.3	250	150	7.5	5.7	100	150	5.7	B7G	P
6BC32	412 389 600		6.3										
6BD5	421 060 350		6	12	200	200		5	100	100	5	A08	P
6BD6	412 365 100		6	3	250	100	9	2	100	100	2	B7G	P
6BD7	641 238 09*		6	3.0	250		1.0	1.2	150		1.2	B9A	DDT
6BD7A	641 238 09*		6.3	3	250		1	1.2	150		1.2	B9A	DDT
6BE6	412 365 400		6	1.5	250	100	3	2.75	100			B7G	H
6BE7	541 236 114		6	1	250	20	0.95	0.7	No Data Available			B9A	N
6BE8	461 237 514		6	{ 1	150		18	8.5	100	60	8	{ B9A	TP
6BF5	412 265 400		6	1	250	100	10	5.2	100	100			
6BF6	412 398 600		6							90	7	B7G	P
6BF7	642 113 470		6	7.5	100	100	36	7.5	100		1.9	B7G	DDT
6BG6	021 040 350	A1	6	9	250		9.5	1.9	100		4.8	B8D	TT
6BG7	742 113 460		6	0.8	100		8	4.8	100				
6BH5	541 236 000		6	15	250	250	75	6	No Data Available			A08	P
6BH6	412 365 100		6	0.8	100		8	4.8	100		4.8	B9A	TT
6BH6	141 230 651		6.3										
6BH8	146 321 457		6	{ 5	150		9.5	3.3	No Data Available			B9A	P
6BJ5	412 36* 500		6	{ 1.6	200	125	15	7	100	100		{ B9A	TP
6BJ6	412 365 100		6	5	250	250	35	10.5	100	150	10	B7G	P
6BJ7	110 239 181		6						D			B9A	DDD

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
6BJ8	645 237 114		6.3	{ 8.5	250		10.5	2.2	100	60		B9A	TP
6BJ8	811 239 641		6	3	250	100	3	1.6	100	100		B9A	DDT
6BK5	604 231 450		6	5	250	250	35	8.5	100	150	8	B9A	P
6BK6	412 389 600		6	2	250		1.2	1.6	100		1.6	B7G	DDT
6BK7	741 236 410		6	1.0	100		9	6.1	100		6.0	B9A	TT
6BK7A	741 236 410		6	2	150		10.7	9	100		9	B9A	TT
6BK7B	741 236 410		6	2	150		10.7	9	100		9	B9A	TT
6BL4	**1 *8* 230		6				180		REC		10mA	A08	R
6BL7	471 461 230		6	9	250		40	7	100		6	A08	TT
6BL8	645 237 114		6	{ 2	100		14	5	100	60	5	B9A	TP
				2	200	175	10	6.2	100	150	6		
6BM5	412 365 400		6	6	250	250	30	7	No Data Available			B9A	P
6BM8	414 237 516		6	{ 1	200		3.7	2.5	100	60	2.5	B9A	TP
				16	200	200	35	6.4	100	100	6		
6BN4	142 361 400		6	2.2	150		9	7	100		7	B7G	T
6BN5	441 231 615		6	10.8	250	225	26	3.2	100	150	3.2	B9A	P
6BN6	142 354 600		6	1	60	60	0.25	1.0	80	60	1.0	B7G	P
6BN8	811 239 641		6.3	3	250		1.6	2.5	100		3.5	B9A	DDT
6BN8	026 895 310	G1	6	3	250	150	9	1.1	100	100	1.1	A08	DDP
6BQ16	260 153 041		6.3		150	150	50	26	No Data Available			B9A	P
6BQ5	*41 23* 6*5		6	7.3	250	250	48	11.3	100	150	10	B9A	P
6BQ6	020 540 310		6	22.5	250	150	57	5.9	100	100	5	A08	P
6BQ6	020 540 310	A1	6	22.5	250	150	57	5.9	100	100	5	A08	P
6BQ7	741 236 410		6	2	150		9	6	150		6	B9A	TT
6BQ7A	741 236 410		6	2	150		9	6.4	100		5	B9A	TT
6BR7	041 230 651		6	3	250	100	2	1.2	100	100	1.2	B9A	P
6BR8	461 237 514		6	{ 1	150		18	8.5	100	60	8	B9A	TP
				0.8	250	100	10	5.2	100	100			
6BR22	601 420 135		6.3		150	125	25	31	No Data Available			B9A	P
6BS4	642 314 600		6	4	100		16	8	100		8	B7G	T
6BS5	541 236 **1		6	7.5	250	250	50	7	100	100		B9A	P
6BS7	001 230 651	G1	6	3	250	100	2	1.2	100	100	1.2	B9A	P
6BS8	641 237 410		6	2.2	150		10	7.2	100		7	B9A	TT
6BT4	280 009 130		6				30		REC		15mA	B8A	RR
6BT6	412 389 600		6	3	250		1	1.2	150		1.2	B7G	DDT
6BT8	891 236 541		6	2.2	200	150	9.5	6.2	100	100		B9A	DDP
6BU6	412 389 600		6	9	150		9.5	1.9	100		1.9	B7G	DDT
6BUR	157 231 461		6		100	60	2.2	1.5	100	60		B9A	PP
6BV7	865 239 141		6	5	250	250	38	10	100	150	10	B9A	DDP
6BV8	146 239 118		6	3.7	200		11	5.6	100			B9A	DDT
6BW4	800 230 901		6				30		REC		15mA	B9A	RR
6BW6	*41 230 651		6	13	300	225	34	3.7	100	150	3.7	B9A	P
6BW7	141 230 651		6	2.4	250	250	9.7	8.2	100	100	7	B9A	P
6BW8	918 234 156		6.3	1.1	250	100	10	5.2	100	100		B9A	DDP
6BX6	141 230 651		6	3	200	200	8	7.2	100	100	7	B9A	P
6BX7	471 461 230		6	16.4	250		42	7.6	100		6	A08	TT
6BX8	641 237 410		6	5	150		11	7.5	125		7	B9A	TT
6BY5	120 980 310		6				60		REC		20mA	A08	RR

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
6BY6	412 365 400	G1	6	2.5	250	100	6.5	2.4	100	100	2	B7G	H
6BY7	141 230 651		6	2	250	100	10	6	150	100	5	B9A	P
6BY8	026 598 310		6	4	250	250	44	12	100	150	10	A08	DDP
6BZ6	412 365 100		6	1	100	125	14	8	125	125	7	B7G	P
6BZ7	741 236 410		6	2.2	150		10	6.8	100		6	B9A	TT
6BZ8	641 237 410	G1	6	1	150		10	8	125		8	B9A	TT
6C2C	026 447 300		6.3	8	250		9	2.6	100			A08	TT
6C3M	026 040 300		2	2.5	150		1.5	1.3	100		1.3	A08	T
6C4	602 364 100		6	8.5	250		10.5	2.2	100		3	B7G	T
6C4C	026 040 300		6.3		250		60	5.2	100			A08	T
6C31	412 344 600	G1	6.3	15	150			12	No Data Available			B7G	T
6C5	026 040 310		6	8	250		8	2	100		2	A08	T
6C6	265 113 00		6	3	250	100	2	1.2	100	100	1.2	1X6	P
6C7	260 891 300		6	9	250		4.5	1.2	100		1.2	Sm7	DDT
6C9	276 454 130		6	{ 2.5 2.5	100 150	100	5 8	3 2.5	100 100	60 100	3 2.5	B8A	TH
6C10	276 454 130	G1	6	{ 2 2	100 250	100	5 8	2.2 2.4	100 100	60 100	2.8 3.5	B8A	TH
6C12	541 237 164		8	{ 3 2	100 250	100	3 6.5	2 2.4	100 100	60 100	3 2.4	B9A	TH
6C16	645 237 114		6	{ 2 2	100 200	175	14 10	5 6.2	100 100	60 100		B9A	TH
6C31	027 546 310		6	{ 4 3	100 250	100	7 5	3.4 2.8	100 100	60 100	5 3.1	A08	TH
6CA4	R*1 23* 9**		6				60		REC		20mA	B9A	RR
6CA5	142 345 600	G1	6	4.5	150	125	36	9.2	125	125	9.2	B7G	P
6CA7	126 540 310		6	14.5	250	250	57	8.5	100	100	9	A08	P
6CB6	412 365 100		6	1	150	125	13	8	100	150	6	B7G	P
6CB6A	412 365 100		6.3	2	200	150	9.5	6.2	100	100		B7G	P
6CC10	461 471 230		6.3	9	250		6.5	2.2	100		3	B8A	TT
6CC31	672 344 100	G1	6.3		200		6	3	100		4	B7G	TT
6CC40	641 237 410		6.3	8.5	250		10.5	2.2	100		3	B9A	TT
6CC41	741 236 410		6.3	1.5	250		2.3	2	100			B9A	TT
6CC42	214 607 413		6.3	2	150		8	5.2	100		5.5	B9A	TT
6CC43	641 237 410		6.3	2.3	250		10	5.9	100			B9A	TT
6CN6	021 040 350	G1	6	30	200	175	75	7.7	100	100	7	A08	P
6CF5	412 365 100		6	1	200	125	11	7.6	125	125	7.6	B7G	P
6CF5	402 365 100		6.3		150	125	11	7.6	100	100		B7G	P
6CF6	412 365 100		6	1	200	125	12	7.8	100	150	6	B7G	P
6CF8	501 236 014		6	2	250	150	3	1.85	100	100		B9A	P
6CG6	412 365 100	G1	6	8	250	150	9	2	100	100		B7G	P
6CG7	641 237 410		6	8	250		9	2.6	100		3	B9A	TT
6CG8	461 237 514		6	{ 2 2	100 250	150	8.5 7.7	5.8 4.6	100 100	60 150	5.9 4	B9A	TT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6CG8A	461 237 514		6 {		100		8.5	5.8	100	60		B9A	TP
6CH6	041 230 651		6	4.5	250	150	40	7.7	100	100		B9A	P
6CH7	741 236 410		6	2.2	150		10	6.8	150		6.8	B9A	TT
6CH8	175 321 446		6 {	2	200		13	3.3	100	60	4.9	B9A	TP
6CJ5	260 054 130		6	2.2	200	150	9.5	6.3	100	150	5	B8A	P
				2.5	250	100	6	2.2	100	100	2.2		
6CK4	424 060 310		6	28	250		40	5.5	No Data Available			A08	T
6CK5	261 054 130		6	7	250	250	36	10	100	150	8	B8A	P
6CK6	541 231 600		6	5.5	250	250	36	10	100	150	9	B9A	P
6CL6	145 236 154		6	3	250	150	30	11	No Data Available			B9A	P
6CL8	461 237 514		6 {	0.8	150		15	8	100	60	8	B9A	TP
				1.0	150	125	12	5.8	100	100	5		
6CL8A	461 237 514		6 {	0.8	150		15	8	100	60	8	B9A	TP
				1	150	125	12	5.8	100	100	5		
6CM4	641 234 146		6		200		12	14	No Data Available			B9A	T
6CM6	504 234 106		6	12.5	250	250	45	4.1	100	100	4	B9A	P
6CM7	701 236 441		6 {	7	200		5	2	100	60	2.8	B9A	TT
				8	250		20	4.4	100	100	4.7		
6CM8	641 237 514		6 {	2	250		1.8		2	100	60	B9A	TP
					200	150	9.5	6.2	100	100			
6CN5	026 540 310		6.3	18	350	250	66	5.2	No Data Available			A08	P
6CN6	120 540 310		6	7	250	250	100	14.3	100	150	10	A08	P
6CN7	981 331 462		3	3	250		1	1.2	100		1.3	B7G	DDT
6CQ4	**1 080 230		6.3				180		REC		30mA	A08	R
6CQ6	412 361 500		6	2.5	250	200	8	2.5	100	150	2.5	B7G	P
6CQ8	645 237 114		6 {	0.85	150		15	8	100		8	B9A	TP
				1	150	125	12	5.8	125	125	5.8		
6CQ8A	645 237 114		6 {	0.8	150		15	8	100	60	8	B9A	TP
				1	150	125	12	5.8	125	125	5.8		
6CR4	414 464 234		6.3	1	150		16	6	No Data Available			B9A	T
6CR5	154 231 541	A1	6.3	22.5	250	150	65	6	100	100		B9A	P
6CR6	182 365 400		6	2	250	100	9.5	2	250	100	1.9	B7G	DT
6CR8	641 237 514		6 {	2	150		12	4	100	60	4	B9A	TP
					150	125	13	7.7	100	100	7		
6CS5	514 234 1*6		6	10	200	125	47	8	100	100		B9A	P
6CS6	412 365 100		6	1	100	30	1	1.1	No Data Available			B7G	H
6CS7	604 237 411		6 {	8.5	250		10.5	2.2	100		2	B9A	TT
				10.6	250		19	4.5	100		4		
6CS8	641 237 514		6 {	2	150		12	4	100	60	4	B9A	TP
				0.9	150	125	13	7.7	100	100	7		
6CT4	411 231 146		6.3	1	150		16	15	No Data Available			B9A	TT
6CT7	268 154 130		6	2	250	100	5	1.8	100	100	1.8	B8A	DP
6CU5	142 345 600		6	8	125	100	50	7.5	125	100	7.5	B8G	P
6CU7	276 454 130		6 {	2	100		5	2.2	100	60	2.8	B8A	TH
				2	250	100	8	2	100	100	3.5		
6CU8	175 231 446		6 {	6	200		13	3.3	100	60	3	B9A	TP
				2.2	200	150	9.5	6.2	100	150	6		
6CV7	264 089 130		6	3	250		1	1.3	150		1.3	B8A	DDT
6CW5	*41 23* 6*5		6	12.5	200	175	70	10	100	100	9	B9A	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
6CW7	147 234 116		6	1.5	90		12	6	100		6	B9A	TT
6CX7	641 237 411		6	2	150		9	6.4	100		6	B9A	TT
6CX8	146 231 456		6	1.5	150		9	4.6	100	60	4.6	B9A	TP
6CY5	412 365 100		6.3	2	200	125	24	10	100	100		B7G	P
6CY7	714 236 411		6	3	250		1.2	1.3	100		1.5	B9A	TT
				18.5	150		30	5.4	100				
6CZ5	504 234 1*6		6	14	250	250	46	4.8	100	100		B9A	P
6D2	192 310 800		6						D			B7G	RR
6D3	812 380 000		6						D			B7G	R
6D5	026 040 310		6	40	300		31	2.1	100		2.1	A08	T
6D8	027 546 310	G1	6	3	150		4.2		100	60		A08	H
				250	100		3.5		150	100			
6DA4	**1 080 230		6.3				120		REC		30mA	A08	R
6DA6	041 230 651		6	2	250	100	9	3.6	100	100	3.6	B9A	P
6DA7	604 237 411		6.3	8	250		9	2.6	100			B9A	TT
				17.5	150		40	5.7	100				
6DB5	514 234 1*6		6.3	9.6	200	125	46	8	100	100		B9A	P
6DB6	412 365 100		6	1	150	150	5.8	2	100	100		B7G	P
6DE7	744 236 411		6	17.5	150		32	6.5	100			B9A	TT
				11	250		5.5	2	100				
6DE6	412 365 100		6	1.1	150	125	16	8	100	100	8	B7G	P
6DC6	412 365 100		6	2.2	200	150	9.5	5.5	150	100	5	B7G	P
6DC8	541 236 891		6.3	2	250	100	9	3.8	100	100		B9A	DDP
6DDHV1	145 237 864		6	2	250		91	1.6	100	50		B9A	DTP
				1	250	100	9	3.5	100	100			
6DE4	001 080 230		6.3				120		REC		30mA	A08	R
6DG6	026 540 310		6	7.5	200	125	47	8	100	150		A08	P
6DG7	041 230 651		6.3	20	250	100	11	4.4	100	100	5	B9A	P
6DJ8	641 237 411		6.3	1.3	90		15	12.5	No Data Available			B9A	TT
6DK6	412 365 100		6.3	0.9	150	125	12	9.8	100	100	9.5	B7G	P
6DL4	414 234 464		6.3		150		12.5	14	No Data Available			B9A	TT
6DL5	412 365 400		6.3	7.3	250	225	26	5.5	100	100		B7G	P
6DN6	021 040 350		6	18	200	125	70	9	100	100		A08	P
6DN7	461 471 230		6.3	9.5	250		34	7.4	100			A08	TT
6DQ5	421 541 350		6.3	17.5	150	100	10.5		No Data Available			A08	P
6DQ6	020 540 310		6	22.5	250	150	75	6.6	125	100		A08	P
6DR4	123 000 000		6						D			B3G	D
6DR6	*41 23* *51		6	23	200	175	45	6.6	100	100		B9A	P
6DR7	644 237 411		6	17.5	150		35	6.5	100			B9A	TT
				3	250		1.4	1.6	100				
6DR8	541 236 891		6.3		12	12	45		No Data Available			B9A	DDP
6DS5	412 365 100		6.3	8.5	250	200	29	5.8	100	100		B7G	P
6DS8	541 237 564		6		12		0.7	1.4	No Data Available			B9A	TP
					12	12	0.4	0.7					
6DT5	504 230 1*6		6.3	16.5	250	250	38	6.5	100	100		B9A	P
6DT6	412 365 100		6.3	2.2	150	100	11	0.8	150	100	2	B7G	P
6DT8	741 236 410		6.3	2.5	250		10	5.5	100		4	B9A	TT
6DW4	*8* 23* 8*1		6.3				180		REC		40mA	B9A	R

VALVE	SELECTOR SWITCH NO.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6DW5	504 234 106		6.3	22.5	200	150	55	5.5	100	100		B9A	P
6DY7	041 230 605		6.3	12.5	250	250	50	60	100	100		B9A	P
6DZ7	426 517 310		6.3	7.3	250	250	48	11.3	No Data Available			A08	PP
6DZ8	414 237 516		6	{	150		0.8	1.4	100	60	1.4	B9A	TP
6E6	274 146 300		6		150	125	45	7.5	100	100			
					250		18	1.7	100		1.7	UX7	TT
6E7	265 101 300	G1	6	2	250	100	8.2	1.6	100	100	1.6	Sm7	P
6E8G	027 546 310	G1	6	{	150		3.3	2.8	150	60	2.8	A08	TH
					250	100	2.3		100	100			
6E102	602 301 450		6.3	7	250	250	72	15	No Data Available			F8	P
6EA5	412 365 100		6.3	1	250	150	10	8	No Data Available			B7G	P
6EA7	461 471 230		6.3	25	200		48	6.5	No Data Available			A08	TT
6EA8	645 237 114		6.3	{	1	150	18	8.5	100	60		B9A	TP
					1	125	12	6.4	100	100	6		
6EB8	146 231 457		6	{	2	250	2	2.7	100	60	2.5	B9A	TP
					2	200	25	12	100	60			
6EF6	026 540 310		6.3	18	250	250	50	5	No Data Available			A08	P
6EH5	142 345 600		6	3.2	100	125	42	14.6	100	125		B7G	P
6EH6	412 365 100		6	1	250	150	7.4	4.6	100	150	4	B7G	P
6EH7	141 230 651		6.3	2	200	90	12	12.5	No Data Available			B9A	P
6EH8	146 231 457		6	{	1	150	13	7.5	100	60	7.5	B9A	TP
					1	150	12	6	100	100	6		
6EJ7	141 230 651		6.3	2.5	200	200	10	15	No Data Available			B9A	P
6EL7	141 230 651		6.3	1.8	200	175	10	8.8	100	100		B9A	P
6EM5	504 234 106		6	18	250	250	35	5.1	100	100		B9A	P
6EM7	471 461 230		6.3	{	3	250	1.4	1.6	100			A08	TT
					20	150	50	7.2	100				
6EQ7	141 235 680		6.3		100	100	9	3.9	100	100		B9A	DP
6ER5	142 361 *10		6.3	1.2	200		10	10.5	100			B7G	T
6ES5	142 360 100		6.3	1	200		15	9.5	100			B7G	P
6ES6	412 365 100		6.3	0.7	12	12			No Data Available			B9A	P
6ES8	641 237 410		6.3	1.2	90		15	12.5	100			B9A	TT
6ET6	412 365 100		6.3	1	12	12	4.8	3	No Data Available			B7G	P
6ET7	189 231 456		6.3		200	150	25	11.5	No Data Available			B9A	DDP
6EU7	230 146 741		6.3	2	250		1.2	1.6	100			B9A	TT
6EU8	746 231 415		6	{	1	150	18	8.5	100	60		B9A	TP
					1	150	12	6.4	100	100			
6EV5	265 424 300		6.3		200	80	11.5	8.8	100	80		B7G	P
6EV6	641 237 410		6.3	2	250		9.2	5.2	100			B9A	TT
6EW6	412 365 100		6	0.8	150	125	11	14	No Data Available			B7G	P
6EW7	744 236 411		6.3	{	17.5	150	45	7.5	100			B9A	TT
					11	250	5.5	2	100				
6EX4	802 309 100		6				30		REC		15mA	B9A	RR
6EX6	021 040 350	G1	6.3	30	200	175	67	7.7	100	100		A08	P
6EY6	026 540 310		6.3	17.5	250	250	44	4.4	No Data Available			A08	P
6EZ5	026 540 310		6.3	20	250	250	43	4.1	No Data Available			B8A	P
6EZ8	144 127 464		6.3	1	150		4.2	4.2	100		4.2	B9A	TT
6F1	261 514 130		6	1.8	200	200	10	9	100	60	8	B8A	P
6F5	020 600 310	G1	6	2	250		0.9	1.5	100		1.5	A08	T
6F6	026 540 310		6	16.5	250	250	34	2.5	100	150	2.5	A08	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
6F7	275 641 300	G1	6	{ 3	100		3.5	0.5	100	60	0.5	Sm7	TP
				3	100	100	6.3	1	100	100	1		
6F7B	275 641 300	G1	6	{ 3	100		3.5	0.5	100	60	0.5	UX7	TP
				3	100	100	6.3	1	100	100	1		
6F7E	275 641 300	G1	6	{ 3	100		3.5	0.5	100	60	0.5	UX7	TP
				3	100	100	6.3	1.05	100	100	1.05		
6F7M	023 756 410	G1	6	{ 3	100		3.5	0.5	100	60	0.5	UX7	TP
				3	100	100	6.3	1	100	100	1		
6F8	027 146 310	G1	6	8	250		9	2.6	100		2.6	A08	TT
6F10	021 415 360		6.3	2	300	150	10	9	100	100		A08	P
6F11	260 154 130		6	1.8	250	100	4.4	2.2	100	100	2.2	B8A	P
6F12	412 361 500		6	{ 2	250	250	10	7.5	100	150	5	B7G	P
				1.5	200	150	4	6.4	100	150	5		
6F13	260 154 130		6	1.8	200	200	10	9	150	150	8	B8A	P
6F14	260 154 130		6	1.25	150	150	28	10.6	100	100	8	B8A	P
6F15	261 154 130		6	2.5	250	100	7	2.3	100	100	2.3	B8A	P
6F16	261 154 130		6	2.5	250	100	6	2.2	100	100	2.2	B8A	P
6F17	412 361 500		6	5	100	100	12.5	4.0	100	100		B7G	P
6F18	141 230 651		6	1.3	200	100	12	4.5	125	100		B9A	P
6F19	141 230 651		6	2	250	100	10	6	150	100	5	B9A	P
6F20	141 230 651		6.3	2	200	175	10	6	100	100		B9A	P
6F21	412 361 500		6	2.5	250	200	7.8	2.5	100	100		B7G	P
6F22	591 236 914		6	2	250	150	3	1.8	100	100		B9A	P
6F23	141 231 651		6.3	2	200	175	10	9.2	100	100		B9A	P
6F24	261 154 130		6.3	2.1	250	200	15	10.5	100	100		B8G	P
6F26	141 230 651		6.3	2	250	100	10	6	100	100	6	B9A	P
6F29	141 230 651		6.3	2	200	90	12	12.5	No Data Available			B9A	P
6F30	141 230 651		6.3	2.5	200	200	10	15.4	No Data Available			B9A	P
6F31	412 365 100		6.3	1	250	100	11	4.2	100	100		B7G	P
6F32	412 365 100		6.3		200	125	8	4.6	100	100		B7G	P
6F32	216 510 030	G1	6	4.5	200	200	5.1	3	100	150	3	M08	P
6F32V	412 365 000		6.3	3	150	150	7	4.3	100	100		B7G	P
6F33	412 365 100		6.3	2	150	125	5.2	3.5	100	100	3	B7G	P
6F35	412 365 100		6.3		40	30	2.7	2.7	No Data Available			B7G	P
6F36	412 365 100		6.3		300	150	10	9	No Data Available			B7G	P
6F40	111 231 654		6.3	2	250	150	3	2	100	100		B9A	P
6F60	041 230 665		6.3	23	250	200	55	5	100	100		B9A	P
6F80	541 231 600		6.3		200	200	36	10	100	100		B9A	P
6FC7	146 234 017		6.3	1.2	90		15	12	No Data Available			B9A	TT
6FD6	412 365 100		6.3		12	12		1.4	No Data Available			B7G	P
6FD12	541 236 891		6.3	2	250	100	9	3.8	100	100		B9A	DDP
6FG5	412 365 100		6.3	0.2	250	250	9	9.5	No Data Available			B7G	P
6FG7	461 237 514		6.3	{ 1	125		13	7.5	100	60	7	B9A	TP
				1	125	125	11	6	100	100	6		
6FH5	142 360 100		6.3	1	150		11	9	100			B7G	T
6FH6	020 540 310	A1	6.3	22.5	250	150	75	6	100	100		A08	P
6FH8	146 234 517		6.3	{ 1	100		7.9	5.5	100	60	5	B9A	TP
				2	250	250	7.3	4.4	100	100			
6FJ8	210 541 380	A1	6.3	22.5	250	150	75	6.6	100	100		A08	DP

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
6FM8	181 239 146		6.3	3	250		1	1.2	100			B9A	DDT
6FN5	521 441 350		6.3	22.5	200	150	100	10	No Data Available			B8A	P
6FR7	644 237 411		6.3	3	250		1.4	6.8	100			B9A	TT
6FQ5	142 360 100		6.3	20	150		50	5.4	100				
6FQ7	741 236 410		6.3	1.2	150		11	11	No Data Available			B7G	T
			6.3	8	250		9	7.7	100			B9A	TT
6FV6	402 365 100		6.3	1	150	75	10	8	100	80	8	B9A	P
6FV8	461 237 514		6	1	150		14	8	100	60	8	B9A	TP
				1	150	125	12	6.5	100	100	6.5		
6FW5	421 060 350		6.3	22.5	250	150	65	7.3	100	100		A08	P
6FW8	741 236 410		6.3	1.2	100		15	13	No Data Available			B9A	TT
6FX4	902 309 100		6				30		REC		15mA	B7G	RR
6FY5	142 360 100		6.3	1	150		11	13	No Data Available			B9A	T
6FY8	455 237 461		6	1.5	150		2.5	2	100	60		B9A	TP
				13.5	150	125	50	7	100	100			
6G6	026 540 310		6	9	200	175	15	2.3	100	100	2.3	A08	P
6G7	026 985 310	G1	6	3	250	125	10	1.3	100	100	1.3	A08	DDP
6G8	026 985 310	G1	6	3	250	125	9	1.1	100	100	1.1	A08	DDP
6GA4	026 040 310		6.3	18.5	250		50	7	100			A08	T
6GA8	641 237 410		6.3		250		8		100			B9A	TT
6GA8	426 040 310		6.3	18.5	250		50	7	100			A08	T
6GB3A	020 540 310	A1	6.3	7.7	100	100	100	14	No Data Available			A08	P
6GB6	020 540 310	A1	6.3	22.5	250	150	6.5	6	100	100		A08	P
6GB9	020 540 310	A1	6.3	22.5	250	150	75	6.6	125	100		A08	P
6GC6	021 540 350	A1	6.3	22.5	250	150	75	6.6	100	100		A08	P
6GE8	514 236 147		6.3	21	150		35	5	100	60		B9A	TP
				2	150	150	5.5	3.2	100	100			
6GF7	141 237 064		6.3	3	250		1.4	1.6	100			B9A	TT
6GG6	802 300 190		6	20	150		50	7.2	100				
							30		REC		15mA	F8	RR
6GII8	645 237 114		6	1	150		13.5	8.5	100	60		B9A	TP
				1	150	125	12	7.5	100	100			
6GJ5	541 234 5**	A1	6.3	22.5	250	150	70	7.1	100	100		B9D	P
6GJ8	645 237 114		6.3	1	150		13.5	8.5	100	60		B9A	TP
				1	125	125	12	7.5	100	100			
6GK5	142 360 100		2.3	1	150		11.5	15	No Data Available			B7G	T
6GK6	141 230 651		6.3	7.3	250	250	48	11.3	100	100		B9A	P
6GK17	001 080 230		6.3				120		REC		30mA	A08	R
6GN6	412 365 100		6.3	56	150	125	14	13	No Data Available			B7G	P
6GN6	412 365 800		6.3	68	250	100	11	4.4	100	100		B7G	DP
6GN8	146 231 457		6.3	2	250		2	2.7	100	60	3	B9A	TP
6GQ7	11* 239 181		6.3	3	200	150	25	11.5	100	100			
							5		D			B9A	DDD
6GS8	156 231 471		6.3		100	75	2	1.2	100	75		B9A	PP
6GT5	541 234 5*6		6.3	42	250	150	70	7.1	100	100		B9A	P
6GV8	641 237 514		6.3	0.6	100		5	6.5	100	60		B9A	TP
				15	200	175	41	7.5	100	100			
6GX6	412 365 100		6.3		150	100	3.7	3.7	100	100		B7G	P
6H1	412 360 500		6	1.8	250	100		2.1	100	100	2	B7G	H
6H4	020 800 310		6						D			A08	D

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
6H6	029 180 310		6						D		4	A08	DD
6H7C	026 447 310		6.3	5	250		3	1.6	100			A08	TT
6H7G	126 447 310		6.3		300		35	3.2	100			A08	TT
6H8C	461 471 230		6.3	8	250		9	3	100			A08	TT
6H8G	026 985 310	G1	6	2	250	125	8.5	2.4	100	100	2.4	A08	DDP
6H8NG	026 985 310	G1	6	2	250	125	6	1.8	100	100	1.8	A08	DDP
6H9C	461 471 230		6.3	2	250		2.2	1.6	100			A08	TT
6H10C	064 471 230		6.3	2	250		2	1.3	100		1.3	A08	TT
6H13C	461 471 230		6.3	30	90		80	5	No Data Available			A08	TT
6H31	412 365 100		6.3		250	100	3		100	100		B7G	H
6HB6	141 230 651		6.3	33	250	125	40	24	No Data Available			B9A	P
6HC8	414 237 516		6.3	{ 3	250		1.4	2	100	60		B9A	TP
				18	250	250	38	5.1	100	100			
6HP8	146 231 457		6.3	{ 2	200		4		100	60		B9A	TP
					200	125	25	12.5	100	100			
6HJ8	145 236 181		6.3	6	150	125	11.5	9.3	100	100		B9A	DP
6HK8	641 237 410		6.3	1	90		8.5	8	100		8	B9A	TT
6HR6	412 365 100		6.3	1.2	200	100	13.2	8.5	100	100		B7G	P
6HS6	412 365 100		6.3	0.8	150	75	8.8	9.5	100	100		B7G	P
6HS8	157 231 461		6.3		100	75	2	0.4	100	75	0.4	B9A	PP
6HZ8	146 231 457		6.3	{ 2	200		3.5		100	60		B9A	TP
					250	175	29	12.6	100	100			
6J4	412 344 600		6	1.5	150		15	12	100		10	B7G	T
6J5	026 040 310		6	8	250		9	2.6	100		2.6	A08	T
6J6	762 344 100		6	3	150		5	4.5	100		5.3	B7G	TT
6J6A	672 344 100		6	3	150		5	4.5	100		5.3	B7G	TT
6J7	026 510 310	G1	6	3	250	100	2	1.2	100	100	1.3	A08	P
6J8	027 546 310	G1	6	{ 3	150			116	100	60	1.6	A08	TH
				3	250	100	1.3	1.2	100	100	1.5		
6JC8	145 237 146		6.3	{ 1	150		12	6.5	100	60		B9A	TP
				1	150	125	9	5.5	100	100			
6JE8	146 231 457		6.3	{ 2	200		4.5	4.2	100	60		B9A	TP
					200	175	22	12	100	100			
6K5	026 000 310	G1	6	3	250		1.1	1.4	200		1.4	A08	T
6K6	026 540 310		6	18	250	250	32	2.3	100	150	2.3	A08	P
6K8	027 546 310	G1	6	{ 1	100		8	2.5	100	60	3	A08	TH
				3	250	100	4	1.2	100	100	1.5		
6K25	026 040 310		6		100		30	210	No Data Available			A08	Thy
6K28	668 231 456		6.3		100	100	4.2	3.4	100	100	3.4	B9A	DP
6L1	274 164 130		6	8.6	200		10	2.8	100		2	B8A	TT
6L5G	026 040 310		6	9	250		8	1.9	100		1.9	A08	T
6L6	026 540 310		6	18	350	250	54	5.2	100	150	5.2	A08	P
6L7	026 540 310	G1	6	3	250	100	6.3	1.1	100	100	1.1	A08	H
6L10	120 415 360		6.3	3	300	150	30	11	100	100		B8A	P
6L12	741 236 410		6	2.3	250		10	5.9	100		5	B9A	TT
6L13	741 226 413		6	2	250		1.2	1.6	100		1.6	B9A	TT
6L15	147 234 116		6.3	1.2	90		15	9	100		9	B9A	TT
6L16	146 234 107		6.3	1.5	90		12	6.2	80		6.2	B9A	TT
6L18	260 064 130		6	13.3	250		12	5.5	80		7	B8A	T
6L19	274 164 130		6	1.8	200		5	3.1	150		3.1	B8A	TT
6L31	412 365 400		6.3	12.5	250	250	45	4.1	100	100	4	B7G	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
6L34	412 314 600		6	1.5	250		10	9	150		7	B7G	T
6L41	601 235 144		6.3	17.2	250	250	45	7	100	100		B9A	P
6L43	145 236 154		6.3	3	300	150	30	11	No Data Available			B9A	P
6L50	214 451 130	A1	6.3	12.6	200	250	70	5	No Data Available			B9A	P
6LD3	264 098 130		6	1.9	250		0.85	1.95	150		1.9	B8A	DDT
6LD13	641 238 09*		6	3	250			1	100			B9A	DDT
6LD20	264 098 130		6	5.9	250		5	2.3	100		3	B8A	DDT
6LFD12	541 236 891		19	2	250	100	9	3.8	100	100		B9A	DDP
6M3	*28 0*0 *30		6						D			A08	R
6M5	541 230 600		6	7	250	250	36	10	100	100	10	B9A	P
6M6	026 540 310		6	6	250	250	36	9.5	100	150	8	A08	P
6M7	026 510 310	G1	6	2.5	250	125	10.5	3.4	100	100	3.2	A08	P
6L50V	215 445 113	A1	6.3	25	400	250	30	3.5	100	100		B9A	P
6M7MG	026 510 310	G1	6	2.5	250	125	6	2	100	100	2	A08	P
6M8	137 546 280	G1	6	{ 1 3	100 100		0.5 8.5	1.1 1.9	100 100	60 100	1.1 1.9	A08	DTP
6MH1	412 344 600		6.3		150		14.5	13	No Data Available			B7G	T
6MH13	672 344 100		6.3	1	100		11	7.5	100		7.5	B7G	TT
6M-L2	642 364 100		6.3	4.5	150		14	5	100			B7G	T
6M-L4	642 314 600		6.3		100		17	6.5	100			B7G	T
6MK7	026 510 310	G1	6	2	250	100	5	2.3	100	100	2.3	A08	P
6MP2	412 365 000		6.3	6	200	175	25	5.5	100	100		B7G	P
6MP17	412 365 400		6.3	8	250	250	32	5.2	100	100		B7G	P
6N3	**1 23* **8		6				180		REC		50mA	B9A	R
6N4	412 361 400		6	3	200		12	6	150		6	B7G	T
6N7	027 446 310		6	5	250		3	1.6	100		1.6	A08	TT
6N7	026 510 310	G1	6	2.5	250	125	10.5	3.4	100	100	3.2	A08	P
6N8	541 236 891		6	2	250	90	5	2.2	100	90	2.2	B9A	DDP
6P1	026 540 310		6	8.5	250	250	30	8.8	100	150	8	A08	P
6P5	026 040 310		6	13.5	250		5	1.25	100		1.4	A08	T
6P7	023 756 410	G1	6	{ 3 3	100 100		3.5 6.3	0.5 1	100 100	60 100	0.5 1	A08	TP
6P8	027 546 310	G1	6	{ 2.4 6	100 250	75	2.2 1.5		100 100	60 75		A08	TH
6P9	412 365 400		6	6	250	250	30	7	No Data Available			B9A	P
6P15	*41 23* 6*5		6	7.5	250	250	49	11.3	100	150	10	B9A	P
6P17	412 360 500		6	13.5	250	250	16	2.6	100	100		B7G	P
6P25	026 540 310		6	8.5	250	250	40	8.8	100	100	8	A08	P
6P26	026 540 310		6	8.5	250	250	40	8.8	100	150	8	A08	P
6PL12	414 237 516		6.3	{ 8.5 6	100 250		0.8 40	1.4 8.8	100 100	60 100		B9A	P
6P28	026 598 310	G1	6	6	250	250	36	9.2	100	150	8	A08	DDP
6Q4	441 230 446		6	1.5	250		15	12	No Data Available			B9A	T
6Q6	026 080 310		6	3	250		1.2	1.05	150		1.0	A08	DT
6Q7	026 980 310	G1	6	3	250		1	1.2	100		1.5	A08	DDT
6QL6	541 236 154		6	11.5	200	175	52	9.5	125	100		B9A	P
6R4	401 230 060		6	2	150		30	5.5	100		5	B9A	T
6R6	026 500 310	G1	6	3	250	100	7	1.45	100	100	1.4	A08	P
6R7	026 980 310	G1	6	9	250		9.5	1.9	100		1.9	A08	DDT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
6R8	8†1 239 146		6	9	250		9.5	1.9	100		1.9	B9A	DDDT
6R51P	451 23* 6*5		6.3	8	250	250	54	11	No Data	Available		B9A	P
6RA2	014 234 006		6.3	31	150		100	8.5	No Data	Available		B9A	P
6R-DHV1	145 327 864		6.3	{ 2	250		1.2	1.6	100	60		B9A	DTP
				1	250	100	9	3.5	100	100			
6RHH2	741 236 410		6.3	1	90		8.5	8	100		8	B9A	TT
6R-HH8	641 237 410		6.3		100		16	16	No Data	Available		B9A	TT
6R-HH9	641 237 410		6.3		90		16	16	No Data	Available		B9A	TT
6RHV1	145 237 164		6	{ 2	250		12	1.6	100	60		B9A	TP
				1	250	100	9	3.5	100	100			
6RP10	260 153 041		6.3	2.6	150	150	36	13.5	No Data	Available		B9A	P
6RR8	402 106 053		6.3	1.9	150	150	13	12.6	No Data	Available		B9A	P
6RR21	541 236 891		6.3		150	150	13.5	15	No Data	Available		B9A	DDP
6RV	026 510 310	G1	6	2	250	100	6.4	2.1	100	100	2.1	A08	P
6RP15	451 23* 6*5		6.3	8	250	250	54	11	No Data	Available		B9A	P
6S2A	*** 23* ***	D1	6.3						No Data	Available		B9A	D
6S4	*1* 234 **6		6	8	250		26	4.5	100		4.5	B9A	T
6S6	120 600 350	G1	6	2	250	100	13	4	100	100	4	A08	P
6S7	026 510 310	G1	6	3	250	100	8.5	1.75	100	100	1.7	A08	P
6S8	†18 916 230	G1	6	2	250		0.9	1.1	200		1.1	A08	DDDT
6SA7	126 641 310		6	3.6	100		12	4.3	100		1.4	A08	H
6SA7G	026 641 310		6	3.6	100		12	4.3	100		1.4	A08	H
6SB7Y	126 541 310		6	1	250	100	3.8		100	100		A08	H
6SC5	026 400 310		6	4	250		7.5	2.7	100		2.7	A08	T
6SC7	074 461 230		6	2	250		2	1.3	200		1.3	A08	TT
6SD7	021 415 360		6	2	250	100	6	3.6	100	100	3.6	A08	P
6SE7	021 415 360		6	1.5	250	100	4.5	3.4	100	100	3.4	A08	P
6SF5	014 060 320		6	2	250		0.9	1.5	200		1.5	A08	T
6SF7	041 581 360		6	1	250	100	12.4	2.05	100	100	2	A08	DP
6SG7	021 415 360		6	1	250	125	11.8	4.7	100	100	4.7	A08	P
6SH7	021 415 360		6	1	250	150	10.8	4.9	100	150	4.9	A08	P
6SJ7	021 415 360		6	3	250	100	3	1.65	100	100	1.6	A08	P
6SJ8EG	027 546 310	G1	6	{ 3	150		5	1.6	100	60	1.6	A08	TH
				3	150	100	1.3	1.2	100	100	1.2		
6SJ8G	027 546 310	G1	6	{ 3	150		5	1.6	100	60	1.6	A08	TH
				3	250	100	1.3	1.2	100	100	1.2		
6SK7	021 415 360		6	3	250	100	9.2	2	100	100	2	A08	P
6SL7	461 471 230		6	2	250		2.3	1.6	150		1.6	A08	TT
6SN7	461 471 230		6	8	250		9	2.9	100		2.6	A08	TT
6SQ7	041 896 230		6	2	250		0.9	1.1	200		1.1	A08	DDT
6SR7	041 986 230		6	9	250		9.5	1.9	100		1.9	A08	DDT
6SS7	021 415 360		6	3	250	100	9	1.85	100	100	1.8	A08	P
6ST7	041 896 230		6	9	250		9.5	1.9	100		1.9	A08	DDT
6SU7	471 461 230		6	2	250		2.3	1.6	200		1.6	A08	TT
6SV7	041 586 230		6	1	250	150	7.5	3.4	100	150	3.5	A08	DP
6SZ7	041 986 230		6	3	250		1	1.2	200		1.2	A08	DDT
6T1	642 314 600		6.3		75		16	6.6	80			B7G	T
6T4	642 314 600		6	3	80		18	7	80			B7G	T
6T8	†91 238 146		6	3	250		1	1.2	150		1.3	B9A	DDDT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6T6	026 500 310	G1	6	1	250	100	10	5.5	100	100	5.5	A08	P
6T7	026 980 310	G1	6	3	250		1.2	1	100		1	A08	DDT
6T8A	891 241 146		6.3	3	250		1	1.2	100			B9A	DDT
6T24	647 230 114		6.3	2	150		17	7	100			B9A	TT
6T26	641 237 410		6.3	2.3	250		10	6	100			B9A	TT
6T27	641 237 410		6.3		150		10	6.8	100			B9A	TT
6TE8	427 546 310	G1	6	{ 2	100		3.7		100	60		{ A08	TH
				{ 2	250	100	3.5		100	100			
6TE9	651 237 440		6	{ 2.5	100		4	2	100	60	2	{ B9A	TH
				{ 2.5	200	90	3	0.7	100	90			
6TP1	645 237 114		6.3	{ 68	150		18	8.5	100	60		{ B9A	TP
				{ 68	250	100	10	5.2	100	100			
6TP3	641 237 154		6.3	{ 2	100		4	2	100	60		{ B9A	TP
				{ 3	200	100	8	3	100	100			
6TP4	145 237 614		6.3	{ 68	150		18	8.5	100	60		{ B9A	TP
				{ 68	250	100	10	5.2	100	100			
6TP5	541 327 164		6.3	{ 2.2	100		2.2	1.3	100	60		{ B9A	TP
				{ 2.2	200	100	9		100	100			
6TH8	027 546 310	G1	6	{ 7	150		6	1.1	150	60		{ A08	TH
				{ 1.5	200	75	3.5		100	75			
6U3	**1 23* **8		6				180		REC		40mA	B9A	R
6U4	001 080 230		6				120		REC		30mA	A08	R
6U5M	028 090 310		6.3				30		REC		15mA	A08	RR
6U6	026 540 310	G1	6	14	200	150	56	6.2	100	100	6.2	A08	P
6U7	026 510 310		6	3	250	100	8	1.5	100	100	1.5	A08	P
6U8	645 237 114		6	{ 1	150		18	8.5	100	60	7	{ B9A	TP
				{ 1	250	100	10	5.2	150	100	5		
6U8A	645 237 114		6.3	{ 1	150		18	8.5	100	60		{ B9A	TP
				{ 1	250	100	10	5.2	100	100			
6V4	8*1 23* 9**		6				30		REC		15mA	B9A	RR
6V5	006 540 230		6	12.5	250	250	45	4.1	100	150	4.1	A08	P
6V6	026 540 310	G1	6	12.5	250	250	45	4.1	100	150	4	A08	P
6V7	026 980 310		6	20	250		8	1.1	100		1.1	A08	DDT
6V8	681 234 119		6	3	250		1	1.2	100		1.3	B9A	DDDT
6W3	**1 23* **8		6				20		REC		40mA	B9A	R
6W4	001 080 230		6				120		REC		30mA	A08	R
6W5	028 090 310		6				60		REC		20mA	A08	RR
6W6	026 540 310	G1	6	9.5	150	150	58	8	100	100	8	A08	P
6W7	026 510 310		6	3	250	100	2	1.2	100	100	1.2	A08	P
6WC5	266 114 300		6.3	3.6	100		12	4.3	No Data Available			B7G	H
6X4	802 309 100		6				30		REC		35mA	B7G	RR
6X5	028 090 310		6				30		REC		35mA	A08	RR
6X8	146 231 457		6	{ 1	100		8.5	5.8	100	60	5	{ B9A	TP
				{ 1.8	250	150	7.5	4.6	100	150	4		
6X8A	146 231 457		6.3	{ 3.5	150	150	18	5.8	100	60		{ B9A	TP
				{ 3.5	150	150	4.6	1.6	100	100			
6Y5	208 193 000		6				30		REC		15mA	UX6	RR
6Y6	026 540 310		6	13.5	150	150	58	7	100	100	7	A08	P
6Y7	027 446 310		6	0	250		5.3	1.8	150		1.8	A08	TT
6Y50	802 308 001		6.3				180		REC		40mA	B9A	R

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
6Z3	381 200 000		6				60		REC		20mA	UX4	R
6Z4	289 130 000		6				30		REC		45mA	UX5	RR
6Z5	328 192 000		6				30		REC		15mA	UX6	RR
6Z6	028 190 310		6				30		REC		15mA	A08	RR
6Z7	026 447 310		6	0	200		4.2	0.5	150		0.5	A08	TT
6Z31	802 309 100		6.3				30		REC		15mA	B7G	RR
6Z40	000 230 008		6.3				120		REC		30mA	B9A	R
6ZDH3A	264 813 000		6	2	250		1.5	1.5	100		1.2	UX6	DT
6ZP1	265 413 000		6	9	200	200	15	1.7	100	100		UX6	P
6ZY5	028 090 310		6				15		REC		15mA	A08	RR
7A2	045 231 600		4	17	250	250	40	3.2	100	150	2.3	B7	P
7A3	045 231 600		4	6	250	250	32	10	100	100	10	B7	P
7A4	260 0*4 130		6	8	250		9	2.6	100		2.6	B8B	T
7A5	265 004 130		6	9	150	125	44	6	100	90	6	B8B	P
7A6	219 008 130		6				5		D			B8B	RR
7A7	265 104 130		6	3	250	100	9.2	2	100	100	2	B8B	P
7A8	266 451 130		6	1	250	100	14	1.4	100	100	1.6	B8B	O
7AB7	526 141 310		6	2	250	100	4	1.8	100	100	1.2	B8B	P
7AC7	412 365 100		6		300	150	10	9	100	100	8	B7G	P
7AD7	265 104 130		6	2.3	300	150	28	9.5	100	150	9	B8B	P
7AF7	217 446 130		6	9	250		9	2.1	100		2.1	B8B	TT
7AG7	265 114 130		6	2	250	250	6	4.2	200	200	4.2	B8B	P
7AH7	265 114 130		6	2	250	250	6.8	3.3	100	150	3.3	B8B	P
7AJ7	265 104 130		6	3	250	100	2.2	1.5	100	100	1.5	B8B	P
7AK7	265 104 130		6	0	150	90	40	6.5	100	100	1.5	B8B	P
7AN7	147 234 116		7.5	1.5	90		12	6	100		6	B9A	TT
7AU7	741 226 413		3.5	8.5	250		10.5	2.2	100		2.2	B9A	TT
7B4	260 004 130		6	2	250		0.9	1.5	200		1.5	B8B	T
7B5	265 004 130		6	18	250	250	32	2.3	100	150	2.3	B8B	P
7B6	264 *98 130		6	2	250		0.9	1.1	200		1.1	B8B	DDT
7B7	265 104 130		6	3	250	100	8.5	1.7	100	100	1.7	B8B	P
7B8	265 454 130		6	2	250	100		1.1	100	100	1.1	B8B	H
7C4	2*0 800 130		6				5		D			A08	R
7C5	265 004 130		6	12.5	250	250	45	4.1	100	150	4.1	B8B	P
7C5LT	265 004 130		6	12.5	250	250	45	4.1	100	150	4.1	B8B	P
7C6	264 198 130		6	1	250		1.3	1	250		1	B8B	DDT
7CE40	146 234 117		7	1.5	90		12	6	80		6	B9A	TT
7C7	265 114 130		6	3	250	100	2	1.3	100	100	1.3	B8B	P
7D3	045 231 600		40	20	150	125	36	2.4	100	100	3.8	B7	P
7D5	045 231 600		13	16.5	250	250	34	2.3	100	150	2.3	B7	P
7D6	045 231 600		40	6	250	250	32	10	100	100	10	B7	P
7D7	076 451 130		6	3	250	100	1.3	0.2	125	100		B8B	TH
7D8	045 231 600		13	6	250	250	32	10	100	100	10	B7	P
7D9	412 360 500		6	13.5	250	250	16	2.6	100	150	2.6	B7G	P
7D9	045 231 600		13	25	250	250	32	1.8	100	150	1.8	B7	P
7D10	*41 230 651		6	4.5	250	250	40	11	100	150	9	B8A	P
7D11	026 540 310		6.3	20	350	250	95	9	100	100		A08	P
7DJ8	641 237 411		7	1.3	90		15	12.5	No Data	Avnailable		B9A	TT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
7E5	426 141 630		6	3	200		5.5	3	150		3	B8B	T
7E6	264 *94 130		6	8	250		9.5	1.9	100		1.9	B8B	DDT
7E7	269 854 130		6	3	250	100	7.5	1.3	100	100	1.3	B8B	DDP
7ED7	141 230 651		7.3	1.9	200	175	10		100	100		B9A	P
7EK7	146 234 117		7	1.2	200		15	4	100		4	B9A	TT
7ES8	641 237 410		7	1.2	90		15	12.5	No Data Available			B9A	TT
7EY6	026 540 310		7.2	17.5	250	250	44	4.4	100	100		A08	P
7F7	217 446 130		6	2	250		2.3	1.6	200		1.6	B8B	TT'
7F8	427 116 340		6	3	250		6	3.3	200		3.3	B8B	TT
7F16	261 154 130		6	2.5	250	100	6	2.2	100	100	2.2	B8A	P
7FC7	146 234 117		7.2	1.2	90		15	12	No Data Available			B9A	TT
7G7	265 114 130		6	2	250	100	6	4.5	100	100	4.6	B8B	P
7GH8	576 234 141		8	3	100		14		100	60		B9A	TH
				1.2	200	150	10		100	100			
7G8	265 441 730		6	2.5	250	100	4.5	2.1	100	100	2.1	B8B	PP
7H6	265 114 130		6	2.5	250	150	9.5	3.5	100	150	3.5	B8B	P
7H7	265 114 130		6	2	250	150	10	4.2	100	150	4.2	B8B	P
7HG8	146 234 117		7.9	3	100		14		100			B9A	TT
7J7	276 454 130		6	3	150		6.6	1.4	150	60	1.4	B8B	TH
				3	250	100	1.4		100	100			
7K7	216 498 130		6	2	250		2.3	1.6	200		1.6	B8B	DDT
7L7	265 104 130		6	1.5	250	100	4.5	3.1	100	100	3.1	B8B	P
7MP18	412 365 400		7.5	5	200	175	35	11	No Data Available			B9A	P
7N7	217 446 130		6	8	250		9	2.6	100		2.6	B8B	TT
7Q7	266 414 130		6	2	100		15	6	100		4.5	B8B	H
7R1	280 300 000		7.5				60		REC		20mA	1X4	R
7R7	269 854 130		6	1	250	100	6.2	3.4	100	100	3.4	B8B	DDP
7S7	276 454 130		6	1	100		4.8	1.4	100	60	1.8	B8B	TH
				2	250	100	4	2	100	100	2.2		
7T7	265 104 130		6	1	250	150	10.8	4.9	100	150	4.9	B8B	P
7V7	265 114 130		6	2	300	150	10	5.8	100	150	5.8	B8B	P
7W7	265 114 130		6	2	300	150	10	5.8	100	150	5.8	B8B	P
7X6	218 009 130		6				30		REC		15mA	B8B	RR
7X7	264 189 130		6	1	250		1.9	1.5	250		1.5	B8B	DDT
7Y4	208 009 130		6				30		REC		30mA	B8B	RR
7Z4	209 008 130		6				60		REC		20mA	B8B	RR
8A8	645 237 114		9	2	100		14	5	100	60	5	B9A	TP
				2	200	175	10	6.2	100	150	6		
8AU8	146 231 457		8.5	1.25	150		8.5	4.9	100	60	5	B9A	TP
				1.5	200	125	16	7	100	100	7		
8AU8A	146 231 457		8.5	1.2	150		8.5	4.9	100	60	5	B9A	TP
				1.5	200	125	16	7	100	100	7		
8AW8	146 231 456		8.4	2	200		4	4	100	60	4	B9A	TP
				3	200	150	13	9	100	100	9		
8AW8A	146 231 456		8.4	2	200		4	4	100	60	4	B9A	TP
				3	200	150	13	9	100	100	9		
8B8	414 237 516		8	1	100		1	1.9	100	60	1.9	B9A	TP
				16	200	200	35	6.4	100	100			
8BA8	146 231 456		8.4	8	200		8	2.7	100	60	5	B9A	TP
				3	200	150	13	9	100	100			

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
8BA8A	146 231 456		8.4	{ 8	200		8	2.7	100	60	5	B9A	TP
8BM8	414 237 516		7.9	{ 3	200	150	13	9	100	100			TT
8BH8	146 231 457		8.4	{ 5	150		9.5	3.3	100	60		B9A	TP
8BN8	811 239 641		8.4	{ 1.6	200	125	15	7	100	100			DDT
8BQ5	*41 23* 6*5		8	3	250		1.6	2.6	100		3.5	B9A	P
			8		250	250	48	11.5	No Data Available			B9A	P
8CF40	645 237 114		9	{ 2	100		14	5	100	60		B9A	TP
8CG7	741 236 410		8.4	{ 2	200	175	10	6.2	100	100			TT
8CM7	701 236 441		8.4	{ 8	250		9	2.6	100		3	B9A	TT
8CN7	891 221 643		4.2	{ 7	200		5	2	100		2.8		DDT
8CS7	704 236 411		8.4	{ 8	250		20	4.4	100		4.7	B9A	TT
			8.4	3	250		1	1.2	100		1.3	B9A	DDT
			8.4	10.6	250		19	4.5	100		4	B9A	TT
8CW5	*51 23* 6*5		8	12.5	200	175	70	10	100	60		B9A	P
8CW8	415 237 146		8	{ 1.7	250		1.2	1.6	100	60	1.6	B9A	TP
				{ 7	250	250	36	10	100	100			TP
8CX8	146 231 456		8	{ 1.5	150		9	4.6	100	60	4.6	B9A	TP
8CY7	6*4 237 411		7.9	{ 2	200	125	25	10	100	60			TT
8D2	061 231 500	G1	13	{ 3	250		1.2	1.3	100			B9A	TT
				{ 150		30	5.4	100					P
ξ 8D3	412 361 500		6	{ 3	250	100	2	1.25	100	100	1.25	B7	P
8D4	026 510 310	G1	6	{ 2	250	100	3	1.8	100			B7G	P
8D5	041 230 651		6	{ 1.5	200	150	4	6.4	100	PenLF 5	5		P
8D6	141 230 651		6	2	250	100	3	1.8	100	100	1.8	A08	P
8D7	001 230 651	G1	6	3	250	100	2	1.2	100	100	1.2	B9A	P
			6	2	200	175	10	2.5	100	100	2.5	B9A	P
			6	3	250	100	2	1.25	100	100	1.2	B9A	P
8D8	501 236 014		6	2	250	150	3	1.9	100	100		B9A	P
8DX8	461 237 145		7.5	{ 1.7	200		30	4	100	60		B9A	TP
				{ 2.1	200	175	18	11	100	100			TP
8EB8	146 231 457		8	{ 2	250		2	2.7	100	60		B9A	TP
8EM5	504 234 106		8.4	{ 200	125	25	12.5	100	100	100			P
8G140	892 300 000		8	18	250	250	35	5.1	100	100		B9A	P
							60		REC		20mA	B4	RR
8GE8	146 231 457		8.2	{ 2	200		4.5	4.2	100	60		B9A	TP
8GK6	141 230 651		8	{ 200	175	22	12	100	100	100			P
8GN8	146 231 457		8	7.4	250	250	48	11.3	No Data Available			B9A	P
8HG8	141 234 675		8	{ 2	250		2	2.7	100	60	3	B9A	TP
				{ 3	200	150	25	11.5	100	100			TP
8MP12	412 365 400		8.5	{ 3	100		14	5.5	100	60	5.5	B9A	TP
				{ 1.2	200	150	10	12	100	100			P
8NP12	412 365 400		8.5		200	175	25		100	100		B7G	P
8RB11	504 234 106		8.5	12.5	200	200	45	7.5	100	100		B9A	P
8RHP1	414 237 516		8.2	{ 16	100		3.5	2.5	100	60	2.5	B9A	TP
8SN7	461 471 230		8.4	{ 8	200	200	35	6.4	100	100	6		TT
8T27	641 237 410		8.4		250			2.6	100		2.6	A08	TT
9A3	061 231 500	G1	4	2	150		10	6.8	100			B9A	TT
					250	125	10	1.8	100	100	1.8	B7	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
9A8	645 237 114		9	{ 2	100		14	5	100	60	5	B9A	TP
9AB4	602 304 100		9	2	200	175	10	6.2	100	150	5		
9AK8	†91 238 146		9.5	2.3	200		1	1.4	100		1.4	B9A	DDDT
9AQ8	641 237 410		9	2.1	200		10	5.8	200		5.8	B9A	TT
9AU7	741 226 413		4.7	3.5	250		10.5	2.2	100		2.2	B9A	TT
9BN5	412 365 400		9	6	250	250	30	7	100	100		B9A	P
9BQ7A	641 237 410		8.4	2	150		9	6.4	100		6	B9A	TT
9BW6	*41 230 651		9	12.5	250	250	45	4.1	100	150	4	B9A	P
9C8	645 237 114		9	{ 2	100		14	5	100	60	5	B9A	TP
				2	200	175	10	6.2	100	100			
9CL8	461 237 514		9.5	{ 0.75	150		15	8	100		7.5	B9A	TP
				0.1	150	125	12	5.8	125	150	5		
9D2	061 231 500	G1	13	3	250	125	10.5	1.65	100	100	1.8	B7	P
9D6	412 361 500		6	2.5	250	200	8	2.5	100	100	2.5	B7G	P
9D7	141 230 651		6	1.5	250	100	10	8.4	100	100		B9A	P
9DZ8	414 237 516		9	{	150		0.8	1.4	100	60	1.4	B9A	TP
					150	125	45	7.5	100	100			
9EF6	026 540 310		9.4	18	250	250	50	5	100	100		A08	P
9EN7	157 236 414		9	{	150		6	5	100	60		B9A	TP
					200	150	7.6	8.5	100	100			
9GB8	641 237 541		9.4	{	250		8		100	60		B9A	TP
					250	250	12		100	100			
9J6	762 344 100		9	0.85	100		8.5	5.3	100		5.3	B7G	TT
9P9	412 365 400		9	6	250	250	30	7	100	100		B9A	P
9RA6	140 230 406		9.5	12	250		26	8.5	100			B9A	T
9T8	891 234 146		9.5	1	100		0.8	1.3	100		1.3	B9A	DDDT
9T26	641 237 410		9.5	2.3	250		10	6	100		6	B9A	TT
9TP4	145 237 614		9.4	{ 68	150		18	8.5	100	60		B9A	TP
					250	100	10	5.2	100	100			
9U8	645 237 114		9.5	{ 1	150		18	8.5	100	60	8.5	B9A	TP
				1	250	100	10	5.2	100	100	5		
9U8A	645 237 114		9.5	{ 1	150		18	8.5	100	60	8.5	B9A	TP
				1	250	100	10	5.2	100	100	5		
9X8	146 231 457		9.5	{ 3.5	100		8.5	5.8	100	60		B9A	TP
10	264 300 000		7.5	32	150	150	6.2	2.1	100	100			
10BQ5	041 230 605		10	7.3	250	250	16	1.55	100		1.5	UX4	T
10C1	276 454 130		28	{ 3.3	100		6	3	100	60	3	B8A	TH
				2.5	200	100	8	2.5	100	100	2.5		
10C2	276 454 130		28	{ 3.3	100		6	3	100	60	3	B8A	TP
				1.5	175	100	3	5	100	100	5		
10C8	641 237 541		10.5	{ 2.7	250		7.3	4.4	100	60	5	B9A	TP
				1.5	150	125	11.5	8	125	125	8		
10C14	541 237 164		19	{ 2.2	100		13.7	3.7	100	60		B9A	TP
					200	100	5	2.3	100	100			
10D1	892 310 000		13				5		D			B5	RR
10D2	192 310 800		19				5		D			B7G	RR
10DA8	604 237 411		10.5	8	250		9	2.6	100			B9A	TT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
10DE7	744 236 411		10	{ 17.5 11	150 250		3.5 5.5	6.5 2	100 100			{ B9A	TT
10EB8	146 231 457		10.5	{ 2 200	250 125		2 25	2.7 12.5	100 100	100 100		{ B9A	TP
10EG7	461 471 230		9.7	{ 11 17.5	350 150		5.5 45	2 7.5	100 100			{ A08	TT
10EM7	461 471 230		9.7	{ 20 3	150 250		50 1.4	7.2 1.6	100 100			{ B9A	TT
10ER5	142 360 100		10.8	1.2	200		10	10.5	No Data Available			B7G	T
10DR7	744 236 411		9.7	{ 17.5 3	150 250		35 1.4	6.5 1.6	100 100			{ B9A	TT
10DX8	461 237 145		10	{ 1.7 2.1	200 200	175	3 18	4 11	100 100	60 100	4	{ B9A	TP
10F1	261 154 130		22	1.8	200	200	10	9	100	100		B8A	P
10F3	260 154 130		22	2.3	200	200	6	6.5	100	150	7	B8A	P
10F9	260 154 130		13	2.5	200	100	7	2.3	100	100	2.3	B8A	P
10F18	141 230 651		13	1.3	200	100	12	4.5	100	100		B9A	P
10FD12	541 236 891		19	1.5	200	200	11	4.5	100	100		B9A	DDP
10FG7	141 237 064		9.7	{ 3 20	250 150		1.4 50	1.6 7.2	100 100			{ B9A	TT
10HF8	146 231 457		10	{ 250 250	250 250		4 18	4 12.5	100 100	60 100	4	{ B9A	TP
10L1	412 314 600		19	1.5	250		10	8.5	100		8	B7G	T
10L14	641 237 410		26	2.1	200		10	5.8	100		5	B9A	TT
10LD3	264 098 130		14	1.1	150		0.6	1.95	150		1.9	B8A	DDT
10LD11	264 098 130		15	5.9	250		5	2.3	100		3	B8A	DDT
10LD12	†91 238 146		28	2.3	200		1	1.4	100		1.4	B9A	DDT
10LD13	641 238 09*		13	4.4	150		0.5	1.4	100		1.4	B9A	DDT
10P13	260 054 130		40	6	150	150	30	7.5	100	100	6	B8A	P
10P14	026 540 310		40	9.4	200	175	40	7.2	100	150	6	A08	P
10P18	*41 23* 6*5		45	12.5	200	175	70	10	100	100	9	B9A	P
10PL12	414 237 516		50	{ 16 200	100 200		3.5 35	2.5 6.4	100 100	60 100	2.5	B9A	TP
11	362 400 000		1.1	4.5	90		2.5	0.4	80		0.4	UX4	T
11A1	*1* 234 **6		6.3		150		100	12				B9A	T
11A2	908 231 600	G1	4	2	200		3	2.8	100		2.8	B7	DDT
11A6	264 147 300		10	1	100			3.1	100		3.1	A08	TT
11C5	026 040 310		10	1	100			2	100		2	A08	T
11CX7	742 364 110		11	{ 3 150	250 150		1.2 30	1.3 5.4	100 100			{ B9A	TT
11D3	908 231 600	G1	13	2	250		0.6	1.1	100		1.1	B7	DDT
11D5	908 231 600	G1	13	3	250		3.8	1.5	150		1.5	B7	DDT
11E1	216 540 030		6		250	250	50	7.3	100	100	7	M08	P
11E8	200 647 310	G1	11		150		20		100			A08	TT
11E13	414 226 573		6.3	40	300	200	74		No Data Available			B9A	FP
11F6	026 540 310		10	1	100	150		2.5	100	150	2.5	A08	P
11J7	026 500 310	G1	10	1	250	100		1.2	250	100	1.2	A08	P
11JE8	146 231 457		10	{ 2 200	200 175		4.5 22	4.2 12	100 100	60 100		{ B9A	TP
11K7	026 500 310	G1	10	1	250	100		1.4	250	100	1.4	A08	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE	
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V			
11L6	026 540 310		10	1	100	150		6	100	150	6	A08	P	
11N7	026 447 310		10	1	100			3.1	100		3.1	A08	TT	
11X5	028 090 310		11				30		REC		15mA	A08	RR	
12	364 200 000		1.1	4.5	90		2.5	0.42	80		0.4	UX4	T	
12A	264 300 000		5	4.5	90		5	1.5	80		1.5	UX4	T	
12A4	142 330 406		6	9	250		23	0.8	250		0.8	B9A	T	
12A5	265 413 200		6	15	100	100	17	1.7	100	90	1.7	UX7	P	
12A6	026 540 310		12.5	12.5	250	250	30	2	100	150	3	A08	P	
12A7	265 181 300	G1	12.5	{	12.5	150	150	9	1	100	100	15mA 1	Sm7	RP
12A8	026 545 310	G1	12.5		3	250	100	3.5	1.15	100	100	1.1		
12AB5	504 234 156		12	12.5	250	250	45	4.1	250	200	4	B9A	P	
12AB5	421 060 350		12	22.5	250	150	57	5.9	100	100	5.8	A08	P	
12AC5	26* *54 130		12	3	200	125	2.3	2.3	100	150	2.3	B8A	P	
12AC6	412 365 100		12.6		12.6		0.5	0.7	No Data Available			B7G	P	
12AD5	541 236 **0		12.6	2.5	100	100	6	2.2	100	100	2.5	B9A	P	
12AD6	412 366 100		12.6		12.6		5	3.8	No Data Available			B7G	P	
12AD7	641 227 413		6	2	250		1.25	1.6	100			B9A	TT	
12AE6	412 389 500		12.6		12.6		0.7	1	No Data Available			B7G	DDT	
12AE7	641 227 413		6.3		12.6		0.9	6.5	No Data Available			B9A	TT	
12AF3	*** 23* 88*		12.6				120		REC		40mA	B9A	R	
12AF6	412 365 100		12.6		12	12	0.7	1.1	No Data Available			B7G	P	
12AH7	417 146 230		12.5	3.6	100		3.7	1.55	80		1.5	A08	TT	
12AH8	541 227 463		6	{	100		14.7	3.5	100	60	3.5	B9A	TH	
12AJ6	412 314 600		12.6		250	100	2.6		100	100	2.8			
12AJ7	541 237 464		12	{	100		0.7	1.2	No Data Available			B7G	TT	
					250	90	4	2	100	60	2	B9A	TH	
				2.5		3	0.6	100	100					
12AJ8	541 237 464		12	{	60		2.6		60	60		B9A	TH	
12AK7	741 226 413		6		100	60	1.7		100	60				
12AL5	192 310 800		12.5	2	250		1.2	1.6	150		1.6	B9A	TT	
12AL8	654 237 141		12.6	{	0.9	12	0.2	0.5	No Data Available			B9A	TP	
12AQ5	412 365 400		12.5		0.8	12	25	8						
					12.5	250	250	45	4.1	100	150	4	B7G	P
12AS5	142 345 600		12	8.5	150	100	35	5.6	150	100	5.6	B7G	P	
12AT6	412 389 600		12.5	3	250		1	1.2	100		1.2	B7G	DDT	
12AT7	741 226 413		6	2	250		10	5.5	200		5	B9A	TT	
12AU4	001 080 230		12				120		REC		40mA	A08	R	
12AU6	412 365 100		12.5	1	250	150	10.8	5.2	100	100	5.2	B7G	P	
12AU7	741 226 413		6	8.5	250		10.5	2.2	100		2.2	B9A	TT	
12AU8	146 231 457		12.6	{	150		8.5	4.9	100	60		B9A	TP	
12AV6	412 389 600		12.5		200	125	15	7	100	100				
12AV7	741 226 413		6	2	250		1.2	1.6	100		1.2	B7G	DDT	
12AW6	412 365 100		12.5	1.5	250	150	18	8.5	100		7	B9A	TT	
							7	5	100	150	5	B7G	P	
12AW7	412 365 100		12.5	1.8	250	150	7	5	100	150	5	B7G	P	
12AX4	001 080 230		12.5				120		REC		35mA	A08	R	
12AX7	741 226 413		6	2	250		1.2	1.6	150		1.6	B9A	TT	

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
12AY3	080 230 801	C1	12.6				180		REC		35mA	B9D	R
12AY7	641 227 413		6	4	250		3	1.7	100		1.7	B9A	TT
12AZ7	741 226 413		6	2	200		10	5.5	100		5.5	B9A	TT
12B3	080 230 808		12.6						D			B9A	R
12B4	142 330 406		6	17.5	150		34	6.4	150		6.3	B9A	T
12B6	026 080 310	G1	12.5	2	250		0.9	1.1	150		1.1	A08	DT
12B7	265 104 130	G1	12.5	3	250	100	9.2	2	100	100	2	B8B	P
12B8	127 561 340		12.5	1.1	100		0.6	1.5	100	60	1.5	A08	TP
12BA6	412 365 100		12.5	3	100	100	8	2.1	90	90	1.8	B7G	P
12BA7	641 231 106		12.5	1	250	100	11	4.4	100	100	4.4	B9A	H
12BA7	641 231 106		12.5	2	100		18	7	100		7	B9A	H
12BC32	412 389 600		12	2	250		1	1.6	100		1.2	B7G	DDT
12BD6	412 365 100		12.5	3	250	100	9	2	100	100	2	B7G	P
12BE6	412 366 100		12.5	2	100		11	7	100		5	B7G	H
12BF6	412 398 600		12.5	9	250		9.5	1.9	100		1.9	B7G	DDT
12BH7	741 226 413		6	10.5	250		11.5	3.1	100		4	B9A	TT
12BK5	604 231 450		12	5	250	250	35	8.5	100	150	8	B9A	P
12BK6	412 389 600		12.5	2	250		1.2	1.6	150		1.6	B7G	DDT
12BL6	412 365 100		12.6	0.6	12	12	1.4	1.3	No Data Available			B7G	P
12BN6	142 354 600		12.5	1	60	60	0.25	1	80	60	1	B7G	P
12BR7	641 228 913		6	2	250		10	5.5	100		4	B9A	DDT
12BR7A	641 228 913		6.3		100		3.7	4	100			B9A	DDT
12BT6	412 389 600		12.5	3	250		1	1.2	150		1.2	B7G	DDT
12BU6	412 389 600		12.5	9	250		9.5	1.9	150		1.9	B7G	DDT
12BV7	141 223 651		6	2.2	250	150	27	13	100	100		B9A	P
12BW4	800 230 901		12				30		REC		15mA	B9A	RR
12BY7	141 223 651		6	2.1	250	150	25	12	150	100	10	B9A	P
12BZ6	412 365 100		12.6	1	100	125	14	8	125	125	7	B7G	P
12BZ7	741 226 413		6	2	250		2.5	3.2	100		3	B9A	TT
12C2C	026 040 310		12.6	8	250		9	2.6	100			A08	T
12C5	142 345 600		12	7.5	150	100	49	7.5	100	90	6	B7G	P
12C8	026 985 310	G1	12.5	3	250	125	10	1.3	100	100	1.3	A08	DDP
12CA5	142 345 600	A1	12	4.5	125	125	36	9.2	100	100	8	B7G	P
12CN6	504 234 106		12	12.5	250	250	45	4.1	100	100		B9A	P
12CN5	142 345 600		12.6		12	12	4.5	3.8	No Data Available			B7G	P
12CR5	154 231 541		12.6	22.5	250	150	65	6	100	100		B9A	P
12CR6	182 365 400		12	2	250	100	6.9	2.2	100	100	2	B7G	DP
12CS5	514 234 1*6		12.6	10	200	125	47	8	100	188		B9A	P
12CS6	112 365 400		12	1	100	30	0.8	1.5	No Data Available			B7G	P
12CT8	641 237 541		12	1.4	150		9	4.9	100	60	4.5	B9A	TP
12CU5	142 345 600		12	1.5	200	125	15	7	100	100		B7G	P
12CU5	142 345 600		12	8	150	100	50	7.5	100	100	7	B7G	P
12CX6	412 365 100		12.6		12	12	3	3.1	No Data Available			B7G	P
12CY6	412 365 100		12.6		12	12	1.6	3.2	No Data Available			B7G	P
12D4	**1 *8* 230		12						D			A08	D
12DA6	041 230 651		12	1	200	100	12	4.4	100	100		B9A	P
12DB5	614 234 1*6		12.6	9.6	200	125	46	8	100	100		B9A	P
12DE8	418 236 151		12.6	0.8	12	12	1.3	1.5				B9A	DP

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE I60					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
12DF5	801 229 013		6.3				30		REC		15mA	B9A	RR
12DF7	641 227 413		6.3	2	250		1.2	1.6	100		1.2	B9A	TT
12DJ8	641 237 410		12.6	1.3	100		15	12.5	No Data Available			B9A	TT'
12DK5	141 230 651		12.6		12	12	2	3.3	No Data Available			B9A	P
12DK7	141 223 651		6.3		12	12	6	5	No Data Available			B9A	P
12DL8	814 236 519		12.6	0.5	12	12	40	15	No Data Available			B9A	DDP
12DM5	142 345 600		12.6	7.5	150	100	49	7.5	100	100		B7G	P
12DN7	641 227 413		6.3	2	250		1.2	1.6	100		1.2	B9A	TT
12DQ7	141 223 651		6	2.1	100	125	26	10.5	100	100		B9A	P
12DS7	805 236 419		12.6	2	12	12	40		No Data Available			B9A	DDP
12DT1	412 389 600		12.6	3	250		1	1.2	100		1.2	B7G	DDT
12DT2	412 389 600		12.6	2	250		1.1	1.6	100		1.6	B7G	DDT
12DT5	504 234 1*6		12.6	16.5	250	250	38	6.2	100	100		B9A	P
12DT6	412 365 100		12.6	2.2	150	100	1.1	0.8	150	100	2	B7G	P
12DT7	641 227 413		6.3	2	250		1.2	1.6	100			B9A	TT
12DT8	741 236 410		12.6	2.5	250		10	5.5	100		4	B9A	TT
12DU7	415 236 8*9		12.6		12	12	12	6.2	No Data Available			B9A	DDP
12DV7	148 226 413		12.6		12		0.4	0.7	No Data Available			B9A	DDT
12DY8	415 237 164		12.6	{	12		1.2	2	No Data Available			B9A	TP
12DZ6	412 365 100		12.6		12	12	14	6				B7G	P
12E5	026 040 310		12.5	13.5	250		5	1.4	100		1.4	A08	T
12E8	027 546 310		12	{	100		3.3		100	60		A08	TH
12EA6	412 365 100	G1	12.6		100	100	3	0.5	100	100	0.5		P
12EC8	461 237 514		12.6	{	12		2.4	4.7	No Data Available			B9A	TP
12EH5	142 345 600		12.6		12	12	0.6	2				B7G	P
12EK6	412 365 100		12.6		12	12	4.4	4.2	No Data Available			B7G	P
12EL6	462 365 100		12.6		12		0.7	1.2	No Data Available			B7G	DDT
12EM6	415 236 **8		12.6		12	12	6	5	No Data Available			B9A	DP
12EQ7	141 235 680		12.6		100	100	9	3.9	100	100		B9A	DP
12ES5	142 360 100		12.6	1	200		10	9.4	100			B7G	T
12EZ6	412 365 100		12.6	0.7	12	12	1.9	2.7	No Data Available			B7G	P
12F	280 300 000		5				60		REC		20mA	UX4	R
12F5	020 600 310		12.5	2	250		0.9	1.5	150		1.5	A08	T
12F8	856 239 141		12.6	0	12	12	1	1	No Data Available			B9A	DDP
12F31	412 365 100		12	1	100	100	10.8	4.3	100	100	4.3	B7G	P
12FR8	414 325 786		12.6	{	0.6	12.6	1	1.2	No Data Available			B9A	DTP
12FT6	412 389 600		12.6		0.8	12.6	12.6	1.9				B7G	DDT
12FX8	747 324 161		12.6	{		12.6	1.3	1.4	No Data Available			B9A	TH
12FX8A	747 324 161		12.6			12.6	4.4	3.6				B9A	TH
12G4	602 364 100		12	{		12.6	1.3	1.4	No Data Available			B9A	TH
						12.6	4.4	3.6				B7G	T
12G7	026 980 310	G1	12.5	3	250				D			A08	DD
12GB3	*2* 540 310		12.6	7.7	100	100	100	14	No Data Available			A08	P
12GB6	020 540 070	A1	12.6	22.5	250	150	57	5.9	100	100	5	A08	P
12GC6	021 540 350	A1	12.6	22.5	250	150	75	6.6	No Data Available			A08	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
12GJ5	541 234 5**	A1	12.6	22.5	250	150	70	7.1	100	100		B9D	P
12GK17	001 080 230		12.6				120		REC		30mA	A08	R
12GN6	412 365 800		12.6	68	250	100	11	4.4	100	100		B7G	DP
12GT5	541 324 5*6		12.6	22.5	250	150	70	7.1	100	100		B9A	P
12GW6	020 540 310	A1	12.6	22.5	250	150	70	7.1	100	100		A08	P
12H1C	416 147 230		12.6	6.5	200		7.6	1.9	100			A08	TT
12H4	623 364 100		6	8	250		9	2.6	90		3	B7G	T
12H6	029 180 310		12.5						D		4	A08	DD
12H10C	064 471 230		12.6	2	250		2	1.3	100			A08	TT
12J5	026 040 310		12	8	250		9	2.6	100		2.6	A08	T
12J7	026 510 310	G1	12.5	3	250	100	2	1.225	100	100	2.2	A08	P
12J8	415 236 189		12.6		12	12	12	5.5	No Data Available			B9A	DDP
12K5	142 355 600		12.6	2	12	12	8	7	No Data Available			B7G	P
12K7	026 510 310	G1	12.5	3	250	125	10.5	1.65	100	100	1.6	A08	P
12K8	027 546 310	G1	12.5	{ 1	100		8	2.5	100	60	3	A08	TH
				3	250	100	4	1.2	100	100	1.6		
12L6	026 540 310		12	8.25	200	125	46	8	100	100	8	A08	P
12L8	414 752 360		12.5	9	200	175	13	2.1	100	100	2.1	A08	PP
12N7	026 510 310	G1	12	2.5	100	100	6	2.2	100	100	2.2	A08	P
12NK7	026 510 310	G1	12.5	2	250	100	5	2.3	100	100	2.3	A08	P
12P1	412 365 100		12.6	68	250	100	11	4.4	100	100		B7G	P
12P2	412 365 100		12.6	68	250	150	10.6	5.2	100	100		B7G	P
12Q7	026 980 310	G1	12.5	3	250		1	1.2	150		1.2	A08	DDT
12R5	142 345 600		12.6	8.5	100	100	40	7	100	100		B7G	P
12S7	268 154 130		13	2	200	90	5	2	100	100	1.9	B8A	DP
12S8	†18 916 230	G1	12.5	2	250		0.9	1.1	150		1.1	A08	DDDT
12SA7	126 641 340		12.5	3.6	100		12	4.3	100		4.5	A08	H
12SA7G	026 641 340		12.5	3.6	100		12	4.3	100		4.5	A08	H
12SC7	074 461 230		12.5	2	250		2	1.3	150		1.3	A08	TT
12SF5	014 060 320		12.5	2	250		0.9	1.5	150		1.5	A08	T
12SF7	041 586 230		12.5	1	250	100	12.9	2	100	100	2	A08	DP
12SG7	021 415 360		12.5	1	250	125	11.8	4.7	100	100	4.7	A08	P
12SH7	021 415 360		12.5	1	250	150	10.8	4.9	100	150	4.9	A08	P
12SJ7	021 415 360		12.5	3	250	100	3	1.65	100	100	1.6	A08	P
12SK7	021 415 360		12.5	3	250	100	9.2	2	100	100	2	A08	P
12SL7	461 471 230		12.5	2	250		2.5	1.6	150		1.6	A08	TT
12SN7	461 471 230		12.5	8	250		9	2.6	100		2.6	A08	TT
12SQ7	041 896 230		12.5	2	250		0.9	1.1	150		1.1	A08	DDT
12SR7	041 986 230		12.5	9	250		9.5	1.9	100		1.9	A08	DDT
12SS7	021 415 360		12.5	3	250	100	9	1.85	100	100	1.8	A08	P
12SW7	041 986 230		12.5	9	250		9.5	1.9	100		1.9	A08	DDT
12SX7	471 461 230		12.5	8	250		9	2.6	100		2.6	A08	TT
12SY7	126 641 340		12.5	1	100		22	4.5	100		4.5	A08	H
12TE8	427 546 310		12	{	100		3.4		100			A08	TH
					250	100	3.7		100	100			
					100		3.4		100	60		B9A	TH
12TE9	651 237 440		12	{	250	100	3		100	100			
12U7	641 227 413		12.6		12		1	1.6	No Data Available			B9A	TT
12V6	026 540 310		12.5	12.5	250	250	45	4.1	100	150	4	A08	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
12W6	026 540 310		12	9.5	150	150	58	8.0	100	100	8.0	A08	P
12WC5	265 414 300		12	1.5	250	100			No Data Available			UX7	P
12X4	802 309 100		12.5				30		REC		15mA	B7G	RR
12Y4	892 310 000		12				31		REC		15mA	UX4	RR
12Z3	281 300 000		12.6				30		REC		15mA	UX4	R
12Z4	281 300 000		12.5				60		REC		60mA	UX4	R
12Z5	281 319 200		6				30		REC		15mA	UX7	RR
12ZDH3A	264 813 000		12	2	250		1.5	1.5	125		1.2	UX6	DT
12ZP1A	265 413 000		12	9	200	200	30	2.3	100	150		UX6	P
13	298 300 000		5				60		REC		20mA	UX4	RR
13BCIU	206 081 930	G1	2.5	1.8	200		3	2	150		2	B8B	DDT
13BF2U	206 581 930	G1	12.5	2.1	200	200	5	2	100	200	2	B8B	DDP
13D1	461 471 230		25	8	250		2	2.6	100		2.5	A08	TT
13D2	461 471 230		6	8	250		9	2.6	100		2.6	A08	TT
13D3	741 226 413		6	4.6	250		6	2.3	100		2.3	B9A	TT
13D8	741 226 413		6.3	8.5	250		10.5	2.2	100		2.2	B9A	TT
13DE7	644 237 410		13	{ 11	250		5.5	2	100			B9A	TT
13DHA	908 231 600	G1	13	{ 17.5	150		32	6.5	100			B7	DDT
13DR7	644 237 410		13	{ 1.5	250		1	1.5	100		1.5	B9A	TT
13EM7	471 461 230		13	{ 3	250		1.4	1.6	100			B9A	TT
13F7	023 110 560		13	{ 17.5	150		35	6.5	100			B9A	TT
13F9U	206 501 130	G1	12.5	{ 20	150		50	7.2	100			B9A	TT
13FD7	644 237 411		6.3	{ 3	250		1.4	1.6	100			B9A	TT
13FG7	141 236 074		13	{ 20	150		50	7.2	100			B9A	TT
13FR7	644 237 411		13	{ 3	250		1.4	1.6	100			B9A	TT
13H1	023 110 560	G1	3	{ 20	200		4		100			B7	H
13H2	023 110 560	G1	13	{ 3	250		3.5		100			B7	P
13PGA	645 231 700	G1	13	{ 3	250		2.3	1.7	100		2.2	B7	P
13SPA	061 231 500	G1	13	{ 3	250		45	4.4	100		4	8SC	DDP
13V1	013 189 560	G1	13	{ 8.5	200	200	7	1.8	100	100	1.8	B7	P
13VPA	061 231 500	G1	13	{ 3	250	100	4	1	100	100	1	UX5	P
14	265 130 000	G1	14	{ 3	250	90	9	2.6	100	90	2.6	B8B	T
14A4	260 0*4 130		12.5	{ 8	250		30	3	100	150	3	B8B	P
14A5	265 004 130		12.5	{ 12.5	250	250	9.2	2	100	100	2	B8B	P
14A7	265 104 130		12.5	{ 3	250	100							
14AF4	216 447 130		12	{ 10	250		9	2.1	100		2	B8B	TT8
14AF7	216 447 130		12.5	{ 9	250		9	2.1	100		2.1	B8B	TT
14B6	264 *89 130		12.5	{ 2	250		0.9	1.1	150		1.1	B8B	DDT
14B8	265 454 130		12.5	{ 2	250	100		1.1	100	100	1.1	B8B	H
14C5	265 Q04 130		12.5	{ 12.5	250	250	47	4.1	100	150	4.1	B8B	P
14C7	265 114 130		12.5	{ 3	250	100	2.2	1.5	100	100	1.5	B8B	P
14E6	264 *98 130		12.5	{ 8	250		9.3	1.9	100		1.9	B8B	DDT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE I60					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
14E7	269 854 130		12.5	3	250	100	7.5	1.3	100	100	1.3	B8B	DDP
14E6	026 540 310		14	16.5	250	250	35	2.5	100	150	2.5	A08	P
14F7	217 446 130		12.5	2	250		2.3	1.6	150		1.6	B8B	TT
14F8	427 116 340		12.5	3	250		6	3.3	150		3.3	B8B	TT
14GW8	415 237 146		14.7	{ 1.7 7	250 250		1.2 36	1.6 10	100 100	60 100	1.6	B9A	TP
14H7	265 114 130		12.5	2	250	150	10	4.2	100	100	4.2	B8B	P
14J7	276 454 130		12.5	{ 3 3	150 250		6.6 1.4	1.4	100 100	60 100	1.4	B8B	TH
14JG8	181 239 146		14	2	250		2	2.2	100			B9A	DDT
14K7	276 454 130		14	{ 2 2	100 200	90	6.4 2.7	2.2 1.5	100 100	60 75	2.8 1.5	B8A	TH
14L7	264 098 130		14	1.6	200		15	1.65	150		1.6	B8A	DDT
14N7	217 446 130		12.5	8	250		9	2.6	100		2.6	B8B	TT
14Q7	266 414 130		12.5	2	100		15	6	100		4.5	B8B	H
14R7	269 854 130		12.5	1	250	100	6.2	3.4	100	100	3.4	B8B	DDP
14S7	276 454 130		12.5	{ 1 2	100 250	100	4.8 4	1.4 2	100 100	60 100	1.6 2.2	B8B	TH
14V7	265 104 130		12.5	2	300	150	9.6	5.8	100	100	5.8	B8B	P
14W7	265 114 130		12.5	2.2	300	150	10	5.8	100	100	5.8	B8B	P
14X7	264 189 130		12.5	1	250		1.9	1.5	150		1.5	B8B	DDT
14Y4	208 009 130		12.5				30		REC		15mA	B8B	RR
14Z3	281 300 000		12.5				60		REC		20mA	UX4	R
15	264 300 000		2.5	33	250		22	2.35	100		2.0	UX4	T
15	265 130 000	G1	2	1.5	150	75	1.85	0.75	100	75	0.75	UX5	P
15A2	645 231 700	G1	4	{ 20 3	200 250	100	4 3.5		100 100	60 100		B7	H
15A6	451 231 600		15	2.9	200	175	36	10	100	100	9	B9A	P
15A8	124 541 360	A2	15	{ 8 7.5	250 100	100	9 45	2.6 7.3	100 100	60 100	2 7.5	A08	TP
15BD7A	641 238 090		15	1.5	200		1.5	1.6	100		1.6	B9A	DDT
15CW5	*51 23* 6*5		15	12.5	200	175	70	10	100	60		B9A	P
15D1	645 231 700	G1	13	20 3	200 250	100	4 3.5		100 100	60 100		B7	H
15D2	645 231 700	G1	13	{ 20 3	200 250	100	4 3.5		100 100	60 100	0.6 4.6	B7	H
15E	260 501 300	G1	2		150	75	1.8	0.7	100	60		B7G	P
15F80	541 231 600		15		200	200	36	10	No Data Available			B9A	P
15TP7	461 237 145		15	{ 1.7 2.9	200 200		3 18	4 10.4	100 100	60 100	4	B9A	TP
15X6	029 180 310		25				30		REC		15mA	A08	RR
16	280 300 000		7.5				60		REC		20mA	UX4	R
16A5	*41 23* 6*5		16	14.2	200	200	45	7.5	100	100	7	B9A	P
16A8	414 237 516		16	{ 1.5 11.5	200 200		1.7 41	2.4 7.5	100 100	60 100	3 6	B9A	TP
16B	280 300 000		7.5				60		REC		15mA	UX4	R
16D1	046 231 700		13		300		45		100			B7	TT
16GK6	141 230 651		16	7.4	250	250	48	11.3	No Data Available			B9A	P
16GK8	414 237 516		16	{	200 250		10 30	3.4 7.5	100 100	60 100		B9A	TP

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
16N8	414 237 516		15	{ 16	100		3.3	3.6	100	60	3.6	B9A	TP
16TP6	141 234 675		16	{ 11.5	200	200	35	6.4	100	100	2.5	B9A	TP
16TP8	141 234 675		16	{ 11.5	100		3.5	2.5	100	60		B9A	TP
17	264 130 000		14	6	90		2.7	0.8	80		0.8	UX5	T
17AV5	421 060 350		16	22.5	250	150	57	5.9	100	100	5.8	A08	P
17AX4	001 080 230		16				120		REC		35mA	A08	R
17AX4GTA	001 080 230		16.8				120		REC		35mA	A08	R
17AY3	*8* 23* 810		16.8				120		REC		30mA	B9A	R
17C5	142 345 600		16	7.5	150	100	49	7.5	100	90	6	B7G	P
17C8	541 236 891		17	2	200	125	5	2.2	100	100	2	B9A	DDP
17D1	869 231 500	G1	13	3	250	125	9	1.1	100	100	1.1	B7	DDP
17D4	**1 *8* 230		16.8						D			A08	D
17D4A	**1 *8* 230		16.8				180		REC		40mA	A08	R
17DA4	001 080 230		16.8				120		REC		30mA	A08	R
17DE4	001 080 230		17				120		REC		30mA	A08	RR
17EW8	741 236 410		17	1.1	100		4.5	4.6	100		4.6	B9A	TT
17GJ5	541 234 5**	A1	16.8	22.5	250	150	70	7.1	10C	10C		B9D	P
17GT5	541 234 506		16.8	42	250	150	70	7.1	100	100		B9A	P
17HC8	414 237 516		16.8	{ 3	250		1.4	2	100	60		B9A	TP
17N8	541 236 891		17	{ 18	250	250	38	5.1	100	100		B9A	TP
				2	200	75	5	2.2	100	75	2	B9A	DDP
18	265 413 000		14	16.5	250	250	34	2.5	100	150	2.5	UX6	P
18A5	421 060 350		18	17	200	125	40	4.8	100	100		A08	P
18AK5	412 365 100		18	2.5	150	125	7.7	5.1	125	100	5.1	B7G	P
18AQ5	412 365 100		18	7.2	150	175	28	3.5	100	125	3.5	B7G	P
18C51	214 607 413		18	2	150		8.2	5.5	125		5.4	B9A	TT
18D2	641 237 514		9.5	1.8	150		12.5	10	100	60		B9A	TP
				1.6	200	175	10	10	100	100		B9A	TP
18D3	645 237 114		6.3	{ 1	150		18	8.5	100	60		B9A	TP
				2	150	150	7	11	100	100		B9A	TP
18D28	141 237 516		18	{ 100			0.8	1.4	100	60		B9A	TP
				150	125	45	7.5	100	100			B9A	TP
18F24	261 154 130		18	2.1	250	200	15	10.5	100	100		A08	P
18FW6	412 365 100		18	1	100	100	11	4.4	100	100	4.4	B7G	P
18GD6	141 230 651		18		100	100	5	4.3	100	100		B9A	P
18GE6	142 360 100		18	1	100		1	1.7	100		1.7	B7G	T
18HB8	416 235 714		18	{ 100			2.5	3.9	100	60		B9A	TP
				100	100	32	6.2	100	100			B9A	TP
18J6	672 344 100		18	1	100		6.5	5	100		5	B7G	TT
19	364 472 000		2	3	150		1.7		100			UX6	TT
19A3	002 283 100		9.5				60		REC		20mA	B7G	R
19AJ8	541 237 164		19	{ 3	100		5	2.3	100	60	2.3	B9A	TH
				2	250	100	6.5	2.4	150	100	2.4	B9A	TH
19AQ5	412 365 400		19	12.5	250	200	47	4.1	100	150	4	B7G	P
19AU4	**1 080 230		19				120		REC		40mA	A08	R
19BD	**1 23* **8		19				60		REC		16mA	B9A	R
19BY7	141 213 651		19	2	175	100	9.7	5.9	200	100	6	B9A	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE I60					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
19C8	8†1 239 146		19	1	100		0.5	1.2	100		1.2	B9A	DDDT
19CL8	461 237 514		18.9	{ 0.85 1	150 150		15 12	8	100	60	8 5	B9A	TP
19D3	541 237 464		19	{ 2,6 100	200 100	125	7.6 13.5	2.4	100	100	2.4 3.7	B9A	TH
19D8	541 237 464		19	{ 2.6 2	200 250	125	7.6 9	2.4	100	100	2.4	B9A	TH
19DC8	541 236 891		19	2	250	100	9	3.8	100	100		B9A	P
19DE7	644 237 411		19.5	{ 11 17,5	250 150		5.5 35		100			B9A	TT'
19EA8	645 237 114		18.9	{ 1 1	150 150		18 12	8.5	100	60	8	B9A	TP
19HR6	412 365 100		18.9	1.2	200	100	13.2	8.5	100	100		B7G	P
19FL8	541 236 890		19	2	250	100	9	3.8	100	100		B9A	DDP
19GQ7	1†* 239 181		18.9				5		D			B9A	DDD
19HS6	412 365 100		18.9	0.8	150	75	8.8	9.5	100	100		B7G	P
19J6	762 344 100		19	1	100		8.5	5.3	100		5.3	B7G	TT
19MR9	412 365 400		19	2.5	100	100	7	3.5	100	100	4	B7G	P
19MV5	412 365 400		19	2	150	125	10	3.5	100	100	3.5	B7G	P
19R3	001 230 008		19				180		REC		40mA	B9A	R
19RP11	401 236 514		19	7	100	100	35	5.5	100	100		B9A	P
19SU	**1 23* **8		19				120		REC		30mA	B9A	R
19T8	†91 238 146		19	3	250		1.0	1.2	150		1.2	B9A	DDDT
19U3	**1 23* **8		19				120		REC		40mA	B9A	R
19V8	681 234 †19		19	3	250		1.0	1.2	100		1.3	B9A	DDDT
19W3	**1 23* *08		19				120		REC		35mA	B9A	R
19X3	**1 23* **8		19				120		REC		60mA	B9A	R
19X8	146 231 457		19	{ 1 1.8	100 250	150	8.5 7.7	5.8	100	60	5 4	B9A	TP
19Y3	**1 23* **8		19				120		REC		60mA	B9A	R
19Y40	001 230 008		19				180		REC		40mA	B9A	R
20	364 200 000		3	16.5	90		3	0.4	80		0.4	UX4	T
20A1	645 231 700	G1	4	12.5 1.5	100 250	75	2.3 2.2		100	60	1.2 2.8	B7	TH
20A3	412 316 100		6		400		50	6	No Data Available			B9A	P
20D1	182 310 900		9.5				5		D			B7G	RR
20D2	745 231 600	G1	13	{ 7.5 3	100 250	100	3.8 2.5		100	60		B7	TH
20D3	541 227 463		6	{ 1 3	100 250	100	3.6		100	60	3.6	B9A	TH
20D4	541 237 164		6.3	{ 2 100	250 100	100	15 7	3.5	100	100	3.3	B9A	TH
20EQ7	141 235 680		20		100	100	9	10.9	100	100		B9A	DP
20F2	260 154 130		11	1.2	150	150	27	10.6	100	100	9	B8A	P
20J8	027 546 310	G1	20	{ 1.5 3	100 250	100	1.5 1.5		100	100		A08	H
20L1	274 164 130		12	12	250		10	2.8	100		2.8	B8A	TT
20P3	026 540 310		20	9.4	200	175	42	7.2	100	100	6	A08	P
20P5	260 054 130		20	6.3	200	150	29	7.5	100	100	7	A08	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
20RDHV1	145 237 864		20	{ 2 1	250 250	100	1.2 9	1.6 3.5	100 100	60 100	1.5 3	B9A	DTP
20Y1	023 100 080		20				60		REC		20mA	F8	R
20Y40	000 230 008	C	20				120		REC		30mA	B9A	R
21A7	276 454 130		21	{ 3 1.5	150 250	100	3.5 1.3		100 100	60 100		B8B	TH
21CW7	146 234 117		21		90		12	6	80		6	B9A	TT
21DJ8	641 237 410		21	1.3	90		15	12.5	No Data	Available		B9A	TT
21ES8	641 237 410		21	1.2	90		15	12.5	No Data	Available		B9A	TT
21L40	041 231 051	A1	21.5	28	200	200	40	6	100	100		B9A	P
21TH8	027 546 310	G1	21	{ 2.5 1.5	100 200	90	4 3	2 0.7	100 100	60 90	2	A08	TH
22	365 200 000	G1	3		150	50	1.7	0.3	125	60	0.5	UX4	P
22AC	265 300 000	G1	2.5	3	90	90	4	1.05	80	90	1	UX4	P
22DE4	001 080 230		22.4				120		REC		30mA	A0E	R
23	205 411 300	A1	2.5	90	400	150	43		No Data	Available		UX7	P
24	264 300 000		2	13.5	200		8	1.6	100		1.2	UX4	T
24A	265 130 000	G1	2.5	3	200	90	4	1	100	90	1	UX5	P
24E	265 130 000	G1	2.5	3	200	90	4	1	100	90	1	UX5	P
24NG	281 193 000		40				30		REC		15mA	UX6	RR
24S	265 130 000	G1	2.5	3	200	90	4	1	100	90	1	UX5	P
25	268 843 000		2	3	150		1.0	0.5	125		0.5	UX6	DDT
25	205 411 300	A1	6.3	90	400	150	43		No Data	Available		UX7	P
25A6	026 540 310		25	18	150	125	33	2.3	100	90	3.5	A08	P
25A7	126 548 310		25	{ 15 0	100 150	100	60 20.5	1.8 0.76	REC 100		20mA 1.8	A08	RP
25AC1D	206 008 030	G1	1.4		200		4	3.8	100		0.3	A08	DT
25AC5	026 040 310		25		250	150	57	5.9	100	100	3.5	A08	T
25AV5	421 060 350		25	22.5							5.8	A08	P
25AX4	001 080 230		25				120		REC		30mA	A08	R
25B5	267 413 000		25	{	100		45	2.2	100		2	UX7	TT
25B6	026 540 310		25	22	150	150	61	5	100	100	5	A08	P
25B8	127 561 340	G1	25	{ 1 3	100 100	100	0.6 7.6	1.5 2	100 100	60 100	1.5 2	A08	TP
25BK5	604 231 450		25	5	250	250	35	8.5	100	150	8	B9A	P
25C5	142 345 600		25	7.5	150	100	49	7.5	100	90	6	B7G	P
25C6	026 540 310		25	14	200	150	61	7.1	100	100	7	A08	P
25CA5	142 345 600		25	4.5	150	125	36	9.2	125	125	9.2	B7G	P
25CR5	154 231 541		25	22.5	250	150	65	6	100	100		B9A	P
25D4	001 080 230		25				120		REC		30mA	A08	R
25D8	127 546 380	G1	25	{ 1 3	100 100	100	0.5 8.5	1.1 1.9	100 100	60 100	1.1 1.9	A08	DTP
25DT5	504 234 1*6		25	16.5	250	250	38	6.5	100	100		B9A	P
25EH5	142 345 600		25	3.2	100	125	42	14.6	No Data	Available		B7G	P
25F5	142 345 600		25	7.5	100	100	37	5.8	No Data	Available		B7G	P
25FG6	*2* 540 310	A1	25	21	200	175	100	11	No Data	Available		A08	P
25FID	206 501 040	G1	1.4	2.5	150	125	1.2	0.7	100	100	0.7	A08	P
25GB6	020 540 310	A1	25	22.5	250	150	6.5	6	100	100		A08	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
25GY8	414 237 516		25	{ 1.5 13.5	150 150		2.5 50	2 7	100 100	60 100	2	B9A	TP
25L6	026 540 310		25	8.2	200	125	47	8	100	90	8	A08	P
25MK15	002 380 100		25				25		REC		20mA	B7G	R
25RE	281 193 000		25				30		REC		15mA	UX6	RR
25S	268 943 000		2	3	150		0.8	0.6	100		0.6	UX6	DDT
25SN7	461 471 230		25	8	250		9	2.6	100		2.5	A08	TT
25U4	001 080 230		25				120		REC		30mA	A08	R
25V5	028 190 310		25				60		REC		20mA	A08	R
25W4	001 080 230		25				120		REC		30mA	A08	RR
25W6	026 540 310		25	8.5	250	125	46	8	100	100	8	A08	P
25W9	001 080 230		25				120		REC		30mA	A08	R
25X4	020 080 310		25				120		REC		30mA	A08	R
25X5	020 080 310		25				120		REC		30mA	A08	R
25X6	028 190 310		25				30		REC		15mA	A08	RR
25Y4	020 080 310		25				60		REC		20mA	A08	R
25Y5	281 193 000		25				60		REC		40mA	UX6	RR
25Y5G	028 190 310		25				60		REC		40mA	A08	RR
25Y6	028 190 310		25				30		REC		15mA	A08	RR
25Z3	281 300 000		25				60		REC		20mA	UX4	R
25Z4	028 080 310		25				120		REC		60mA	A08	R
25Z5	291 183 000		25				60		REC		60mA	UX6	RR
25Z6	029 180 310		25				60		REC		60mA	A08	RR
26	264 300 000		1.5	10	150		5.5	1.1	100		1.1	UX4	T
26AE6	*** 23* **8	C	26						D			B9A	R
26A6	412 365 100		26	1.8	250	250	10.5	4	100	100	4	B7G	P
26A7	414 752 360		26	4.5	30	30	20	5.5	No Data Available			A08	PP
26AQ8	641 237 410		26	1.5	200		8.7	6	100		6	B9A	TT
26B6	026 540 310		35	18	250	125	33	2.3	100	90	2.3	A08	P
26BK6	412 389 600		26	2	250		1.2	1.6	150		1.6	B7G	DDT
26C6	412 398 600		26	9	250		9.5	1.9	100		1.9	B7G	DDT
26CG6	412 365 100		26		250	150	9	2	100	100		B7G	P
26D6	412 365 100		26	0	100	100	2.7	7.2	100	100	6	B7G	H
26E6	026 540 310		26	14	200	125	60	7.1	100	100	7	A08	P
26NG	281 193 000		40				30		REC		15mA	UX6	RR
26Z5W	801 229 013		13				30		REC		15mA	B9A	RR
26Z6	801 239 010		26				60		REC		15mA	B9A	RR
27	264 130 000		2.5	21	250		5.2	0.9	100		0.9	UX5	T
27BL8	645 237 114		27	{ 2 2	100 200	175	14 10	5 6.2	100 100	60 100	5	B9A	TP
27S	264 130 000		2.5	21	250		5.2	0.9	100		0.9	UX5	T
27SU	320 080 210		13				120		REC		70mA	A08	R
27SV	230 080 310		13				180		REC		40mA	A08	R
28AK8	8†1 239 146		28	2	200		1.3	1.5	100		1.4	B9A	DDDT
28AX8	8†1 239 146		28	1	100		0.8	1.4	100		1.4	B9A	DDDT
28D7	245 671 430		28	3.5	30	30	12.5	3.4	No Data Available			B8B	PP
28Z5	208 009 130		28				60		REC		20mA	B8B	RR
29	264 413 000		2.5	3	200		4.5	1.4	100		1.4	UX6	T
29C1	220 283 330		4						D			A08	D

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
29GR6	141 230 651		28.6	7.4	250	250	48	11.3	No Data Available			B9A	P
30	364 200 000		2	9	150		3	0.9	100		0.9	UX4	T
30A5	142 345 600		30	6.7	100	100	43	9.2	100	100		B7G	P
30C1	645 237 114		9	2	100		14	5	100	60	5.1	B9A	TP
30C13	645 237 114		9	2	100		14	5	100	60	6	B9A	TP
				2	200	200	10	6.6	100	150			
				2	100		14	5	100	60			
				2	200	175	10	6.2	100	100			
30C15	157 236 414		9		150		6	5	100	60		B9A	TP
					200	125	7.6	8.5	100	100			
30C17	157 236 414		7.4		100		15	8.5	100	60	8	B9A	TP
30F5	141 230 651		7.5	0.8	200	150	6.4		100	100		B9A	P
30F27	141 230 651		3.7	1.8	200	200	10	8.8	100	100		B9A	P
30FL1	641 237 541		9.4	1.2	200	150	13.5	15	No Data Available			B9A	P
				7.9	200		10	3.6	100	60		B9A	TP
				2.1	200	200	10	7.5	100	100			
30GP9	026 543 100		30	19	200	200	45	3.5	100	100		A08	P
30L1	147 234 116		7.5	3.4	150		26	6.6	100		6	B9A	TT
30L15	147 324 116		7	1.2	90		15	9	80		8	B9A	TT
30L17	146 234 117		7.2	6	75		15	16.5	No Data Available			B9A	TT
30P12	*41 23* 6*5		12	10.3	200	200	31	6.7	100	100		B9A	P
30P14	026 540 310		13	9.4	200	200	42	7.2	100	100		A08	P
30P16	041 230 605		16	14.2	200	200	45	8.2	100	100	7	B9A	P
30P18	041 23* 6*5		16	6	200	200	34	10	No Data Available			B9A	P
30PL1	641 237 154		13	7.9	200		10	3.4	100	60		B9A	TP
				9.6	200	200	28	6	100	100			
30PL12	414 237 516		16	16	100		3.5	2.5	100	60		B9A	TP
					200	200	35	6.4	100	100			
30PL13	414 237 516		16	7.9	200		10	3.4	100	60		B9A	TP
				20	250	250	77	10	100	100			
30PL14	414 237 516		16	7.7	200		10	3.4	100	60		B9A	TP
				15	150	150	50	7.6	100	100			
30X	264 300 000		2	12.5	175		3.1	9.3	100		9	UX4	T
31	364 200 000		2	22.5	150		8	0.9	100		0.9	UX4	T
31A3	280 000 130		31				60		REC		20mA	B8A	R
31BX7	461 471 230		31.5	17	250		42	7.2	No Data Available			A08	TT
31Z	244 300 000	A1/A2	6	100	400		75	2.8	No Data Available			UX4	TT
32	365 200 000	G1	2	15	400		75						
				3	150	75	1.7	0.6	100	75	0.6	UX4	P
32A8	414 237 516		32	1	100		1	1.9	100	60		B9A	TP
32E	365 200 000	G1	2	16	200	200	35	6.4	100	100	7	UX4	P
				3	150	75	1.7	0.6	100	75	0.6		
32ET5	142 345 600		32	7.5	100	100	30	5.5	100	100		B7G	P
32L7	126 548 310		32.5				60		REC		20mA	A08	RP
				5	90	90	38	6	80	75	6		
33	364 520 000		2	14	150	150	14.5	1.4	100	100	1.4	UX5	P
33A/101K	641 227 413		6.3	2	250		1.2	1.6	100			B9A	TT
33A/158M	216 447 130		6	5	200		20	2.8	200		2.8	B8B	TT
34	204 140 300	A1/A2	6.3	36	300		80	4.4	No Data Available			UX7	TT
34	365 200 000	G1	2	3	150	75	2.8	0.6	100	75	0.6	UX4	P
34E	365 200 000	G1	2	3	150	75	2.8	0.6	100	75	0.6	UX4	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
35	265 130 000	G1	2.5	3	250	90	6.5	1	100	75	1	UX5	P
35A3	002 380 100		35				60		REC		20mA	B7G	R
35A5	265 004 130		35	8	200	100	41	5.9	100	90	5.9	B8B	P
35B5	412 365 400		35	7.5	150	100	40	5.8	100	90	5.8	B7G	P
35C3	002 380 100		35				60		REC		20mA	B7G	R
35C5	142 345 600	A1	35	7.5	150	100	40	5.8	100	90	5.8	B7G	P
35CD6	021 040 350		35	30	200	175	75	7.7	100	100		A08	P
35D5	401 236 050		35	10.5	200	175	52	9.5	100	100		B9A	P
35DZ8	414 237 516		35	{	150		0.8	1.4	100	60	{	B9A	TP
35EH5	142 345 600	35	62		100	100	3.2	12	No Data Available	B7G		P	
35F6	041 230 665	A1	35	23	250	200	55	5	100	100			B9A
35FN5	521 441 350		35	22.5	200	150	100	10	No Data Available	B8A	P		
35HB8	416 235 714		35	{	100		2.5	3.9	100	60	{	B9A	TP
35L6	026 540 310		35		100	100	32	6.2	100	100			
35QL6	451 236 154		35	7.5	200	100	40	5.8	100	90	5.8	A08	P
			35	11.5	200	200	52	9.5	100	100	8.3	B8A	P
35R1	002 382 100	G1	35				60		REC		30mA	B7G	R
35R2	002 380 100		35				60		REC		30mA	B7G	R
35RE	281 193 000		35				60		REC		20mA	UX6	RR
35S	265 120 000		2.5	3	250	90	6.5	10.8	100	90	1.8	UX5	P
35W4	002 383 100		27.5				60		REC		70mA	B7G	R
35Y4	280 200 130		27.5				60		REC		20mA	B8B	R
35Y5	280 200 130		27.5				60		REC		20mA	B8B	R
35Y31	002 380 100		35				120		REC		20mA	B7G	R
35Z3	280 000 130		35				120		REC		60mA	B8B	R
35Z3LT	280 000 130		35				120		REC		60mA	B8B	R
35Z4	020 080 310		35				120		REC		60mA	A08	R
35Z4GT	020 080 310		35				120		REC		60mA	A08	R
35Z5	022 080 310		27.5				60		REC		60mA	A08	R
35Z6	028 190 310		35				60		REC		20mA	A08	RR
36	265 130 000	G1	6	3	250	90	3.2	1	100	90	1	UX5	P
36AM3	002 283 100		36				60		REC		15mA	B7G	R
37	264 130 000	G1	6	18	250		7.5	1.1	100		1.1	UX5	T
38	265 130 000		6	18	200	200	14	1	100	100	1	UX5	P
38A3	**1 23* **8		38				60		REC		20mA	B9A	R
38R3	001 230 008		38				180		REC		40mA	B9A	R
39	260 501 300	G1	6.3	3	250	90	5.8	1	100	90		B7G	P
39	265 130 000	G1	6	3	200	90	5.8	1	100	90	1	UX5	P
40	364 200 000		5	1.5	200		0.2	0.2	150		0.2	UX4	T
40PPA	045 231 600		40	25	150	150	36	2	100	100	4	B7	P
40SUA	802 310 000		40				60		REC		60mA	B5	R
40Z5	022 080 310		35				120		REC		30mA	A08	R
41	265 413 000		6	18	250	250	32	2.3	100	100	2.3	UX6	P
41E	265 413 000		6	18	250	250	32	2.3	100	100	2.3	UX6	P
41FP	642 310 000		6	18	250		19	2.8	100		2.8	B5	T
41M	026 540 310		6	18	250	250	32	2.3	100	150	2.3	A08	P
41MDG	652 310 000	G1	4	0	150	100		0.2	150	100	0.2	B5	P
41MH	642 310 000		4	1.5	200		3.2	3	100		4	B5	T

VALVE	SELECTOR SWITCH No.	T.C.	V _f	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE I60					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	I _a mA	mA/V	Anode Volts	Screen Volts	mA/V		
41MHF	642 310 000		4	2	150		2.5	2.8	125		2.8	B5	T
41MHL	642 310 000		4	3	200		4	3.1	100		4.5	B5	T
41MLP	642 310 000		4	4.5	200		7.5	1.9	125		1.9	B5	T
41MP	642 310 000		4	7.5	200		24	6.0	100		7.5	B5	T
41MPG	454 231 600	G1	4	1.5	250	100	3.3		100	100		B7	H
41MRC	642 310 000		4	1	200		2.5	2.6	150		2.6	B5	T
41MSG	465 230 574		4	1.5	150	60	0.8	2.5	100	60	2.5	B9	PP
41MTA	642 310 000		4	1	100		4.9	4	100		4	B9	T
41MTB	642 310 000		4	1	100		3.6	2.6	100		2.6	B5	T
41MTL	642 310 000		4	2.5	200		5.9	3	100		3	B5	T
41MTS	645 231 700		4	1	250	100	5	1.6	100	100	1.6	B7	PP
41MXP	642 310 000		4	12.5	200		40	6	100		7.5	B5	T
41MVSG	542 310 000	A1	4	1.4	200	200	3	2	100	100	2	B5	P
41STH	645 231 700	G1	4	1.5	100		2		100	60	1.6	B7	TH
42	264 300 000		1.5	1.5	200	60	1		100	60	2.5		
				13.5	150		3.9	0.8	100			UX4	T
42	265 413 000		6	16.5	250	250	34	2.5	100	150	2.5	UX6	P
42E	265 413 000		6	16.5	250	250	34	2.5	100	150	2.5	UX6	P
42MP/PEN	045 231 600		4	5.5	250	250	32	6	100	150	7	B7	P
42NPT	041 231 500	A1	4(5)	3	200	200	34	8.5	100	150	8	B7	P
42/OT	045 231 600		4	5.5	250	275	34	7	100	150	7	B7	P
42OTDD	968 231 500	G1	4	5.5	250	250	34	7	100	150	7	B7	DDP
42PTB	061 231 500	G1	4	3	200	200	34	8.5	100	150	8	B7	P
42SPT	041 231 500	A1	4	10.5	250	250	64	11	100	150	10	B7	P
43	265 413 000		25	18	150	125	33	2.3	100	100	2.3	UX6	P
43E	265 413 000		25	18	150	125	33	2.3	100	100	2.3	UX6	P
43MG	026 540 310		25	18	250	125	33	2.3	100	100	2.3	A08	P
43IU	892 300 000		4				60		REC		20mA	B4	RR
44	265 130 000		6	3	200	90	5.8	1	100	90	1	UX5	P
44A/160M	241 657 143		6	14	250	250	30	3.9	100	100	3	B9G	PP
44IU	892 300 000		4				60		REC		50mA	B4	RR
44SU	802 300 000		4				30		REC		15mA	B4	R
45	264 300 000		2.5	50	250		34	2.1	100		2.1	UX4	T
45A	264 300 000		2.5	68	325		43	2.3	100		2.3	UX4	T
45A5	26* *54 130		45	9	200	200	54	9.5	100	100	7	B8A	P
45B5	041 23* 6*5		45	12.5	200	200	70	10	100	100		B9A	P
45BQ5	041 23* 6*5		45	12.5	300	175	70	10	100	100		B9A	P
45DQ8	461 237 145		45	1.7	200		3	4	100	60	4	B9A	TP
				12.5	200	175	70	10	100	100			
45DX8	461 237 145		45	1.7	200		3	4	100	60		B9A	TP
				2.1	200	175	18		100	100			
45IU	892 300 000		4				120		REC		30mA	B4	RR
45LIU	206 540 130		45	13	200	200	45	7.5	100	100	7	A08	P
45Z3	28* 108 300		45				60		REC		70mA	B7G	R
45Z5	022 080 310		37.5				60		REC		20mA	A08	R
46	264 630 000		2.5	33	250		22	2.3	100		2.3	UX5	T
47	264 530 000		2.5	16.5	250	250	31	2.5	100	150	3.8	UX5	P
48	265 413 000		30	10	100	100	52	3.8	100	90	3.8	UX6	P
49	264 630 000		2	20	150		6	1.1	100		1.1	UX5	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
49	265 413 000		6.3	50	400	250	95		No Data Available			UX6	P
50	264 300 000		7.5	70	400		55	2.1	100		2.1	UX4	T
50A5	265 004 130		50	7.5	150	100	49	8	100	90	7	B8B	P
50AX6	028 190 310		50				120		REC		30mA	A08	RR
50B5	412 365 400		50	7.5	150	100	49	7.5	100	90	6	B7G	P
50BC1D	206 089 000		1.4	0.5	90		1.4	0.8	80			A08	DDT
50BK5	604 231 450		50	5	250	250	35	8.5	100	150		B9A	P
50C5	142 345 600		50	7.5	150	100	49	7.5	100	90	6	B7G	P
50C6	026 540 310		50	13.5	150	150	58	7	100	100	7	A08	P
50CID	206 089 030	G1	1.4	1.5	100		1.5	0.9	100		0.9	A08	DDT
50CA5	142 345 600		50	4.5	150	125	37	9.2	No Data Available			B7G	P
50CD6	021 040 350	A1	50	30	200	200	75	7.5	100	100	7	A08	P
50DC4	002 363 100		25				60		REC		20mA	B7G	R
50EH5	142 345 600		50	3.2	100	125	42	14.6	No Data Available			B7G	P
50F2	412 365 400		50	7.5	100	100	50	7.5	100	100		B7G	P
50F2D	206 501 030	G1	1.4	1.5	100	125	1.4	1	100	100	1	A08	P
50FA5	142 345 600		50	7.5	100	100	40	5.8	100	100		B7G	P
50FE5	026 540 310		50	16	150	150	80	9.5	100	100		A08	P
50FK5	142 345 600		50		100	100	32	12.8	No Data Available			B7G	P
50FY8	414 237 516		50	{ 1.5 13.5	150 150	125	2.5 50	2	100 100	60 100		B9A	TP
50LID	206 540 030		1.4	4.5	100	125	4.8	1	100	100	1	A08	P
50L6	026 540 310		50	8.2	200	125	46	9.5	100	75	8	A08	P
50X6	219 008 130		50				60		REC		20mA	B8D	RR
50YIU	388 208 120		45				120		REC		30mA	A08	R
50Y6	029 180 310		50				60		REC		20mA	A08	RR
50Y7	028 193 310		46				60		REC		20mA	A08	RR
50Z6	029 180 310		50				120		REC		30mA	A08	RR
50Z7	029 183 310		48				60		REC		20mA	A08	RR
51	265 130 000	G1	2.5	3	250	90	6.5	10.5	175	90	10	UX5	P
52	264 530 000		6	1	250	100	41	2	125	100	2	UX5	P
52KU	030 908 020		5				60		REC		30mA	A08	RR
53	275 146 300		2.5	5	250		3	1.6	100		3.1	UX7	TT
53KU	030 908 020		5				120		REC		40mA	A08	RR
54KU	030 908 020		5				120		REC		60mA	A08	RR
55	269 813 000	G1	2.5	20	250		8	1.1	100		1.1	UX6	DDT
55A/165M	245 761 430		12	15	150	150	60	4	100	100		B8G	PP
55N3	**1 23* **8		55				120		REC		30mA	B9A	R
56	264 130 000		2.5	12.5	250		5	1.4	100		1.4	UX5	T
56AS	264 130 000		6	13.5	250		5	1.4	100		1.4	UX5	T
57	265 113 000	G1	2.5	3	250	100	2	1.2	100	100	1.2	UX6	P
57AS	265 113 000	G1	6	3	250	100	2	0.2	100	100	1.2	UX6	P
58	265 113 000	G1	2.5	3	250	100	8	1.5	100	100	1.5	UX6	P
58AS	265113 000	G1	6	3	250	100	8	1.5	100	100	1.5	UX6	P
59	265 411 300		2.5	18	250	250	35	2.5	100	150	2.5	UX7	P
59B	265 410 300		2.5	26	250	250	26	6	100	150	6	UX7	P
60	200 300 000	D1/D2	5				120		REC		30mA	UX4	RR
60/250	892 300 000		4				30		REC		15mA	B4	RR

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
60FX5	142 345 600		60	62	100	100	36	13.5	No Data Available			B7G	P
61SPT	520 604 310		6	10.5	250	250	64	11	100	150	10	A08	P
62DDT	264 098 130		6	3	250		1	1.3	150		1.3	B8A	DDT
62TH	276 454 130		6	{ 2	100		5	2.2	100	60	2.6	B8A	TH
62VP	261 154 130		6	{ 2	150	100	8	2	100	100	3.5	B8A	P
				2.5	250	100	6	2.2	100	100	2	B8A	P
63SPT	256 101 403		6	2	250	250	10	6.5	100	150	6	B9G	P
63T1	641 237 154		6	{ 2.3	100		4	1.4	100	60	1.4	B9A	TP
63TP	641 237 154		6.3	{ 8	200	200	17.5	3.3	100	150	3	B9A	TP
64	260 101 300	G1	6.3	{ 2.3	100		4	1.9	100	60	1.4	B9A	TP
				{ 8	200	200	17	3.3	100	150	3	B7G	P
64	260 101 300	G1	6.3	3	200	90	3.1	1	100	100		B7G	P
64	265 130 000	G1	6	3	200	90	3.1	1.05	100	90	1.05	UX5	P
64A	260 101 300	G1	6.3	3	200	90	3.1	1	100	100		B7G	P
65	265 130 000	G1	6	3	200	90	4.5	1	100	90	1	UX5	P
66KL1	280 009 130		6				30		REC		15mA	B8A	RR
67PT	261 054 130		6	7	250	250	36	10	100	150	9	B8A	P
67	264 130 000		6	9	150		5	1.1	100		1.1	UX5	T
68	265 130 000	G1	6	13.5	150	90	14	1.4	100	75	1.4	UX5	P
68A	265 130 000	G1	6	13.5	150	125	14	1.4	100	100		UX5	P
69	264 413 000		6	3	200		4.5	1.4	150		1.5	UX6	T
70	264 413 000		6	6	200		2.3	0.5	150		0.5	UX6	T
70A7	125 548 310		70	{ 7.5	150	100	60	5.8	REC		15mA	A08	RP
70L7	126 541 380		70	{ 7.5	125	100	60	7.5	REC	90	5.8	A08	RP
71	264 300 000		5	40	200		20	1.7	100		20mA	UX4	T
71A	264 300 000		5	16.5	90		10	1.4	80		6.5	UX4	T
71B	264 300 000		5	40	200		20	1.7	100		1.7	UX4	T
75	020 000 300	A1/G1	6	60	400		82		No Data Available			A08	T
75	269 813 000	G1	6	2	250		0.9	1.1	150		1.1	UX6	DDT
76	264 130 000		6	13.5	250		5	1.4	100		1.4	UX5	T
77	265 113 000	G1	6	3	250	100	2.3	1.25	100	100	1.2	UX6	P
77E	265 113 000	G1	6	3	250	100	2.3	1.25	100	100	1.2	UX6	P
78	265 113 000	G1	6	3	250	125	10.5	1.65	100	100	1.6	UX6	P
78E	265 113 000	G1	6	3	200	75	4	1.1	100	75	1.1	UX6	P
80	298 300 000		5				60		REC		20mA	UX4	RR
80A	298 300 000		5				60		REC		20mA	UX4	RR
80M	289 300 000		5				60		REC		20mA	UX4	RR
80S	289 300 000		5				60		REC		20mA	UX4	RR
81	280 300 000		7.5				60		REC		20mA	UX4	R
81M	280 300 000		7.5				60		REC		20mA	UX4	R
82	289 300 000		2.5				60		REC		20mA	UX4	RR
82V	289 300 000		2.5				60		REC		20mA	UX4	RR
83	289 300 000		5				120		REC		20mA	UX4	RR
83V	289 300 000		5				60		REC		60mA	UX4	RR
84	289 130 000		6				30		REC		30mA	UX5	RR

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
85	269 813 000	G1	6	20	250		8	1.1	100		1.1	UX6	DDT
85AS	268 913 000	G1	6	20	250		8	1.1	100		1.1	UX6	DDT
85S	268 913 000	G1	6	10.5	250		3.7	0.7	125		1.1	UX6	DDT
88	289 300 000		5				60		REC		20mA	UX4	RR
89	265 113 000	G1	6	10	100	100	9.5	1.2	100	90	1.2	UX6	P
90	264 413 000		2.5		150		3.5	1.4	150		1.4	UX6	T
90AC	642 310 000		4	12.5	200		40	7.5	100		7	B5	T
92	264 413 000		6		250		3.5	1.4	100		1.4	UX6	T
95	265 413 000		2.5	20	350	300	42	2.3	100	150	2.3	UX6	P
96	281 300 000		10				120		REC		30mA	UX4	R
98	289 130 000		6				30		REC		15mA	UX5	RR
99V	426 300 000		3.3	4.4	90		2.5	0.4	100		0.4	UX4	T
99X	264 300 000		3.3	4.5	90		2.5	0.4	100		0.4	UX4	T
100AC	642 310 000		4	6	200		5	2	100		2	B5	T
104V	642 310 000		4	1	100		15	3.5	100		3.5	B5	T
100/200LLID	346 547 220		1.4	9.4	150	125	4		100	100		A08	P
112A	364 200 000		5	4.5	90		5	1.5	80		1.5	UX4	T
114	020 000 300	A1G1	1.4		200		15		100			A08	T
114B	020 000 300	A1G1	1.4	4	200		12	1.1	100		1.1	A08	T
116/Pen	005 231 600	G1	11.5	1	100	100		7	100	100	6	B7	P
117DDP	541 236 891		17	2	250	150	5	2.2	100	100	2	B9A	DDP
117L7	126 458 310		117	5.2	100	100	60	5.3	REC		20mA	A08	RP
117M7	126 458 310		117	5.2	100	100	60	5.3	REC		20mA	A08	RP
117Z3	*02 381 000		117				60		REC		20mA	B7G	R
117Z4	020 080 310		117				60		REC		20mA	A08	R
117Z6	029 180 310		117				60		REC		20mA	A08	RR
120	642 310 000		2	12	150		12		100			B5	T
121VP	26* *54 130		12.5	3	200	125	7.2	2.3	100	150	2.3	B8A	P
120VPA	041 230 500	A1	2	1	150	60	2.9	1.1	150	60	1.1	B7	P
124AC	542 310 000	A1	4	1.4	200	60	1.6	0.9	100	60	0.9	B5	P
141DDT	264 089 130		14	1.5	200		1.5	1.6	100		1.5	B8A	DDT
141TH	276 454 130		14	2	100		5	2	100	60	2.8	B8A	TH
142BT	026 540 130		14	2	250	100	8	2.2	100	75	1.5		
144V	642 310 000		14	8.5	200	200	29	3.7	100	100	3.7	A08	P
154V	642 310 000		4	8	200		6	1.4	100		1.4	B5	T
			4	6	200		9	2	100		2	B5	T
163Pen	041 23* 6*5		16	10.4	200	175	53	9.5	No Data Available			B9A	P
164V	642 310 000		4	9	200		12	3.4	100		3.4	B5	T
171DDP	541 236 891		17	2	200	125	5	2.2	100	100	2	B9A	DDP
181	264 300 000		3	30	200		16	1	100		1	UX4	T
182	264 300 000		5	45	200		18	1.5	100		1.5	UX4	T
182B	264 300 000		5	35	250		18	1.5	100		1.5	UX4	T
183	264 300 000		5	60	250		30	1.7	100		1.7	UX4	T
185BT	020 540 310	A1	18	18	200	200	100	9.5	100	100	8	A08	P
185BTA	020 540 310	A1	18	18	200	200	100	9.5	100	100	8	A08	P
202DDT	809 231 600	G1	20	3	200		3	2.4	150		2.4	B7	DDT
202MPG	545 231 600	G1	20	1.5	200	100	3		100	100		B7	H

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
202SPB	061 231 500	G1	20	1.5	250	100	4.8	2.8	100	100	2.8	B7	P
202STH	645 231 700	G1	20	1.5	100		2		100	60		B7	TH
202VP	041 231 500	A1	20	1.5	200	60	1		100	60			
202VPB	061 231 500	G1	20	1.5	250	100	4.3	2.2	100	100	2.2	B7	P
203THA	545 231 600	G1	20	2	250	100	3.5		100	100		B7	H
205D	264 300 000		3.5	29	400		30		100		1.8	UX4	T
200A	264 300 000		5		60		1.5	0.7	No Data Available			UX4	T
205E	264 300 000		4.5	22.5	350		29	1.9	100			UX4	T
205F	264 300 000		4.5	18	300		31	1.7	100			UX4	T
210DDT	682 390 000	G1	2	1	100		2.3	1.1	100		1.1	B5	DDT
210DET	642 300 000		2	4.5	150		3	1.1	100		1.1	B4	T
210DPT	041 230 500	A1	2	1	150	60	2.9	1.3	150	60	1.3	B7	P
210HF	642 300 000		2	3	150		1.6	1.5	100		1.5	B4	T
210HL	642 300 000		2	3	150		1.6	1.1	100		1.1	B4	T
210HPT	642 350 000		2	4.5	150	175	7.5	2.5	100	100	2.5	B5	P
210LF	642 300 000		2	4.5	150		4.8	1.4	100		1.4	B4	T
210PG	645 230 700	G1	2		150		1.1		150	60	0.4	B7	H
210PGA	645 230 700	G1	2		150	40	1.1		150	60	1.4	B7	H
210RC	642 300 000		2	0	150	40	0.4		150	75	1.5	B4	T
210SPG	645 230 700	G1	2	1.5	150		0.8	0.8	150		0.8	B4	T
					150		1.1		150		0.5	B7	H
					150	40	0.5		150	75	1.5		
210T	264 300 000		7.5	32	350		16	1.5	100		1.5	UX4	T
210VPT	041 231 500	A1	2	1	150	60	1.9	1.1	150	60	1.1	B7	P
213	289 300 000		5				30		REC		15mA	UX4	RR
213Pen	*41 23* *51	A1	21	22	200	200	45	6.2	100	100	6	B9A	P
215P	642 300 000		2	7.5	150		10	2.2	100		2.2	B4	T
215SG	542 300 000	A1	2	1	150	60	1.4	1.1	150	60	1.1	B4	P
217A	228 300 000		10				120		REC		30mA	UX4	R
220	200 300 000		2.5				15		REC		15mA	UX4	R
220B	446 230 700		2	3	150		5.0	1.5	100		1.5	B7	TT
220DD	892 310 000		2						D			B5	DD
220HPT	642 350 000		2	4.5	150	150	8	2.5	100	100	2.5	B5	P
220IPT	040 230 500	A1	2	1.5	150	60	2.2	1	100	60	1	B7	P
220OT	642 350 000		2	4.5	150	150	9.5	2.5	100	100	2.5	B5	P
220P	642 300 000		2	7.5	150		11	2.2	100		2.2	B4	T
220FA	642 300 000		2	4.5	150		10	4	100		4	B4	T
220PT	642 350 000		2	9	150	150	19	2.5	100	100	2.5	B5	P
220SG	542 300 000	A1	2	1	150	60	1.5	1.6	100	60	1.6	B4	P
220TH	645 230 700	G1	2	3	100		1.7	1.2	100	60	1.2	B7	TH
					150	60	0.6	0.6	125	60	0.6		
220VS	542 300 000	A1	2	1	100	60	2	1.6	100	60	1.6	B4	P
220VSG	542 300 000	A1	2	1.5	150	60	2.6	1.5	100	60	1.6	B4	P
225DU	082 323 900		2				15		REC		10mA	B7	RR
230	642 300 000		2	20	150		18	3	100		3	B4	T
230	200 300 000	D1	5				30		REC		14mA	UX4	R
230PT	642 350 000		2	15	150	150	14	2	100	100	2	B5	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE I60					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
230XP	642 300 000		2	18	150		22	3	100		2	B4	T
231D	264 300 000		3	3	90		2.1	8.4	100		0.5	UX4	T
240B	446 230 700		2	1	150		8.5		100			B7	TT
240QP	446 235 700		2	12	150	150	6		100	100	2.5	B7	PP
244	264 130 000		2	6	150		5.5	1	100		1	UX5	T
244V	642 310 000		4	5.5	200		5.5	2.8	100		2.8	B5	T
246A	365 200 000	G1	3.3	1.5	150	40	1.5	0.4	No Data Available			UX4	P
247A	206 040 030		2	4.5	150		3.2	0.9	100		0.9	A08	T
248A	026 510 310	G1	6.3		150	125	5.5	1.8	100	100		A08	P
249B	223 300 000	D1	2.5				120		REC		30mA	UX4	R
252A	264 300 000		5	50	400		60	3.4	100		3.4	UX4	T
255	268 943 000		2	3	150		0.8	0.6	100		0.5	UX6	DDT
257	264 530 000		5	21.5	150	100	200	1.3	100	90	1.3	UX5	P
257A	260 300 000	G1	3.1	3	90		2.1	0.5	80		0.5	UX4	T
259A	265 130 000	G1	2	1.5	200	75	5.5	1.4	100	75	1.4	UX5	P
259B	265 130 000	G1	2	1.2	200	75	5.5	1.4	100	75	1.4	UX5	P
262B	261 300 000	G1	10	4.5	150		2.8	0.9	100		0.9	UX4	T
264	264 300 000		1.1	9	150		2.5	0.6	100		0.6	UX4	T
264E	264 300 000		1.4	8	100		2.1	0.6	100		0.6	UX4	T
264C	264 300 000		1.5	8	100		2.1	0.6	100		0.6	UX4	T
271A	264 130 000		5	30	400		37.5	2.9	100			UX5	T
272A	264 130 000		10	15	150		5.4	0.7	100		0.7	UX5	T
274A	289 300 000		5				60		REC		20mA	UX4	RR
274B	289 300 000		5				60		REC		20mA	UX4	RR
275A	264 300 000		5	4.5	200		47	2.7	100		2.7	UX4	T
281A	264 530 000		5	60	150	75	35	1.5	No Data Available			UX5	P
283A	265 130 000	G1	2	1.5	200	75	5.9	1.3	100	75	1.3	UX5	P
285	265 130 000	G1	2	12	200	150	8.8	0.9	100	100	0.9	UX5	P
286A	265 113 000	G1	2	1.5	200	75	6.2	1.2	100	75	1.2	UX6	P
290A	265 113 000	G1	10	1.5	200		5.4	1.2	150		1.2	UX6	P
291A	275 641 300	G1	10	{ 3 7.5	200 200	75	4.5 3.1		100 100	60 75		B7	H
292A	268 913 000	G1	10	6	150		2.1	0.6	100		0.6	UX6	DDT
293A	265 413 000		10	18	200	200	14.5	1	100	100	1	UX6	P
300A	364 200 000		5	97	400		80		No Data Available			UX4	T
300B	364 200 000		5	97	400		80		No Data Available			UX4	T
302	645 231 700	G1	30	{ 2 3.5	100 250	100	1.5 3.5		100 250	60 100		B7	TH
303A	268 943 000		2	6	150		2	0.6	100		0.6	UX6	DDT
304AC	542 310 000	A1	4	2	200	100	3	1.9	100	100	1.9	B5	P
309A	265 413 000		10	1.5	200	75	4.8	1.1	100	60	1.1	UX6	P
310A	265 113 000	G1	10	3	150	150	5.5	1.8	100	100	1.8	UX6	P
310B	265 113 000	G1	10	3	150	150	5.5	1.8	100	100	1.8	UX6	P
311A	265 130 000	G1	10	15	150	150	30	2.8	100	100	2.8	UX5	P
311SU	28* *** 130		31				60				20mA	B8A	R
324A	200 300 000	D1	5				5		D			UX4	R
328A	265 113 000	G1	7.5	3	150	150	5.5	1.8	100	100	1.8	UX6	P
329A	265 130 000	G1	7.5	15	150	150	37.5	3.3	100	100	3	UX5	P
329L	265 130 000	G1	7.5	15	150	150	37	3.3	100	100	3	UX5	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE I60					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
332Pen	026 540 310		33	8.5	200	200	45	8	100	100	7	A08	P
336A	265 413 000		10	14	250	250	30	4.2	100	100		UX6	P
337A	265 113 000	G1	10	3	150	150	6.3	1.6	100	100	1.6	UX6	P
345A	289 130 000		6				60		REC		20mA	UX5	RR
347A	020 600 310	G1	6	4,5	150		2.8	0.9	100		0.9	A08	T
349A	026 540 310		6	14	250	250	30	4.2	100	150	4.2	A08	P
350B	026 540 310		6	20	400	250	85	6.2	No Data Available			A08	P
351A	028 090 310		1				120		REC		20mA	A08	RR
352A	268 913 000	G1	10	6	100		2.1	0.6	100		0.6	UX6	DDT
354V	642 310 000		4	4.5	250		6.5	3.6	100		3	B5	T
361A	243 560 000		1.4		50	40	0.4	0.6	No Data Available			UX5	P
362A	243 560 000		1.4		50	50	1.3	0.5	No Data Available			UX5	P
367A	060 524 310		6	20	400	250	85	6.2	No Data Available			A08	P
373A	021 455 310		2		150	150	2	1.3	100		1.3	A08	P
374A	021 405 310		3		150	125	18	3	125		3	A08	P
375A	026 540 310		20		40	40	12	4.7	No Data Available			A08	P
381A	120 080 300		6.3				5		D			A08	D
383A	120 406 030		6		150		7.5	2.8	100		2.8	A08	T
385A	125 040 130		6		150		7.5	2.5	100		2.5	A08	P
387A	125 040 130		6		150		5.6	4	100		3.8	A08	P
396A	214 607 413		6.3	2.2	150		8.2	5.5	100		6	B9A	TT
401A	265 300 000		5	9	50		1.5	0.8	No Data Available			UX4	T
402	264 300 000		3	40	200		40	1	100		1	UX4	T
402-OT	005 231 600	G1	40	12	250	250	32	7	100	150	7	B7	P
402P	000 231 600	G1	4	15	200		27	5.5	100		7.5	B7	T
402Pen	005 231 600	G1	40	6.7	200	200	40	7	100	100	7	B7	P
402PenA	005 231 600	G1	40	9	150	150	56	8	100	100	8	B7	P
403A	413 265 100		6	2.3	150	150	7	4.4	100	100	4	B7G	P
403B	412 365 100		6.3		200	125	7.7	5.1	100	100		B7G	P
404A	402 106 053		6.3		150	150	13.5	12.5	100	100		B9A	P
405BU	892 300 000		4				15		REC		10mA	B4	RR
406	642 300 000		4		150		5.5	0.5	100		0.5	B4	T
407A	214 637 412		20	2	150		8.2	5.5	100		5.5	B9A	TT
408A	412 365 100		20	2	150	125	7.5	5	100	125	5	B7G	P
409A	410 065 100		6.3		150	125	5.2	3.2	100	100		B7G	P
408BU	892 300 000		4				15		REC		10mA	B4	RR
410HF	642 300 000		4	2.5	200		0.2	0.2	100		0.2	B4	T
410P	642 300 000		4	16	250		12	1.8	100		1.8	B4	T
410PT	462 350 000		4	1	100	150		2.5	100	150	2.5	B5	P
410RC	642 300 000		4	2.5	200		0.2	0.2	100		0.2	B4	T
410SG	542 300 000	A1	4	1	200	100	4.5	0.9	100	100	0.9	B4	P
412BU	892 300 000		4				30		REC		17mA	B4	RR
412SU	802 300 000		4				60		REC		22mA	B4	R
415PT	642 350 000		4	25	300	200	20	1.7	100	150	1.7	B5	P
415QT	642 350 000		4	25	300	200	20	1.8	100	150	1.8	B5	P
415SP	642 300 000		4	18	150		11	1.6	100		1.6	B4	T
420T	045 231 600		4	4.4	250	250	40	10.5	100	150	9	B7	P
425PT	642 350 000		4	17	250	150	12	1.3	100	100	1.3	B5	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE I60					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
431U	892 300 000		4				60		REC	15mA	B4	RR	
435A	402 106 053		6	10	200	150	13	16.3	No Data Available		B9A	P	
436A	211 403 506		6.3	1.4	200	150	23	32	No Data Available		B9A	P	
437A	304 002 116		6	10	150		40		No Data Available		B9A	T	
441U	892 300 000		4				60		REC	20mA	B4	RR	
442BU	892 300 000		4				60		REC	20mA	B4	RR	
446A/B	021 000 310	A1/G1	6	3	250		15	4.5	100		A08	T	
450	642 300 000		4	55	250		50	3.5	100		B4	T	
450AC	542 310 000	A1	4		200	100	3.5	3	100	100	B5	P	
451	892 300 000		1.8						REC		B4	RR	
450	264 300 000		7.5		400		55	2.1	100		UX4	T	
451PT	26* *54 130		45	9	200	200	54.5	9.5	100	100	7	B8A	P
451U	823 900 000		4				120		REC		30mA	B4	RR
460BU	892 300 000		4				60		REC		20mA	B4	RR
482A	264 300 000		5	45	200		18	1.5	100		1.5	UX4	T
482B	264 300 000		5	35	250		18	1.5	100		1.5	UX4	T
483	264 300 000		5	60	250		30	1.7	100		1.7	UX4	T
484V	642 310 000		4	2.5	200		0.2	1.2	100		1.2	B5	T
485	264 130 000		3	9	200		5.8	1.4	100		1.4	UX5	T
486	026 040 300		3	3	90		3	0.6	80		0.6	A08	T
500	892 300 000		4				30		REC	15mA	B4	RR	
501	653 420 000		1.4	0	40	40	1	0.8	No Data Available		B5A	P	
501AX	653 420 000		1.4	0	40	40	1	0.8	No Data Available		B5A	P	
502AX	653 420 000		1.2	1.2	40	40	8.6	0.5	No Data Available		B5A	P	
503AX	653 420 000		1.2	2	40	40	0.8	0.5	No Data Available		B5A	P	
505AX	653 420 000		0.6	0	40	30	0.1	0.1	No Data Available		B5A	P	
506	892 300 000		4				30		REC	15mA	B4	RR	
506AX	653 420 000		1.2	4.5	40	40	1.2	0.5	No Data Available		B5A	P	
506BU	892 300 000		4				30		REC	15mA	B4	RR	
506K	892 300 000		2				30		REC	15mA	B4	RR	
506KB	892 300 000		4				30		REC	15mA	B4	RR	
507AX	265 436 200		2		40	40	0.9	0.5	No Data Available		B7G	P	
509	892 300 000		2				60		REC	20mA	B4	RR	
509AX	634 200 000		0.6		40		0.1	0.1	No Data Available		B5A	T	
511D	892 300 000		4				60		REC	20mA	B4	RR	
512AX	653 420 000		0.6	0.6	20	20	0.1	0.1	No Data Available		B5A	P	
515BX	634 200 000		0.6		40		0.1	0.1	No Data Available		B5A	T	
518AX	653 420 000		1.2	2	40	40	0.8	0.5	No Data Available		B5A	P	
520AX	653 420 000		0.6	2.5	40	40	0.2	0.1	No Data Available		B5A	P	
521AX	653 420 000		1.2	3	20	20	0.8	0.4	No Data Available		B5A	P	
522AX	653 420 000		1.2	0	20	20	0.3	0.4	No Data Available		B5A	P	
523AX	653 420 000		1.2	1.2	20	20	0.3	0.3	No Data Available		B5A	P	
524AX	653 420 000		1.2	1.7	12	12	0.4	0.3	No Data Available		B5A	P	
525AX	653 420 000		1.2	1.2	20	20	0.2	0.3	No Data Available		B5A	P	
526AX	653 420 000		1.2	1.5	20	20	0.4	0.4	No Data Available		B5A	P	
527AX	653 420 000		1.2	0	20	20	0.1	0.2	No Data Available		B5A	P	
528AX	653 420 000		1.2	0	20	20	0.3	0.4	No Data Available		B5A	P	
529AX	653 420 000		1.2	1.2	12	12	0.3	0.3	No Data Available		B5A	P	

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
531DX	653 420 000		1.2	1.5	12	12	0.3	0.3	No Data Available			B5A	P
532DX	653 420 000		1.2	0	20	20	0.4	0.4	No Data Available			B5A	P
533DX	653 420 000		1.2	0	20	20	0.3	0.4	No Data Available			B5A	P
536AX	653 420 000		1.2	0	20	20	0.3	0.4	No Data Available			B5A	P
537AX	653 420 000		1.2	1.5	20	20	0.4	0.4	No Data Available			B5A	P
538A	741 226 413		6	2	250		10	5.5	200	5		B9A	TT
539DX	653 420 000		1.2	1.4	20	20	0.2	0.3	No Data Available			B5A	P
541DX	653 420 000		1.2	0	30	30	0.2	0.4	No Data Available			B5A	P
542A	602 304 100		6	2	250		10	5.5	200	5.5		B7G	T
542 DXS	653 420 000		1.2	2	20	20	0.4	0.3	No Data Available			B5A	P
543A	402 013 060		6	2.5	200		9.5	3.8	100	3		B8D	T
543B	402 013 060		6	2.5	200		9.5	3.8	100	3		B8D	T
544A	602 364 100		6	8.5	250		10.5	2.2	100	3		B7G	T
544DX	653 420 000		1.2	0	30	30	0.1	0.3	No Data Available			B5A	P
546A	802 309 100		6				30		REC	15mA		B7G	RR
546DX	653 420 000		1.2	0	20	20	0.3	0.4	No Data Available			B5A	P
547A	120 415 360		6	3	300	150	30	11	100	100	10	A08	P
547DX	653 420 000		1.2	0	40	30	0.2	0.4	No Data Available			B5A	P
548A	762 344 100		6	0.8	100		8.5	5.3	100	5.3		B7G	TT
548DX	653 420 000		1.2	1.4	20	20	0.2	0.3	No Data Available			B5A	P
549A	192 310 800		6						D			B7G	DD
550A	471 461 230		6	2	250		2.3	1.6	150	1.6		A08	TT
553AXA	652 430 000		1.2	0	20	20	0.4	0.5	No Data Available			B5A	P
559	021 010 030	D1					5		D			A08	R
569AX	652 430 000		1.2		60	60	1.8	1.1	No Data Available			B5A	P
573AX	624 300 000		1.2	4	90		11	2	80	2		B5A	T
574AX	653 420 000		0.6	0.6	20	20	0.1	0.1	No Data Available			B5A	P
578	8*1 239 146		4.7	3	250		1	1.2	100	1.3		B9A	DDDT
605	642 300 000		4	6	150		10	1.4	100	1.4		B4	T
608CX	623 410 000		6.3	2	150		9	5	100	5		B5A	T
612BU	892 300 000		6				30		REC	15mA		B4	RR
615	642 300 000		4	41	150		4	1.4	100	1.4		B4	T
619CX	623 410 000		6.3	2	250		4	4	100			B5A	T
620T	642 300 000		6	99	400		62	2.3	100	2.3		B4	T
635GTX	026 040 310		6	20	350		20		100			A08	T
660	642 300 000		6	100	400		120	2.3	100	2.3		B4	T
660T	642 300 000		6	1	100			7.4	100	7.5		B4	T
680XP	642 300 000		6	100	400		3.5	1.1	100	1.1		B4	T
713A	021 415 350		6	2	150	125	7.5	4	100	100	4	A08	P
717A	021 415 360		6	2	150	125	7.5	4	100	100	4	A08	P
731A	412 365 100		6	2.3	150	150	7	4.3	100	100	4	B7G	P
802	205 411 300	A1	6	18	400	250	30	2.2	100	150	2	UX7	P
805	642 300 000		6	6	150		10	1.4	100		1.4	B4	T
807	254 130 000	A1	6	12.5	400	250	83	6.5	100	150	6	UX5	P
816	200 300 000	D1	2.5				120		REC		30mA	UX4	R
825	642 300 000		6		150		6	1.4	150	1.4		B4	T
825BU	892 300 000		7.5				60		REC	20mA		B4	RR
829B	245 134 200	A1/A2	6.3		300	250	25	1.9	No Data Available			B7A	PP

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE I60					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
832	245 124 200	A1/A2	6.3		150	125	30	3.5	100	150	3.5	B7A	PP
832A	245 134 200	A1/A2	6.3		150	125	30	3.5	100	150	3	B7A	PP
836	2** 00* 300	D1	2.5				120		REC		30mA	B7G	R
837	205 411 300		12.6	40	400	150	45		No Data Available			UX7	P
840	254 130 000	A1	2	3	200	75	1	0.4	100	60	0.4	UX5	P
841	264 300 000		7.5	1	100			0.7	100		0.7	UX4	T
842	264 130 000		7.5	100	400		25	1.2	100		1.2	UX5	T
843	264 130 000		2.5	25	350		25	1.7	100		1.7	UX5	T
864	364 200 000		1.1	4.5	90		2.9	0.6	80		0.6	UX4	T
871	200 300 000	D1	2.5				120		REC		30mA	UX4	R
879	200 300 000	D1	2.5				5		D			UX4	R
884	026 040 310		6		300		55	4kΩ	No Data Available			A08	THY
885	264 130 000		2.5		300		55	4kΩ	No Data Available			UX5	THY
904V	642 310 000		4	2	200		2	2	150		2	B5	T
950	041 230 500	A1	2	16.5	200	150	7	0.9	100	100	0.9	B7	P
951	265 300 000	G1	2	3	200	60	1.7	0.6	100	60		UX4	P
952F	288 310 000		6.3						D			5AA	D
954	213 154 000	A1	6.3	3	250	100	2	1.4	100	100		7AA	P
955	264 310 000		6.3	7	250		6.3	2.2	100			5AA	T
956	213 154 000	A1	6	3	250	100	6.7	1.8	100	100		7AA	P
957	322 460 000		1.2	5	150		2	0.6	100			5AA	T
958A	322 460 000		1.2	20	150				No Data Available			5AA	T
959	322 154 000	A1	1.2	3	150	60	1.7	0.6	100	60		7AA	P
985	289 130 000		5				30		REC		15mA	UX5	RR
986	289 300 000		5				60		REC		20mA	UX4	RR
994V	642 310 000		4	0.5	100			3.6	100		3.6	B5	T
1002	802 300 000		1.8				60		REC		25mA	B4	R
1005	008 092 030		6.3				30		REC		15mA	A08	RR
1006	289 300 000		1.7				120		REC		30mA	UX4	RR
1007	008 090 230		1.0				60		REC		20mA	A08	RR
1012	289 300 000		1.7				120		REC		30mA	UX4	RR
1130	892 300 000		1.8						D			B4	DD
1005	008 092 030		6				30		REC		15mA	A08	RR
1028	202 322 200	D1	6				60		REC		23mA	B7G	R
1103	809 231 600	G1	13	2	250		1.5	1.5	100		1.2	B7	DDT
1201	426 141 630		6	3	200		5.5	3	150		3	B8B	T
1201	892 300 000		2.5				30		D			B4	DD
1203	200 800 130		6						D			B8B	D
1203A	200 800 130		6						D			B8B	D
1204	526 141 310		6	2	250	100	1.7	1.2	100	100	1.2	B8B	P
1206	265 441 730		6	2.5	250	100	4.5	2.1	100	100	2.1	B8B	PP
1221	165 113 000	G1	6	3	250	100	2	1.2	100	100	1.2	UX6	P
1222	265 403 100		6.3	18	350	250	54	5.2	100	150	5.2	A08	P
1223	026 510 310	G1	6	3	250	100	2	1.2	100	100	1.2	A08	P
1229	265 300 000	G1	2	3	150	75	1.7	0.6	100	75	0.6	UX4	P
1230	264 300 000		2	9	150		3		100			UX4	T
1231	265 104 130		6	30	300	200	13	6.3	100	100	6.3	B8B	P
1232	265 114 130		6	2	250	100	6	4.5	100	100	4.5	B8B	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
1236A	333 882 220	D1	2						D			A08	R
1238	245 671 430		28	3.5	40	30	12.5	3.4	No Data Available			B8B	PP
1247	000 230 000		0.6						D			B8A	D
1273	265 104 130		6	3	250	100	2.2	1.5	100	100	1.5	B8B	P
1274	028 090 310		6				30		REC		15mA	A08	RR
1275	289 300 000		5				120		REC		30mA	UX4	RR
1276	264 300 000		4.3	45	250		60	5.2	100			UX4	T
1280	265 104 130		12.5	3	250	100	2.2	1.5	100	100	1.5	B8B	P
1282	265 114 130		6	2	300	150	10	5.8	100	150	5.8	B8B	P
1284	265 104 130		12.5	3	250	100	9	2	100	100	2	B8B	P
1288	364 240 730		1.4		90		5.2	1.8	80		1.8	A08	TT
1291	274 304 620		1.4		90		5.2	1.8	80		1.8	A08	TT
1292	364 204 730		1.4		90		5.2	1.8	80		1.8	A08	TT
1293	260 064 030		1.4		90		4.7	1.3	80		1.3	B8B	T
1294	200 800 130		1.4						D			A08	D
1299	365 004 230		1.4	4.5	150	90	10.2	2.4	100	90	2.4	B8B	P
1560	289 300 000		5				60		REC		20mA	UX4	RR
1560	892 300 000		5				60		REC		20mA	B4	RR
1561	892 300 000		4				60		REC		20mA	B4	RR
1562	280 300 000		7.5				120		REC		30mA	UX4	R
1602	264 300 000	G1	7.5	23.5	250		10	1.3	100		1.3	UX4	T
1603	265 113 000		6	3	250	100	2	1.2	100	100	1.2	UX6	P
1608	264 300 000		2.5	90	400		95		No Data Available			UX4	T
1609	364 520 000		1.1	1.5	150	75	2.5	0.7	100	75	0.7	UX5	P
1610	264 530 000		2.5	16.5	250	250	31	2.5	100	150	3.8	UX5	P
1611	026 540 310	G1	6	16.5	250	250	34	2.5	100	150	2.5	A08	P
1612	026 540 310		6	3	250	100	5.3	1.1	100	100	1.1	A08	H
1613	026 540 310		6	16.5	250	250	34	2.5	100	150	2.5	A08	P
1614	026 540 310		6	18	350	250	54	5.2	100	150	5.2	A08	P
1616	200 300 000		2.5				120		REC		30mA	UX4	R
1619	026 540 310	G1	2.5	10	300	250	45	4.5	100	150	4.5	A08	P
1620	026 510 310		6	3	250	100	2	1.2	100	100	1.2	A08	P
1621	026 540 310		6	16.5	250	250	34	3.5	100	150	2.5	A08	P
1622	026 540 310		6	18	350	250	54	5.2	100	100	5.2	A08	P
1624	026 540 310		2.5	10	300	250	45	4.5	100	150		A08	P
1625	205 401 300	A1	12	12.5	400	250	83	6.5	100	150	6	UX7	P
1626	026 040 310		12.5	32	250		20	2.1	100		2.1	A08	T
1631	026 540 310		12.5	18	350	250	54	5.2	100	150	5.2	A08	P
1632	026 540 310		12.5	8	200	100	50	9.5	100	90	9	A08	P
1633	471 461 230		25	8	250		11.5	2.6	100		2.6	A08	TT
1634	074 461 230	G1	12.5	2	250		2	1.3	150		1.3	A08	TT
1635	027 446 310		6	0	300		3.5	0.9	100		0.9	A08	TT
1637	026 500 310		6	18	250	250	32	3.8	100	150	3.8	A08	P
1638	029 180 310		6						D			A08	DD
1639	026 890 310		6	5.5	250		5	2	100		2	A08	DDT
1641	200 300 000	D1/D2	5				120		REC		39mA	UX4	RR
1641/RK60	200 300 000		5				15		REC		12mA	UX4	RR
1642	216 471 300		6	16.5	250		8.3	1.4	100			UX7	TT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
1644	414 752 360	D1	12.5	9	200	200	13	2.1	100	100	2.1	A08	PP
1649	021 415 360		6	2	300	150	10	9	100	100	8	A08	P
1654	2** 00* 300		1.4						D			B7G	D
1655	074 461 230		6	2	250		2	1.3	200		1.3	A08	TT
1659	268 913 000	G1	2.5	2	250		0.9	1.1	150		1.1	UX6	DDT
1662	364 526 300		1.4	8.4	150	90	13.3	1.9	100	75	1.9	B7G	P
1664	026 985 310	G1	2.5	3	250	125	10	1.3	100	100	1.3	A08	DDP
1701	892 300 000		1.8				120		REC		30mA	B4	RR
1801	892 300 000		4				15		REC		10mA	B4	RR
1805	892 300 000	D1	4				30		REC		15mA	B4	RR
1807	892 300 000		4				30		REC		15mA	B4	RR
1810	003 200 000		4				30		REC		15mA	B4	R
1815	892 300 000		4				60		REC		20mA	B4	RR
1817	892 300 000		4				120		REC		30mA	B4	RR
1821	892 300 000	G1	4				30		REC		15mA	B4	RR
1823	892 300 000		4				30		REC		15mA	B4	RR
1831	892 300 000		4				30		REC		12mA	B4	RR
1832	082 300 000		4				120		REC		30mA	B4	R
1851	026 510 310		6	2	300	150	10	9	100	100	8	A08	P
1851GT	026 510 310	G1	6.3		300	150	10	9	100	100		A08	P
1852	021 415 360		6	2	300	150	10	9	100	100	8	A08	P
1853	021 415 360		6	3	300	200	12.5	5	100	150	5	A08	P
1853GT	204 153 600		6.3	3	300	200	12.5	5	100	100		A08	P
1861	892 300 000		4				60		REC		20mA	B4	RR
1867	389 200 000	D1	4				60		REC		20mA	UX4	RR
1868	023 180 090		4				60		REC		20mA	F8	RR
1875	023 000 000		4				5		D			8SC	R
1876	123 000 080		4				5		D			8SC	R
1877	002 300 000	D1	4				3		D			B4	R
1881A	892 300 000		4				30		REC		15mA	B4	RR
1882	023 080 090		5				60		REC		20mA	8SC	RR
1883	023 080 090		5				60		REC		20mA	8SC	RR
1884	120 908 030		2.5				15		REC		15	A08	RR
2051	026 041 310		6		250		75	3kΩ	No Data Available			A08	THY
2101	264 530 000		2	4.5	150	150	8	1.7	100	100	1.7	UX5	P
2102	268 953 000		2	1	100		2.5	1.3	100		1.3	UX6	DDT
2103	274 546 300		2	7.5	150	150	4	1.5	100	100	1.6	UX7	PP
2151	265 413 000		14	31	250	250	47	2.7	100	150	2.4	UX6	P
2318	892 300 000		4				30		REC		15mA	B4	RR
2506	892 300 000	A1/A2	4				15		REC		10mA	B4	RR
3006	802 300 000		4						D			B4	D
3041	652 430 000		1.2	1	20	20	0.2	0.3	No Data Available			B5A	P
3041A	652 430 000		1.2	1	20	20	0.2	0.3	No Data Available			B5A	P
3074A	204 140 300		6		300		50	3	No Data Available			UX7	TT
3075A	002 300 000	D1	2						D			B4	D
3310A	265 113 000		10		250	150	5.6	2	100	100		UX6	P
3311A	265 113 000		10		200	150	33	3	100	100		UX6	P
3328A	265 113 000		7.5		250	150	5.6	1.9	100	100		UX6	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
3329A	265 113 000	G1	7.5		200	125	31	2.9	100	100		UX6	P
3481	026 510 310	G1	6	13.5	150	150	5.5	1.8	100	100	1.8	A08	P
3720	364 200 000		5	1.5	200		0.2	0.2	150		0.2	UX4	T
3871	264 300 000		30	19	100	100	52	3.8	100	90	3.8	UX6	P
3872	364 200 000		2	9	150		3		100			UX4	T
3873	365 200 000	G1	2	3	150	75	1.5	0.6	100	75	0.6	UX4	P
3921	264 300 000		2.5	50	250		34	2.1	100		2.1	UX4	T
3924	265 130 000	G1	2.5	3	200	90	4	1	100	90	1	UX5	P
4019A	264 300 000		4		200		9.7	1.3	100		1.2	UX4	T
4019B	642 300 000		4	4	100		7.5	1.2	100		1.2	B4	T
4020A	264 300 000		2	2	150		1.2	0.6	100		0.6	UX4	T
4020B	264 300 000		2	2	150		1.2	0.6	100		0.6	UX4	T
4021A	264 300 000		4	10	150		32.5	3	100		0.6	UX4	T
4021B	642 300 000		4	8	150		23	3	100		3	B4	T
4022R	264 300 000		4	6	200		16.2	2.2	100		2.0	UX4	T
4033	264 130 000		6	20	400		50	9	100		8	UX5	T
4033A	642 310 000		6	20	400		50	9	100		8	B5	T
4033L	642 310 000		6	20	400		60	10	100		8	B5	T
4037A	802 300 000		4				120		REC		30mA	B4	R
4045A	642 350 000		5	70	250	60	43	1.3	No Data Available			B5	P
4061A	205 411 300	A1	6	10	400	200	50	2.5	100	150	2.5	B7	P
4074A	204 140 300	A1/A2	6	13	300		15	3	100		3	UX7	TT
4077A	003 200 000	D1	5				120		REC		30mA	B4	R
4264A	364 200 000		1.5		100			6.3	100		6	UX4	T
4274A	289 300 000		5				120		REC		30mA	UX4	RR
4300A	364 200 000		5	90	400		50		No Data Available			UX4	T
4310A	265 113 000	G1	10	5.5	250	150	5.2	2	100	100	2	UX6	P
4328A	265 113 000	G1	7.5	5.5	250	175		2	100	150	2	UX6	T
4328D	026 510 310	G1	7.5	5.5	250	150	5.2	2	100	100	2	A08	T
4608	642 310 000		4	6	150		11	2.5	100		2.5	B5	T
4610	542 310 000	A1	4	1.3	200	100	1.5	0.9	100	100	0.9	B5	P
4611	364 200 000		6	40	200		20	1.7	No Data Available			UX4	T
4611	642 300 000		6	40	200		20	1.7	No Data Available			B4	T
4612	642 300 000		4	40	250		40	2.7	No Data Available			B4	T
4613	642 300 000		4	22	250		48	3.5	No Data Available			B4	T
4614	642 310 000		4	16	200		12	1.3	No Data Available			B5	T
4618	542 310 000	A1	4	2	200	100	3	2.2	100	100	2.2	B5	P
4619	892 300 000		4				30		REC		15mA	B4	RR
4623	123 000 000	D1	6.3				5		D			B3G	D
4631	264 300 000		2	1.5	150		0.7		150			UX4	T
4635	642 310 000		4	16	200		12	9	No Data Available			B5	T
4636	542 310 000		4	2	200	100	3	2.3	100	100		B5	P
4650	642 350 000		4	63	300	300	30		No Data Available			B5	P
4651	023 180 090		6.3				60		REC		20mA	F8	RR
4652	892 300 000		4				60		REC		20mA	B4	RR
4654	411 230 050	A1	6	14	250	275	72	8.5	No Data Available			8SC	P
4654K	023 114 500	A1	6	12.5	250	275	72	8.5	125	125		8SC	P
4654P	411 230 050	A1	6	14	250	275	72	8.5	No Data Available			8SC	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
4655	462 300 000	A1/G1	4.5				60		REC		15mA	B4	RR
4657	642 310 000		4	1.5	200		1	2.2	200		2.2	B5	T
4670	432 564 570		2	8.5	90	90	1		80	75		8SC	PP
4671	264 310 000		6.3	5	200		4.5	2	100			5AA	T
4672	513 100 000		6.3	3	90	90	1.2	1.1	100	100	1.1	5AA	P
4673	642 310 000	G1	4	2.5	250	200	8	5	100	150	5	B5	P
4673	023 110 560	G1	4	4	250	200	8	5	100	150	5	8SC	P
4675	264 310 000	A1/G1	4	5	200		4.5	2	100			5AA	T
4676	251 310 000		4	3	250	100	2	1.4	100	100		5AA	P
4679	026 447 300		6	2.5	250		8	5	100		4.6	A08	P
4682	023 100 560	G1	4		375	250	24		100	150		8SC	P
4683	023 004 060		4		350		43		100			8SC	T
4684	023 104 560		4		400	250	24		100	150		8SC	P
4689	026 540 310		6.3		400	275	48		No Data Available			A08	P
4688	023 104 560		4		400	275	48		100	150		8SC	P
4689	023 104 560	A1/G1	6		400	275	48		100	150		8SC	P
4694	023 104 560		6	7.5	400	250	24	8	100	150		8SC	P
4695	251 310 000		6.3	3	250	100	6.7	1.7	100	100		5AA	P
4696	023 180 560		6.3	2.5	250	150	8	14	No Data Available			F8	DP
4699	023 104 560		6	12.5	300	300	55	13	100	150	9	8SC	P
5222	402 613 060	A1	6.3	1	100		0.7	1.7	100		1.7	B8D	T
5516	235 242 300		3	14	400	250	75	4	100	150	4	A08	P
5556	264 300 000		4.5	30	350		9	0.9	No Data Available			UX4	T
5590	412 365 100		6	4.5	90	90	3.9	2	80	90	2	B7G	P
5591	412 365 100		6	1.9	200	125	7.7	5	125	100	5	B7G	P
5603	021 415 360		6	12.5	150	150	50	5.4	100	100	5	A08	P
5645	612 430 000		6.3	2.8	100		5	2.7	100		2.7	B5B	T
5646	612 430 000		6.3	1.1	100		1.4	2.4	100		2.4	B5B	T
5608	412 365 100		6	12	150	125	7.5	5	100	90	5	B7G	P
5610	612 364 000		6	1.5	90		17	4	80		4	B7G	T
5618	265 134 200		3	8	300	75	19	3.5	100	60	3.5	B7G	P
5635	442 *63 710		6	0.5	100		4.8		100		3.8	B8B	TT
5636	412 163 510		6	3	100	100	4	1.9	100	100	1.9	B8D	P
5637	402 013 060		6		100		1.4	2.7	100		2.7	B8B	T
5639	412 163 510		6	2.6	150	100	21	9	100	100	9	B8D	P
5640	412 163 510		6	6	100	100	31	5	100	100	5	B8B	P
5641	082 813 080		6				30		REC		15mA	B8D	R
5647	381 280 000		6				5.0		D			B5A	D
5654	412 365 100		6	2	150	125	7.5	5	100	100	5	B7G	P
5656	544 231 761		6	2	150	125	15	5.8	100	100		B9A	PP
5659	026 540 310	G1	12.5	12.5	250	250	32		100	150		A08	P
5660	026 895 310		12.5	3	250	125	10	1.3	100	100	1.3	A08	DDP
5661	021 415 360		12.5	0.4	250	100	9.2	2	100	100	2	A08	P
5670	214 607 413		6	2	150		8.2	5.5	125		5.5	B9A	TT
5672	653 420 000		1.2	6.5	60	60	3.1	0.6	No Data Available			B5A	P
5677	634 200 000		1.2	6	150		1.9	0.6	100			B5A	T
5678	652 430 000		1.2	0	60	60	1.8	1	No Data Available			B5A	P
5679	218 309 120		6				5		D			B8B	RR

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
5686	141 235 615		6	12.5	250	250	27	3.1	100	100		B9A	P
5687	641 221 437		6	12.5	250		12.5	4.1	100		7	B9A	TT
5690	238 192 310		6				20		REC		30mA	A08	RR
5691	471 461 230		6	2	250		2.3	1.6	150		1.6	A08	TT
5692	471 461 230		6	9	250		6.5	2.2	100		2.2	A08	TT
5693	021 415 360		6	3	250	100	3	1.6	100	100	1.6	A08	P
5694	126 447 310		6	6	300		7	3.2	No Data Available			A08	TT
5702	652 311 400		6.3	2	150	115	7.5	5	100	100	5	B7G	P
5703	623 410 000		6.3	2	150		9	5	100		5	B5A	T
5704	623 100 000		6.3				5		D			B5A	R
5718	402 013 060		6	2	100		13	5.5	100		5.5	B8D	T
5719	402 013 060		6	1.3	150		1.8	2.3	100		1.6	B8B	T
5722	802 208 300		3						D			B7G	D
5725	412 365 100		6	2	150	125	5.2	3.2	100	100	3.5	B7G	P
5726	192 310 800		6.3				5		D			B7G	RR
5732	026 510 310	G1	6	3	150	100	8	2.2	100	100	2	A08	P
5744	623 410 000		6.3	2	250		4	4	100			B5A	T
5749	412 365 100		6	1	250	100	11	4.4	100	100	4.3	B7G	P
5750	412 366 400		6	2	100		11	7	100		6	B7G	H
5751	741 226 413		6	3	250		1	1.2	100		1.2	B9A	TT
5755	471 461 230		6	2	250		2.3	1.6	200		1.6	A08	TT
5763	601 235 144		6	7.5	250	250	45	7	100	150	7	B9A	P
5784	652 311 400		6.3	2	150	125	5.2	3.2	100	100	3	B7G	P
5785	823 000 000		1.2						D			B3G	D
5797	411 235 600		26.5	1	30	30	0.5	1	No Data Available			B8D	P
5798	741 231 460		26	0	20		2.3	3.1	No Data Available				TT
5812	413 365 200		3	23	250	250	40	4.1	100	150	4.1	B7G	P
5814	741 226 413		6	8.5	250		10.5	2.2	100		3	B9A	TT
5814A	741 236 413		6.3	0.5	250		10.5	2.2	100		3	B9A	TT
5824	026 540 310		25	22	150	125	61	5	125	125	5	A08	P
5825	200 300 000	D1	1.5						D			UX4	D
5838	028 090 310		12				30		REC		15mA	B8A	RR
5839	028 090 310		26				30	REC		15mA	A08	RR	
5840	412 163 510		6	1.4	100	100	7	5	100	100	5	B8D	P
5842	602 441 443		6	1.5	150		26	24	100		2.4	B9A	T
5844	672 344 100		6	2.3	100		4.8	3.4	100		3.4	B7G	TT
5845	802 290 300		6						D			B7G	DD
5847	402 106 053		6	2	150	150	13	12.5	150	150	12	B9A	P
5851	206 005 340		2.5	7.5	150	125	5.5	1.6	125	125	1.6	B8B	P
5852	028 090 310		6				30		REC		15mA	A08	RR
5854	653 420 000		1.2	2	40	40	0.8	0.5	No Data Available			B5A	P
5871	026 540 310		6.3	12.5	250	250	45	4.5	100	150	4	A08	P
5873	264 114 730		6	3	150		9	2.9	100		2.3	B8B	TT
5875	652 430 000		1.2		90	90	3.5	2.5	80	90		B5A	P
5879	401 230 561		6	3	250	100	1.8	1	100	100	1	B9A	P
5881	026 540 310		6	12.5	300	200	48	5.3	100	150	5	A08	P
5882	028 090 310		12.6				30		REC		20mA	A08	RR
5894	245 134 200	A1/A2	6		400	250	30	3.4	No Data Available			B7A	PP

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
5896	812 093 100		6				15		REC		15mA	B8B	RR
5897	402 013 060		6	2.3	150		14	6.5	100		5.8	B8A	T
5898	402 013 060		6	2	150		1.8	2.3	100		1.7	B8A	T
5899	412 163 510		6	1.4	100	100	7.2	4.5	100	100	5	B8D	P
5900	412 163 510		6		100	100	7.2	4.5	100	100	5	B8A	P
5901	412 163 510		6	1.5	100	100	7.5	5	100	100	5	B8A	P
5902	412 163 510		6	6.5	100	100	30	4.2	100	100		B8A	P
5903	812 093 100		26				5		D			B8B	RR
5904	402 013 060		26	0	20			5	No Data Available				T
5905	412 163 510		26		20	20	2.3	2.8	No Data Available			B8A	P
5906	412 163 510		26	1.5	100	100	7.5	5	100	100	5	A08	P
5907	412 163 510		26		20	20	2.7	3	No Data Available			B8A	P
5908	412 163 510		26		20	20	2.3	1.7	No Data Available			B8A	P
5910	265 *24 300		1.4		90	90	1.6	0.9	100	90	0.9	B7G	P
5915	412 365 100		6		75	75	6.3	2	80	75	2	B7G	H
5916	412 163 510		26		100	100	4.4	1.3	100	100	1.3	B8A	P
5920	762 344 100		6	2.1	100		8.5	6	100		6	B7G	TT
5930	264 300 000		2.5	45	250		60	5.2	No Data Available			UX4	T
5931	020 809 030		5				120		REC		30mA	A08	RR
5932	026 540 310		6	14	250	250	72	6	100	150	6	A08	P
5933	354 130 000	A1	6	14	300	250	83	6.5	100	150	6	UX5	P
5947	222 833 380		4.4						D			A08	D
5961	126 541 340		6		250	100			100	100		A08	H
5963	741 226 413		6	2	75		3.5	2	100		2.5	B9A	TT
5964	762 344 100		6	1	100		9.5	6	100		6	B7G	TT
5965	741 226 413		6	1.8	150		8.2	6.5	150		6	B9A	TT
5967	624 334 260		1.2		40		3	2	No Data Available			B8B	TT
5968	240 670 430		1.2		40		0.7	1.3	No Data Available			B8B	TT
5969	245 675 430		1.2	3	125	40	6	1.7	No Data Available			B8B	PP
5970	245 675 430		1.2		40	40	3	1.8	No Data Available			B8D	PP
5972	652 420 000		1.2		60	60	2.5	1.3	No Data Available			B5A	T
5975	614 230 000		6.3		200		12	4	100		4	B5A	T
5977	402 013 060		6	2.7	100		10	4.5	100		4.5	B8B	T
5987	462 613 060		6	18	100		9	1.8	100		1.8	B8B	T
5992	026 540 310		6	12.5	250	250	45	4.1	100	150	4	A08	P
5995	802 310 000		6.3				30		REC		15mA	B5A	R
5993	802 010 309		6				30		REC		15mA	B9A	RR
5998	461 471 230		6		100		100	15.5	No Data Available			A08	TT
6004	020 000 030	D1/D2	2.5				60		REC		20mA	A08	RR
6005	412 365 400		6	12.5	250	250	45	4	100	150	4	B7G	P
6006	021 415 360		6	14	250	125	11	4.7	100	100		A08	P
6007	653 420 000		1.2	0.2	20	20	0.4	0.4	No Data Available			B5A	P
6008	653 420 000		0.6	1.1	20	20	0.5	0.1	No Data Available			B5A	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6021	642 113 470		6	1.0	100		6.5	5.4	100		5	B8D	TT
6026	001 230 460		6	2.6	150		12	5.9	100		5.9	B8B	T
6028	412 365 100		20	1.8	150	125	7.5	5	100		5	B7G	P
6029	624 300 000		1.2	4	90		11	2	80			B5A	T
6030	672 344 100		6	3	150		5	4.5	100		5.8	B7G	TT
				0.8	100		8.5	5.8	100		5.8		
6042	461 471 230		25	8	250		9	2.6	100		2.6	A08	TT
6045	672 344 100		6	0.5	100		9	6.4	100		6.4	B7G	TT
6046	026 540 310		25	8.2	200	125	46	8	100	125	8	A08	P
6049	412 163 510		6.3	1.5	100	100	7.4	3.5	100	100	3.5	B8A	P
6050	624 300 000		1.2	5	150		4	1.6	100			B5A	T
6051	652 430 000		1.2	4	40	40	3	1.2	No Data Available			B5A	P
6052	812 093 100		6				30		REC			B8B	RR
6053	812 093 100		26				5		D			B8B	DD
6055	402 013 060		26		40			4.7	No Data Available			B8D	T
6056	412 163 510		26		40	40		3	No Data Available			B8D	P
6057	741 226 413		6	2	250		1.2	1.6	150		1.6	B9A	TT
6058	192 310 800		6						D			B7G	DD
6059	041 230 651		6	3	250	100	2	1.2	100	100	1.2	B9A	P
6060	741 226 413		6	2	250		10	5.5	200		5	B9A	TT
6061	*41 230 651		6	13	300	225	34	3.7	100	150	3.7	B9A	P
6062	601 235 114		6	7.5	250	250	45	7	100	150	7	B9A	P
6063	802 309 100		6				30		REC		15mA	B7G	RR
6064	412 361 500		6	2	250	250	10	7.5	100	150	5	B7G	P
				1.5	200	150	4	6.4	100	150	5		
6065	412 361 500		6	2.5	250	250	8	2.5	100	100	2.5	B7G	P
6066	412 389 600		6	3	250		1	1.2	150		1.2	B7G	DDT
6067	741 226 413		6	8.5	250		10.5	2.2	100		2.2	B9A	TT
6072	741 226 413		6	4	250		3	1.7	100		1.7	B9A	TT
Δ6080	471 461 230		6	30	100				No Data Available			A08	TT
6082	471 461 230		26.5	30	100		100	7	No Data Available			A08	TT
6084	501 236 014		6	2	250	125	10	9	150	100		B9A	P
6085	641 227 413		6	5.5	250		6	2.7	100		2	B9A	TT
6086	541 236 **1		18	1.8	200	100	8.3	8.2	100	100	8	B9A	P
6087	020 809 030		6				60		REC		20mA	A08	RR
6088	653 420 000		1.2	1.2	40	40	0.6	0.5	No Data Available			B5A	P
6092	653 420 000		1.2	6.5	60	60	2.9	0.7	No Data Available			B5A	P
6094	452 634 516		6	12.5	250	250	45	6	100	150	6	B9A	P
6095	412 365 400			12.5	250	250	45	4.1	100	150	4	B7G	P
6096	412 365 100		6	2	150	125	7.5	5	125	125	5	B7G	P
6097	192 310 800		6						D			B7G	DD
6098	106 052 430		6	22.5	250	250	77	5.4	100	100		A08	P
6099	672 344 100		6	3	150		5	4.5	100		5.8	B7G	TT
				0.8	100		8.5	5.3	100		5.8		
6100	602 364 100		6	8.5	250		10.5	2.2	100		3	B7G	T
6101	762 344 100		6	2	150		9	5.5	100		6	B7G	TT
6106	020 809 030		5				60		REC		20mA	A08	RR
6110	812 093 100		6				5		D			B8B	RR
6111	642 113 470		6	1.9	100		8.5	5	100		5	B8B	TT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
6112	642 113 470		6	1.4	150		1.7	2.5	100		0.8	A08	TT
6113	641 471 230		6	3	250		3	1.7	100		1.6	A08	TT
6118	026 890 310		6	3	250		1.0	1.2	150		1.3	A08	DDT
6132	*41 230 651		6	4.5	250	250	40	11	100	150	9	B9A	P
6125	8*2 384 100		6	8.5	250		10.5	2.2	150		2.2	B7G	T
6134	021 415 360		6	2	300	150	10	9	100	150		A08	P
6135	6*2 364 100		6	8.5	250		10.5	2.2	100		2.2	B7G	T
6136	412 365 100		6	1	250	150	10.6	5.2	100	150	5	B7G	P
6137	021 415 360		6	3	250	100	9.2	2	100	100	2	A08	P
6145	265 104 130		5		150	100	34	10	100	100		B7G	P
6146	115 141 310	A1	6	28	200	200	100	7	No Data Available			A08	P
6147	206 035 240		1.2	7.5	150	125	5.5	1.6	100	125	1.5	B8B	P
6149	623 410 000		6.3		150		9	5	100			B5A	T
6151	623 410 000		6.3		250		4	4	100			B5A	T
6152	614 230 000		6.3		200		12	4	100			B5A	T
6153T	023 164 570	G1	6	2	100		16	5	100	60	5	8SC	TH
6156	412 360 500		6	2	250	100	12	3.5	100	100	3		
6157	**1 23* ***	D1	6	13.5	250	250	16	2.6	100	150	2.6	B7G	P
6158	741 226 413		6				120		REC		30mA	B9A	R
6159	125 141 310	A1	26	4.6	250		6	2.3	100		2.3	B9A	TT
6169	642 113 640		6	30	200	200	100	7	No Data Available			A08	P
6180	461 471 230		6	1	200		11	6.5	100		6.5	A08	T
6186	412 365 100		6	8	250		9	2.6	100		2.6	A08	TT
6187	412 365 100		6	1.4	250	150	7	5	100	100	4	B7G	P
6188	461 471 230		6	2	150	125	5.2	3.2	100	125	3	B7G	P
6189	461 471 230		6	2	250		2.3	1.6	150		1.4	A08	TT
6189	641 227 413		6	8.5	250		10.5	2.2	100		3	B9A	TT
6197	145 236 154		6	3	250	150	30	11	100	150	10	B9A	P
6201	741 226 413		6	2	250		10	5.5	100		5	B9A	TT
6202	802 309 100		6				60		REC		20mA	B7G	RR
6203	800 230 109		6						REC			B9A	RR
6205	412 163 510		6	4	100	100	7.5	5	100	100	5	B8D	P
6206	412 163 510		6.3	1.3	100	100	7.5	5	100	100	4.5	B8A	P
6211	741 226 413		6	1.2	100		4.6	3.6	100		3.6	B9A	TT
6215	020 000 300	D1										A08	D
6216	641 236 510		6	6	200	100	47	8.8	100	100		B9A	P
6227	041 230 651		6	5.2	200	200	30	9	100	100		B9A	P
6222	402 613 080		6.3	1	100		0.7	1.7	100		1.7	B8D	T
6247	442 613 000	A1	6	3	200		4	3	100		2.6	B7G	T
6252	245 134 200		6.3	17	400	200	20	6.5	No Data Available			B7A	FP
6265	412 365 100		6	1	250	150	9	4	100	125		B7G	P
6267	501 236 014		6	1.0	250	100	3.0	1.8				B9A	P
6281	653 420 000		6	0.6	20	20			No Data Available			B5A	P
6286	624 300 000		1.2	2	60		6	2.1	No Data Available			B5A	T
6287	156 236 546		6	12.5	250	250	48	4.1	100	100		B9A	P
6293	125 141 300	A1	6		200	200	100	7.3	No Data Available			A08	P
6302	265 113 000	G1	6	2.2	300	150	11	9	No Data Available			UX6	P
6305	112 311 100	D1	4				5		LEC		5mA	B7G	R

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6325	108 090 230		6				60		REC	20mA		A08	RR
6327	121 040 350		6	22.5	250	250	120	8	100	100		A08	P
6336	471 461 230		6	41.5	150		100	11	No Data Available			A08	TT
6350	614 227 143		6	2	250		12	5.5	100	5		B9A	TT
6336A	471 461 230		6.3	60	200		75	5	No Data Available			A08	TT
6351	141 321 655		6.3	2	350	250	12	11	No Data Available			B9A	P
6352	2** 382 930		1.5						D			B8A	D
6360	414 226 573		6.3	15	200	200	30	3.3	No Data Available			B7A	FP
6374	**1 23* **8	D1	6				120		REC	30mA		B9A	R
6375	400 230 060		1.2	4.5	150		12.0	3.4	150	3.4		B8D	T
6384	106 052 430		6.3	22	250	250	77	5.5	No Data Available			A08	P
6385	214 607 413		6	2.1	150		82	5.5	125	5.5		B9A	TT
6386	214 607 413		6	2	100		9.6	4	100	4		B9A	TT
6394	461 471 230		26.5	45	150		100	11	No Data Available			A08	TT
6397	306 025 240		1.2	7.5	150	125	7	1.9	100	100		B8B	P
6414	641 227 413		6.3	2	200		8	5.5	100			B9A	TT
6417	601 235 144		12.5	7.5	250	250	45	7	100	150	7	B9A	P
6418	652 430 000		1.2	1.2	20	20	0.2	0.3	No Data Available			B5A	P
6443	**1 23* ***	D1	6				120		REC	36mA		B9A	R
6463	614 227 143		6	9.5	250		14.5	5.2	100			B9A	TT
6485	412 365 100		6	1.6	300	150	10	9	100	100		B7G	P
6486/A	410 263 511		6.3	2	150	125	3.5	3.2	125	125	3.5	B9A	P
6488	412 653 160		6	2.0	100	100	7.5	5.0	100	100	5.0	B8D	P
6489	261 360 000		6		100		8		100			SM5	T
6516	412 360 500		6	13.5	250	250	16.0	2.6	100	150	2.6	B7G	P
6520	461 471 230		6	60	150		50	7	No Data Available			A08	TT
6526	652 430 000		1.2	6	100	100	6.5	1.9	100	100		B5A	P
6528	471 461 230		6.3	20	200		90	15	No Data Available			A08	TT
6533	644 612 360		6.3		150		0.9	1.7	100			B8D	T
6535	672 344 100		6.3	0.8	100		8.5	5.3	100		5.3	B7G	TT
6542	542 134 500	A1/A2	6	2	200	200	50	4.5	100	100		B7A	FP
6550	026 540 310		6	16.5	400	225	87	9	No Data Available			A08	P
6582A	410 263 511		6.3		150	125	7.5	4.5	100	100		B9A	P
6611	652 430 000		1.2		40	40	1	1	No Data Available			B5A	P
6612	652 430 000		1.2		40	40	3	3	No Data Available			B5A	P
6660	412 365 100		6	1.1	250	100	11	4.4	100	100	4.3	B7G	P
6661	412 365 100		6	1.0	250	150	7.4	4.6	100	100		B7G	P
6662	412 365 100		6	1.0	250	100	9.2	3.6	100	100	3.6	B7G	P
6663	182 310 900		6						D			B7G	DD
6664	412 389 600		6.3	12	250		10	5.5	100			B7G	DDT
6669	412 365 400		6	12.5	250	250	47	4.1	100	150	4	A08	B
6676	412 365 100		6.3	56	150	150	13	8	100	100		B7G	P
6677	145 236 154		6	3	250	150	30	11	100	100		B9A	P
6678	645 237 114		6.3	{ 1.6	150		18	8.5	100	60	9	B9A	TP
6679	641 227 413		6	{ 0.9	250	100	10	5.2	100	100	5		
6680	641 227 413		6	{ 2	250		10	5.5	100		5		
6681	641 227 413		6	{ 8.5	250		10.5	2.2	100		2.2		
			6	2	250		1.2	1.6	150		1.6	B9A	TT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE I60					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
6686	041 230 651		6	2.5	200	200	20	11	100	100		B9A	P
6687	412 365 100		6	5	150	75	0.5	0.6	125	75	0.6	B7G	H
6688	141 23* 615		6	1	200	150	13.1	16.5	No Data Available			B9A	P
6689	541 236 **1		6	1.7	200	125	10	9	100	100		B9A	P
6690	742 163 410		6.3	0.8	100		8	4.8	100		4.8	B8A	T
6697	641 227 413		6	8.5	250		10	2.0	150			B9A	TT
6754	801 230 109		6.3				30		REC		15mA	B9A	RR
6761	641 236 510		6	7.5	150	125	70	13	No Data Available			B9A	P
6760	641 236 510		18	7.5	150	125	70	12	No Data Available			B9A	P
6788	412 163 510		6.3	1.4	100	100	0.8	1.1	100	100	1.1	B8A	P
6814	402 013 060		6.3		100		10	6	100		6	B8A	T
6829	641 227 413		6	2.2	150		10.7	8.1	150		8.1	B9A	TT
6832	642 113 470		6.3		100		0.7	1	100			B8D	TT
6840	614 227 130		6.3		250		14	6.7	100			B8D	P
6850	542 134 500	A1/A2	12		200	200	50	4.5	100	100		B7A	PP
6939	214 226 563		6.3	100	300	200	85	10	No Data Available			B9A	PP
6943	412 163 510		6.3		100	100	8	3.6	100	100	3.6	B8D	P
6944	412 163 510		6.3		100	100	7	3.2	100	100	3.2	B8D	P
6945	412 163 510		6.3		100	100	25	3.5	100	100		B8D	P
6946	402 013 060		6.3		100		9	3.8	100			B8D	T
6947	642 113 470		6.3		150		6.5	4	100			B8D	TT
6948	642 113 470		6.3		100		0.8	1.6	100			B8D	TT
6954	412 365 100		6.3	1	150	150	5.9	2	100	100		B7G	P
6955	641 227 413		6	8.5	250		11.5	2.3	100			B9A	TT
6968	402 365 100		6.3	2	150	125	7.5	5	125	100	4	B7G	P
6973	504 234 156		6.3	15	250	250	46	4.8	100	100		B9A	P
6889	200 053 420	A1 A1	6.3	22.5	250	250	77	5.4	100	100		A08	P
6900	741 221 436		6.3	2	150		36	11.5	No Data Available			B9A	TT
6893	125 141 130	A1	12	30	200	200	100	7	No Data Available			B9A	P
6907	245 134 200	A1/A2	6.3	50	400	250	100		No Data Available			B7A	PP
6913	741 226 413		6.3	5	150		11	4.6	100			B9A	TT
6919	182 310 900		6				5		D			B7G	RR
6922	641 327 411		6.3		200				No Data Available			B9A	TT
6927	672 344 100		6	{ 3	150		5	4.5	100		5	B7G	TT
				{ 0.8	100		8.5	5.8	100		5		
6928	412 365 400		6	12.5	250	250	45	4.1	100	150	4	B7G	P
6851	641 227 413		6.3	3.1	250		1	1.2	100		1.2	B9A	TT
6853	030 809 020		5				60		REC		20mA	A08	RR
6854	214 607 413		6.3	19.6	150		8.2	5.2	100		5.2	B9A	TT
6870	141 223 651		6	3.5	250	250	25	8.5	100	100	8	B9A	P
6872	521 413 100	A1	6.3	1	400	100	3.5	2.2	100	100		B7G	P
6877	402 634 016		6.3	12	100		75	6.5	No Data Available			B9A	T
6883	125 141 130	A1	12	30	200	200	100	7	No Data Available			B9A	P
6887	182 310 900		6						D			B7G	DD
6888	021 415 600		6.3		150	90	38		100	90		A08	P
7000	026 510 310	G1	6	3	250	100	2	1.2	100	100	1.2	A08	P
7025	741 236 413		6	2	250		1.2	1.6	150		1.6	B9A	TT
7027	526 544 310		6.3		200	200			100	100		B8A	P
7032	412 365 100		6.3	2	250	100	4.5	1.8	100	100		B7G	H

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
7036	412 365 100		6	0	75	75	6.3	2	80	75	2	B7G	H
7044	641 221 437		6.3	2	150		36	10	No Data Available			B9A	TT
7054	141 230 651		13.5	2.8	250	150	19	11.5	No Data Available			B9A	P
7055	182 310 900		13.5				5		D			B7G	RR
7056	412 365 100		13.5	2.2	200	150	9.5	6.2	100	100		B7G	P
7057	641 237 410		13.5	2.2	150		10	6.8	100			B9A	TT
7058	641 237 410		13.5		250		1.2	1.6	100			B9A	TT
7059	654 237 115		13.5	{ 1 0.9	150 250	100	18 10	8.5 5.2	100 100	60 100	8 5	B9A	TP
7060	641 237 541		13.5	{ 1.5 1.6	150 200	125	9 15	4.9 7	100 100	60 100			TP
7061	504 234 156		13.5	10	200	200	36	4.2	100	100			P
7062	641 227 413		6.3	0.8	100		8.5	7.8	100		8.5	B9A	TT
Δ7105	471 461 230		12.6	30	100				No Data Available			A08	TT
7118	641 227 413		6.3	1.4	100		8.5	5.6	100		5.6	B9A	TT
7119	641 221 437		6.3	7	200		2.3	6.4	100		6.4	B9A	TT
7125	541 236 891		6.3	2	250	100	9	3.8	100	100	3.6	B9A	DDP
7137	412 344 600		6.3	1.3	150		13.5	8.5	100			B7G	T
7150	631 421 1*5		6.3		150	125	24	34	No Data Available			B9A	P
7167	412 365 100		13.5	1	150	80	10	8	No Data Available			B7G	P
7184	026 540 310		6.3	12.5	250	250	47	4.1	100	100		A08	P
7189	441 235 6*5		6.3	7.3	250	250	48	11.3	No Data Available			B9A	P
7193	020 000 310	A1/G1	6	10.5	300		11	3	100		3	A08	T
7199	675 231 414		6.3	{ 8 1.5	200 250	125	9 12.5	2 7	100 100	60 100		B9A	TP
7212	125 142 360		6.3	28	200	200	100	7	No Data Available			A08	P
7227	*41 23* 651		27.5	2.5	40	40	8	5	No Data Available			B9A	P
7233	646 236 416		6.3	40	150		50	9	No Data Available			B9A	T
7236	471 461 230		6.3	14	150		100	12.5	No Data Available			A08	TT
7239	41* 235 1*1	A1	6.3	5	300	100	10.5	4.2	100	100		B9A	P
7244	672 344 100		6	0.4	100		9	6	100		5	B7G	TT
7245	412 344 600		6.3		150		13.5	11	100			B7G	T
7247	641 227 413		6.3	{ 2 8.5	250 250		1.2 10.5	1.6 2.2	100		1.6 2.2	B9A	TT
7258	641 237 541		12.5	{ 3 8.5	150 150	125	15 12	4.5 7.8	100 100	60 100			TP
7318	641 227 413		6.3	8.5	250		11.5	2.3	100			B9A	TT
7320	041 230 605		6.3	7.3	250	250	48	11.3	100	100		B9A	P
7355	026 014 350		6.3	15	250	250	70	7.6	100	100		A08	P
7358	125 141 300		6.3		200	200	100	7	100	100		A08	P
7408	026 540 310		6.3	12.5	250	250	4.7	4.6	100	100		A08	P
7492	741 226 413		6.3		250			5.5	100			B9A	TT
7498	412 361 500		6.3		250	250		7.5	100	100		B7G	P
7558	145 236 151		6.3	18	250	250	40	5.3	100	100		B9A	P
7581	026 540 310		6.3	14	250	250	72	6	100	100		B8A	P
7591	026 514 350		6.3	10	300	300	75	10.2	100	100		A08	P
7607	125 141 300	A1	6.3	17	300	250	80	8	100	100		A08	P
7643	645 237 114		6.3	{ 2 2	100 200	175	14 10	5 6.2	100 100	60 100	6	B9A	TP

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
7687	645 237 114	G1	6.3	{ 8.5	200		7.5	2.5	100	60		B9A	TP
7700	265 113 000		6	3	200 125	10	5.8	100	100				
7731	641 237 114		6.3	{ 1	150		18	8.5	100	60	1.2	B9A	TP
7752	412 365 100		6	0.95	250 100	10	5.2	100	100				
7755	412 365 100		6	2	150 125	5.5	3.5	100	100	3.5		B7G	P
7756	106 052 430	D1	6		40 30	3	2.7	No Data Available				B7G	P
7803	641 237 410		6.3	36	300 300	58	4.3	100	150	4.3		A08	P
7898	741 236 41*		12	1.3	90	15	12.5	No Data Available				B9A	TT
8013A	200 300 000		2.5	2	250	10	5.5	100		5.5		B9A	TT
8016	020 000 030		1.2			15		REC		10mA		B4	R
8020	200 300 000	D1	5			120		D				A08	D
8032	125 141 310	A1	13.5	32	200 200	100	7	REC		30mA		UX4	R
9001	412 365 100		6	3	250 100	2	1.4	No Data Available				A08	P
9002	612 364 100		6	7	250	6.3	2.2	100	100	1.4		B7G	P
9003	412 365 100		6	3	250 100	6.7	1.8	100	100	2.2		B7G	T
9004	203 180 000		6.3					100	100	1.8		B7G	P
9005	233 810 000	A1/G1	3.6			5		D				5AA	R
9006	812 380 100		6			5		D				5AA	D
9072	020 000 310		6		300	15	2.5	D				B7G	R
18013	061 231 500		4		200 200	8	5	No Data Available				A08	T
18014	005 231 600							100	100			B7	P
18015	061 231 500	G1	21		200 200	35	8	125	125			B7	P
18016	005 231 600		21		150 125	8	8.3	125	125	8.3		B7	P
18040	265 104 130		18	3.4	200 200	15	10	125	125	9		B7	P
18042	541 236 **1		18	1.8	200 100	8.3	8.2	100	150	10		B8B	P
18043	541 236 **1							100	100	8		B9A	P
18045	041 230 651		6	1.8	200 200	8.2	8.2	100	100			B9A	P
18046	041 230 651		18	3	200 200	20	11	100	150	10		B9A	P
18048	261 504 130		18	3	200 100	20	11	100	150	10		B9A	P
95108	653 420 000		20	4.8	250 150	16	6.5	100	100			B8D	P
824476	461 471 230		1.2	1	40 40	2.2	1	No Data Available				B5A	P
			6	8	250	9	2.6	100		2.6		A08	TT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
A11A	892 300 000		4				60		REC		20mA	B4	RR
A11B	892 300 000		4				60		REC		20mA	B4	RR
A11C	892 300 000		4				60		REC		20mA	B4	RR
A11D	892 200 000		4				60		REC		20mA	B4	RR
A20B	892 310 000		4				60		D			B5	DD
A23A	809 231 600	G1	4	7	250		4	2	100		2	B7	DDT
A26	264 300 000		15	1.5	90		4.5	1.1	80		1.1	UX4	T
A27D	819 236 500	G1	4	6	250	250	36	9.5	100	150	9.5	B7	DDP
A28	264 300 000		15	1.5	90		7.5	1.1	80		1.1	UX4	T
A30	264 300 000		15	27	200		22	1.0	100		1.0	UX4	T
A30B	642 310 000		4	2	250		10	5.5	200		5.5	B5	T
A30D	642 310 000		4	3.5	200		6	2.4	100		2.4	B5	T
A32	264 300 000		15	3	150		1.5	0.9	150		0.9	UX4	T
A36A	645 231 700	G1	4	2	150		6	1.2	150	60	1.2	B7	TH
A36B	645 231 700	G1	4	2	200	100	3.5		200	75		B7	TH
				2	100		22	6	100	60	6	B7	TH
				2	250	150	3.5		100	150			
A36C	645 231 700	G1	4	3	100		9	3.8	100	60	5	B7	TH
				2.5	250	100	3.25	2.5	100	100	3	B7	TH
A40	264 300 000		15	40.5	200		21	1.5	100		1.5	UX4	T
A40	264 310 000		4		100			2	100		2	5AA	T
A40M	254 130 000	A1	4	1.5	200	100	3	2	200	100	3	UX5	P
A40M	542 310 000	A1	4	1.5	200	100	3	2	200	100	2	B5	P
A41	351 220 000	A1/G1	4		250	100		2	100	100		5AA	P
A48	264 300 000		15	4.5	90		4.5	1.1	80		1.1	UX4	T
A50A	542 310 000	A1	4	2	200	100	3	2.3	100	200	2.3	B5	P
A50A	040 231 500	A1	4	2	200	100	3	2.3	100	100	2.3	B7	P
A50B	061 231 500	G1	4	1.5	250	250	6	3.5	200	200	3.5	B7	P
A50M	041 231 500	A1	4	2	200	125	4.5	2.3	100	100	2.3	B7	P
A50M	542 310 000	A1	4	2	250	125	4.5	2.3	100	100	2.3	B5	P
A50N	542 310 000	A1	4	2	250	100	4.2	2.5	200	100	2.5	B5	P
A50N	041 231 500	A1	4	2	250	100	4.2	2.5	200	100	2.5	B7	P
A50P	060 231 500	G1	4	3	250	250	11.5	2	100	150	2	B7	P
A70B	642 310 000	G2	4	25	250	250	36	2.6	100	150		B5	P
A70B	045 231 600		4	25	250	250	36	2.6	100	150	2.6	B7	P
A70C	045 231 600		4	3	250	250	36	9	100	150	9	B7	P
A70D	045 231 600		4	3	250	250	36	9	100	150	9	B7	P
A70E	045 231 600		4	14	250	275	72	8.5	100	150	8.5	B7	P
A70P	045 231 600		4	14.5	250	250	70		100	150		B7	P
A80A	123 174 560	G1	4	1.8	90		2		100	90	1.3	8SC	O
				8.5	250	75	1.6		200		2.5		
A80A	645 231 700	G1	4	1.8	90	75	2		100	90	1.3	B7	O
				8.5	250	75	1.5		100	90	1.5		
A104	642 300 000		1.1	10	100		5	0.3	100		0.3	B4	T
A106	642 300 000		1.4	9	100		2	0.4	100		0.4	UX4	T
A106	642 300 000		1.4	9	100		2	0.4	100		0.4	B4	T
A109	642 300 000		1.3	9	150		2	0.4	100		0.4	B4	T
A109	264 300 000		1.4	9	150		2	0.4	100		0.4	UX4	T
A110	264 300 000		1.4	4.5	150		4	0.4	125		0.4	UX4	T
A110	642 300 000		1.4	4.5	150		3	0.4	125		0.4	B4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
A125	642 300 000		1.2	3	150		0.4	0.4	100		0.4	B4	T
A203	642 300 000		2	30	150		12	1.5	100		1.5	B4	T
A205	642 300 000		2	18	150		7	1.2	100		1.2	B4	T
A206	642 300 000		2	8.5	150		3.8		100		1	B4	T
A209	642 300 000		2	9	150		4	1.0	100		1.0	B4	T
A209	264 300 000		2	9	150		4	1.0	100			UX4	T
A210	364 200 000		2	9	150		3	1.0	100			UX4	T
A210	642 300 000		2	9	150		3	0.9	100		0.9	B4	T
A211	642 300 000		2	2	150		2	1.2	100		1.2	B4	T
A214	642 300 000		2	3	150		4.5	1.3	100		3	B4	T
A225	642 300 000		2	3	150		1	1	100		1	B4	T
A225	364 200 000		2	3	150		1	1	100		1	UX4	T
A235	200 300 000	D1	6				30		REC		15mA	UX4	R
A235	042 300 000	A1	2		150		1.5	0.4	150		0.4	B4	T
A239	230 300 000	D1	5				60		REC		20mA	UX4	R
A241	642 300 000	G2	2	2	20	20	1.2	1	No Data Available			B4	P
A242	265 300 000	G1	2	3	150	75	1.7	0.6	100	75	0.6	UX4	P
A303	264 300 000		3	27	150		3	0.6	100			UX4	T
A306	264 300 000		3	15	150		1.5	0.4	100			UX4	T
A404	642 300 000		4	10	100		4	0.4	100		0.4	B4	T
A406	364 200 000		4	9	100		2	0.4	100			UX4	T
A406	642 300 000		4	9	100		2	0.4	100			B4	T
A408	642 300 000		4	4	150		4	1.5	100		1.5	B4	T
A409	642 300 000		4	9	150		3.5	0.9	100		1.2	B4	T
A409	264 300 000		4	9	150		3.5	0.9	100		0.9	UX4	T
A410	642 300 000		4	3	150		3.5	0.5	100		0.2	B4	T
A410	264 300 000		4	3	150		3.5	0.5	100		1.2	UX4	T
A410N	642 300 000		4	3	150		3.5	0.5	100		0.5	B4	T
A411	642 300 000		4	3	200		6	2.5	150		2.5	B4	T
A414	364 200 000		4	4.5	150		3	2	100		2	UX4	T
A414	642 300 000		4	4.5	150		3	2	100			B4	T
A414K	642 300 000		4	4.5	150		4	2	100		2	B4	T
A415	642 300 000		4	4	150		4	1.5	100		2	B4	T
A420	642 300 000		4	4	150		4	1.5	100		1.5	B4	T
A425	642 300 000		4	2.5	200		0.2	1.2	100		1.2	B4	T
A430	642 300 000		4	3	200		6	2.5	150		2.5	B4	T
A430	042 300 000	A1	4		150		1.5	0.5	150		0.5	B4	T
A430N	642 310 000		4	4.5	250		6.5	3.5	100		3	B5	T
A435	642 300 000		4	1	150		2.1	0.5	150		0.5	B4	T
A440N	642 310 000		4	1.6	200		0.2	2.2	150		2.2	B5	T
A442	542 300 000	A1	4	1	200	100	4	0.7	200	100	0.8	B4	P
A442	254 300 000	A1	4	1	200	100	1	0.4	200	100	0.8	UX4	P
A557	602 310 000	G1	4	8	150		28	2	100		2	B5	T
A577	602 310 000	G1	4	20	250		40	2	100		2	B5	T
A600	642 300 000		6	9	150		4	1.5	100		1.5	UX4	T
A609	642 300 000		6	9	150		4	1.5	100		1.5	B4	T
A609	602 310 000	G1	6	9	150		4	1.5	100			B5	T
A615	642 300 000		6	4.5	150		4	2.4	100		2.4	B4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE I60					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
A630	642 300 000		6	1.5	150		0.7	1.5	150		1.5	B4	T
A635	642 300 000		6		150		1.2	1.5	150		1.5	B4	T
A642	542 300 000	A1	6	1	200	100		0.7	200	100	0.7	B4	P
A802	642 310 000		4	3	100		2.5	2.5	100		2.5	B5	T
A819	060 231 500	G1	4		250	250	8	7.5	100	100		B7	P
A863	026 500 310	G1	6	3	250	100	2	1.2	100	100	1.2	A08	P
A901	045 231 600		5		100	100	50	9	No Data Available			B7	P
A1685	026 510 310	G1	6.3	3	150	100	8	3.2	100	100	3.2	A08	P
A1685M	026 510 310	G1	6	3	150	100	8	3.2	100	100	3.2	A08	P
ΔA1714	412 3** 600		6	2.2	150				100		8	B7G	T
A1820	265 004 130		6		250	250	40	10.5	100	150	9	B8B	P
ΔA1834	471 461 230		6	40	100				No Data Available			A08	TT
A1860	502 332 406		2.5	7	200	150	35	6	100	100		B9A	T
A2030N	642 310 000		20	3	200		6	2.3	100		2.3	B5	T
A2040N	642 310 000		20	1.6	200		0.2	3	100		1	B5	T
A2087	8*2 380 100		4.4				5		D			B7G	R
A2118	642 350 000		20	3	200		6	2.3	100		2	B4	T
A2134	412 36* 500		6	7.8	150	150	55	9.5	100	100	9	B7G	P
A2272	21* *1* *13	D1	6						D			B9G	R
ΔA2293	*1* 234 **6		6.3	23	150				No Data Available			B9A	T
A2426	*2* 54* 310	A1	6.3	13.5	150	150	50	8	No Data Available			A08	P
A2521	414 464 234		6.3	1	150		15	15	No Data Available			B9A	T
A2599	411 231 146		6.3	1	150		16	15	No Data Available			B9A	T
A2674	211 403 506		6.3	1.4	200	150	23	30	No Data Available			B9A	P
A2688	412 314 600		6.3	1	100		12	11.5	No Data Available			B7G	T
A2738	*26 541 310		6.3		250	175	50	10	100	100		A08	P
A2744	414 464 234		6.3	1	150		16	15	No Data Available			B9A	T
A2792	*4* 23* 1**	A1	6.3	1.7	400		1	2.5	100		2.5	A08	T
A2900	741 226 413		6.3	2	250		10.5	6.2	100		6.2	B9A	TT
A2913	413 214 600		6.3		200		15.5	14	No Data Available			B9A	T
A4090	642 310 000		4	3.5	250		6	2.4	150		2.4	B5	T
A4110	642 310 000		4	3.5	250		6	2.4	100		2.5	B5	T
AA61	274 164 130		6	5.2	250		6	2.7	100		2.7	B8A	TT
AA91E	182 310 900		6.3				5		D			B7G	DD
AA81	023 110 980		4						D			8SC	DDD
AB1	902 310 000	D1	4						D			B5	DD
ABC1	023 198 060	G1	4	7	250		4	2	100		2	8SC	DDT
ABC91	412 389 600		6	2	250		1.2	1.6	100		1.4	B7G	DDT
ABL1	023 198 560	G1	4	6	250	250	36	9	100	150	9.0	8SC	DDP
AC/042	642 300 000		2	38	300		50	5	100		5	B5	T
AC/044	642 300 000		4	38	300		50	5	100		5	B4	T
AC054	642 300 000		4	22	250		48	3.5	No Data Available			B4	T
AC/064	642 300 000		4	21	200		20	3	100		3	B4	T
AC084	642 300 000		4	22	300		17	1.1	100		1.1	B4	T
AC084N	642 300 000		4		100		21	2.5	100		2.5	B4	T
AC2	023 100 060	G1	4	5.5	250		6	2.5	100		2.5	8SC	T
AC2DD	869 231 500	G1	4	5	250	250	32		100	150		B7	DDP
AC2/HL	642 310 000		4	1.2	250		2.5	6.5	100		5	B5	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE	
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V			
AC2/Pen	045 231 600	G1	4	5.3	250	250	32	8.5	100	150	8	B7	P	
AC2/PenDD	869 231 500		4	5.3	250	250	32	8.5	100	150	8	B7	DDP	
AC3Pen	045 231 600		4	3	250	250	36	9	100	150	9	B7	P	
AC4/Pen	045 231 600		4(5)	7	250	250	56	11	100	100	10	B7	P	
AC5/Pen	045 213 600		4	8.5	250	250	40	9.4	100	150	9.9	B7	P	
AC5/PenDD	869 231 500	G1	4(5)	8.5	250	250	40	9.4	100	150	9.4	B7	DDP	
AC6/Pen	045 231 000	A1	4(5)	6.9	300	225	63	9.5	100	100	8.5	B7	P	
AC101	602 310 000	G1	4	5.5	250		7	2.7	100			B5	T	
AC104	642 310 000		4	10	150		8.5	3.5	100		3.5	B5	T	
AC701	103 060 020	G1	4	1.6	40		0.5	0.7	No Data Available			B8D	T	
ACD	802 310 000	G1	4						D			B5	D	
ACDD	892 310 000		4						D			B5	DD	
AC/DDT	809 231 600		4	4	200		5	2.3	100		2.3	B7	DDT	
AC/DX	642 310 000		4	3	200		5	3.5	100		3.5	B5	T	
AC/G	642 310 000		4	7.5	200		8	2.7	100		2.7	B5	T	
ACH1	174 652 300	G1	4	{ 2 2	150 150	75	5 2.5	2 80	100 80	60 75	2 2	} C7	TH	
ACHF	642 310 000		4	3	200		3	2.5	100		2.5		B5	T
ACHL	642 310 000		4	2.5	200		7	2	100		3.5	B5	T	
AC/HLDD	809 231 600	G1	4	3	200		4.9	2.6	100		2.6	B7	DDT	
ACHLDD	910 231 680	G1	4	3	200		4.9	2.6	100		2.7	B9	DDDT	
ACHL4	642 310 000	G1	4	5	250		5	3.3	100		3.3	B5	T	
ACHL4DD	809 231 600		4	3	250		7	2.5	100		2.5	B7	DDT	
ACHM4	542 310 000		A1	4		250	100	10	2.5	100	100	2.5	B5	P
AC/HP	041 231 500		A1	4	1.5	200	100	4.2	3.2	100	100	3.2	B7	P
AC/HP	543 210 000		A1	4	1.5	200	100	4.2	3.2	100	100	3.2	B5	P
ACHVP	542 310 000	A1	4	2	200	100	3	2.3	100	100	2.3	B5	P	
ACH4	642 310 000		4	4	200		3	3.3	100		3.3	B5	T	
AC/L	642 310 000		4	13.5	200		17	4.25	100		4.25	B5	T	
ACL4	642 310 000		4	15	250		9	4	100		4	B5	T	
AC/LP	642 310 000	4	14	200		18	4.25		100		4.25	B5	T	
ACME4	642 310 000	G2	4	16	250	250	26		100	150		B5	P	
ACP	642 300 000		4	21	200		19	3	100		3	B4	T	
AC/P	642 310 000		4	13.5	200		17	2.7	100		2.7	B5	T	
ACP1	642 310 000		4	28	200		24	2.3	100		2.3	B5	T	
ACP/4	042 310 000	A1	4	1	100		20	7	100		7	B5	T	
ACP/4	642 310 000		4	20	250		20	4	100		4	B5	T	
ACPN	642 350 000		4	12	250	200	22		100	150		B5	P	
ACFNDH	642 350 000		4	10	250	200	18		100	150		B5	P	
AC/PP	642 300 000		4	25	400		50	5	100		5	B4	T	
ACPP	045 231 600		4	5.5	250	250	32		100	100		B7	P	
AC/Pen	045 231 600	G2	4	15.5	250	250	32	2.7	100	100	2.5	B7	P	
AC/Pen	642 310 000		4	12	200	200	24	2.5	100	100	2.5	B5	P	
ACPT	642 310 000		4	8	250	200	31		100	150		B5	P	
ACFX4	642 310 000		4	18	250		30	4	100		4	B5	T	
ACFX4A	642 300 000		4	25	250		50	5	100		5	B4	T	
ACQ	045 231 600	A1	4	22	400	250	57	6	100	150	6	B7	P	
ACQA	045 231 600		6	23	400	250		6	100	150	6	B7	P	
AC/S1VM	542 310 000		4	1.4	200	75	5.6	1.1	200	75	1.1	B5	P	

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
AC/S2	542 310 000	A1	4	1	200	60	6	3.4	200	60	3.4	B5	P
AC/S2Pen	041 231 500	A1	4	1.5	250	100	8	4.6	200	100	5.5	B7	P
AC/SG	542 310 000	A1	4	1.5	200	60	4.5	1.9	200	60	1.9	B5	P
AC/SGVM	542 310 000	A1	4	2	200	60	5.8	2.0	200	60	2	B5	P
AC/SH	542 310 000	A1	4	1.5	200	75	7.4	2.5	200	75	3.5	B5	P
AC/SL	041 230 500	A1	4	1	200	75	3.8	2	200	75	2	B7	P
AC/SL	061 230 500	G1	4	1	200	75	3.8	3.3	200	75	3.3	B7	P
ACSP1	041 231 500	A1	4	3	200	200	4.9	2.7	100	150	2.7	B7	P
ACSP3	061 231 500	G1	4	1.5	250	100	9	7.5	200	100	7.5	B7	P
AC/SP3/RH	061 231 500	G1	4	1.5	250	100		7.5	100	100		B7	P
ACTH1	645 231 700	G1	4	2.7	75		6	3	100	60	3.5	B7	TH
				3	250	100	3	3.5	250	100	3.8		
ACTH1A	271 640 530	G1	4	3	75		6	3	100	60	3.5	MO8	TH
				3	250	100	3	3.5	100	100	3.5		
ACTP	571 231 640	G1	4	3	150		1.5	1.4	100	60	1.4	B9	TP
				5	250	200	5.5	1.6	250	200	3.4		
ACVG	542 310 000	A1	4		200	75	5	3	200	75	3	B5	P
ACVH	542 310 000	A1	4	1.5	200	75	9.3	2.7	200	75	3.3	B5	P
AC/VP	041 231 500	A1	4	1.5	200	100	5.7	2.5	200	100	3	B7	P
AC/VP	542 310 000	A1	4	1.5	200	100	5.7	2.5	200	100	3	B5	P
ACVPB	061 231 500	G1	4	1.5	250	150	12	4	250	200	4	B7	P
AC/VP1	041 231 500	A1	4	2.8	250	200	7.4	2	100	150	2	B7	P
AC/VP2	061 231 500	G1	4	2.8	250	100	7.4	2	100	150	2	B7	P
ACVP4	041 231 500	A1	4		250	100	6	3	100	100	3	B7	P
ACVS	542 310 000	A1	4	1.5	200	75	4.4	2	200	75	3	B5	P
ACVS4	542 310 000	A1	4	2	250	50	6	2	200	60	2	B5	P
AC/Y	045 231 600		4	10	250	250	32	3.5	100	100	3.5	B7	P
AC/Y	642 310 000	G2	4	10	250	250	32	3.5	100	100	3.5	B5	P
AC/YC	045 231 600		4	10	250	250	68	7.5	100	150	7.5	B7	P
AC/YY	045 231 600		4	10	250	250	68	7.5	100	150	7.5	B7	P
AC/Z	642 310 000	G2	4	5.5	250	250	32	7.5	100	150	8	B5	P
AC/Z	045 231 600		4	5.5	250	250	32	7.5	100	150	8	B7	P
AC/ZDD	869 231 500	G1	4	5.5	250	250	32	8	100	150	8	B7	DDP
AD	281 300 000		6.3				30		REC		15mA	UX4	R
AD1	023 004 060		4	45	250		60	6	100		6	8SC	T
AD1/350	023 004 060		4	66	400		42		100			8SC	T
AD1N	023 004 060		4		300		60		100			F8	T
AD101	642 310 000		4	26.5	250		40	4.6	100			B5	T
ADG	642 310 000		20	10	200		10	3.5	100		3.5	B5	T
ADHF	642 310 000		20	3	200		5	3.5	100		3.5	B5	T
ADHP	041 231 500	A1	20		200	100	5	2.8	200	100	2.8	B7	P
ADL	652 310 000		20	13	200		20	3	100		3	B5	T
ADFN	642 350 000		20	15	250	200	22		100	150		B5	P
ADVHP	041 231 500	A1	20		200	100	5.5	2.5	200	100	2.5	B7	P
AE	265 413 000		13	13.5	100	100	8.5	1.6	100	90	1.6	UX6	P
AF	281 300 000		2.5				120		REC		20mA	UX4	R
AF2	542 310 000	A1	4	2	200	100	4.2	2.5	200	100	3.2	B5	P
AF3	023 110 560	G1	4	3	250	100	8	1.8	250	100	1.8	8SC	P
AF7	023 110 560	G1	4	2	250	100	3	2.1	250	100	2.1	8SC	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE I60					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
AP8	026 546 310	G1	6	2	200	50	3.5		100	60		A08	O
AG	289 300 000		5				120		REC		20mA	UX4	RR
AG495	642 310 000		4	4	200		4	2.5	100		2.5	B5	T
AG4100	642 300 000		4	3	150		5	2	125		2	B4	T
AH1	023 145 560		4	2	250	75	3	1.8	200	75	1.8	8SC	P
AH100	023 145 560	G1	4	2.5	200	100	5.5	1.5	100	100	1.5	8SC	P
AH4105	542 310 000	A1	4	2	200	125	4.5	2.3	100	100	2.3	B5	P
AK2	123 164 570	G1	4	{ 2	100	75	4.2	0.9	80	75	0.9	8SC	O
			2		250	75	4.5	2.2	100	75	2		
AL1	023 004 560		4	15	250	250	36	2.8	100	150	2.8	8SC	P
AL2	023 100 560	G1	4	25	250	250	36	2.6	100	150	2.6	8SC	P
AL2/375	023 100 560	G1	4	25	250	250	36	2.6	100	150	2.6	8SC	P
AL3	245 231 600		4	3	250	250	36	9	100	150	9	B7	P
AL3	023 104 560		4	6.5	250	250	36	9.5	100	150	8	8SC	P
AL4	145 231 600		4	3	250	250	36	9	100	150	9.5	B7	P
AL4	023 104 560		4	6.5	250	250	36	9.5	100	150	8	8SC	P
AL4/375	145 231 600		4	6	250	250	34	9.5	100	150	8	B7	P
AL4/375	023 104 560		4	6	250	250	34	9.5	100	150	8	8SC	P
AL5	145 231 600		4	14	250	250	72	8.5	100	150	7	B7	P
AL5/375	023 104 560		4	14	250	275	72	8.5	100	150	6	8SC	P
AL60	041 231 500	A1	4(5)	7	250	250	72	14.5	100	150	8.5	B7	P
AL60	502 331 460		2.4	7	200	150	35	6	100	100		B8D	P
AL495	642 310 000		4	12	250		30	4	100		4	B5	T
AL860	502 331 406		4.8	7	200	150	35	6	100	100		B9A	P
AMOE	045 231 600		4	14	250	250	72	9	100	150	8	B7	P
AN4092	642 310 000	D1	4	3.5	200		6	2	100		2	B5	DT
APP4G	041 231 500	A1	4	6	250	250	36	10	100	100		B7	P
AP495	642 310 000		4	1.5	200		2.5	5	150		5	B5	T
APP4A	045 231 600		4	16.5	250	250	36	3.5	100	150	3.5	B7	P
APP4AS	023 100 560	G1	4	16.5	250	250	36	3.5	100	150	3.5	8SC	P
APP4B	045 231 600		4	5	250	250	32	10	100	150	10	B7	P
APP4BS	023 104 560		4	5	250	250	32	10	100	150	10	8SC	P
APP4C	145 231 600	4(5)	5	250	250	36	10	100	150	10	B7	P	
APP4D	145 231 600		4	16	250	250	72	7	100	150	7	B7	P
APP4E	145 231 600		4(5)	13.5	350	275	72	8.5	100	150	8.5	B7	P
APP4E	023 104 560		4(5)	13.5	350	275	72	8.5	100	150	8.5	8SC	P
APP4G	061 231 500	G1	4(5)	6	250	250	36	10	100	150	10	B7	P
APP4G	005 231 600	G1	4(5)	6	250	250	36	10	100	150	10	B7	P
APP495	642 350 000		4	23	300	200	25	2	100	100	2	B5	P
APP4100	642 310 000	G2	4	15	250	250	24	2.5	100	150	2.5	B5	P
APP4120	642 310 000	G2	4	15	350	200	22	3.5	100	100	3.5	B5	P
APV4	892 300 000		4				60		REC		20mA	B4	RR
APV4100	892 300 000		4				60		REC		20mA	B4	RR
APV4200	892 300 000		4				60		REC		20mA	B4	RR
AR495	642 310 000		4	1	100			5	100		5	B5	T
AR4100	642 310 000		4	3	200		3	2	150		2	B5	T
AR4101	642 310 000		4	1	100			3	100		3	B5	T
AS494	542 310 000	A1	4		200	100	15	1.5	100	100	1.5	B5	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
AS495	542 310 000	A1	4	2	200	100	1	3.4	200	100	3.4	B5	P
AS4100	542 310 000	A1	4	6	200	100	4	1.4	100	90	1.4	B5	P
AS4120	542 310 000	A1	4	2	200	100	3	3	150	100	3	B5	P
AS4125	542 310 000	A1	4	2	250	100	3	3	200	100	3	B4	P
AV11	200 300 000	D1	2.5						REC			UX4	R
AX	264 300 000		5	9	150		3	0.8	100		0.8	UX4	T
AX1	892 300 000		4				60		REC		20mA	B4	RR
AX50	892 300 000		4				120		REC		30mA	B4	RR
AZ1	023 080 090		4				30		REC		20mA	8SC	RR
AZ2	023 080 090		4				60		REC		20mA	8SC	RR
AZ3	023 180 090		4				60		REC		20mA	8SC	RR
AZ4	023 080 090		4(5)				60		REC		30mA	8SC	RR
AZ11	902 300 080		4				60		REC		20mA	F8	RR
AZ12	902 300 080		4(5)				60		REC		20mA	F8	RR
AZ21	288 039 920		2				30		REC		17mA	A08	RR
AZ31	020 809 030		4				30		REC		20mA	A08	RR
AZ32	020 809 030		4				60		REC		20mA	A08	RR
AZ33	028 090 300		4				60		REC		20mA	A08	RR
AZ41	*8* **9 230		4				30		REC		10mA	B8A	RR
AZ50	023 080 090		4(5)				120		REC		30mA	8SC	RR
B2	642 300 000		2	2	150		2	1.2	100		1.2	B4	T
B7	642 300 000		6		150		8	0.67	100		0.67	B4	T
B11	642 300 000		6		200		20	1.4	100		1.4	B4	T
B21	447 230 600		2	3	150		5.0	1.5	100		2.1	B7	TT
B22	446 230 700		2		150		5		150			B7	TT
B23	642 300 000		2		150		4	0.75	100		0.75	B4	T
B24	446 230 700		2	0	150		7		100			B7	TT
B30	461 236 400		13	0	200		30		100			B7	TT
B36	471 461 230		13	8	250		9	2.6	100		2.6	A08	TT
B63	264 147 300		6	5	250		6	3.1	200		3.1	UX7	TT
B65	471 461 230		6	8	250		9	2.6	100		2.6	A08	TT
B105	264 300 000		1.4	18	150		8	1.0	100			UX4	T
B105	642 300 000		1.4	18	150		8	1.0	100			B4	T
B109	741 236 410		26	1.5	200		10	6.2	100		6	B9A	TT
B152	741 226 413		6	2	250		10.0	5.5	200		5	B9A	TT
B203	642 300 000		2	26	150		11	1.5	100		1.5	B4	T
B204	264 300 000		2	22.5	125		8	0.9	100		0.9	UX4	T
B205	642 300 000		2	18	150		7	1.2	100		1.2	B4	T
B205	264 300 000		2	18	150		7	1.2	100		1.2	UX4	T
B217	642 300 000		4.5	4.5	150		3	1.3	100		1.3	B4	T
B217	264 300 000		2	4.5	150		3	1.3	100		3	UX4	T
B228	264 300 000		2	2	150		2	1.2	100		1.2	B4	T
B230	446 230 700		2	1	150		5.5		150			B7	TT
B240	470 642 300		2	0	150		15		150			C7	TT
B240	264 473 000		2		150		15		No Data Available			UX6	TT
B242	542 300 000	A	2	0	200	75	4.5	1.1	100	75	1.1	B4	P
B242	254 300 000	A	2	0	200	75	4.5	1.1	100	75	1.1	UX4	P
B255	542 300 000	A	2	1	150	100	1.8	1.2	150	100	1.2	B4	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
B255	254 300 000	A	2	1	150	100	1.8	1.2	150	100	1.2	UX4	P
B262	542 300 000	A	2	1	150	100	1.8	1.3	150	100	1.3	B4	P
B262	265 300 000	G1	2	1	150	100	1.8	1.3	150	100	1.3	UX4	P
B309	741 226 413		6	2	250		10	5.5	100	100	5	B9A	TT
B319	147 234 116		7.5	1.5	90		12	6	100		6	B9A	TT
B329	741 226 413		6	8.5	250		10.5	2.2	100		2.2	B9A	TT
B339	741 226 413		6	2	250		1.2	1.6	150		1.6	B9A	T
B342	265 300 000	G1	2	2.5	150	75	4	1.3	150	75	1.3	UX4	P
B349	147 234 116		7	1.2	90		15	9	80		9	B9A	TT
B403	642 300 000		4	30	150		15	1.5	100		1.5	B4	T
B403	264 300 000		4	30	150		15	1.5	100		1.2	UX4	T
B405	642 300 000		4	18	150		11	1.6	100		1.6	B4	T
B405	264 300 000		4	18	150		11	1.6	100		1.4	UX4	T
B406	642 300 000		4	15	150		8	1.4	100		1.4	B4	T
B406	264 300 000		4	15	150		8	1.3	100		1.3	UX4	T
B409	642 300 000		4	16	250		12	2	100		2	B4	T
B409	264 300 000		4	16	250		12	2	100		2	UX4	T
B415	264 300 000		4	4.5	150		3	2	100		2	UX4	T
B242	642 300 000		4	2.3	200		6	2.5	150		2.5	B4	T
B424	264 300 000		4	2.3	200		6	2.5	150		2.5	UX4	T
B424S	642 300 000		4	3	200		6	2.5	100		2.5	B4	T
B425	642 300 000		4	4.5	150		3	2	100		2	B4	T
B425	264 300 000		4	4.5	150		3	2	100		2	UX4	T
B435N	642 310 000	D1	4	3.5	200		6	2	100		2	B5	T
B438	642 300 000		4	2.5	200		0.2	2	150		2	B4	T
B438	264 300 000		4	2.5	200		0.2	2	150		2	UX4	T
B438S	642 300 000		4	1.5	200		2	2	150		2	B4	T
B442	542 300 000	A1	4	1	200	100	4.5	0.9	200	100	0.9	B4	P
B442M	542 300 000	A1	4	1	200	100	4.5	0.9	100	100	0.9	B4	P
B442M	254 300 000	A1	4	1	200	100	4.5	0.9	100	100	0.9	UX4	P
B442S	542 300 000	A1	4	1	200	100	4.5	0.91	100	100	0.9	B4	P
B443	642 350 000		7	17	200	150	12	1.2	100	150	1.2	B5	P
B443	264 300 000	G2	4	17	200	150	12	1.2	100	150	1.2	UX4	P
B443S	642 350 000		4	12	250	75	12	1.6	100	60	1.6	B5	P
B443S	642 300 000	G2	4	12	250	75	12	1.6	100	60	1.6	B4	P
B443S	264 300 000	G2	4	12	250	75	12	1.6	100	60	1.6	UX4	P
B491	642 310 000		4	1.5	200		4	4	150		4	B4	T
B543	642 350 000		5	15	200	150	13	1.3	150	100	1.3	B5	P
B543	264 300 000	G2	5	15	200	150	12	1.3	150	100	1.4	UX4	P
B543	642 300 000	G2	5	15	200	150	12	1.3	150	100	1.3	B4	P
B543S	642 350 000		5	15	200	150	12	1.3	150	100	1.3	B5	P
B605	642 300 000		6	18	150		9	1.8	100		1.8	B4	T
B605	264 300 000		6	18	150		9	1.8	100	100	1.8	UX4	T
B609	642 300 000		6	18	250		12	1.8	100		1.8	B4	T
B719	741 236 410		6	2	250		10	6	250		6	B9A	TT
B729	741 236 410		6.3		200		10	3.4	100		3.5	B9A	TT
B2006	642 310 000		20	18	200		15	1.6	100		1.6	B5	T
B2038	642 310 000		20	3	200		6	2.3	100		2.3	B5	T
B2041	602 300 000	G1	20	1	100		2.5	0.1	100		0.1	B4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
B2042	542 310 000	A1	20	2	200	60	4	1	100	60	1	B5	P
B2043	642 310 000	G2	20	18	200	200	20	1.7	100	100	1.7	B5	P
B2044	218 004 530		20	4	200	60	0.7	2.8	100	60		A08	P
B2044S	642 310 000	D1	20	3	200		6	1.8	100		1.8	B5	DT
B2045	542 310 000	A1	20	2	200	60	4	1	150	60	1	B5	P
B2046	542 310 000	A1	20	2	200	100	3	2.2	150	100	2.2	B5	P
B2047	542 310 000	A1	20	2	200	100	4	2	150	100	2	B5	P
B2052T	542 310 000	A1	20	2	200	100	3	2	150	100	2	B5	P
B2055	542 310 000	A1	20	1.5	200	100	3	2	100	100	2	B5	P
B2099	642 310 000		20	1.6	200		0.2	3	150		3	B5	T
BA2	446 230 700		2		150		1.5		150			B7	TT
BB1	902 310 000	D1	16						D			B5	DD
BB220A	446 230 700		2	3	150		4		100			B7	TT
BB240	446 230 700		2	6	150		2.2		100			B7	TT
BBC12	682 390 000	G1	2	4.5	150		2.5	1.5	100		1.5	B5	DDT
BCH1	465 231 700	G1	24	{ 2	100		5	1.2	100	60	1.2	B7	TP
BF1	642 300 000		4		200	50	1.3	0.7	100	60			
BF61	261 054 130		6		150		8	1.3	100		1.3		
BF62	261 054 130		6		250	250	36	10	100	150	8		
BF451	261 054 130		45		250	250	26	3.2	100	150	3.2		
BHP61	023 010 560	G1	2	0.5	150	125	2.5	0.7	125	125	0.7	8SC	P
BL2	652 310 000	G1	30	20	200	100	40	3	100	90	3	B5	P
BL63	027 146 310	G1	6	16	250		14	4.2	100		4.2	A08	TT
BLP61	023 004 560		2		150	150	7	2.7	100	100		8SC	P
BM968	200 300 000	D1	2.5				60		REC		35mA	UX4	R
BPM04	412 365 400		6.3	12.5	250	250	45	4.1	100	150	4	B7G	P
BW3	642 350 000		2	4.5	150	125	6	2.2	100	100	2.2	B5	P
BW602	642 300 000		2	12	150		12	3.4	100		3.4	B4	T
BW1304	642 300 000		2	6	150		6	3.2	100		3.2	B4	T
EX2	446 230 700		2		200		2.5		100			B7	TT
BX604	642 300 000		2	12	150		8	1.5	100		1.5	B4	T
C3A	261 504 130		6.3		250	150	16	6.5	100	100		B8G	P
C3G	261 504 130		6.3	1.8	200	150	13	14	No Data Available			A08	P
C3G	216 514 130		6.3	1.8	250	150	13	13.5	100	100		B8B	P
C3G	802 362 450		6.3	1.8	200	150	13	14	No Data Available			F8	DP
C3M	261 504 130		20	4.5	250	150	15.0	6.0	100	100	5.2	B8B	P
C9	642 300 000		4	9	150		3.5	0.9	100		0.9	B4	T
C10B	023 100 080		20				75		REC		23mA	8SC	R
C10B	802 310 000		20				60		REC		23mA	B5	R
C20C	892 310 000		13						D			B5	DD
C23B	809 231 600	G1	13	5	200		4	2	100		2	B7	DDT
C25	642 300 000		4	2.5	200		2.3	1.2	150		1.2	B4	T
C30	261 504 130		6.3	4.5	250	150	15	6	100	100		B8B	P
C30B	000 231 600	G1	13	4	200		4	3.2	150		3.2	B7	T
C36A	645 231 740		21	{ 1.5	100		4	2	100	60	1.2	B9	TH
					250	75	3		100	75			
C36B	645 231 700	G1	29	{	100		4	2	100	60	1.2	B7	TH
					250	150	3.4		200	75	3		

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
C36C	645 231 740		29	{ 2.5	100 250	75	4 3	2 3.5	100 100	60 75	1.2	B9	TH
C50P	061 231 500	G1	12	2.2	200	200	2.5	2.8	100	150	2.8	B7	P
C50N	061 231 500	G1	13	2	200	200	9.5	2	100	150	2	B7	P
C70D	023 110 560	G1	33	8.5	200	200	45	8	100	150	7	8SC	P
C70D	045 231 600		35	8.5	200	200	45	8	100	150	7	B7	P
C80B	123 154 560	G1	13	1.5	200	90	1.9		150	75		8SC	O
C109	642 300 000		1	9	150		3.5	0.5	100		0.5	B4	T
C125	642 300 000		1	3	150		0.7	0.8	125		0.8	B4	T
C142	542 300 000	A1	1	1.5	150	75	1.7	0.8	100	75	0.8	B4	P
C144	245 134 200	A1A2	6.3	15	300	200	40	9	No Data Available			B7A	FP
C180	245 134 200	A1A2	6.3	20	300	250	55	3.5	No Data Available			B7A	FP
C243	642 350 000		2	15	150	150	17	1.5	100	100	1.5	B5	P
C243N	642 350 000		2	4.5	150	125	6	3.2	150	100	2.2	B5	P
C243N	264 530 000		2	4.5	150	125	6	2.2	150	100	2.2	UX5	P
C405	642 300 000		4	32	250		20	1.9	100		1.9	B4	T
C405	264 300 000		4	32	250		20	1.9	100		1.9	UX4	T
C408	642 300 000		4	7	150		14	2.9	100		2.9	B4	T
C443	642 350 000		4	25	300	200	20	1.7	100	150	1.7	B5	P
C443N	642 350 000		4	42	300	200	20	1.5	100	150	1.5	B5	P
C443N/S	642 350 000		4	20	300	150	20	1.5	100	100	1.5	B5	P
C453	642 350 000		4	25	300	200	20	1.7	100	150	1.7	B5	P
C508	264 300 000		5	9	150		6.2	1.7	100		1.7	UX4	T
C509A	642 300 000		5	10	150		10	1	100		1	B4	T
C543	642 350 000		4	1	100	150		2	100	150	2	B5	P
C603	642 300 000		6	40	200		20	1.7	100		1.7	B4	T
C606	642 300 000		6	27	250		20	3.3	100		3.5	B4	T
C643	642 350 000		6	21	300	200	20	1.5	100	150	1.5	B5	P
CB215	446 230 700		2	1	150		15	1.7	100		1.7	B7	TT
CB215S	023 064 470		2	1	150		12	1.7	100		1.7	8SC	TT
CB220	446 230 700		2	3	150		15		100			B7	TT
CBC1	023 198 060	G1	13	7	250		4	2	100		2	8SC	DDT
CBL1	023 189 560	G1	44	8.5	200	200	45	8	100	150	7	8SC	DDP
CBL6	023 198 560	G1	44	8	100	100	45	6	100	75	6	8SC	DDP
CBL31	026 985 310	G1	44	8.5	200	200	45	8	100	150	7	A08	DDP
CC1	023 100 060	G1	13	3.7	200		2.6	2	150		2	8SC	T
CC2	023 100 060	G1	13	5.5	250		6	2.5	200		2.5	8SC	T
CC81E	641 227 413		6.3	0.6	250		10	5.5	100		5.5	B9A	TT
CC82E	641 227 413		6.3	8.5	250		10.5	2.2	100		2.5	B9A	TT
CC86E	641 227 413		6.3	9.3	250		14.5	5.2	100		6	B9A	TT
CCH1	023 156 470	G1	20	{ 10	200		2.5	2.3	100	60	2.3	8SC	TH
				2	200	50	2		100	60			
CCH2	023 164 570	G1	29	{ 10	200		2.5	2.3	100	60	2.3	8SC	TH
				2	200	75	2		100	75			
CCH35	027 546 310	G1	7.5	{ 2	100		5.4	2.2	100	60	2.8	A08	TH
				2	250	100	5	2.4	200	100	4		
CE230	320 200 000	D1	2.5				30		REC		15mA	UX4	R
CF1	023 110 560	G1	13	2	200	100	3	2.3	100	100	2.3	8SC	P
CF2	023 110 560	G1	13	2	200	100	4.5	2.2	100	100	2.2	8SC	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
CF3	023 110 560	G1	13	2	100	75	7.5	2.1	100	75	2.1	8SC	P
CF7	023 110 560	G1	13	2	100	100	3	2.1	100	100	2.1	8SC	P
CF50	123 100 560	G1	30	2	200	100	1.5	3.3	100	100	3.3	8SC	P
CF51	123 100 560	G1	30	2	250	100	1.7	3.3	100	100		8SC	P
CF61	276 454 130		6	2	100		5	2.2	100	60	2.8	B8A	TH
				2	250	100	3	2	100	100	2.4		
CF141	276 454 130		14	2	100		6.4	2.2	100	60	2.8	B8A	TH
CH1	023 145 560	G1	13	2	200	90	2.7	1.5	100	75	1.5		
CK1	023 154 560	G1	13	1.5	200	90	8	3	200	75	1.6	8SC	P
CK3	023 154 560	G1	19	15	200	100	2.5		No Data Available			8SC	O
CK108	265 113 000	G1	6.3	3	250	100	2.3	1.2	100	100		UX6	P
CK507AX	653 420 000		1.2	2	40	40	0.9	0.6	No Data Available			B5A	P
CK509AX	634 200 000		0.62		40		0.1	0.1	No Data Available			B5A	T
CK515BX	634 200 000		0.62		40		0.1	0.1	No Data Available			B5A	T
CK518AX	653 420 000		1.2	2	40		0.8	0.5	No Data Available			B5A	T
CK520AX	653 420 000		0.62	2.5	40	40	0.2	0.1	No Data Available			B5A	P
CK521AX	653 420 000		1.2	3	20	20	0.6	0.4	No Data Available			B5A	P
CK523AX	653 420 000		1.2	1.2	20	20	0.3	0.3	No Data Available			B5A	P
CK524AX	653 420 000		1.2	1.7	20	20	0.4	0.3	No Data Available			B5A	P
CK525AX	653 420 000		1.2	1.2	20	20	0.2	0.3	No Data Available			B5A	P
CK526	653 420 000		1.2	1.5	20	20	0.5	0.4	No Data Available			B5A	P
CK527AX	653 420 000		1.2		20	20	0.1	0.2	No Data Available			B5A	P
CK528AX	653 420 000		1.2	1.2	40	40	0.7	0.6	No Data Available			B5A	P
CK529AX	653 420 000		1.2	1.2	20	20	0.3	0.3	No Data Available			B5A	P
CK531DX	653 420 000		1.2	1.5	20	20	0.3	0.2	No Data Available			B5A	P
CK532DX	653 420 000		1.2		20	20	0.4	0.4	No Data Available			B5A	P
CK533AX	653 420 000		1.2		20	20	0.4	0.4	No Data Available			B5A	P
CK544DX	653 420 000		1.2		30	30	0.1	0.3	No Data Available			B5A	P
CK545DX	653 420 000		0.6	0.6	20	20			No Data Available			B5A	P
CK546	653 420 000		1.2		20	20	0.4	0.4	No Data Available			B5A	P
CK547DX	653 420 000		1.2		30	30	0.2	0.4	No Data Available			B5A	P
CK1002	008 090 010		6				30	3kΩ	No Data Available			A08	CCR
CK1005	008 092 030		6.3				30		REC	15mA		A08	RR
CK1006	289 300 000		2				60		REC	20mA		UX4	RR
CK1007	008 092 030		1				60		REC	20mA		A08	RR
CK1012	289 300 000		2				120		REC	30mA		UX4	RR
CK1024	008 090 010		6				60	3kΩ	No Data Available			A08	CCR
CK1028	202 322 300	D1	6				60		REC	20mA		B7G	R
CK1091	200 800 300		1.4						D			B7G	D
CK1216	672 344 100		6.3		100		5	3.4	100		3.4	B7G	TT
CK5608	264 147 300		2.5	6	200		6	2.4	100		2.4	UX7	TT
CK5608A	264 147 300		2.5	6	300		6	2.4	100		2.4	UX7	TT
CK5639	412 163 510		6.3		150	100	21	9	150	100		B8D	P
CK5639A	412 163 510		6.3		150	100	21	9	150	100		B8D	P
CK5654	412 365 100		6.3	2	150	125	7.5	5	100	100		B7G	P
CK5656	544 231 671		6.3	2	150	125	15	5.8	100	100		B9A	PP
CK5670	214 607 413		6.3		150		8.5	5.5	100			B9A	TT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE I60					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
CK5672	653 420 000		1.2	6.5	60	60	3.2	0.6	No Data Available			B5A	P
CK5676	624 300 000		1.2	5	150		4	1.6	100 1.6			B5A	T
CK5677	624 300 000		1.2	5.5	150		1.9	0.8	100 1.9			B5A	T
CK5678	652 430 000		1.2		60	60	1.8	1.1	No Data Available			B5A	P
CK5687	641 221 437		6.3	2	150		36	11	No Data Available			B9A	TT
CK5692	461 471 230		6.3	9	250		6.5	2.2	100			A08	TT
CK5693	126 447 310		6.3	6	200		7	3.2	100			B8B	TT
CK5694	126 447 310		6.3	6	300		7	3.2	100			A08	TT
CK5697	632 400 000		0.6	3	12		0.2	0.1	No Data Available			B5A	T
CK5702	653 420 000		6.3		150	125	7.5	5	100	100		B7G	P
CK5702WA	653 420 000		6.3		150	125	7.5	5	100	100		B7G	P
CK5702WB	653 420 000		6.3		150	125	7.5	5	100	100		B7G	P
CK5703	623 410 000		6.3		150		9	5	100		5	B5A	T
CK5703WA	623 410 000		6.3		150		9	5	100		5	B5A	T
CK5703WB	623 410 000		6.3		150		9	5	100		5	B5A	T
CK5725	412 365 100		6.3	2	150	125	5.2	3.2	100	100		B7G	P
CK5074WA	823 100 000		6.3		150		5		D			B5A	DD
CK5704	823 100 000		6.3				5		D			B5A	DD
CK5726	182 310 900		6.3				5		D			B7G	DD
CK5744	623 410 000		6.3		250		4	4	100			B5A	T
CK5744WA	623 410 000		6.3		250		4	4	100			B5A	T
CK5744WB	623 410 000		6.3		250		4	4	100			B5A	T
CK5749	412 365 100		6.3		250	100	11	4.4	100	100	4.4	B7G	P
CK5751	641 227 413		6.3	3	250		1.0	1.2	100		1.2	B9A	TT
CK5755	614 224 173		6.3	0.9	100		0.1	0.5	100		0.5	B9A	TT
CK5784	652 311 400		6.3	2	150	125	5.2	3.2	100	100		B7F	P
CK5784WA	652 311 400		6.3	2	150	125	5.2	3.2	100	100		B7F	P
CK5784WB	652 311 400		6.3	2	150	125	5.2	3.2	100	100		B7F	P
CK5785	823 000 000		1.2						D			D	
CK5814	741 226 413		6	8.5	250		10.5	2.2	100		2.2	B9A	TT
CK5829	812 139 100		6.3				5		D			B7F	DD
CK5829WA	812 139 100		6.3				5		D			B7F	DD
CK5851	206 035 240		1.2	7.5	150	125	5.5	1.6	100	100		B8D	P
CK5854	652 430 000		1.2	2	40	40	0.8	0.5	No Data Available			B5A	P
CK5873	264 114 730		6.3	3	150		9	2.9	100			B8D	TT
CK5875	652 430 000		1.2		90	90	3.5	2.5	80	75		B5A	P
CK5879	401 230 571		6.3	3	250	100	1.8	1	100	100		B9A	TT
CK5881	026 540 310		6.3	14	150	250	75	6.1	100	100		A08	P
CK5910	265 024 300		1.4		90	90	1.6	0.9	100		0.9	B7G	P
CK5965	641 227 413		6.3		150		8.2	6.5	100			B9A	TT
CK5967	624 334 270		1.2		40		3	0.1	No Data Available			B8D	TT
CK5968	624 334 270		1.2		40		0.7	1.3	No Data Available			B8D	TT
CK5969	245 675 430		1.2	3	150	40	6	1.7	No Data Available			B8D	FP
CK5970	245 675 430		1.2		40	40	3	1.8	No Data Available			B8D	FP
CK5971	642 430 000		1.2		60		3.5	2.1	No Data Available			B5A	T
CK5972	652 430 000		1.2		60	60	2.5	1.3	No Data Available			B5A	P
CK5975	614 230 000		6.3		100		10	5.1	100		5	B5A	T
CK5995	8*2 310 000		6.3				30		REC		15mA	B5A	R

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
CK6005	412 365 400		6.3	12.5	250	250	45	4.1	100	150	4	B7G	P
CK6021	642 113 470		6.3		100		6.5	5.4	100		5.4	B8D	TT
CK6029	624 300 000		1.2	4	90		11	2	80		3	B5A	T
CK6050	624 300 000		1.2	5	150		4	1.6	100		2	B5A	T
CK6051	652 430 000		1.2	4	40	40	3	1.2	No Data Available			B5A	P
CK6088	653 420 000		1.2	1.2	40	40	0.7	0.6	No Data Available			B5A	P
CK6092	653 420 000		1.2	4.5	40	40	1.4	0.6	No Data Available			B5A	P
CK6100	602 364 100		6.3	8.5	250		10.5	2.2	100			B7G	T
CK6101	672 344 100		6.3		100		9	6	100		6	B7G	TT
CK6110	812 093 100		6.3						D			B8D	DD
CK6111	642 113 470		6.3		100		8.5	5	100		5	B8D	TT
CK6112	642 113 470		6.3		100		0.8	1.8	100		2	B8D	TT
CK6135	602 364 100		6.3	8.5	250		10.5	2.2	100		2.2	B7G	T
CK6147	206 035 240		1.2	7.5	150	125	5.5	1.6	100	100		B8D	P
CK6152	614 230 000		6.3		100		10	5.1	100		5	B5A	T
CK6186	412 365 100		6.3		250	150	7	5	100	100		B7G	P
CK6201	641 227 413		6.3		250		10	5.5	100			B9A	TT
CK6245	652 311 400		6.3		20	30	2.5	3.3	No Data Available			B7G	P
CK6247	442 613 060		6.3		250			2.6	100			B8D	T
CK6247WA	442 613 060		6.3		250			2.6	100			B8D	T
CK6286	624 300 000		1.2	2	60		6	2.1	No Data Available			B5A	T
CK6397	206 035 240		1.2	7.5	150	125	7.2	2	100	100		B8D	P
CK6418	652 430 000		1.2	1.2	20	20	0.2	0.3	No Data Available			B5A	P
CK6419	652 430 000		0.6	0.6	12	12			No Data Available			B5A	P
CK6485	412 365 100		6.3		300	150	10	9	100	100		B7G	P
CK6519	653 420 000		1.2		20	20	0.4	0.4	No Data Available			B5A	P
CK6526	652 430 000		1.2	6	100	100	6.5	1.9	100	100	2	B5A	P
CK6533	644 612 360		6.3		150		0.9	1.7	100			B8D	T
CK6533WA	644 612 360		6.3		150		0.9	1.7	100			B8D	T
CK6611	642 113 470		6.3		100		8.5	5	100		5	B8D	TT
CK6540	652 311 400		6.3		150		7.5	5	100			B7G	P
CK6612	642 113 470		6.3		100		0.8	1.8	100		0.8	B8D	TT
CK6872	652 311 400		6.3		150	125	7.7	4.1	100	100		B7G	P
CL1	023 100 560	G1	13	14	200	200	25	2.5	100	150	2.5	8SC	P
CL2	023 100 560	G1	24	15	100	100	50	3.8	200	75	3.8	8SC	P
CL3	160 452 300		35	9.5	200	200	40	5.5	150	100	5	C7	P
CL4	023 100 560	G1	33	8.5	200	200	45	8	100	150	7	8SC	P
CL6	023 100 560	G1	35	9.5	200	100	45	8	100	90	7	8SC	P
CL33	026 540 310		33	8.5	200	200	45	8	100	100	7	A08	P
C0241	026 500 300	G1	2	1	150	75	3.5	1.4	125	80	1.4	A08	P
C0243	026 447 300		2		150		4	1.8	100		1.8	A08	TT
C0244	026 540 300		2	2.5	150	125	4.1	1.8	125	125	1.8	A08	P
C0257	021 450 300		2	3	100	100	6	2.5	100	100	3	A08	P
C0258	026 540 300		1.8	6	150	125	10	2	100	100		A08	P
CY1	023 100 080		20				60		REC		60mA	8SC	R
CY1C	803 210 000		20				60		REC		20mA	B5	RR
CY2	123 190 080		30				60		REC		20mA	8SC	RR
CY21	208 001 003		25				120		REC		23mA	B9A	R

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
CY31	020 080 310		20				120		REC		60mA	A08	R
CY32	029 180 310		30				60		REC		23mA	A08	RR
CZ30	028 193 210		80				60		REC		20mA	A08	RR
CZ501D	265 113 000	G1	3.5	2.5	150	125	6.5	3.5	100	100	3	UX6	P
CZ504D	265 413 000		5.5	13.5	250	200	40	3.5	100	100		UX6	P
D1	123 000 000	D1	4				5		D			B3G	R
D1	289 300 000		5				60		REC		20mA	UX4	RR
D1	642 300 000		4	1	40		1	0.8	No Data Available			B4	T
D2	642 300 000		4	6	100		2.2	0.2	100		0.2	B4	T
D2M9	182 310 900		6.3				5		D			B7G	DD
D3A	141 230 615		6.3	11.2	200	150	22	36	No Data Available			B9A	P
D3F	141 23* 615		1.2	3	150	60	1.7	0.6	100	60		B9A	P
D4	642 310 000		4	3	200		4	3.3	100		3	B5	T
D13U	023 100 060	G1	13	5	250		6	2.5	100			8SC	T
D41	892 310 000		4						D			B5	DD
D42	812 300 000		4				15		D			B4	D
D43	012 300 000	D1	4				15		D			B5	D
D61	268 154 130		6.3	2	250	125	5	1.8	100	100		B8A	DP
D63	028 190 310		6						D			A08	DD
D77	192 310 800		6						D			B7G	DD
D105	264 300 000		1	18	150		8	2	150		2	UX4	T
D105	642 300 000		1	18	150		8	2	150		2	B4	T
D110	264 300 000		4	40	250		40	2.7	100		2.7	UX4	T
D110	642 300 000		4	40	250		40	2.7	100		2.7	B4	T
D121	268 154 130		12.5	2	200	90	5	2	100	100	2	B8A	DP
D143	652 350 000		1	1	100	150		1.2	100		1.2	B5	P
D152	192 310 800		6						D			B7G	RR
D210	642 300 000		2	3	150		3.5	1.2	100		1.2	B4	T
D210DW	603 200 000	G1	2	4.5	150		2.4	1.3	100		1.3	B4	T
D243	642 350 000		2.5	27	300	200	20	2	100	100		B5	P
D400	892 310 000		4						D			B5	DD
D401	902 310 000	D1	4						D			B4	DD
D404	364 200 000		4	40	250		40	2.7	100			UX4	T
D404	642 300 000		4	40	250		40	2.7	100			B4	T
D410	642 300 000		4	3	150		3.5	0.5	150		0.5	B4	T
D804	023 181 910		6						D			8SC	DD
DA	000 231 600	G1	13	2.6	200		3.7	2.2	150		2.2	B7	T
DA1	642 300 000		2	1	40		0.3	0.4	No Data Available			SM4	T
DA2	642 300 000		2	2.1	40		1.2	0.5	No Data Available			SM4	T
DA3	642 300 000		2	2.8	40		1.8	0.6	No Data Available			SM4	T
DA30	642 300 000		4(5)	70	300		60	3.5	100		6	B5	T
DA42	214 300 000	A1	7.5		400			3	100			B4	T
DA90	281 0*8 300		1.4				5		D			B7G	R
DA101	200 800 300		1.2						D			B7G	D
DA406	542 300 000	A	4	2.5	150	75	3	0.8	100	75	0.8	B4	P
DAC1	023 008 060	G1	1.4		90		0.1	0.3	80		0.3	8SC	DT
DAC21	206 008 030	G1	1.4		100		0.7	0.4	80		0.3	A08	DT
DAC22	264 008 030		1.2		90		0.3	0.3	90		0.3	B8G	DT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE	
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V			
DAC25	264 228 230	G1	1.2		150		0.6	0.3	125		0.3	A08	DT	
DAC31	036 080 200		1.4		90		0.4	0.3	80		0.3	A08	DT	
DAC32	036 080 200		1.4		90		0.1	0.3	90		0.3	A08	DT	
DAF1	802 362 450		1.2		150	60	1.4		125	60		F8	DP	
DAF11	802 362 450		1.2		90	50	0.8	0.5	80	60	0.5	F8	DP	
DAF40	268 354 230	A	1.4		75	75	0.8	0.7	80	75	0.8	B8A	DP	
DAF41	268 354 230		1.4	1	75	75	0.8	0.7	80	75	0.8	B8A	DP	
DAF70	604 238 050		1.2		60	60	0.8	0.4	80	75		B8D	DP	
DAF91	208 564 300		1.4	1	90	90	2	0.7	80	90	0.7	B7G	DP	
DAF92	265 804 300		1.4	1	90	90	2	0.7	90	90	0.7	B7G	DP	
DAF96	208 564 300		1.4	1.5	60	60	0.2	0.2	80	75	0.2	B7G	DP	
DAF191	2*8 564 300		1.4		60	60	2.2	0.7	80	75		B7G	DP	
DAF961	208 564 300	A	1.2		60	60	2.2	0.7	No Data Available			B7G	DP	
DAS1	542 300 000		2	2.7	150	125	1.5	0.6	100	100	0.6	SM4	P	
DB	446 230 700		25		250		40		100			B7	TT	
DBC21	206 098 030	G1	1.4	1.5	150		1.6	0.9	100		0.9	A08	DDT	
DBC25	208 904 630	G1	1.2	1.5	150		1.6	0.9	125		0.9	B8B	DDT	
DBC31	026 980 300		1.4	1.5	150		1.6	0.9	100		0.9	A08	DDT	
DC2/HLDD	809 231 600		25	1	200			2	100		2	B7	DDT	
DC2P	642 310 000		35	13.5	200		17	3.7	100		3.7	B5	T	
DC2/Pen	045 231 600	G2	35	10	250	200	30	2.5	100	100	2.5	B7	P	
DC2/Pen	642 310 000		35	10	250	200	30	2.5	100	100	2.5	B5	P	
DC25G	542 310 000		A	20	1	200	75	5.5	1.8	200	75	1.8	B5	P
DC2SGVM	542 310 000		A1	20	2	200	60	5.8	1.5	200	60	1.5	B5	P
DC3HL	642 310 000		25	1	90		0.3	0.4	100		0.4	B5	T	
DC11	602 302 400		1.2	2.5	90		2	1	80		1	F8	T	
DC25	260 024 030		1.2	3.5	100		1.8	0.8	100		0.8	B8B	T	
DC70	400 230 060		1.2	4.5	150		14.5	3.7	100		3.4	B8D	T	
DC80	402 230 060		1.2	3.5	150		20	3.5	100		3.5	B9A	T	
DC90	266 044 300		1.4	3	90		3	1.1	90		1.1	B7G	T	
DC93	204 036 200		1.4	5	100		10	2.4	100		2.3	B7G	T	
DC96	266 044 300		1.4	2.5	90		2.1	1	90		1	B7G	T	
DC193	2*4 *36 200		1.4	5	100		10	2.4	100		2.4	B7G	T	
DCC90	274 346 200		1.4	2.5	90		3.7	1.8	80		1.8	B7G	TT	
DCH1	207 540 630		G1	1.4	{	60		2.1	1.4	60	60	1.4	} A08	TH
				150		125	1	1	100	100				
DCH11	642 273 450	G1	1.2	{	4	90	0.8		100	60	} F8	TH		
						150	60	1		100			60	
DCH21	207 540 630		1.4		{	60		2.1	1.4	80			60	} A08
						90	60	1		80			60	
DCH22	276 454 030		1.2			{	60		1.4				80	
			90	50	0.7			80	60					
DCH25	276 454 030	1.4	{	60			2	1.3	80	60	} A08			
				90	60	1		80	60					
DCH31	027 546 300	G1		1.4	{	60		2.1	1.4	80		60	} A08	
				90		60	1	1.4	80	60				
DC/HL	642 310 000	A1	6	1	100			3	100		3	B5	T	
DC/P	642 310 000		8	1	200			4.5	200		4.5	B5	T	
DC/SG	542 310 000		6		150	75		2.7	200	75	2.7	B5	P	

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
DD4	892 310 000		4						D			B5	DD
DD4D	091 231 800		4						D			B7	DD
DD6	892 310 000		6						D			B5	DD
DD6	192 310 800		6						D			B7G	DD
DD6DS	023 180 910		6						D			8SC	DD
DD6G	192 310 800		6						D			B7G	DD
DD13	892 310 000		13				5		D			B5	DD
DD41	219 080 130		4						D			M08	RR
DD101	219 080 130		10						D			M08	DD
DD207	892 300 000		2						D			B4	DD
DD465	902 310 000	D1	4						D			B5	DD
DD620	892 310 000		6						D			B5	DD
DD818	892 310 000		8						D			B5	DD
DD960	204 036 200		1.4	3	60		9	2.4	No Data Available			B7G	T
DDA1	892 310 000		4						D			B5	DD
DDD11	742 302 460		1.2	4.5	150		1.5	1.0	125		1.5	F8	TT
DDD25	206 447 030		1.4	1.5	100		3.5	1.2	100		1.2	A08	TT
DDL4	892 310 000		4				5		D			B5	RR
DDP4B	968 231 500	G1	4	5	250	250	36	8	100	150	7	B7	DDP
DDP4M	918 236 500	G1	4	5	250	250	36	8	100	150	7	B7	DDP
DD/Pen	849 231 500	A	4	2.5	200	100	5	2.7	100	100	2.7	B7	DDP
DDPP4B	869 231 500	G1	4	5	250	250	36	10	100	150	9	B7	DDP
DDPP4BS	023 189 560	G1	4	5	250	250	36	10	100	150	9	8SC	DDP
DDPP4M	869 231 500	G1	4(5)	5	250	250	36	10	100	150	9	B7	DDP
DDPP6B	968 231 500	G1	6	6	250	250	36	9.5	100	150	9	B7	DDP
DDPP6BS	023 189 560	G1	6	5	250	250	36	10	100	150	9	8SC	DDP
DDPP39	968 231 500	G1	39	8	200	200	45	8.5	100	150	8	B7	DDP
DDPP39M	918 236 500	G1	39	8	200	200	45	8.5	100	150	8	B7	DDP
DDPP39S	023 198 560	G1	44	8	200	200	45	8.5	100	150	8	8SC	DDP
DDR2	256 101 403		6	5	250	250	40	12	No Data Available			B9G	P
DDR3	812 380 000		6				60		REC		20mA	B7G	R
DDR7	412 360 500		6	12.5	250	250	16	2.6	100	150	2.6	B7G	P
DDT	908 231 600	G1	4	3	200		3.4	2.4	100		2.4	B7	DDT
DDT2	682 390 000	G1	2	3	150		1	1.4	100		1.4	B5	DDT
DDT2B	682 390 000	G1	2	4.5	150		2.5	1	100		1	B5	DDT
DDT2BS	023 089 060	G1	2	4.5	150		2.5	1	100		1	8SC	DDT
DDT4	809 231 600	G1	4	3	150			2.5	150		2.5	B7	DDT
DDT4(S)	908 231 600	G1	4	5	200		3	3.6	150		3.6	B7	DDT
DDT4(S)	023 198 060	G1	4	5	250		4	3.6	150		3.6	8SC	DDT
DDT6	809 231 600	G1	6	5.5	250		4	2	150		2	B7	DDT
DDT6S	023 189 060	G1	6	5.5	250		5	2	150		2	8SC	DDT
DDT13	908 321 600	G1	13	4	200		5	2	150		2	B7	DDT
DDT13S	023 189 060	G1	13	5	200		4	3.6	100		3.6	8SC	DDT
DDT16	809 231 600	G1	16	3	200		5	2.5	100		2.5	B7	DDT
DDT213	809 231 600	G1	13	4	200		5	2.2	150		2.2	B7	DDT
DDT215	682 390 000	G1	2	3	150		3	1.6	100		1.6	B5	DDT
DDT220	682 390 000	G1	2.5	4.5	150		2.5	1	100		1	B5	DDT
DE1	264 130 000		2.5	21	250		5.2	1	100		1	UX5	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
DE5	280 300 000		2.5				120		REC		30mA	UX4	R
DET19	204 140 300	A1A2	6		300		25	2.1	100			UX7	TT
DET20	020 000 310	A1G1	6	5.5	250		12	3	100		3	A08	T
DF1	032 000 560	G1	1.4		90	90	1.2	0.7	80	90	0.7	8SC	P
DF11	602 302 450		1.2		90	50	0.9	0.6	80	60	0.6	F8	P
DF16	654 230 000		0.6		20	20	0.3	0.3	No Data	Available		B5A	P
DF21	206 501 030	G1	1.4		90	90	1.2	0.7	80	90	0.7	A08	P
DF22	206 501 030	G1	1.4	1.5	90	90	1.4	1.1	80	90	1.1	A08	P
DF23	265 114 130		1.2	1.5	90	60	0.6	0.6	80	60	0.6	A08	P
DF25	265 114 130		1.2	0.5	150	60	1	0.6	125	60	0.6	A08	P
DF26	265 114 130		1.2	1.1	150	90	1.2	0.3	125	90	0.3	A08	P
DF31	026 510 300	G1	1.4		90	90	1.2	0.6	80	90	0.6	A08	P
DF32	026 510 300	G1	1.4	1.5	90	90	1.4	1.1	80	90	1.2	A08	P
DF33	036 500 200	G1	1.4	0.5	90	90	0.8	0.7	80	90		A08	P
DF51	542 300 000	A1	1.5		40	12	1.1	0.1	No Data	Available		SM4	P
DF60	652 430 000		1.2	2	60	60	0.5	0.8	No Data	Available		B5A	P
DF61	652 430 000		1.2	1	60	60	0.9	0.8	No Data	Available		B5A	P
DF62	652 430 000		1.2	1	90	90	7.4	2	80	75		B5A	P
DF63	652 430 000		1.2	2.5	90	90	1.2	0.4	80	80	0.6	B5A	P
DF64	652 430 000		0.6	0.6	20	20	0.6	0.1	No Data	Available		B5A	P
DF65	265 430 000		0.6	1.1	20	20	0.5	0.1	No Data	Available		B5A	P
DF70	*4* 23* 650		0.6		40	40	0.4	0.2	No Data	Available		B8D	P
DF72	*40 230 650		1.2		60	60	1.7	1	No Data	Available		B8D	P
DF73	*40 230 650		1.2		90	75	1.7	0.8	80	75	0.8	B8D	P
DF91	265 024 300		1.4		90	75	3.5	0.9	80	60	0.9	B7G	P
DF92	265 024 300		1.4	2	90	60	1.9	0.7	80	60	0.7	B7G	P
DF95	265 024 300		1.4	1	90	75	3.7	1	80	60	1	B7G	P
DF96	265 *24 300		1.4	0.8	75	75	1.4	0.6	80	75	0.7	B7G	P
DF97	265 224 300		1.4		60	60	1.7	0.8	80	75	0.8	B7G	P
DF161	026 510 300	G1	0.7		20	20	0.3	0.8	No Data	Available		A08	P
DF167	653 420 000		0.6		20	20	0.1		No Data	Available		B5A	P
DF191	265 *24 300		1.4		60	60	4.2	1	No Data	Available		B7G	P
DF668	652 430 000		1.2	1.6	90	90	5.7	2.3	80	90		B5A	P
DF669	652 430 000		1.2		60	60	1.8	1.1	No Data	Available		B5A	P
DF904	265 *24 300		1.4		90	90	1.6	0.9	90	90	0.9	B7G	P
DF906	265 3*4 300		1.4		40	40	3	1.7	No Data	Available		B7G	P
DF961	265 024 300		1.2		60	60	3.4	0.8	No Data	Available		B7G	P
DFP50	246 557 430		1.4	1.1	20	20	2.2	1.2	No Data	Available		A08	FP
DFP51	246 557 430		1.4		20	20	2.1	0.7	No Data	Available		A08	FP
DFP101	634 572 400		1.4		40	40	1	0.2	No Data	Available		B7G	FP
DG210	642 350 000		2	1.5	100	20	1	1	No Data	Available		B5	P
DH	642 310 000		16	3	200		6	3.7	100		3.7	B5	T
DH30	908 231 600	G1	13	2	200		2.8	4.5	150		4.5	B7	DDT
DH42	908 231 600	G1	4	3	250		1.1	1.2	150		1.2	B7	DDT
DH63	026 890 310	G1	6	3	250		1.1	1.2	150		1.2	A08	DDT
DH73	026 890 310	G1	6	3	250		4.5	2	250		2	A08	DDT
DH74	026 890 310	G1	13	3	250		1.1	1.2	100		1.2	A08	DDT
DH76	026 890 310	G1	13	3	250		1.1	1.2	150		1.2	A08	DDT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
DH77	412 389 600		6	3	250		1	1.2	150		1.2	B7G	DDT
DH81	264 *98 130		6	3	250		1	1.2	150		1.2	B8B	DDT
DH101	264 *98 130		19	3	250		1	1.2	150		1.2	B8B	DDT
DH107	412 389 600		19	3	250		1	1.2	150		1.2	B7G	DDT
DH109	†91 238 146		28	2.3	200		1	1.4	100		1.4	B9A	DDDT
DH118	264 089 130		13	1	100		0.8	1.4	100		1.4	B8A	DDT
DH119	641 238 09*		13	0.7	100		0.8	1.4	100		1.4	B9A	DDT
DH142	264 098 130		14	1.6	200		1.5	1.6	100		1.4	B8A	DDT
DH147	026 890 310	G1	6	5.5	250		5	2	100		2	A08	DDT
DH149	264 198 130		6	1	250		1.3	1	250		1	B8A	DDT
DH150	264 098 130		6	3	250		10	1.3	150		1.3	B8A	DDT
DH718	264 089 130		6.3	3	250		1	1.3	100		1.4	B8A	DDT
DH719	981 23† 146		6	3	250		1	1.3	100		1.3	B9A	DDDT
DHD	908 231 600	G1	16	3.2	200		3.2	2.2	200		2.2	B7	DDT
DHL	642 310 000		16	1.5	150		3.8	4.5	100		4.5	B5	T
DK1	023 064 560	G1	1.4		90	50	1.8	0.5	80	60	0.5	8SC	H
DK21	206 540 630	G1	1.4		60	60	4.5	1.4	80	60	1.4	A08	H
DK31	027 546 300	G1	1.4	{ 1	75	60			80	60		A08	TH
				{ 1	150	90			125	90			
DK32	036 546 200	G1	1.4		90	50	1.8	0.5	80	60	0.5	A08	H
DK40	265 454 030		1.4	2	75	75	0.9	0.7	80	75		B8A	O
DK91	266 424 300		1.4	4	75		4.5	1.2	80		1.4	B7G	H
DK92	266 464 300		1.4	4	60		4	1.2	80		1.2	B7G	H
DK96	265 461 300		1.4	1.5	75	50	1	0.4	80	60	0.4	B7G	H
DK192	265 454 300		1.4		60	60			No Data Available			B7G	H
DL	642 310 000		16	8	200		25	4.5	100		4.5	B5	T
DL1	023 004 560		1.4	3	90	90	4	1.2	80	75	1.2	8SC	P
DL2	032 004 560		1.4	7.5	90	90	7.5	1.5	80	75	1.5	8SC	P
DL11	602 302 450		1.2	4.4	90	90	3.7	1	80	90	1	F8	P
DL21	206 540 030		1.4	3	90	90	4	1.3	80	90	1.3	A08	P
DL22	265 004 330		1.2	4	150	125	5	1.6	100	100	1.6	A08	P
DL25	265 204 330		1.2	4.7	150	125	4.5	2.1	100	100	2.1	A08	P
DL29	265 004 320		1.4	4.5	90	90	9.5	2.4	80	90	2.4	B8G	P
DL31	036 540 200		1.4	3	90	90	4	1.2	80	75	1.2	A08	P
DL33	036 540 320		1.4	4.5	90	90	9.5	.2.	80	75	.2.	A08	P
DL35	036 540 200		1.4	7.5	90	90	7.5	1.5	80	75	1.5	A08	P
DL36	036 540 200		1.4	4.5	90	90	9.5	2.2	90	90	2.2	A08	P
DL41	362 054 220		1.4	5.8	150	125	5	1.3	80	90	1.3	B8A	P
DL63	026 890 310	G1	6	3	250		4.2	1.6	100		1.6	A08	DDT
DL64	652 430 000		1.2	1.5	20	20	0.2	0.2	No Data Available			B5A	P
DL65	365 420 000		1.2	0.2	20	20	0.5	0.4	No Data Available			B5A	P
DL66	653 420 000		1.2	1.4	20	20	0.3	0.3	No Data Available			B5A	P
DL67	653 420 000		1.2	0.2	20	20	0.5	0.4	No Data Available			B5A	P
DL68	653 420 000		1.2	2.2	20	20	0.6	0.4	No Data Available			B5A	P
DL69	652 430 000		1.2	2.5	90	90	1.7	0.8	80	75	0.8	B5A	P
DL70	*4* 23* 650		1.2	7.5	150	90	7.5	1.9	150	90	1	B8D	P
DL71	*4* 23* 650		1.2	1.2	40	40	0.6	0.5	No Data Available			B8D	P
DL72	*4* 23* 650		1.2	4.5	40	40	1.2	0.5	No Data Available			B8D	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
DL73	*40 230 650	G1	1.2	9	100	100	15	2.5	100	100	3.8	B8D	P
DL74	026 890 310		13	3	250		5.1	1.6	100		1.6	A08	DDT
DL75	*40 230 650		1.2	2.5	90	90	1.7	0.8	90	90	0.9	B8D	P
DL82	264 *98 130		6.	3	250		5	1.4	150		1.4	B8B	DDT
DL91	264 526 300		1.4	7	90	75	7.4	1.6	80	60	1.5	B7G	P
DL92	264 536 200		1.4	7	90	75	7.4	1.6	80	75	1.6	B7G	P
DL93	365 426 300		1.4	8.4	150	90	13.3	1.9	100	75	1.9	B7G	P
DL74	365 024 300		1.4	4.5	90	90	9.5	2.1	80	75	2.1	B7G	P
DL95	264 536 200		1.4	4.5	90	90	9.5	2.1	80	75	2.1	B7G	P
DL96	265 034 200		1.4	5.2	90	90	5	1.4	80	60	1.4	B7G	P
DL98	524 233 600		1.2	38	150	125	25	1.7	No Data Available			B7G	P
DL145	264 098 130		15	5.9	250		5	2.3	150		2.3	B8A	DDT
DL161	654 230 000		1.4		20	20	0.5	0.5	No Data Available			B5A	P
DL167	653 420 000		1.2		20	20	0.5	1.5	No Data Available			B5A	P
DL192	264 536 200		1.4	7	60	60	7	1.5	No Data Available			B7G	P
DL193	265 436 200		1.4	7.5	100	60	9.5	2.9	150	60	2.9	B7G	P
DL620	653 420 000		1.2	6.5	60	60	3.1	0.6	80	75	0.6	B5A	P
DL650	653 420 000		1.2		20	20	0.4	0.4	No Data Available			B5A	P
DL651	653 420 000		1.2		20	20	0.4	0.4	No Data Available			B5A	P
DL907	365 004 200		1.4	5.5	150	125	15	3.1	125	125	3.1	B7G	P
DL962	264 536 200		1.4	7	60	60	7	1.5	No Data Available			B7G	P
DL963	265 436 200		1.2	7.5	150	60	10	2.2	100	60		B7G	P
DLL21	246 547 330		1.4	8.7	150	125	1		100	100		A08	PP
DLL25	046 547 230		1.4	9.4	150	125	17		125	125		B8G	PP
DLL31	326 447 250		1.4	5	90	90	3		80	75		A08	PP
DLL101	264 574 300		1.4	7	90	60	8.2	1.1	80	60	1.2	B7G	PP
DLL102	264 574 300		1.4		40	40	1.3	0.5	80	60		B7G	PP
DLP51	023 004 560		4	17	250	250	36	2.5	100	100		8SC	P
DN41	968 231 500		4	3.3	250	200	32	10	100	150	9	B7	DDP
DN143	264 598 130		6	6.2	250	275	44	9.5	100	150	9	B8B	DDP
D024	642 300 000		4	40	400		63	7.5	100		6.0	B4	T
D025	642 300 000		6	75	300		60	3.7	100		3.7	B4	T
D026	642 300 000		4	92	400		63	3.8	100		3.8	B4	T
D030	642 300 000		4	100	400		60	6.9	100		6	B4	T
D042	918 236 500		4	6	250	250	36	9.5	100	150	8	B7	DDP
DP	264 008 030		16	7.5	200		25	6	100		6	A08	DT
DP5	642 350 000		4	5	250	250	10	4	100	150	4	B5	P
DP7	023 004 560		4	20	250	250	20	2.5	100	150	2.5	8SC	P
DP61	412 365 100		6	8.5	200	125	7.7	5.1	150	150	4	B7G	P
DP495/6	869 231 500		4	6.5	250	250	35	9.5	100	150		B7	DDP
DP4480	819 236 500	G1	44	8.4	200	200	46	8	100	100	7	B7	DDP
DPT	045 213 600		16	10	200	200	40	3.1	100	150	3.1	B7	P
DPT	642 310 000		16	10	200	200	40	3	100	150	3	B5	P
DS	542 310 000	A1	16	1.5	200	75	2.8	1.1	200	75	1.1	B5	P
DS	000 231 600	G1	13	3	200		4	2.5	150		2.5	B7	T
DSB	542 310 000	A1	16	1	150	90	3.4	3.2	150	90	3.2	B5	P
DSPen	061 231 500	G1	16	1.5	200	100	4	2.3	200	100	2.3	B7	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
DT7	642 300 000		4	16	200		14	2	100		2	B4	T
DT41	809 321 600	G1	4	1	100			3	100		3	B7	DDT
DT215	023 089 060	G1	2	4.5	150		25	1	100		1	8SC	DDT
DT215	682 390 000	G1	2	4.5	150		2.5	1.5	100		1.5	B5	DDT
DT436	809 231 600	G1	4	7	250		4	3.6	100		2	B7	DDT
DT436	023 198 060	G1	4	7	250		4	2	100		2	8SC	DDT
DT1336	023 198 060	G1	13	5	200		4	2	100		2	8SC	DDT
DTV1	809 231 600	G1	13	1	100			3	100		3	B7	DDT
DU1	802 300 000		4				30		REC		15mA	B4	R
DU2	892 300 000		4				30		REC		15mA	B4	RR
DU3	892 300 000		4				15		REC		10mA	B4	RR
DU4	892 300 000		4				30		REC		15mA	B4	RR
DU5	892 300 000		4				30		REC		15mA	B4	RR
DU10	802 300 000		4				60		REC		25mA	B4	R
DVSG	542 310 000	A1	16	1	200	75	7.5	2.5	100	75	2.5	B5	P
DVS/Pen	542 310 000	A1	16	1.5	200	100	6.5	1	200	100	3	B5	P
DW1	892 300 000		4				15		REC		10mA	B4	RR
DW2	892 300 000		4				30		REC		20mA	B4	RR
DW2X	892 300 000		4				30		REC		20mA	B4	RR
DW3	892 300 000		4				60		REC		20mA	B4	RR
DW4	892 300 000		4				60		REC		20mA	B4	RR
DW4/350	892 300 000		4				60		REC		20mA	B4	RR
DW4/500	892 300 000		4				60		REC		20mA	B4	RR
DW5	802 300 000		4				120		REC		30mA	B4	R
DW7X	892 300 000		4				30		REC		15mA	B4	RR
DW8	892 300 000		5				30		REC		15mA	B4	RR
DW15	892 300 000		7.5				30		REC		15mA	B4	RR
DW30	892 300 000		7.5				60		REC		20mA	B4	RR
DW802	642 300 000		4	25	250		26	4	100		4	B5	T
DW1508	642 310 000		4	7.5	150		4	1.5	100		1.5	B5	T
DW4011	642 310 000		4	5	200		5	3.6	150		3.6	B5	T
DW4023	642 310 000		4	3	150		2.5	1.7	100		1.7	B5	T
DX2	642 300 000		2	3	150		3.5	1.4	100		1.4	B4	T
DY30	*2* 0*0 3*0	D1	1.2						D			A08	D
DY70	230 000 000	D1	1.2						D			B3G	D
DY80	23* 232 *32	D1	1.2						D			B9A	D
DY86	23* 323 *23	D1	1.4						D			B9A	D
DY87	23* 232 *32	D1	2.4						D			B9A	D
DY604	642 300 000		4	15	150		8	1.3	100		1.3	B4	T
DZ2	542 300 000	A1	4	1	200	100	4	0.7	100	100	4	B4	P
E	642 300 000		4	9	200		1.7	0.4	100		0.4	B4	T
E	264 300 000		3	22.5	125		6.5		125			UX4	T
E1C	216 489 130		6.3	5	200		4.5	2	100		2	A08	DDT
E1F	216 054 300		6.3	3	250	100	2	1.4	100	100		B7	P
E4	642 300 000		4	16	200		12	1.8	100			B4	T
E4D	892 300 000		4				30		REC		15mA	B4	RR
E4F	892 300 000		4				60		REC		20mA	B4	RR
E4H	802 300 000		4				125		REC		30mA	B4	R

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
E4K	003 200 000	D1	4				60		REC		20mA	B5	R
E4L	003 200 000	D1	4				120		REC		30mA	B5	R
E20V	023 100 080		20				60		REC		20mA	8SC	R
E80CC	641 337 412		6.3	5.5	250		6	2.8	100		2.5	B9A	TT
E80CF	645 237 114		6.3	2	100		14	5	100	60	6	B9A	TP
				2	200	175	10	6.2	100	100			
E80F	501 236 014		6.3	1.6	250	100	3	1.8	150	100	1.8	B9A	P
E80L	041 230 651		6.3	5.2	200	200	30	9	100	100		B9A	P
E81CC	641 224 173		6.3		250		10	5.5	100		5.5	B9A	TT
E81L	041 230 651		6.3	3	200	200	20	11	100	100		B9A	P
E82CC	641 227 413		6.3	8.5	250		10.5	2.2	100			B9A	TT
E83CC	641 227 413		6.3	2	250		1.2	1.6	100		1.6	B9A	TT
E83F	541 236 **1		6.3	2	200	125	10	9	100	125	12	B9A	P
E86C	641 234 146		6.3	2	200		12	14	No Data Available			B9A	T
E87L	041 230 651		6	6	250	150	36	10	100	100		B9A	P
E88C	414 234 464		6.3		150		12.5	13.5	No Data Available			B9A	T
E88CC	641 237 410		6.3	1.2	90		15	12.5	100		13	B7G	TT
E90CC	672 344 100		6.3	2.1	100		8.5	6	100		8.5	B7G	TT
E90F	412 365 100		6.3	1.2	250	150	7.4	4.6	100	100		B7G	P
E91H	412 365 100		6.3	5	150	75	0.5	0.6	125	75	0.6	B7G	H
E92CC	672 344 100		6.3	1.7	150		8.5	6	100		6	B7G	TT
E95F	412 365 100		6.3	2	150	125	7.5	5.5	100	100		B7G	P
E99F	412 365 100		6.3	20	250	100		15	No Data Available			B9A	P
E91AA	182 310 900		6.3						D			B7G	D
E130L	*2* 54* 310	A1	6.3	15.5	250	150	100	27	100	100		A08	P
E135	365 304 220		12.6	25	400		80		100			A08	P
E180CC	641 227 413		6.3	1.9	150		8.5	6.3	100		7.8	B9A	TT
E180F	141 23* 615		6	1.5	200	150	10	15	No Data Available			B9A	P
E181CC	641 227 413		6.3	3	150		8.5	4.7	100		5.6	B9A	TT
E182CC	741 221 436		6.3	2	150		36	15	No Data Available			B9A	TT
E184	141 230 651		6.3	2.5	200	200	10	15	No Data Available			B9A	P
E188CC	641 327 410		6.3	1.4	90		12	11.5	No Data Available			B9A	TT
E220B	446 230 700		2	1	150		3	2.5	100		2.5	B7	TT
E235	642 300 000		2	7.5	150		13	3	100		3	B4	T
E235L	*26 54* 310		6.3	8.2	100	100	100	14	No Data Available			A08	P
E236L	*2* 54* 310	A1	6.3	8.2	100	100	100	14	No Data Available			A08	P
E280F	141 23* 615		6.3		200	150	20	26	No Data Available			B9A	P
E283CC	146 231 074		6.3	2	250		1.2	1.6	100			B9A	TT
E438M	642 310 000		4	3	200		2.5	1.5	100			B5	T
E441	642 310 000	G2	4		100	100	1.7	1	100	100		B5	P
E445M	542 310 000	A1	4	2	200	100	6	1	100	100		B5	P
E810F	141 235 615		6.3	1.9	150	150	35	50	No Data Available			B9A	P
E1861	041 230 651		6.3		200	200	19	10	No Data Available			B9A	P
E2754	602 441 443		6.3	1.5	150		25	25	No Data Available			B9A	T
E186F	141 23* 615		6.3	1.4	200	150	11.5	16	No Data Available			B9A	P
E405	642 300 000		4	32	250		20	2	100		2	B4	T
E406	642 300 000		4	34	250		8	2.3	100		2.3	B4	T
E406N	642 300 000		4	34	250		8	2.3	100		2.3	B4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
E408	642 300 000		4	30	400		26	2	100		2	B4	T
E408N	642 300 000		4	36	400		30	2.7	100		2	B4	T
E409	642 310 000		4	16	200		12	1.3	100		1.3	B5	T
E409N	642 310 000		4	16	200		12	1.3	100		1.3	B5	T
E410	642 300 000		4	28	400		30	6	100		6	B4	T
E414	642 310 000		4	6	150		6.5	2	100		2	B5	T
E414	642 300 000		4	15	150		8	1.3	100		1.3	B4	T
E415	642 310 000		4	8	200		6	1.4	100		1.4	B5	T
E415	264 130 000		4	8	200		6	1.4	100		1.4	UX5	T
E420	642 300 000		4	18	150		11	1.6	100		1.6	B4	T
E422	642 300 000		4	16	250		12	5	100		5	B4	T
E424	642 310 000		4	2.5	200		6	2.4	100		2.4	B5	T
E424N	642 310 000		4	3.5	200		6	2.4	100		2.4	B5	T
E424R	612 300 000	G1	4	5	200		6	1.6	100		1.6	B4	T
E425	642 310 000		4	4.5	150		3	3	100		1	B5	T
E428	642 310 000		4	3	200		6	2.4	100		2.4	B5	T
E430	642 310 000		4	3	150		4	2	100		2	B5	T
E430N	642 310 000		4	15	200		15	3	100		3	B5	T
E435	642 310 000		4	1.5	200		3	1	100		3	B5	T
E438	642 310 000		4	3	200		2.5	1.5	100		1.5	B5	T
E441N	652 300 000	G1	4		100		1.7	1	100		1	B4	T
E442	542 310 000	A1	4	1.3	200	60	1.5	0.9	100	60	0.9	B5	P
E442S	542 310 000	A1	4	2	200	60	4	1	100	60	1	B5	P
E443H	642 350 000		4	40	400	200	30	1.9	100	100	1.9	B5	P
E444	258 413 000	A1	4	3	200	90	4	3	100	90	3	UX6	DP
E444N	258 413 000	A1	4	3	100	90	4	3	100	90	3	UX6	DP
E444S	642 310 000	D1	4	3.5	200		6	2	100		2	B5	DT
E445	542 310 000	A1	4	2	200	100	6	1	100	100	1	B5	P
E446	542 310 000	A1	4	2	200	100	3	2.3	100	100	2.3	B5	P
E447	542 310 000	A1	4	2	200	125	4.5	2.3	100	100	2.3	B5	P
E448	164 552 300	G1	4	1.5	200	125	3	0.6	100	100		C7	P
E449	165 452 300	G1	4	2	200	75	3	1.8	100	75	1.8	C7	P
E451	642 350 000		4		400	250	17		100	150	2.4	B4	P
E452T	542 310 000	A1	4	2	200	100	3	2	100	100	2	B5	P
E452T	254 130 000	A1	4	2	200	100	3	2	100	100	2	UX5	P
E453	045 231 600		4	15	250	250	24	2.5	100	150	2.5	B7	P
E454	216 809 300	G1	4	3.5	200		3.5	1.6	100		1.6	UX7	DDT
E455	542 310 000	A1	4	1.5	200	100	3	2	100	100	2	B5	P
E455	254 130 000	A1	4	1.5	200	100	3	2	100	100	2	UX5	P
E462	542 310 000	A1	4	2	200	100	3	2	100	100	2	B5	P
E463	045 231 600		4	22	250	250	36	2.7	100	150	2.7	B7	P
E499	642 310 000		4	1.6	200		0.2	4	150		4	D5	T
E501D	265 113 000	G1	3.5	2.5	250	125	6.5	3.5	100	100		UX6	P
E501R	265 113 000	G1	6.3	2.5	250	125	6.5	3.5	100	100		UX6	P
E504D	265 413 000		5	13.5	250	200	40	3.5	100	100		UX6	P
E504P	265 423 000		6.3	13.3	250	200	40	3.5	100	100		UX6	P
E543	045 231 600		4	15	250	250	24	2.5	100	150	2.5	B7	P
E646	020 080 310		26				120		REC		30mA	A08	R

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
E703	642 300 000		7.5	100	400		30	1	100		1	B5	T
E851	030 908 020		5				120		REC		30mA	A08	RR
E1137	366 446 622		6	2.3	250		32	16	No Data Available			B9G	T
E1148	020 000 310	A1G1	6	5.5	250		14	3	100		3	A08	T
E1192	021 450 310	A1	6	11	250	150	30	3.5	100	100	3.5	A08	P
E1242	265 511 403		6	30	300	250	25	1.9	100	150		B9G	P
E1323	020 000 310	A1G1	6	3	100		25	6.7	100		6	A08	T
E1413	265 024 300		1.4	1	90	75	3.5	0.9	80	75	0.9	B7G	P
E1478	642 300 000		4	1	100			6.9	100		6	B5	T
E1484	208 564 300		1.4	1	90	90	2.7	0.6	80	90	0.6	B7G	DP
E1489	241 657 143		6		350	250	21	3.9	100	100	3.9	B9G	PP
E1517	412 361 500		6	2.5	200	200	8	2.5	100	100	2.5	B7G	P
E1518	412 361 500		6	2	250	250	10	7.5	100	150	5	B7G	P
E1606	461 471 230		6	8	250		9	2.6	100		2.6	A08	TT
E1624	6*2 364 100		6	8.5	250		10.5	2.2	100		2.2	B7G	T
E1654	026 510 310	G1	6	1.5	200	200	10.9	8.5	100	150	8	A08	P
E1662	412 360 500		6	12	250	250	20	2.6	100	150	2.6	B7G	P
E1677	002 300 000	D1	2				15		REC		10mA	B4	R
E1678	026 510 310	G1	13	3	250	100	7.6	1.5	100	100	1.5	B7G	P
E1681	026 540 310		15	13	200	175	35	2.5	100	100	2.5	A08	P
E1682	020 800 310		30				120		REC		30mA	A08	R
E1706	256 051 463		6	8	250	175	80	13	100	100	10	B9G	P
E1709	064 471 230		6	2	250		2	1.3	150		1.3	A08	TT
E1733	009 **8 230		6				60		REC		20mA	B8B	RR
E1736	265 004 130		6	4.4	250	250	40	10.5	100	150	10	B8B	P
E1740	209 008 130		6				30		REC		15mA	B8B	RR
E1751	192 310 800		6				5		D			B7G	RR
E1780	009 **8 230		4				30		REC		15mA	B8B	RR
E1787C	316 541 120		6	9	250	175	50	8	100	100	8	B9G	P
E1795	280 008 130		50				120		REC		30mA	B8B	R
E1796	265 004 130		80	9.5	200	175	70	10	100	100	9	B8B	P
E1809	265 104 136		6	3	250	100	8	2.8	100	100	2.8	B8B	P
E1813	264 198 130		19	3	250		1	1.2	100		1.2	B8B	DDT
E1816	364 526 300		1.4	7	90	75	7.4	1.5	80	60	1.5	B7G	P
E1835	005 231 600	G1	13	4.4	250	250	40	10.5	100	150	9	B7	P
E1838	264 198 130		6	3	250		1	1.2	100		1.2	B8B	DDT
E1848	264 *98 130		6	2	200		10	1.4	100		1.4	B8B	DDT
E1884	002 300 000	D1	2				5		D			B4	R
E1912	412 389 600		6	3	250		1	1.2	100		1.2	B7G	DDT
E1935	241 657 143		6	26	250	200	30	3.9	100	100	3.9	B9G	PP
E1938	802 309 100		6				30		REC		15mA	B7G	RR
E1969	542 376 400		6	{ 2	100		5	2.2	100	60	2.8	B7G	TH
				{ 1	250	75	5.3	2.2	250	75			
E1976	412 361 500		19	2.5	200	200	8	2.5	100	150	2.5	B7G	P
E1984	412 36* 500		6	5.5	250	250	30	10	100	150	9	B7G	P
E1985	281 008 300		40				60		REC		20mA	B7G	R
E1987	412 36* 500		40	8	200	150	50	10	100	100	9	B7G	P
E1994	471 461 230		13	8	250			2.6	100		2.6	A08	TT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
E2004	*2* 0*0 3*0	D1	1.2				5		D			A08	R
E2020N	642 310 000		20	18	200		15	1.5	100		1.6	B5	T
E2047	412 361 500		12.5	2.5	200	200	8	2.5	200	200	2.5	B7G	P
E2122	902 308 100		6				30		REC		15mA	B7G	RR
E2128	241 657 143		19	16.5	250	150	30	3.9	100	100	3.9	B9G	FP
E2134	412 36* 500		6		200	200	55	9.5	100	100	7	B7G	P
E2153	412 36* 500		13	8	200	150	50	10	100	100	9	B7G	P
E2178	**1 23* **8		20				120		REC		40mA	B9A	R
E2179	*41 23* *51	A1	20	12	150	150	50	8.5	100	100	7	B9A	P
E2185	026 040 310		6	8	250		9	2.6	100		2.6	A08	T
E2223	*** 23* **8		25				120		REC		30mA	B9A	R
E2256	**1 23* **8		20				120		REC		40mA	B9A	R
E2382	021 *4* 350	A1	52		150	150	100	16	No Data Available			A08	P
E7013	602 304 100		6.3	2	250		20	5.5	100		5.5	B7G	T
E7014	602 304 100		9.4	2	250		10	5.5	100		5	B7G	T
E7015	641 227 413		6.3		100		11	3	100		3	B9A	TT
E7017	641 227 413		6.3	1	100		0.5	1.2	100		1.2	B9A	TT
E7019	146 234 117		6.3	1.5	90		12	6	100		6	B9A	TT
E7020	641 237 410		6.3	2.3	250		10	5.9	100		5	B9A	TT
E7022	641 237 410		7	1.2	90		15	12.5	No Data Available			B9A	TT
E7023	146 234 117		7	1.5	90		12	6	80		6	B9A	TT
E7024	641 237 410		9	2.1	200		10	5.8	100		6	B9A	TT
E7025	641 237 410		26	2.1	200		10	5.8	100		6	B9A	TT
E7026	141 230 651		6.3	2	150	150	10	7.4	100	100		B9A	P
E7027	501 236 014		6.3	2	250	150	3	2.5	100	100		B9A	P
E7033	*41 23* *51	A1	6.3	38.5	250	250	32	4.6	100	100		A08	P
E7040	020 540 310	A1	25	21	150	150	100	11	No Data Available			A08	P
E7041	*41 23* *51	A1	21.5	24	150	150	45	6.5	100	100		B9A	P
E7043	541 231 600		15	2.3	150	150	36	10	No Data Available			B9A	P
E7044	*41 23* 6*5		16	6	200	200	34	10	No Data Available			B9A	P
E7051	645 237 114		6.3	{ 1	150		18	8.5	100	60	8	B9A	TP
				{ 1	150	100	10	5.2	100	100			
E7053	414 237 516		6.3	{ 22.5	100		3.5	2.2	100	60	2	B9A	TP
				{ 22.5	250	250	28	5	100	100			
E7055	414 237 516		16	{ 11.5	100		3.5	2.2	100	60	2	B9A	TP
				{ 11.5	150	150	41	7.5	100	100			
E7056	645 237 114		9.5	{ 1	150		18	8.5	100	60	8	B9A	TP
				{ 1	150	100	10	5.2	100	100			
E7059	414 237 516		50	{ 16	100		3.5	2.2	100	60	2	B9A	TP
				{ 16	200	200	35	6.8	100	100			
E7060	266 044 300		1.4	2.5	90		2.1	1	80		1	B7G	T
E7062	265 024 300		1.4		90	90	1.6	0.8	80	90		B7G	P
E7066	208 564 300		1.4		90	90	1.1	0.4	80	90	0.4	B7G	P
E7074	641 234 146		6.3	1.5	150		12	14	No Data Available			B9A	T
E7075	641 234 146		3.8	1.5	150		12	14	No Data Available			B9A	T
E7078	041 230 651		6.3	2	250	100	9	4.4	100	100		B9A	P
E7079	041 230 651		12.6	1	150	100	12	4.4	100	100		B9A	P
E7081	020 540 310	A1	6.3	21	150	150	100	11	No Data Available			A08	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
E7087	461 237 145		15	{ 1.7	200		3	4	100	60	4	B9A	TP
				{ 2.1	150	150	18	11	100	100			
E7088	461 237 145		6.3	{ 1.7	200		3	4	100	60	4		
				{ 2.1	150	150	18	11	100	100		B9A	TP
E7108	501 236 014		6.3	2	250	150	3	2	100	100			
E7109	156 231 471		6.3	1.1	200	150	13	16.5	No Data Available			B9A	PP
E7110	141 230 651		6.3	3.5	250	250	10	6.8	100	100		B9A	P
E7143	412 314 600		3.1	1	200		11.5	6.7	100		6	B7G	T
E7144	614 237 410		6.3	1.2	90		15	12.5	No Data Available			B9A	TT
E7145	501 236 014		6.3	2	50	50	1.8		No Data Available			B9A	P
EA40	200 800 130		6				5		D			B8A	R
EA50	123 000 000	D1	6						D		6	B3G	D
EA63	541 231 600		6.3	5.5	250	250	36	10.5	No Data Available			B9A	P
EA76	281 380 000		6				5		D			B5B	R
EA111	023 010 000	D1	6.3				60		REC		20mA	F8	R
EA962	200 100 300	D1	6.3						D			B7G	D
EAA11	812 300 190		6.3				5		D			F8	RR
EAA91	182 311 900		6.3				5		D			B7G	DD
EAA901	182 310 900		6.3						D			B7G	DD
EAA901S	182 310 900		6.3						D			B7G	DD
EAB1	023 110 890		6						D			8SC	DDD
EABC80	191 238 146		6	3	250		1	1.2	100		1.3	B9A	DDDT
EAC91	812 314 600		6	3.2	200		7.4	2.8	100		2.8	B7G	DT
EAF21	265 814 130		6.3	2	250	100	6	2.8	100	100		B8G	P
EAF41	268 154 130		6	4	250	100	5	1.8	100	100	1.8	B8A	DP
EAF42	268 154 130		6	2	250	100	5	1.8	100	100	1.8	B8A	DP
EB4	023 180 910		6						D			8SC	DD
EB11	802 301 190		6						D			F8	DD
EB34	029 180 310		6				5		D			A08	DD
EB40	208 090 130		6						D			B8A	DD
EB41	201 908 130		6				5		D			B8A	RR
EB91	192 310 800		6						D			B7G	DD
EB111	023 004 060		4	50	250		60	5.2	100			F8	T
EBC1	023 198 060	G1	6	7	250		4	2	100		2	8SC	DDT
EBC3	023 189 060	G1	6	5.5	250		5	2	100		2	8SC	DDT
EBC11	892 301 460		6	8	250		5	2.2	100		2	F8	DDT
EBC21	264 *89 130		6	5.5	250		5	2	100		2	B8B	DDT
EBC30	023 189 060	G1	6	4.3	200		4	2	150		2	8SC	DDT
EBC33	026 890 310	G1	6	5.5	250		5	2	100		2	A08	DDT
EBC41	264 089 130		6	3	250		1	1.3	100		1.2	B8A	DDT
EBC51	389 060 420		6.3	7.3	250		70	4	100		4	B9G	DDT
EBC80	641 238 090		6.3	3	250		1	1.2	100		1.2	B9A	DDT
EBC81	641 238 09*		6	3	250		1	1.2	100		1.2	B9A	DDT
EBC90	412 389 600		6	3	250		1	1.2	100		1.2	B7G	DDT
EBC91	412 389 600		6	2	250		1.2	1.6	100		1.6	B7G	DDT
EBF1	023 189 560	G1	6	3	250	125	9	1.1	100	100	1.1	8SC	DDP
EBF2	023 189 560	G1	6	2	250	100	5	1.8	100	150	1.8	8SC	DDP
EBF2G	206 589 130	G1	6.3	2	250	100	5	1.8	100	100	1.8	A08	DDP

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
EBF11	892 361 450		6	2	250	100	5	1.8	100	100	1.8	F8	DDP
EBF15	982 361 450		6	2	250	100	12	5	100	100	5	F8	DDP
EBF21	268 954 130		6	3.2	250	100	7.5	2.2	100	100		B8G	DDP
EBF32	026 895 310	G1	6	2	250	100	5	1.8	100	100	1.8	A08	DDP
EBF35	216 589 130	G1	6	2	250	100	5	1.8	100	100	1.8	A08	DDP
EBF80	541 236 891		6	2	250	90	5	2.2	100	90	2.2	B9A	DDP
EBF81	541 236 891		6	2	250	75	6.7	1.1	100	100		B9A	DDP
EBF83	541 236 891		6.3		12	12	0.4	1	No Data Available			B9A	DDP
EBF89	541 236 891		6.3	2	250	100	9	3.8	100	100		B9A	DDP
EBF171	892 541 360		6.3	3.2	250	80	6	1.8	100	80		B8B	DDP
EBL1	023 189 560	G1	6	6	250	250	36	9.5	100	150	9	8SC	DDP
EBL21	264 598 130		6	6	250	250	36	9	100	150	9	B8B	DDP
EBL31	026 895 310	G1	6	6	250	250	36	9.5	100	150	9	A08	DDP
EBL71	264 589 130		6	5	250	250	44	9.5	250	200	9.5	A08	DDP
EC2	023 100 060	G1	6	5.5	250		6	2.5	100		1.5	8SC	T
EC21	206 401 003		6	4	250		5	2.7	100		2.5	B9G	T
EC31	026 040 310		6	16	250		20	3.2	100		3.2	A08	T
EC40	244 644 130		6	1.5	300		15	12	100		9	B8A	T
EC41	206 040 130		6	5.5	200		20	4.5	125		4	B8A	T
EC52	241 600 003		6	2.6	250		10	6.5	100		6.5	B9G	T
EC53	123 000 000	A1G1	6	3.3	200		7.5	2.9	100		2.9	B3G	T
EC54	244 644 413		6	1.5	250		10	9	100		7	B9G	T
EC56	*21 0*0 310	A1G1	6.3	1.8	200		30	15	No Data Available			A08	T
EC57	*21 0*0 310	A1G1	6.3	1.8	200		30	15	No Data Available			A08	T
EC70	462 603 160		6	2	100		13	5.5	100		5.5	B8D	T
EC71	402 013 060		6.3		100		8.5	5.8	100		5.8	B8D	T
EC80	441 230 446		6	1.5	250		15	12	150		10	B9A	T
EC81	401 230 060		6	2	150		30	5.5	100		3	B9A	T
EC84	414 464 234		6.3	1.1	150		16	10	100		10	B9A	T
EC86	641 234 146		6.3	1.5	75		12	14	No Data Available			B9A	T
EC88	414 234 464		6	1.2	150		12.5	14	No Data Available			B9A	T
EC90	6*2 364 100		6	8.5	250		10.5	2.2	100		3.3	B7G	T
EC91	412 314 600		6	2	250		6	8.5	200		8	B7G	T
EC92	602 304 100		6	2	250		10	5	100		5	B7G	T
EC93	642 314 600		6	4	100		16	8	100		8	B7G	T
EC94	642 314 600		6.3	2.5	100		16	6.6	100		6.6	B7G	T
EC95	142 361 700		6.3	1.2	200		10	10.5	No Data Available			B7G	T
EC96	412 314 600		6.3	1	200		11.5	6.7	100		5	B7G	T
EC98	412 344 600		6.3	1.3	150		13.5	13.5	No Data Available			B7G	T
EC157	*21 0*0 310		6.3	2	200		44	22	No Data Available			A08	T
EC158	*21 0*0 310	A1G1	6.3	4	200		68	15	No Data Available			A08	T
EC760	462 603 160		6.3	2.4	150		13	6.5	100			B8D	T
EC806S	541 234 141		6.3		200		12	14	No Data Available			B9A	P
EC903	642 314 600		6.3	4	100		16	8	100			B7G	T
EC1000	102 *13 060	G1	6.3	2	80		14	14.5	No Data Available			B8D	T
ECC31	027 446 310		6	4.6	250		6	2.3	100		2.3	A08	TT
ECC32	461 471 230		6	4.6	250		6	2.3	100		2.3	A08	TT
ECC33	461 471 230		6	4	250		9	3.8	100		3.6	A08	TT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
ECC34	461 471 230		6	16	250		10	2.2	100		2.2	A08	TT
ECC35	461 471 230		6	2.5	250		2.3	2	100		2	A08	TT
ECC40	274 164 130		6	5.2	250		6	2.7	100		2.7	B8A	TT
ECC70	742 113 460		6.3	1	100		6.5	5.4	100		5.4	B8D	TT
ECC81	741 226 413		6	2	250		10	5.5	150		5	B9A	TT
ECC82	741 226 413		6	8.5	250		10.5	2.2	100		2	B9A	TT
ECC83	741 226 413		6	2	250		1.2	1.6	150		1.6	B9A	TT
ECC84	147 234 116		6	1.5	90		12	6	100		6	B9A	TT
ECC85	741 236 410		6	2.3	250		10	5.9	100		5	B9A	TT
ECC86	641 237 410		6.3	0.3	12		2.5	4.6	No Data Available			B9A	TT
ECC88	741 236 410		6.3	1.2	90		15	12.6	No Data Available			B9A	TT
ECC89	146 234 116		6.3	1.2	90		15	12	No Data Available			B9A	TT
ECC91	672 344 100		6	0.8	100		8.5	5.3	100		5.3	B7G	TT
ECC180	641 237 410		6.3	2	150		9	6.4	100		6.3	B9A	TT
ECC186	641 227 413		6.3	8.5	250		10.5	2.2	100		3.1	B9A	TT
ECC189	641 327 410		6.3	1.2	90		15	12.5	No Data Available			B9A	TT
ECC230	461 471 230		6	30	100		100	6.5	No Data Available			A08	TT
ECC282	641 227 413		6.3		100		11.8	3.1	100		3.1	B9A	TT
ECC801	641 227 413		6.3		250		10	5.5	100			B9A	TT
ECC801S	641 227 413		6.3		250		10	5.5	100			B9A	TT
ECC802	641 227 413		6.3	8.5	250		10.5	2.2	100		2	B9A	TT
ECC802S	641 227 413		6.3	8.5	250		10.5	2.2	100		2	B9A	TT
ECC803	641 227 413		6	2	250		1.2	1.6	100		1.6	B9A	TT
ECC803S	641 227 413		6.3	2	250		1.2	1.6	100		1.6	B9A	TT
ECC804	641 237 410		6.3		200		10	3.4	100		3	B9A	TT
ECC813	614 227 143		6.3		250		14.5	5.2	100		5	B9A	TT
ECC865	641 237 410		6.3	14	200		8.7	6	100		6.5	B9A	TT
ECC960	672 344 100		6.3	2.1	100		8.5	6	100		6	B7G	TT
ECC962	672 344 100		6.3	1.7	150		8.5	6	100		6	B7G	TT
ECF1	023 164 570	G1		{ 3	150		8	2.2	150	60	2.6	8SC	TP
				{ 2	250	100	5	2.5	100	100	2.5		
ECF12	642 371 450		6	{ 2	100		11	3	100	60	3	F8	TP
				{ 2	250	100	5	2	100	100	2		
ECF80	645 237 114		6	{ 2	100		14	5	100	60	5	B9A	TP
				{ 3	250	200	7	5.5	150	150	5		
ECF82	645 237 114		6	{ 1	150		18	8.5	100	60	7	B9A	TP
				{ 1	250	100	10	5.2	100	100	5		
ECF83	146 237 514		6.3	{ 3.7	60		6.5	3.6	80	60		B9A	TP
				{ 60	50		3	1.3	80	60			
ECF86	141 236 175		6	{ 3	100		14	5.5	100	60	6	B9A	TP
				{ 1.2	200	150	10	12	100	100			
ECF802	141 237 564		6.3	{ 2	200		3.5	3.5	100	60	3	B9A	TP
				{ 1	100	100	6	5.5	100	100	5		
ECF804	645 237 114		6.3	{ 1.5	150		13.5	7.2	100	60	7	B9A	TP
				{ 2	150	150	7	11	100	100			
ECH2	023 164 570	G1	6	{ 1	100		9.5	5.5	100	60	5	8SC	TH
				{ 2.5	250	100	3.2		200	100	3		
ECH3	023 164 570	G1	6	{ 2	100		5	2.4	100	60	2.8	8SC	TH
				{ 2	250	100	4.8	2.5	200	100	2.5		

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
ECH3G	027 546 310	G1	6 {	2	100		5	1.4	100	60	2,8	A08	TH
ECH4	123 614 570		6 {	2	250	100	4.8	2.5	100	100			
ECH4G	127 546 310		6.3 {	2	100		6.3	2.7	100	60	2.2	8SC	TH
				2	250	100	6.5	2.6	100	150	2.6		
ECH11	642 371 450		6 {	2	100		6.3	2.7	100	60	2.2	A08	TH
				2	250	200	6.5	2.6	100	150	2.6		
ECH21	276 454 131	6 {	2	100		5	2.4	100	60	2.8	F8	TH	
			2	250	100	4.7	2.5	200	100	2.5			
			2	100		6.2	2.4	100	60	3.2	B8B	TH	
			2	250	90	5.3	2.2	100	90	2.2			
ECH33	027 546 310	G1	6 {	2	100		5	2.4	100	60	2.8	A08	TH
				2	200	100	3	2.8	100	100			
ECH35	027 546 310	G1	6 {	2	100		5.4	2.2	100	60	2.8	A08	TH
				2	250	100	5	2.4	100	100	1.2		
ECH41	275 454 130	6 {	2	100		5	2.2	100	60	2.2	B8A	TH	
			2	250	100	3	2	100	100	2.4			
ECH42	276 454 130	6 {	2	100		5	2.2	100	60	2.8	B8A	TH	
			2	250	100	8	2	100	100	3.2			
ECH43	276 454 130	6 {	2	100		5	2.2	100	60	2.2	B8A	TH	
			2	250	100	8	2	100	100	2			
ECH71	276 454 431		6 {	2	250		2		100	60		B8B	TH
				2	250	100	3	0.7	100	100			
ECH80	541 23* 674		6.3 {	2	250	75	3	0.7	100	80	0.7	B9A	TH
ECH81	541 237 164	6 {	3	100		5	2.3	100	60	2.3	B9A	TH	
			2	250	100	6.5	2.4	150	100	2.4			
ECH83	541 237 164	6 {		12		0.7	1.4	No Data Available			B9A	TH	
				12	12	0.4	0.7	No Data Available					
ECH84	141 237 564	6 {		50		3	3.7	No Data Available			B9A	TP	
				125	12	1.6	1.9	No Data Available					
ECH113	276 454 130		6 {	2	100		4.8		100	60		B8A	TH
					250	90	3		100	100			
ECH171	642 544 371	6 {		250		3			100	60		B8B	TH
			2	250	75	2		100	60				
ECL11	452 371 460	6 {	2.5	250		2	2		100	60	2	F8	TP
			6	250	250	36	9	100	150	7			
ECL80	641 237 154	6 {	2.3	100		4	1.4		100	60	1.4	B9A	TP
			8	200	200	17.5	3.3	100	150	3			
ECL81	451 237 614	6 {	1.5	200		0.5	1.2		100	60	1.2	B9A	TH
			5.5	250	250	36	8.7	100	100				
ECL82	414 237 516	6.3 {	1	200		3.7	2.4		100	60	2.5	B9A	TP
			16	200	200	35	6.4	100	100	6			
ECL83	641 237 154	6.3 {	1.5	200		1.6	2.5		100	60	2.5	B9A	TP
			9.5	200	175	30	5.5	100	100	5			
ECL84	641 237 145	6 {	1.7	200		3	4		100	60	4	B9A	TP
			2.9	200	200	18	10.4	100	100				
ECL85	641 237 514	6 {	0.8	100		5	6.5		100	60	6.5	B9A	TP
			15	200	175	41	7.5	100	100				
ECL86	415 237 146	6 {	1.9	250		1.2	1.6		100	60	1.6	B9A	TP
			7	250	250	36	10	100	100				
ECL113	267 454 130		6 {	1	150		2	1.6	100	60	1.6	B8A	TP
				3.5	250	250	25	8.5	100	150	8.5		
ED111	266 104 430		6.3 {	5	200		40	8	No Data Available			B8A	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
EDD11	742 301 460		6	8	200		3.5		200		3.5	F8	TT
EDD111	742 311 460		6	8	250		9	2.3	100		2.3	F8	TT
EE1	023 180 560		6.3	2.5	250	150	8	14	No Data Available			F8	DP
EE50	256 501 403		6.3	3	250	250	10	14	250	150	10	B9G	P
EEL71	274 554 631		6.3	6.5	250	250	24	6.5	100	100		B9G	FP
EEP1	023 180 560	G1	6.3	2.5	250	150	8	17	No Data Available			8SC	DP
EEP71	023 110 560	G1	6	3	250	100	8	2.2	100	100		8SC	P
EEL171	542 654 371		6.3	{ 12 2	250	250	40	9	100	100		} B8B	FP
EEL171	216 000 300	G1	6.3		100	50	3		100	60			
EEL171	036 080 200		6.3	12	250	250	40	9	100	100		B7	T
				2	100	50	2		100	60		A08	DT
EF1	023 110 560	G1	6	2	250	100	3	2.3	100	100	2.3	8SC	P
EF2	023 110 560	G1	6	2	250	100	4.5	2.2	100	100	2.2	8SC	P
EF2S	023 110 560	G1	6.3	2	250	100	5	1.8	100	100		8SC	P
EF3	023 110 560	G1	6	2.5	250	100	8	1.8	100	100	1.8	8SC	P
EF5	023 110 560	G1	6	3	250	100	8	1.7	100	100	1.7	8SC	P
EF6	023 110 560	G1	6	2	250	100	3	2	100	100	2	8SC	P
EF6N	023 110 560	G1	6.3	2	250	100	3	2.1	100	100	2	8SC	P
EF7	023 110 560	G1	6	1.5	250	100	3	2.1	100	100	2.1	8SC	P
EF8	023 111 560	G1	6	2.5	250	250	8	1.8	100	150	1.8	8SC	P
EF9	023 110 560	G1	6	2.5	250	100	6	2.2	100	100	2.2	8SC	P
EF9N	023 110 560	G1	6.3	2.5	250	100	6	2.2	100	100	2.2	8SC	P
EF11	602 301 450		6	2	250	100	6	2.2	100	100	2	F8	P
EF12	602 301 450		6	2	250	100	3	2.1	100	100	2	F8	P
EF12spec.	602 301 450		6.3	2	250	100	3	1.7	100	100	1.5	F8	P
EF13	612 301 450		6	2	250	100	4.5	2.3	100	100	2	F8	P
EF14	612 350 140		6	4.5	200	200	12	7	100	150	6	F8	P
EF15	612 301 450		6	2	250	100	12	5.5	100	100	5	F8	P
EF22	265 104 130		6	2.5	250	100	6	2.2	100	100	2.2	B8B	P
EF25	023 110 560	G1	6	2	250	100	5	1.8	100	100	1.8	8SC	P
EF36	026 510 310	G1	6	2	250	100	3	1.8	100	100	1.8	A08	P
EF37	026 510 310	G1	6	2	250	100	3	1.8	100	100	1.8	A08	P
EF37A	026 510 310	G1	6	2	250	100	3	1.8	100	100	1.8	A08	P
EF38	126 510 310	G1	6	2.5	250	250	8	1.8	100	150	1.8	A08	P
EF39	026 510 310	G1	6	2.5	250	100	6	2.2	100	100	2.2	A08	P
EF40	26* 145 130		6	2	250	150	3	1.8	100	150	1.8	B8A	P
EF41	261 154 130		6	2.5	250	100	6	2.2	100	100	2.2	B8A	P
EF42	260 154 130		6	2	250	250	10	9.5	100	150	8	B8A	P
EF43	260 154 130		6	2	250	150	15	6.4	100	150	6	B8A	P
EF44	260 145 130		6.3	2	250	150	3	1.8	100	150	1.8	B8A	P
EF50	256 101 403		6	1.5	250	250	10	6.5	100	150	6	B9G	P
EF51	261 154 130		6	2	250	250	14	9.5	100	150	9	B8B	P
EF52	261 154 130		6	2	250	250	10	10	100	150	8	B8G	P
EF53	256 101 403		6	2	250	250	10	6.5	100	150	6.5	B9G	P
EF54	265 114 113		6	1.7	250	250	10	7.7	100	150	7	B9G	P
EF55	256 101 403		6	4	250	150	10	7	100	100	6	B9G	P
EF70	412 163 510		6	2	100	100	3	2.5	100	100	2.5	B8D	P
EF71	412 163 510		6	2	100	100	13	5.5	100	100	4.5	B8D	P
EF72	412 163 510		6	1.4	100	100	7	5	100	100	5	B8D	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
EF73	412 653 160		6	2	100	100	7.5	5.5	100	100	5	B8D	P
EF74	412 653 160		6.3	1.4	100	100	7	3.1	100	100	3	B8D	P
EF80	141 230 651		6	2	200	175	10	7.2	100	100	6	B9A	P
EF81	541 236 000		6.3	2.5	250	125	6	2.2	100	100		B9A	P
EF82	*41 230 651		6	4.5	250	250	40	11	100	150	9	B9A	P
EF83	501 236 014		6.3	1.6	250	50	4	1.6	100	100	2	B9A	P
EF85	141 230 651		6	2	250	100	10	6	150	100	5	B9A	P
EF86	501 236 014		6	2	250	150	3	2.3	100	100	1.8	B9A	P
EF87	501 236 014		6.3	2	250	100	3.3	1.9	100	100		B9A	P
EF88	501 236 014		6.3	2	250	100	7	2.1	100	100		B9A	P
EF89	041 230 651		6	2	250	100	9	3.6	250	100	3.6	B9A	P
EF89F	041 230 651		6.3	20	250	100	11	4.4	100	100	5	B9A	P
EF91	412 361 500		6	2	250	250	10	7.6	100	150	5	B7G	P
EF92	412 361 500		6	1.5	200	150	4	6.4	100	150	5	B7G	P
EF93	412 365 100		6	2.5	250	200	8	2.5	100	150	2.5	B7G	P
			6	1	250	100	11.6	4.5	150	100	4	B7G	P
EF94	412 365 100		6	1	250	150	10.6	5.2	100	150	5.2	B7G	P
EF95	412 365 100		6	2.3	150	150	7	4.3	100	100	4	B7G	P
EF96	412 365 100		6	1.5	250	150	6.5	5	100	100	5	B7G	P
EF97	412 365 100		6.3	0.7	12	12			No Data Available			B7G	P
EF98	412 365 100		6.3	1	12	12	4.8	3	No Data Available			B7G	P
EF111	612 350 140		6.3	2	250	75	6	2.2	No Data Available			F8	P
EF112	612 350 140		6.3	2	250	100	3	2.1	100	100		F8	P
EF172	112 540 360		6.3	2	250	100	5	3	100	100		B8A	P
EF174	112 540 360		6.3	3.5	200	200	12	9	100	100		B8A	P
EF175	112 540 360		6.3	2.1	250	100	12	4.5	100	100		B8A	P
EF183	141 230 651		6	2	200	90	12	12.5	No Data Available			B9A	P
EF184	141 230 651		6.3	2.5	200	200	10	15	No Data Available			B9A	P
EF190	412 365 100		6.3	2	200	150	9.5	6.2	100	100		B7G	P
EF410	26* *54 130		6.3	2	250	100	6	2.7	100	100		B8A	P
EF730	562 603 160		6.3	1	100	100	5.3	3.2	100	100	3.5	B8D	P
EF731	412 163 510		6.3		100	100	7.2	4.5	100	100	4.5	B8D	P
EF732	412 163 510		6.3	1.5	100	100	7.5	5	100	100	5	B8D	P
EF734	412 163 510		6.3	1.5	100	100	7.5	5	100	100	5	B8D	P
EF762	412 163 510		6.3	1.5	100	100	7.5	5	100	100	5	B8D	P
EF800	141 230 651		6.3	2	200	175	10	7.2	100	100		B9A	P
EF802	141 23* 65*		6.3	1.8	200	175	12	8	100	100		B9A	P
EF804	101 230 654		6.3	2	250	150	3	2	100	100		B9A	P
EF804S	101 030 654		6.3	2	250	150	3	2	100	100		B9A	P
EF805S	141 230 651		6.3	1.8	250	75	8	5.7	100	80		B9A	P
EF806S	501 236 014		6.3		250	150	3.2	2	100	100		B9A	P
EF183	141 230 651		6.3	2	200	90	12	12.5	100	80		B9A	P
EF811	141 235 680		6.3	1.5	200	90	11.5	12.5	No Data Available			B9A	DP
EF812	141 230 651		6.3	1.8	150	150	10		100	100		B9A	P
EF814	141 230 651		6.3	1.9	150	150	10		100	100		B9A	P
EF860	141 230 651		6.3		250	250	10	6.8	100	100		B9A	P
EF861	141 230 615		6.3	1.1	200	150	13	16.5	No Data Available			B9A	P
EF866	501 236 014		6.3	2	250	150	3	2	100	100	2	B9A	P
EF905	412 365 100		6.3	2	150	125	7.5	5	100	100		B7G	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
EFF50	265 414 573		6	2	250	200	6	8	100	150	7	B9G	PP
EFF51	265 414 573		6	2	250	200	6	8	100	150	7	B9G	PP
EFM1	023 114 560		6	2	250	100	1.3		No Data Available			8SC	1P
EPF20	256 145 130		6.3	2	250	200	5	12	100	100		B8G	P
EPF60	214 156 163		6.3	2	250	150			100	100		B9G	P
EG420	802 300 000		4				120		REC		30mA	B4	R
EH1	023 145 560	G1	6	2	250	80	3	1.8	200	75	1.8	8SC	P
EH2	023 115 560	G1	6	3	250	100	4.2	1.4	100	100	1.4	8SC	P
EH90	412 365 100		6.3	1	100	30	1	1.1	No Data Available			B7G	H
EH900	412 365 100		6.3		150	80	1	1.1	100	90		B7G	H
EK1	123 164 570	G1	6	{ 1.5 8.5	90 250	75	2 1.6		80 100			8SC	O
EK2	023 154 560	G1	6	2	250	75	2.8	1.8	100	60	2.1	8SC	O
EK2G	026 545 310		6.3	2	250	75	2.7	1.8	100	60	2.1	A08	O
EK3	023 154 560	G1	6	2	100	60	11	3.8	100	60	3.8	8SC	O
EK32	026 545 310	G1	6	2	250	75	1.5	1.5	100	60	2.1	A08	O
EK90	412 366 100		6	2	100		11	7	100		5	B7G	H
EL1	023 100 560	G1	6	18.5	250	250	32	2.6	100	150	2.6	8SC	P
EL2	023 100 560	G1	6	18	250	250	32	2.8	100	150	2.8	8SC	P
EL3	023 104 560		6	6	250	250	36	9	100	150	9	8SC	P
EL3/375	023 104 560		6.3	6	250	250	36	9	100	150	8	8SC	P
EL3/425	023 104 560		6.3	15.6	400	300	25	3	No Data Available			8SC	P
EL3N	023 104 560		6.3	6	250	250	36	9	100	150	8	8SC	P
EL3NG	023 104 560		6.3	6	250	250	36	9	100	100		8SC	P
EL3NG	026 540 310		6.3	6	250	250	36	9	100	150	8	A08	P
EL5	023 104 560		6	14	250	275	72	8.5	100	150	8.5	8SC	P
EL5/375	023 140 560		6.3	14	250	275	72	8.5	No Data Available			8SC	P
EL5/600	023 114 500	A1	6.3		250	275	72	8.5	100	150	8.5	8SC	P
EL5G	026 540 310		6.3	14	250	275	72	8.5	100	150	8.5	A08	P
EL6	023 104 560		6	4	250	250	72	14.5	100	150	10	8SC	P
EL6/435	023 104 560		6.3	7.5	250	250	20	5.5	100	100		8SC	P
EL6spec.	023 104 560		6.3	7	250	250	72	14.5	100	150	10	8SC	P
EL8	023 104 560		6.3	7.5	250	250	20	5.5	100	150		8SC	P
EL11	602 301 450		6	6	250	250	36	9	100	150	7	F8	P
EL11N	602 301 450		6.3	6	250	250	36	9	100	150	7	F8	P
EL12	602 301 450		6	7	250	250	72	15	No Data Available			F8	P
EL12/325	602 301 450		6.3	7	250	250	72	18	No Data Available			F8	P
EL12/375	602 301 450		6.3	7	400	250	72	15	No Data Available			F8	P
EL12spec.	502 301 400	A1	6.3	19	400	350	42	10	No Data Available			F8	P
EL13	602 310 450		6.3	7.5	250	250	20	5.5	100	150	5	F8	P
EL20	265 104 130		6	34	300	300	12.5	3.7	100	100		B8B	P
EL22	265 004 130		6	7	250	250	44	9.5	100	150	9	B8B	P
EL30	026 541 310		6.3	4.5	250	250	18	6.5	100	100		A08	P
EL31	120 540 310	A1	6	9	300	275	91	14	100	150	10	A08	P
EL32	026 500 310	G1	6	18	250	250	32	2.8	100	150	2.8	A08	P
EL33	026 540 310		6	6	250	250	36	9	100	150	8	A08	P
EL33A	026 540 310		6.3	6	250	250	36	9	100	100		A08	P
EL34	126 540 310		6	13.5	250	250	75	11	100	100	8	A08	P

VALVE	SELECTOR SWITCH No.	T.C.	V _f	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	I _a mA	mA/V	Anode Volts	Screen Volts	mA/V		
EL35	026 540 310	A1	6	15.5	250	250	72	5	100	150	5	A08	P
EL36	*2* 54* 310		6	8.2	100	100	77	11	100	150	10	A08	P
EL36	026 540 310		6.3	4	250	250	72	14.5	100	150	10	A08	P
EL37	026 540 310	A1	6	13.5	250	250	100	11	100	150	10	A08	P
EL38	120 540 310		6	7	250	250	89	14.3	100	150	10	A08	P
EL38N	120 540 310		6	7	250	250	89	14.3	100	150	10	A08	P
EL39	020 541 310	A1	6	3.2	200	125	45	6.5	100	100		A08	P
EL41	26* *54 130		6	7	250	250	36	10	100	150	8	B8A	P
EL42	261 054 130		6	10.8	225	225	26	3.2	100	150	3.2	B8A	P
EL43	260 154 130	A1	6	3	250	250	36	10	100	150	8	B8A	P
EL44	200 154 130		6	22.5	250	250	20	5	100	150	5	B8A	P
EL50	023 114 500		6	14	250	275	72	8.5	100	150	8	8SC	P
EL51	023 104 500	A1	6		400	300	44	7	100	150	7	8SC	P
EL53	023 104 560		6	7.7	400	250	24	8	100	150	7	8SC	P
EL54	023 140 560		6	12.2	300	300	55	13	No Data Available			8SC	P
EL60	216 005 413	A1	6	14.5	250	250	67	9	100	100	8	B9G	P
EL70	412 163 510		6	9	100	100	31	2.2	100	90	2.2	B8D	P
EL71	412 163 510		6.3	8.5	100	100	30	4	100	100		B8D	P
EL80	541 230 600	A1	6.3	6.5	250	250	36	10	100	150	9	B9A	P
EL81	*41 23* *51		6	38.5	250	250	32	4.6	100	100	2.2	B9A	P
EL81P	*41 23* *51		6.3	38.5	250	250	32	4.6	100	100	2.2	B9A	P
EL82	*41 23* 6*5	A1	6.3	10.4	200	200	54	9	100	100		B9A	P
EL83	541 23* 600		6	5.5	250	250	36	10	100	150	9	B9A	P
EL84	*41 23* 6*5		6	7.3	250	250	48	11.3	100	150	10	B9A	P
EL85	441 231 615	A1	6	10.8	250	225	26	3.2	100	150	3.2	B9A	P
EL86	*41 23* 6*5		6.3	12.5	200	175	70	10	100	100		B9A	P
EL88	041 230 651		6.3	4.5	200	200	33	9.7	100	100		B9A	P
EL89	041 230 651	A1	6.3	6	250	250	38	10.5	100	100		B9A	P
EL90	412 365 400		6	12.5	250	250	45	4.1	100	150	4	B7G	P
EL91	412 360 500		6	13.8	250	250	16	2.6	100	150	2.6	B7G	P
EL95	412 365 400	A1	6.3	9	250	250	24	5	100	100		B7G	P
EL131	126 54* 310		6.3	12	250	250	100	11	No Data Available			A08	P
EL150	602 301 450		6.3	7	350	250	95	6.5	No Data Available			F8	P
EL171	102 541 360	A1	6.3	12	250	250	40	9	No Data Available			B8A	P
EL172	102 541 360		6.3	7	250	250	72	15	No Data Available			B8A	P
EL180	141 223 651		6.3	2	250	150	25	12	100	100		B9A	P
EL183	541 231 640	A1	6.3		200	200	40	25	No Data Available			B9A	P
EL300	521 441 350		6.3	22.5	200	150	100	10	No Data Available			B8A	P
EL360	*2* 540 310		6.3	7.7	100	100	100	14	No Data Available			A08	P
EL803	541 231 600	A1	6.3	3.5	200	200	36	10	100	100		B9A	P
EL803S	641 321 600		6.3		200	200	32	10	No Data Available			B9A	P
EL804	041 230 005		6.3	12	200	175	70	10	100	100		B9A	P
EL820	*41 23* *51	A1	6	38.5	250	250	32	4.6	100	150	4	B9A	P
EL821	*41 23* 651		6	4.5	250	250	40	11	100	150	10	B9A	P
EL822	*41 23* 651		6	2.5	250	150	40	13	100	100	10	B9A	P
EL861	041 230 651	A1	6.3		200	200	20	11	No Data Available			B9A	P
EL863	541 231 600		6.3	5.5	250	250	36	11	No Data Available			B9A	P
ELL1	423 174 560		6	20	250	250	15	1.7	100	150	1.8	8SC	PP

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
ELL80	546 234 175		6.3		250	250	24		100	100		B9A	FP
ELP71	023 104 560		6	7	250	250	36	9	100	150		8SC	P
ELP72	023 100 560	G1	6	17	250	250	36	2.5	100	150		8SC	P
ELP73	023 100 560	G1	6	17	250	250	36	2.5	100	150		8SC	P
EMG1	452 361 100		6.3	4.5	20	20	7	4	No Data Available			B7G	P
EQ80	541 236 114		6	1	250	20	0.9	0.7	No Data Available			B9A	N
ER4	002 300 000	D1	4				3		D			B4	D
EW60	280 000 103		6				120		REC		30mA	B9G	R
EY51	023 000 000	D1	6						D			B3G	D
EY70	082 813 080		6				30		REC		17mA	B8D	R
EY80	**1 23* **8		6				120		REC		40mA	B9A	R
EY81	*** 23* **8	C	6.3				120		REC		40mA	B9A	R
EY82	**1 23* **8		6.3				180		REC		50mA	B9A	R
EY83	*** 23* **8	C	6.3						D			B9A	D
EY84	**1 23* ***	D1	6				120		REC		30mA	B9A	R
EY86	23* 232 *32	D1	6						D			B9A	D
EY88	*** 23* **8	C1	6.3				120		REC		40mA	B9A	R
EY89	**1 23* **8		6.3				120		REC		30mA	B9A	R
EY91	812 380 000		6				60		REC		20mA	B7G	R
EY92	002 360 100		6.3				60		REC		15mA	B7G	R
EY3000	023 100 000	D1	6.3				120		REC		20mA	8SC	R
EY13	230 238 090		6.3				120		REC		30mA	F8	RR
EZ1	023 180 090		6				30		REC		15mA	8SC	RR
EZ2	023 180 090		6				30		REC		15mA	8SC	RR
EZ3	023 180 090		6				60		REC		20mA	8SC	RR
EZ4	023 180 090		6				60		REC		20mA	8SC	RR
EZ11	902 300 180		6				30		REC		15mA	F8	RR
EZ12	902 300 180		6				60		REC		20mA	F8	RR
EZ22	208 009 130		6				60		REC		20mA	B8B	RR
EZ33	028 090 310		6				60		REC		20mA	A08	RR
EZ35	028 090 310		6				30		REC		45mA	A08	RR
EZ40	280 *09 130		6				30		REC		25mA	B8A	RR
EZ41	280 009 130		6				30		REC		30mA	B8A	RR
EZ80	9*1 23* 8**		6				30		REC		35mA	B9A	RR
EZ81	8*1 23* 9**		6				60		REC		25mA	B9A	RR
EZ82	8*1 23* 9**		6.3				30		REC		15mA	B9A	RR
EZ90	802 309 100		6.3				30		REC		15mA	B7G	RR
EZ91	802 309 100		6.3				30		REC		15mA	B7G	RR
EZ900	802 309 100		6.3				30		REC		15mA	B7G	RR
F2A11	602 301 450		6.3	6.5	250	250	100	18	No Data Available			F8	P
F5	642 300 000		4	40	300		40	6	100		6	B4	T
F10	642 300 000		4	15	300		30	5.5	100		5.5	B4	T
F100	642 350 000		4	16	250	250	42	2.5	100	150	2.5	B5	P
F109	264 300 000		1.5	14.5	200		6.2	11.5	100		11	UX4	T
F109A	642 300 000		1.5	14.5	200		6.2	1.2	100			B5	T
F109A	264 300 000		1.5	14.5	200		6.3	1.2	100			UX4	T
F203	264 300 000		2.5	50	300		36	2	100			UX4	T
F203	642 300 000		2.5	56	300		36	2	150		2	B4	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
F209	642 300 000		2.5	21	250		5.2	0.9	100			B4	T
F209	264 300 000		2.5	21	250		5.2	0.9	100			UX4	T
F209A	642 310 000		2.5	21	250		5	1	100		1	B5	T
F215	264 130 000		2.5	6	150		6.5	2	100		2	UX5	T
F215	642 310 000		2.5	6	150		6.5	2	100		2	B5	T
F242	265 130 000	G1	2.5	1.3	200	100	1.5	0.9	200	100	0.9	UX5	P
F410	642 300 000		4	15	300		13.5	2.8	100		2.8	B4	T
F443	642 350 000		4	30	400	200	45	3.2	100	100	3.2	B5	P
F443N	642 350 000		4	30	400	200	45	3.2	100	100	3.2	B5	P
F460	642 310 000		4	2	250		10	5.5	200		5.5	B5	T
F704	642 300 000		7.5	84	400		55	2.1	100		2.1	B5	T
F707	642 300 000		7.5	84	400		55	2.1	100		2.1	B4	T
F707	264 300 000		7.5	84	400		55	2.1	100		2.1	UX4	T
F708	264 300 000		7.5		400		30	1.6	100		1.6	UX4	T
F/7001	412 365 100		6.3		150	125	35	4.8	100	100	4	B7G	P
FC2	645 230 700	G1	2		150	50	2		80		0.4	B7	O
					150	75	0.9	0.2	125	75	0.8		
					150	50	1.2		100		0.5		
FC2A	645 230 700	G1	2		150	50	0.7	0.3	100	75	1	B7	O
					150	50	0.7	0.3	100	75	1		
					150	50	0.7	0.3	100	75	1		
FC4	645 231 700	G1	4	4	90	90	2	1	100	90	1.3	B7	O
				4	250	90	1.6	1	250	90	1.5		
				4	250	90	1.6	1	250	90	1.5		
FC13	023 164 570	G1	13	3	90	75	2	1.3	100		1.5	8SC	O
				2	200	75	2.6	0.6	200	75	2.5		
				3	90	75	2	1.3	80	75	1.2		
FC13C	645 231 700	G1	13	2	200	75	2.6		200	75	2.5	B7	O
				2	200	75	2.6		200	75	2.5		
				2	200	75	2.6		200	75	2.5		
FC141	207 640 530	G1	1.4		90	90	0.5		80	90		MO8	H
FH2118	165 452 300	G1	20	2	200	80	3		100	75		C7	P
FW1	893 200 000		4				30		REC		15mA	B4	RR
FW3	892 300 000		4				60		REC		30mA	B4	RR
FW4/500	982 300 000		4(5)				120		REC		30mA	B5	RR
FW4/800	982 300 000		4(5)				60		REC		30mA	B5	RR
FY	642 350 000		4	10	250	250	32	5	100	150	5	B5	P
FZ1	023 180 090		13				30		REC		15mA	8SC	RR
G	264 300 000		5	3	200		0.2		100		0.2	UX4	T
G/6C4	602 364 100		6.3	8.5	250		10.5	2.2	100		3	B7G	T
G/25L6	026 540 310		25	8.2	200	125	46	8	100	90	8	A08	P
G/50C5	142 345 600		50	7.5	150	100	49	7.5	100	90	6	B7G	P
G84	280 300 000		2.5				60		REC		20mA	UX4	R
G407	642 300 000		4	4	150		4	1.3	100		4	B4	T
G409	642 300 000		4	4	150		4	1.3	100		4	B4	T
G431	892 300 000		4				30		REC		15mA	B5	RR
G459	023 080 090		4				60		REC		20mA	8SC	RR
G460	892 300 000		4				60		REC		20mA	B4	RR
G470	892 300 000		4				30		REC		15mA	B4	RR
G504	892 300 000		4				15		REC		15mA	B4	RR
G2080	023 100 080		20				60		REC		15mA	8SC	R
G3060	123 190 080		30				60		REC		20mA	8SC	RR
G4100	802 300 000		4				120		REC		30mA	B4	R
G4120	892 300 000		4				60		REC		20mA	B5	RR

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
G4120N	892 300 000		4				60		REC		40mA	B4	R
G4150	892 300 000		4				60		REC		20mA	B4	RR
G4180	892 300 000		4				120		REC		30mA	B4	RR
G4300	892 300 000		4				120		REC		30mA	B4	RR
G/5749	412 365 100		6	1	250	100	11	4.4	100	100	4.4	B7G	P
G/5750	412 366 400		6	2	100		11	7	100		6	B7G	H
G/6042	461 471 230		25	8	250		9	2.6	100		2.6	A08	TT
G/6059	041 230 651		6	3	250	100	2	1.2	100	100	1.2	B7G	P
G/6060	741 226 413		6	2	250		10	5.5	200		5	B9A	TT
G/6061	*41 230 651		6	13	300	225	35	3.7	100	150	3.7	B9A	P
G/6062	601 235 144		6	7.5	250	250	45	7	100	150	7	B9A	P
G/6066	412 389 600		6	3	250		1	1.2	150		1.2	B7G	DDT
G/6100	602 364 100		6	8.5	250		10.5	2.2	100		3	B7G	T
G/6132	*41 230 651		6	4.5	250	250	40	11	100	150	9	B9A	P
G/6157	**1 23* ***	D1	6				120		REC		30mA	B9A	R
G/6158	744 226 413		6	4.6	250		6	2.3	100		2.3	B9A	TT
G/6180	461 471 230		6	8	250		9	2.6	100		2.6	A08	TT
G/6443	**1 23* ***	D1	6				120		REC		30mA	B9A	R
G/6516	412 360 500		6	12.5	250	250	16	2.6	100	150	2.6	B7G	P
GG1	288 009 930		4				30		REC		15mA	B8B	RR
GN24	892 300 000		4				30		REC		15mA	B4	RR
GR4	892 300 000		4				120		REC		30mA	B4	RR
GT1C	642 310 000		4		200		48	3K	No Data Available			B5	THY
GΥ11	333 022 200	D1	2.5				30		REC		15mA	F8	R
GZ30	020 908 030		5				60		REC		20mA	A08	RR
GZ31	020 908 030		5				120		REC		30mA	A08	RR
GZ32	030 809 020		5(5.7)				60		REC		50mA	A08	RR
GZ33	030 809 020		5				120		REC		30mA	A08	RR
GZ34	*30 809 020		5				120		REC		30mA	A08	RR
GZ37	030 908 020		5(5.7)				120		REC		40mA	A08	RR
GZ40	28* **9 130		5				30		REC		17mA	B8A	RR
GZ41	28* **9 130		5				30		REC		26mA	B8A	RR
G660	023 190 080		6.3				30		REC		15mA	8SC	RR
G715	802 300 000		7.5				120		REC		30mA	B4	R
G1054	892 300 000		4				30		REC		15mA	B4	RR
G1064	892 300 000		4				30		REC		20mA	B4	RR
G1380	023 180 090		12				30		REC		15mA	8SC	RR
G1404	802 300 000		4				120		REC		30mA	B4	R
G1503	892 300 000		2.5				30		REC		15mA	B4	RR
G2004	892 300 000		4				60		REC		20mA	B4	RR
G2005	892 300 000		5				60		REC		20mA	B4	RR
G2080	802 310 000		20				60		REC		20mA	B5	R
G2504	892 300 000		4				60		REC		20mA	B4	RR
G4004	892 300 000		4				120		REC		30mA	B4	R
H2	642 300 000		2	1	150		2.5	0.8	150		0.8	B4	T
H2D	682 390 000	G1	2	1.5	150		3.5	1.3	100		1.3	B5	DDT
H4	642 300 000		4	4	150		4	1.3	125		1.3	B4	T
H4D	216 809 300	G1	4	3	200		4.5	2.7	100		2.5	B7	DDT
H4D	809 231 600	G1	4	2.5	200		5.5	2.7	150		2.7	B7	DDT

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
H12	642 300 000		2	1.3	100		0.6	1	100		1.2	SM4	T
H13	023 100 060	G1	13	4	200		6	2.5	100		2.5	A08	T
H20	642 310 000		20	1.6	200		0.2	1	100		1	B5	T
H30	000 231 600	G1	13	1.5	250		7.5	6	100		6	B7	T
H42	000 231 600	G1	4	2	250		1	1.5	200		1.7	B7	T
H42	216 000 300	G1	4	2	250		1	1.5	100		1.5	B7	T
H63	020 600 310	G1	6.3	2	250		1	1.6	100		1.5	A08	T
H141D	206 080 030	G1	1.4	1	90		0.1	0.2	80		0.2	M08	DT
H210	642 300 000		2	3	150		1.1	1.1	100		1.1	B4	T
H406D	542 300 000	A1	4	1.5	200	75	4	0.8	100	80		B4	P
H407spec.	642 300 000		4	9	150		3.5	0.9	100		0.9	B4	T
H410D	642 300 000	A1	4	1.5	200	75	3.5	0.8	100	75		B5	P
H412	642 300 000		4	9	150		5	1.2	125		1.2	B4	T
H607	642 300 000		6	1	100			0.4	100		0.4	B4	T
H1818D	542 310 000	A1	20	2	200	100	3	2	100	100		B5	P
H1918D	542 310 000	A1	20	2	200	60	4	1	100	60		B5	P
H2018D	542 310 000	A1	20	2	200	60	4	1	100	60		B5	P
H2518D	542 310 000	A1	20	2.5	250	100	3.5	2	100	100		B5	P
H2618D	542 310 000	A1	20	2.5	250	100	5	2	100	100		B5	P
H4080D	542 310 000	A1	4	1.5	200	75	4	2.5	100	100		B5	P
H4111D	542 310 000	A1	4	2.5	250	100	3.5	2	100	100		B5	P
H4115D	542 310 000	A1	4	2.5	250	100	3.5	2	100	100		B5	P
H4125D	542 310 000	A1	4	2	200	100	6	1	100	100		B5	P
H4128D	542 310 000	A1	4	2.5	250	100	3.5	2	100	100		B5	P
H4129D	542 310 000	A1	4	2.5	250	100	5	2	100	100		B5	P
HAA91	182 310 900		12						D			B7G	DD
HABC80	811 239 146		19	3	250		1	1.2	100		1.3	B9A	DDDT
HAD	908 231 600	G1	13	2.5	200		3.3	2	150		2	B7	DDT
HBC90	412 389 600		12.5	3	250		1	1.2	100		1.2	B7G	DDT
HBC91	412 389 600		12.5	2	250		1.2	1.6	100		1.2	B7G	DDT
HCH81	541 237 464		12.6	{ 2.5	100	90	4	2	100	60	2	B9A	TH
				5	250		3	0.6	100	90	0.6		
HD2	542 300 000		2		200		5	1	150		1	B4	T
HD2	682 390 000	G1	2	2.5	150		3.5	1.3	100			B5	DDT
HD14	036 080 200	G1	1.4		90		0.1	0.2	100		0.2	A08	DT
HD21	682 390 000	G1	2	1.5	150		1.8	1.5	150		1.5	B5	DDT
HD22	682 390 000	G1	2	3	150		1.8	1.5	100		1.5	B5	DDT
HD23	682 390 000	G1	2	1	150		1	1	125		1	B5	DDT
HD23	862 390 000	G1	2	2	150		1	1.4	100		1.4	B5	DDT
HD24	682 390 000	G1	2	1.5	150		0.8	1	100		1.4	B5	DDT
HD30	524 332 600		1.2	75	150	125		1.7	No Data Available			B7G	P
HD93	23* 232 *32	D1	1.2						D			B9A	D
HD96	021 040 310	A1	25	22.5	250	150	55	5.5	100	100		A08	P
HF61	26* *54 130		6.3	2.6	250	100	6	2.2	100	100	2.2	B8A	P
HF62	260 154 130		6.3	2	250	250	10	9	100	150	8	B8A	P
HF85	141 230 651		12.5	2.3	200	125	11.4	6.1	100	90		B9A	P
HF93	412 365 100		12.5	1	250	100	11	4.4	100	100	4.3	B7G	P
HF94	412 365 100		12.5	1	250	250	10.6	5.2	100	100	3.9	B7G	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
HF121	26* 054 130		12.5	3	200	125	1.2	2.3	100	100	2	B8A	P
HK90	412 366 100		12.5	2	100		11	7	100		5	B7G	H
HL2	642 300 000		2	1.5	150		2.2	1.5	150		1.5	B4	T
HL2	023 004 060		2	1.5	150		2.2	1.5	150		1.5	8SC	T
HL2K	642 300 000		2	1.5	150		2.2	1.5	150		1.5	B4	T
HL2S	023 004 060		2	1.5	150		2.2	1.5	150		1.5	8SC	T
HL3	206 040 030		2	1.5	125		0.5	1.5	125		1.5	M08	T
HL4	642 310 000		4	4.5	250		5	3.5	150		3.5	B5	T
HL4G	000 231 600	G1	4	4.5	250		5	3.5	150		3.5	B7	T
HL4GS	023 100 060	G1	4	4.5	250		5	3.5	150		3.5	8SC	T
HL13	023 100 060	G1	13	3.7	200		5	3.3	150		3	8SC	T
HL13	000 231 600	G1	13	2.7	200		6	3.5	150		4	B7	T
HL13C	000 231 600	G1	13	3.7	200		5	3.3	150		4	B7	T
HL13G	023 004 060	G1	13	5.5	250		6	2.5	150		2.5	8SC	T
HL13S	023 100 060	G1	13	3	200		6	3.5	150		3.5	8SC	T
HL21	642 300 000		2	3	150		1.7	1.5	125		1.5	B4	T
HL21DD	682 390 000	G1	2	2	150		2	1.3	125		1.3	B5	DDT
HL22	206 040 030		2	2	150		2	1.3	125		1.3	M08	T
HL22DD	206 080 930	G1	2	2	150		2	1.3	125		1.3	M08	DDT
HL23	206 040 030		2	1.5	150		1.5	1.2	100		1.2	M08	T
HL23DD	206 080 930	G1	2	1.5	150		0.6	1.2	100		1.2	M08	DDT
HL41	216 040 030		4	3.1	250		2.2	3.4	150		3.1	M08	T
HL41DD	216 090 830	G1	4	3.1	250		2.2	2.6	100		2.4	M08	DDT
HL42DD	216 090 830	G1	4	0.2	200		2.8	2.9	100		2.5	M08	DDT
HL84	*41 23* 6*5		30	12.5	200	175	70	10	100	100		B9A	P
HL90	412 365 400		19	12.5	250	250	45	4.1	100	150	4	B7G	P
HL92	142 345 600		50	7.5	150	125	49	7.5	100	100	7	B7G	P
HL94	142 345 600		30	6.7	100	100	43	9.2	100	100	9.2	B7G	P
HL133	216 000 030	G1	13	3.3	200		6	2.9	200		2.9	M08	T
HL133DD	216 090 830	G1	13	2.5	200		1.5	2.5	150		2.3	M08	DDT
HL135	023 100 060	G1	13	3	200		6	3.5	150		3.5	8SC	T
HL210	642 300 000		2	1	100		1.1	0.7	100		1	B4	T
HL410	642 300 000		4	6	150		1.2	0.8	150		0.8	B4	T
HL607	642 300 000		6	1	100			1	100		1	B4	T
HL1320	000 231 600	G1	13	3.3	200		6	3	150		3	B7	T
HLA1	642 310 000		4	1	200		5	8	200		7	B5	T
HLA2	642 310 000		4	2.5	200		6	5.5	150		5.5	B5	T
HLB1	642 300 000		2	3	150		2	1.5	100		1.5	B5	T
HL/DD1320	809 231 600	G1	13	3	200		4.3	1.9	100		1.9	B7	DDT
HM20	642 310 000		20	3.3	250		6	2.5	100		2.3	B5	T
HN309	641 237 154		12	{ 2 9	{ 250 150	150	2.8 24	2.2 5.6	100 150	60 150	2 5.6	{ B9A B7	TP TT
HP2	446 230 700		2	1	150		8.5		125				
HP13	061 231 500	G1	13	1	250	100	8	3.5	250	100	3.5	B7	P
HP13S	023 110 560	G1	13	1	250	100	8	3.5	250	100	3.5	8SC	P
HP210	542 300 000	A1	2	1.5	150	150	1.9	1.9	150	150	1.9	B4	P
HP210C	041 230 500	A1	2	1	150	150	1.9	1.9	150	150	1.9	B7	P
HP210NC	542 300 000	A1	2	1	150	150	1.9	1.9	150	150	1.9	B4	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
HP210NC	041 230 500	A1	2	1	150	150	1.9	1.9	150	150	1.9	B7	P
HP211	041 230 500	A1	2	1	150	150	2.6	1.7	150	150	1.7	B7	P
HP211C	041 230 500	A1	2	1	150	150	2.6	1.7	150	150	1.7	B7	P
HP211C	542 300 000	A1	2	1	150	150	2.6	1.7	150	150	1.7	B4	P
HP215	542 300 000	A1	2	1.5	150	80	1.5	1.2	150	75	1.2	B4	P
HP215	041 230 500	A1	2	1.5	150	80	1.5	1.2	150	75	1.2	B7	P
HP415	041 231 500	A1	4	2	250	100	8	2.7	100	100	2.7	B7	P
HP1018	160 152 300	G1	10	3	250	100	2.3	1.3	100	150	1.3	B7	P
HP1118	160 152 300	G1	10	3	250	100	8.2	1.6	100	100	1.6	B7	P
HP2018	542 310 000	A1	20	2	200	100	4	3.5	100	100	3.5	B5	P
HP2018	041 231 500	A1	20	2	200	100	4	3.5	200	100	2.5	B7	P
HP2118	041 230 500	A1	20	2	200	100	5	3.5	100	100	3.5	B7	P
HP2118	542 310 000	A1	20	2	200	100	5	3.5	100	100	2.5	B5	P
HP4100	542 310 000	A1	4	2	200	100	3	3.5	100	100	3.5	B5	P
HP4101	041 231 500	A1	4	2	200	100	3.5	3.5	100	100	3.5	B7	P
HP4101	542 310 000	A1	4	2	200	100	3.5	3.5	100	100	3.5	B5	P
HP4101C	542 310 000	A1	4	2	200	100	3.5	2.8	100	100	2.8	B5	P
HP4101C	041 231 500	A1	4	2	200	100	3.5	2.8	100	100	2.8	B7	P
HP4105	542 310 000	A1	4	2	250	100	4.5	3	100	100	3	B5	P
HP4105	041 231 500	A1	4	2	250	100	4.5	3	100	100	3	B7	P
HP4106	041 231 500	A1	4	2	200	100	5	3.5	100	100	3.5	B7	P
HP4106	542 310 000	A1	4	2	200	100	5	3.5	100	100	3.5	B5	P
HP4106C	041 231 500	A1	4	2	200	100	5	3.5	100	100	3.5	B7	P
HP4106C	542 310 000	A1	4	2	200	100	5	3.5	100	100	3.5	B5	P
HP4115	041 231 500	A1	4	2	200	100	4.3	2.2	100	100	3.2	B7	P
HP4115C	542 310 000	A1	4	2	250	100	4.5	3.2	100	100	3.2	B5	P
HP4115C	041 231 500	A1	4	2	250	100	4.5	3.2	100	100	3.2	B7	P
HPT	412 361 500		6	2	250	250	10	7.5	100	150	5	B7G	P
				1.5	200	150	4	6.4	100	150	5		
HR1	2** 3** *00	A1	0.6						D			B7G	D
HR2	642 300 000		2	2	150		12	0.6	125		0.6	B4	T
HR2	112 311 100	D1	4				5		D			B7G	R
HR2S	023 004 060		2	2	150		1.2	0.6	125		0.6	8SC	T
HR3	112 311 100	D1	4				15		REC		10mA	B7G	R
HR4	112 311 100	D1	4				30		REC		15mA	B7G	R
HR5	112 311 100	D1	4				30		REC		15mA	B7G	R
HR6	030 000 020	D1	4				60		REC		20mA	A08	R
HR7	020 000 030	D1	4				30		REC		15mA	A08	R
HR8	030 000 020	D1	4				30		REC		15mA	A08	R
HR9	0** 080 230	D1	4						D			A08	D
HR11	020 000 030	D1	4						D			A08	D
HR210	642 300 000		2	1.5	200		1	1.3	150		1.3	B4	T
HR406	642 300 000		4	3	200		1	1.5	150		1.5	B4	T
HR410	641 300 000		4	3	200		1	1.5	150		1.5	B4	T
HSD	809 231 600	G1	13	3	200		6	2.7	150		2.3	B7	DDT
HVR1	002 300 000	D1	2				5		REC			B4	R
HVR2	003 200 000	D1	4				3		REC		2mA	B4	R
HVR2A	003 200 000	D1	2(2.5)				3		REC		2mA	B4	R

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
HVU1	002 300 000	D1	4				3		D			B4	R
HY24	264 300 000		2	45	200		20		100			UX4	T
HY61	254 130 000	A1	6	14	300	250	83	6.5	No Data Available			UX5	P
HY65	030 540 210	A1	6	45	350	200	63		100	100		A08	P
HY90	002 383 100		27.5				60		REC		25mA	B7G	R
HY113	264 030 000		1.4	4.5	60		0.4	0.2	No Data Available			UX5	T
HY125	364 520 000		1.4	3	60	50	0.9	0.3	No Data Available			UX5	P
HY615	020 000 310	A1G1	6	35	300		20		100			A08	T
HY866	280 300 000		2.5				120		REC		30mA	UX4	R
HZ50	280 300 000		13				60		REC		20mA	UX4	R
IF860	141 230 651		20		200	200	8.5	6.6	100	100		B9A	P
IL861	041 239 651		20		200	200	20	11	100	100		B9A	P
IRV120/350S	023 180 090		4				60		REC		20mA	8SC	RR
IW2	893 200 000		4				30		REC		40mA	B4	RR
IW2A	892 300 000		4				30		REC		40mA	B4	RR
IW3	892 300 000		4				60		REC		50mA	B4	RR
IW4	892 300 000		4				60		REC		40mA	B4	RR
IW4/350	892 300 000		4				60		REC		40mA	B4	RR
IW4/500	893 200 000		4(5)				60		REC		20mA	B4	RR
K4	892 300 000		4				120		REC		30mA	B4	RR
K23A	682 390 000	G1	2	5.5	150		2.5	1.4	100		1.4	B5	DDT
K23B	682 390 000	G1	2	1.5	150		1.4	1.2	150		1.2	B5	DDT
K24	265 130 000	G1	2.5	1.5	200	75	2	0.8	100	75	0.8	UX5	P
K27	264 130 000		2.5	4.5	90		3	1	80		1	UX5	T
K30A	642 300 000		2	3	150		1.5	0.8	150		0.8	B4	T
K30B	642 300 000		2	7.5	150		4	0.9	100		0.9	B4	T
K30C	642 300 000		2	1.5	150		2	1.4	100		1.4	B4	T
K30D	642 300 000		2	3	150		4	1.5	100		1.5	B4	T
K30E	642 300 000		2	4.5	150		2	1.5	100		1.5	B4	T
K30G	642 300 000		2	7	150		6	3.5	100		3.5	B4	T
K30K	642 300 000		2	1.5	150		2.2	1.4	100		1.5	B4	T
K33A	064 234 700		2		150		3		150			B7	TT
K33B	446 230 700		2	1.5	125		3	2.1	125		2.1	B7	TT
K40B	542 300 000	A1	2		150	75	2	1.5	100	75	1.5	B4	P
K40N	542 300 000	A1	2		150	90	2.5	1.4	100	90	1.4	B4	P
K40N	041 230 500	A1	2		150	90	2.5	1.4	100	90	1.4	B7	P
K50M	041 231 500	A1	2	5	150	125	3	1.5	100	100	1.5	B7	P
K50N	064 235 500	G1	2	1.5	150	60	2	1.4	125	60	1.4	B7	P
K70B	642 350 000		2	4.5	150	150	9.5	2.5	100	100	2.5	B5	P
K70D	642 350 000		2	2.4	150	150	5	4	100	100	4	B5	P
K77A	465 230 574		2	10.5	150	150	2.5	4	100	100	4	B9	PP
K77B	446 235 700		2	11.7	150	150	3.8		100	100		B7	PP
K80A	645 230 700	G1	2		150	50	2		80	60	0.4	B7	O
					150	75	1		125	75	0.8	B7	O
K80B	645 230 700	G1	2		150	150	2.1		100	60	0.1	B7	O
					150	150	0.7		100	75	1	B7	O
K435/10	642 300 000		4	3	300		50	5	100		5	B4	T
K450/50	642 300 000		4	50	400		120	5	100		5	B4	T
K1658	542 310 000	A1	7	25	400	225	50	3.2	No Data Available			B5	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
K1668	542 310 000	A1	7	25	400	225	50	3.2	No Data Available			B5	P
K1678	542 310 000	A1	7	25	400	225	50	3.2	No Data Available			B5	P
K1694	642 300 000		4	3.5	200		6	2.6	100		2.4	B4	T
KBC1	023 098 060	G1	2	4.5	150		2.5	1	100		1	8SC	DDT
KBC32	036 980 200	G1	2		100		2.4	1.2	100		1.2	A08	DDT
KC1	023 004 060		2	1.5	150		1.2	0.6	125		0.6	8SC	T
KC3	023 004 060		2	2.8	150		3	2.5	100		2.5	8SC	T
KC4	023 004 060		2	1.5	150		2.2	1.4	125		1.4	8SC	T
KC50	642 300 000		2	1	40		0.2	0.4	No Data Available			SM4	T
KC51	642 300 000		2	2	40		1.2	0.5	No Data Available			SM4	T
KCF30	037 546 200	G1	2	{ 1.0	100		3.7	1.6	100	60	1.7	A08	TP
				2.5	150	80	1.5	0.9	100	75	0.9		
KCH1	023 064 570	G1	2	{ 0.5	90		3	1.5	80	60	1.5	8SC	TH
				5	90	60	1	0.9	100	60	0.9		
KD50	652 300 000		2	2.8	40		1.8	0.6	No Data Available			SM4	T
KDD1	023 074 460		2		90		0.8	0.8	80		0.8	8SC	TT
KE50	542 300 000	A1	2	2	150	50	0.8	0.6	100	60	0.6	SM4	P
KP1	050 412 300	A1	2	1	150	150	3	1.8	125	150	1.8	C7	P
KP2	050 412 300	A1	2	1	150	150	3	1.3	125	150	1.3	C7	P
KP3	023 010 560	G1	2	1	90	90	1	0.5	80	90	0.5	8SC	P
KP4	023 010 560	G1	2	1	90	90	1.2	0.7	80	90	0.7	8SC	P
KP7	023 004 500	A1	2	1.5	90	90	1.8	0.7	80	90	0.7	8SC	P
KP8	023 004 500	A1	2	1	90	90	1.5	0.6	80	90	0.6	8SC	P
KP35	026 510 300	G1	2	1.5	150	60	1.4	1.1	125	60	1.1	A08	P
KI1	023 051 560	G1	2	1.5	90	60	2.1	1.4	80	60	1.4	8SC	P
KK2	023 064 560	G1	2	1	90	50	2		80	60		8SC	O
KK2G	026 546 300	G1	2	1	90	50	2		80	60		A08	O
KK32	037 546 200	G1	2	{	150	50	2.1		150	60	2.1	A08	O
					150	50	0.7		150	60	0.7		
KL1	642 350 000		2	4.5	90	90	8	1.7	80	75	1.7	B5	P
KL1	032 004 560		2	4.5	90	90	8	1.7	80	75	1.7	8SC	P
KL2	023 004 560		2	7.5	90	90	11	1.8	80	75	1.8	8SC	P
KL4G	036 540 200		2	2.5	90	90	4.7	1.8	80	75	2.8	A08	P
KL5	032 004 560		2	4	90	90	4.8	1.4	80	75	1.4	8SC	P
KL35	036 540 200		2	4.5	150	150	5.6	2.2	100	100	2.2	A08	P
KL3	423 564 570		2	12	150	150	8		100	100		8SC	PP
KLL32	026 447 350		2	11.3	150	150	3.8	2.6	100	100	2.6	A08	PP
KR5	264 530 000		6	9	150	150	14	1.9	100	100	1.9	UX5	P
KR20	264 413 000		2.5		250		3.5	1.4	250		1.4	UX6	T
KR22	264 413 000		6		250		3.5	1.4	250		1.4	UX6	T
KR25	264 413 000		2.5	16.5	250	250	34	2.2	100	150	2.2	UX6	P
KR28	289 130 000		6				30		REC		15mA	UX5	RR
KR31	281 300 000		10				120		REC		30mA	UX4	R
KT2	642 350 000		2	4.5	150	150	7.5	2.5	100	100	2.5	B5	P
KT8	542 310 000	A1	6	16	250	250	72	6	100	100	6	B5	P
KT8C	542 310 000	A1	6	16	250	250	72	6	100	150	6	B5	P
KT16	026 540 230		1.4	4.5	90	90	8.8	1.9	No Data Available			A08	P
KT21	642 350 000		2	2.5	150	125	5.3	5.3	100	100	5.3	B5	P
KT24	642 350 000		2	3.5	150	125	5	3.2	100	100	3.2	B5	P
KT30	045 231 600		13	12	250	250	40	3.9	100	150	3.9	B7	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE I60					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
KT31	305 221 600	G1	13	4	200	175	40	10	100	150	9	B7	P
KT32	026 540 310		26	7.6	150	150	75	9	100	100	8	A08	P
KT33	326 540 210		13	13.2	200	200	60	10	100	100	9	A08	P
KT33C	326 540 210		13	7	200	175	92	10	100	100	9	A08	P
KT35	326 540 210		13	11.5	200	200	50	10	100	100	9	A08	P
KT36	020 540 310	A1	26	10	150	150	60	11	100	100	10	A08	P
KT41	045 231 600		4(5)	4.4	250	250	40	10.5	100	150	9	B7	P
KT42	045 231 600		4	16.5	250	250	34	2.5	100	150	2.5	B7	P
KT44	041 231 500	A1	4(5)	25	250	250	85	6.3	100	150	6.2	B7	P
KT45	041 231 500	A1	4	25	250	250	85	6.3	100	150	6.3	B7	P
KT55	*26 540 310		52	15	150	150	88	16	No Data Available			A08	P
KT61	026 540 310		6	4.4	250	250	40	10.5	100	150	9	A08	P
KT63	026 540 310		6	16.5	250	250	34	2.5	100	150	2.5	A08	P
KT66	026 540 310		6	15	250	250	65	6.3	100	150	6	A08	P
KT67	256 001 403		6	9	250	175	80	13	100	100	10	B9G	P
KT71	026 540 310		48	9.8	200	175	70	10	100	100	9	A08	P
KT72	026 540 310		16	12.5	200	175	30	2.5	100	100	2.5	A08	P
KT73	026 540 310		6	4.5	200	175	35	2.5	100	100	2.5	A08	P
KT74	026 540 310		16	12.5	200	175	30	2.5	100	100	2.5	A08	P
KT76	026 540 310		15	13	200	175	35	2.5	100	100	2.5	A08	P
KT77	026 540 310		6.3		250	250	100	11.5	100	100		A08	P
KT81	265 004 130		6	4.4	250	250	40	10.5	100	150	9	B8B	P
KT88	026 540 310		6	20	250	250	57	8	No Data Available			A08	P
KT101	265 004 130		80	9.5	200	175	70	10	100	100	9	B8B	P
KTW61	026 510 310	G1	6	4	250	100	10	2.9	100	90	2.9	A08	P
KTW62	026 500 310	G1	6	3	250	100	8	2.8	100	100	2.8	A08	P
KTW63	026 510 310	G1	6	3	250	100	7.6	1.5	100	90	1.5	A08	P
KTW73	026 510 310	G1	6	3	250	100	6.5	1.7	100	90	1.7	A08	P
KTW73M	026 500 310	G1	6	3	250	100	6.5	1.7	100	100	A08	P	
KTW74	026 510 310	G1	13	3	250	100	7.6	1.5	100	90	1.7	A08	P
KTW74M	026 500 310	G1	13	3	250	100	7.6	1.5	100	100		A08	P
KTZ	061 231 500	G1	4	1.5	250	250	18	12	200	200	10	B7	P
KTZ63	026 510 310	G1	6	3	250	100	2	1.2	100	100	1.2	A08	P
KTZ73	026 500 310	G1	6	3	250	100	2	1.5	100	90	1.5	A08	P
KTZ73M	026 500 310	G1	6	3	250	100	2	1.5	100	100		A08	P
KZ	802 310 000		20				60		REC		20mA	B5	R
L2	642 300 000		2	4.5	150		9	1.6	150		1.6	B4	T
L2/B	642 300 000		2	3.8	150		4	1.5	125		1.5	B4	T
L2D	642 310 000		2	4.5	150		2	1.5	100		1.5	B5	T
L2/DD	682 390 000	G1	2	3.8	150		4	1.6	100		1.6	B5	DDT
L4	642 300 000		4	16	250		20	3.2	100		3.2	B4	T
L11	642 300 000		1	12	100		2.8	0.6	100		0.6	B4	T
L12	642 300 000		2	3	40		2.2	0.8	No Data Available			SM4	T
L21	642 300 000		2	6	150		3.2	1.8	100		1.8	B4	T
L21DD	682 390 000	G1	2	3	150		5.2	1.8	100		1.8	B5	DDT
L22DD	206 080 930	G1	2	4.2	150		4	1.6	100		1.6	A08	DDT
L30	042 231 600		13	8	200		25	4.2	100		4.2	B7	T
L42MD	642 350 000		4	20	250	250	22	2.5	100	100		B5	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
L63	026 040 310		6	8	250		9	2.6	100		2.6	A08	T
L77	6*2 364 100		6	8.5	250		10.5	2.2	100		2.2	B7G	T
L210	642 300 000		2		150			0.9	100		0.9	B4	T
L408	642 300 000		4	3	150		5	1.5	125		1.5	B4	T
L412	642 300 000		4	1.5	200		3	1.2	100		1.2	B4	T
L413	642 300 000		4	16	200		12	1.8	100		1.6	B4	T
L414	642 300 000		4	8	150		12	2.8	100		2.8	B4	T
L415	642 300 000		4	10	200		8	2	100		2	B4	T
L416D	643 200 000	G2	4	13	250	80	12	1.4	100	75		B4	P
LA	364 520 000		6	12	200	175	22	2.2	100	100	2.2	UX5	P
LD210	642 300 000		2	4.5	150		3	1.3	125		1.3	B4	T
LD410	642 300 000		4	6	200		4	1.8	100		1.8	B4	T
LG5	218 090 130		6				120		REC		30mA	A08	RR
LG6	218 090 130		12				30		REC		15mA	B8B	RR
LG14	123 000 000	D1	6				5		D			B3G	R
LK430	642 300 000		4	32	250		20	1.9	100			B4	T
LK460	642 300 000		4	40	250		30	2.2	No Data Available			B4	T
LK4110	642 300 000		4	36	400		30	2.7	No Data Available			B4	T
LK4112	642 300 000		4	21.6	250		48	3.5	No Data Available			B4	T
LK4200	642 300 000		4	36	400		45	4	No Data Available			B4	T
LL2	642 300 000		2	2.5	150		3	2.5	125		2.6	B4	T
LL2S	023 004 060		2	2.5	150		3	2.6	125		2.6	B5C	T
LL4	642 310 000		4	10	350		18	3.5	125		3.5	B5	T
LL610	642 350 000		5	17	200	150	12	1.3	No Data Available			B5	P
LN119	414 237 516		50	{ 0 16	{ 100 200	{ 200	{ 3.5 35	{ 2.5 6.4	{ 100 100	{ 60 100	{ 2.5 }	{ B9A }	TP
LN152	641 237 154		6	{ 2.3 6.7	{ 100 200	{ 175	{ 4.0 15.0	{ 1.4 3.2	{ 100 100	{ 60 100	{ 1.4 3.0	{ B9A }	TP
LN309	641 237 154		12.5	{ 8.5 8.0	{ 250 200	{ 175	{ 10.5 30	{ 2.2 4.5	{ 100 100	{ 60 100	{ 2.0 4.0	{ B9A }	TP
LN319	641 237 154		13	{ 9	{ 200 200	{ 175	{ 32	{ 6.5	{ 100 100	{ 60 100	{ 3.4	{ B9A }	TP
LN329	645 237 114		9	{ 2 2	{ 100 200	{ 175	{ 14 10	{ 5 6.2	{ 100 100	{ 60 100	{ 6 }	{ B9A }	TP
LP2	642 300 000		2	4.5	150		10	3.6	100		3.6	B4	T
LP4	642 300 000		4	36	250		48	5.5	100		5.5	B4	T
LS5	642 300 000		4.7	47	400		25		No Data Available			B4	T
LP25	642 300 000		4	31	400		50	7.5	100		6.9	B4	T
LS5A	642 300 000		5.2		400		33	0.9	No Data Available			B4	T
LS6A	642 300 000		6	91	400		64	2.3	No Data Available			B5	T
LS7	642 300 000		4	4	150		21	2.4	100		2.4	B5	T
LS8	642 300 000		4	8	150			1.3	100			B4	T
LS8A	642 300 000		4	8	150		26	3	No Data Available			B4	T
LS9B	642 300 000		2	1.5	150		8	0.6	100		0.6	B4	T
LS826	246 310 000		6.3	1.1	100		7.5	5	100		5	B5B	T
LU4A	642 300 000		4	16	200		12	1.8	100		1.6	B4	T
LZ329	645 237 114		9	{ 2 2	{ 100 200	{ 175	{ 14 10	{ 5 6.2	{ 100 100	{ 60 100	{ 5 5	{ B9A }	TP

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
LZ319	645 237 114		9	{ 2.0	100		14	5	100	60	5.0	B9A	TP
M3057	041 230 651		6.3	{ 2.0	200	175	10	6	100	100	5.0	B9A	P
M8079	192 310 800		6	4.5	200	200	30	9	100	100		B7G	RR
M8080	602 364 100		6	8.5	250		10.5	2.2	100		3	B7G	T
M8081	672 344 100		6	0.8	100		8.5	5.3	100		5.3	B7G	TT
M8082	412 360 500		6	12.4	250	250	16	2.6	No Data Available			B7G	P
M8083	412 361 500		6	{ 2	250	250	10	7.65	100	150	5.0	B7G	P
M8091	**1 23* ***	D1	6.3	{ 1.5	200	150	4	6.4	100	150	5.0	B9A	R
M8096	601 235 144		6	7.5	250	250	45	7	100	150	7	B7A	P
M8097	812 314 600		6	2.8	200		7.5	2.8	100		2.8	B7G	DT
M8099	412 314 600		6	2	250		6	8.5	200		8	B7G	T
M8100	412 365 100		6	2.3	150	150	7	4.3	No Data Available			B7G	P
M8101	412 365 100		6	1	250	100	11	4.4	250	100	4.4	B7G	P
M8121	412 163 510		6	1.4	100	100	7	5	100	100	5	B8D	P
M8122	412 653 160		6	2	100	100	7.5	5	100	100	5	B8D	P
M8123	281 380 000		6				5		D			B8D	R
M8125	412 163 510		6	2	100	100	3	2.5	100	100	2.3	B8D	P
M8135	412 3** 651		6	4.5	250	250	40	11	100	150	10	B9A	P
M8136	741 226 413		6.3	8.5	250		8.5	2.2	100		2	B9A	TT
M8137	741 226 413		6	2	250		1.2	1.6	100		1.6	B9A	TT
M8138	802 309 100		6				30		REC		15mA	B7G	RR
M8156	462 603 160		6	2	100		13	5.5	100		5.5	B8D	T
M8157	265 511 413		6	30	300	250	25	1.9	100	100	1.9	B9G	P
M8161	412 361 500		6	2.5	250	200	8	2.5	100	150	2.5	B7G	P
M8162	741 226 413		6	1.5	200		8.5	6.5	200		8.5	B9A	TT
M8178	402 013 060		6.3		100		8.5	5.8	100		5.8	B8D	T
M8195	501 236 014		6.3	1	250	100	3	1.8	100	100	1.8	B9A	P
M8196	412 265 100		6.3	2	150	125	5.5	3.5	100	100	3	B7G	P
M8212	182 310 900		6.3				5		D			B7G	RR
M8245	412 365 400		6.3	12.5	250	250	45	4.1	100	150	4	B7G	P
MAZ41	*8* **9 23*		4				30		REC		15mA	A08	RR
MC1	423 060 000		1.9	1.5	100		4	0.8	100		0.8	8SC	T
ME2	642 350 000		2	12	200	200	13		100	100		B5	P
ME25	642 350 000		4	30	400	300	60		100			B5	P
MH4	642 310 000		4	2	200		8	3	100		3.6	B5	T
MH40	642 310 000		4	3	200		2.7	2.4	100		2.4	B5	T
MH41	642 310 000		4	1.5	200		5.2	6	200		6	B5	T
MH206	645 230 600	G1	2	3	150	75	3.2		100	75		B7	H
MH1118	645 231 600	G1	10	3	200	100	3.5		100	90	0.6	B7	H
MH4105	645 231 600	G1	4	3	200	100	7.5		100	100		B7	H
MHD4	908 231 600	G1	4	4	200		2	1.9	100		1.9	B7	DDT
MHL4	642 310 000		4	8	250		8	2.5	100		2.5	B5	T
MHLD6	026 890 310	G1	6	5	200		11.5	3	100		3	A08	DDT
MKT4	045 231 600		4	11	250	200	32	3	100	100	3	B7	P
MKT4	642 310 000	G2	4	11	250	200	32	3	100	100	3	B5	P
ML4	642 310 000		4	16	250		14	3.2	100		3.2	B5	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
ML6	642 310 000		6	8	200		24	3.8	100		3.8	B5	T
ML40	642 310 000		4	3	200			3	100		3	B5	T
MM4V	542 310 000	A1	4	1.5	200	125	6	2.5	100	100	2.5	B5	PP
MM20	542 310 000	A1	20		200	100	6	3.5	100	100	3.5	B5	P
MO495	123 174 560	G1	4	{ 1.5 8.5	90 250	75	1.6		80 100	75		8SC	O
MP2	642 300 000		2	12	150		12.5	3	100		3	B4	T
MP4	067 231 500	G1	4		250	150	8	2.5	100	100	2.5	B7	P
MP/Pen	045 231 600		4	16	250	250	3	3.5	100	100	3.5	B7	P
MP/Pen	642 310 000	G2	4	16	250	250	30	3.5	100	100	3.5	B5	P
MPT4	045 231 600		4	9	250	200	32	3	100	100	3	B7	P
MPT4	642 310 000	G1	4	9	250	200	32	3	100	100	3	B5	P
MR1	802 300 000		4				120		REC		30mA	B4	R
MR4	642 300 000		4	3	200		6	2.5	150		2.5	B4	T
MS4	542 310 000	A1	4	1.5	250	75	2.4	1.1	250	75	1.1	B5	P
MS4B	542 310 000	A1	4	1	200	75	3.4	3	100	75	3	B5	P
MS4C	542 310 000	A1	4	1	200	75	3.4	3.2	200	75	3.2	B5	P
MSG/HA	542 310 000	A1	4	1.5	200	80	2.1	2	100	75	2	B5	P
MSG/LA	542 310 000	A1	4	1.5	200	75	5.2	3.7	100	75	3.7	B5	P
MSP4	041 231 500	A1	4	1.8	200	100	3.4	2.4	100	75	3.5	B7	P
MSP4	542 310 000	A1	4	1.8	200	100	3.4	2.4	100	75	3.5	B5	P
MSP41	542 310 000	A1	4	4	250	250	8.5	3.2	100	150	3.2	B5	P
MSP41	041 231 500	A1	4	4	250	250	8.5	3.2	100	150	3.2	B7	P
MS/Pen	041 231 500	A1	4	1.5	200	100	4.8	2.8	100	100	2.8	B7	P
MS/Pen	542 310 000	A1	4	1.5	200	100	4.8	2.8	100	100	2.8	B5	P
MS/Pen	542 310 000	A1	4	2.5	200	150	9	4	100	150	4	B5	P
MS/PenA	041 231 500	A1	4	2.5	200	150	9	4	100	150	4	B7	P
MS/PenB	061 231 500	G1	4	1.5	200	100	4.8	2.8	100	100	2.8	B7	P
MS/PenT	041 231 500	A1	4	1.5	200	100	4.8	2.8	100	100	2.8	B7	P
MS/PenT	542 310 000	A1	4	1.5	200	100	4.8	2.8	100	100	2.8	B5	P
MU1	002 300 000	D1	4				60		REC		20mA	B4	R
MUT	002 300 000	D1	2				5		D			B4	R
MU12	892 300 000		4				60		REC		25mA	B4	RR
MU12/14	892 300 000		4(5)				60		REC		40mA	B4	RR
MU14	892 300 000		4				60		REC		40mA	B4	RR
MU4250	232 300 000	D1	4				120		REC		30mA	B4	R
MVSG	542 310 000	A1	4	1.5	200	75	7.5	2.5	100	75	2.5	B5	P
MVSPen	542 310 000	A1	4	2	250	125	5.1	2.3	200	100	2.3	B5	P
MSVPen	041 231 500	A1	4	1.5	200	100	4.3	2.2	100	100	2.2	B7	P
MSVPenB	061 231 500	G1	4	1.5	200	100	4.3	2.2	200	100	2.2	B7	P
MX40	645 231 700	G1	4	{ 1 3	150 250	75 75		0.15 2.0	150 250	75 75	0.6 1.4	B7	TH
MZ05-20	642 300 000		6	12	350		45	4.2	100		4	B4	T
N14	036 540 200		1.4	7.5	90	90	7	1.5	80	75	1.5	A08	P
N15	026 540 230		1.4	7	90	90	7	1.5	80	75	1.5	A08	P
N16	026 540 230		1.4	4.5	90	90	9.5	2.1	80	90	2.1	A08	P
N17	264 536 200		1.4	7	90	75	7.4	1.5	80	60	1.5	B7G	P
N18	364 526 300		1.4	4.5	90	90	9.5	2.1	80	75	2	B7G	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
N19	365 024 300		1.4	4.5	90	90	7.7	2	80	75	2	B7G	P
N25	365 *24 300		1.4	5.2	90	90	5	1.4	80	75	1.4	B7G	P
N30	045 231 600		13	12	250	250	40	0.9	100	150	3.9	B7	P
N31	205 331 600	G1	13	4.4	200	175	40	10	100	100	9	B7	P
N34	105 231 600	G1	13		250	250	40	10.5	No Data Available			B7	P
N37	412 360 500		13	8	200	150	50	10	100	100	9	B7G	P
N40	045 231 600		4	3.5	250	250	32	2.9	100	150	2.9	B7	P
N41	045 231 600		4	3.5	250	250	32	10	100	150	9	B7	P
N42	045 231 600		4	16.5	250	250	34	2.5	100	150	2.5	B7	P
N43	005 231 600	G1	4(5)	4.5	250	250	40	10	100	150	9	B7	P
N63	026 540 310		6	16.5	250	250	34	2.5	100	150	2.5	A08	P
N66	026 540 310		6	15	250	250	85	6.3	100	150	6	A08	P
N77	412 360 500		6	12	250	250	20	2.6	100	150	2.6	B7G	P
N78	412 360 500		6	5.5	250	250	35	10	100	150	9	B7G	P
N108	412 36* 500		40	8	200	150	50	10	100	100	9	B7G	P
N118	23* *54 130		40	6	150	150	30	7.5	100	100		B8A	P
N119	*41 23* 6*5		45	12.5	200	175	70	10	No Data Available			B9A	P
N142	261 054 130		45	9.5	200	175	54.5	9.5	100	100	9	B8A	P
N144	412 360 500		6	12	250	250	20	2.6	100	150	2.6	B7G	P
N145	261 054 130		40	6.3	200	150	29	7.5	100	100	7	B8A	P
N147	026 540 310		6	6	250	250	36		100	150	8	A08	P
N148	265 004 130		6	12.5	250	250	45	94.1	100	100	4	B8A	P
N150	261 054 130		6	7	250	250	36	10	100	100	9	B8A	P
N151	261 045 130		6	13.5	250	250	22.5	2.9	100	100	2.9	B8A	P
N152	*41 23* *51	A1	20	28	200	200	40	6	100	100	6	B9A	P
N153	541 231 600		50	2.3	200	175	36	10	100	100	9	B9A	P
N154	*41 23* 6*5		16	14.2	200	200	45	8.2	100	100	7	B9A	P
N155	441 231 615		6	10.8	225	225	26	3.2	150	100	3.2	B9A	P
N308	02* 54* 310	A1	25	9.5	100	100	100	13	No Data Available			A08	P
N309	541 231 600		15	2.3	200	175	36	10	100	100	9	B9A	P
N329	*41 23* 6*5		16	14.2	200	200	45	8.2	100	100	7	B9A	P
N339	*41 23* *51	A1	21.5	13	150	150	50	8.5	100	100	7	B9A	P
N349	*41 23* *51	A1	20	12	150	150	5	8.5	100	100	7	B9A	P
N359	041 231 551	A1	21.5	28	200	200	40	6	100	100	6	B9A	P
N369	041 23* 6*5		12.6	10.3	200	175	31	8.3	No Data Available			B9A	P
N379	*41 23* 6*5		15	4.5	200	175	10		No Data Available			B9A	P
N709	*41 23* 6*5		6	7.3	250	250	48	11.3	100	150	10	B9A	P
N727	412 365 400		6	4.5	250	250	45	4.1	100	150	4	B7G	P
NDD40	802 310 000		4						D			B4	D
NEP51	023 110 560		4	3	250	100	8	2.2	100	100		8SC	P
NF2	023 110 560	G1	12.5	2	200	100	3	2.1	100	100	2.1	8SC	P
NF3	023 110 560	G1	12.5	2	200	100	4.5	2.3	100	100	2.3	8SC	P
NG320	002 300 000	D1	2						D			B5	D
NG3020	002 300 000	D1	2				5		D			B4	R
NHP51	023 100 560	G1	4	2.5	250	100	3.5	2	100	100		8SC	P
NIX2	*41 23* *51	A1	21.5	28	200	200	40	6	100	100	6	B9A	P
NLP61	023 104 560		4	7	250	250	4	9	100	100		8SC	P
NLP62	020 314 560		4	14	250	250	72	9	No Data Available			8SC	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE	
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V			
NSS42	542 310 000	A1	4	2.5	250	100	3.5	2	100	100		B5	P	
NSS43	542 310 000	A1	4	2.5	250	100	3.5	2	100	100		B5	P	
NSS183	542 310 000	A1	20	2.5	200	100	3.5	2	100	100		B5	P	
NT51	023 100 060	G1	4	5	250		6	2.5	100		2.2	8SC	T	
NVS4	542 310 000	A1	4	2	200	100	6	1	100	100		B5	P	
NW4	642 310 000		4	2.5	200		2.5	1	100		2.2	B5	T	
OO	364 200 000		5		40		1	0.6	No Data Available			UX4	T	
OOA	364 200 000		5		40		1.5	0.6	No Data Available			UX4	T	
O1	364 200 000		5	4.5	90		2.5		80			UX4	T	
O1A	364 200 000		5	4.5	90		2.5	0.7	80		0.7	UX4	T	
O1AA	364 200 000		5	4.5	90		3.2	0.9	90		0.8	UX4	T	
O1B	364 200 000		5	4.5	90		2.5	0.7	90		0.7	UX4	T	
O15/400	642 300 000		4	35	400		40	4.5	100		4.5	B4	T	
O54V	642 310 000		4		100			4	100			B5	T	
O84	642 300 000		4	4	150		4	1.3	100		1.2	B4	T	
O202	645 230 000	G1	2	{	150	50	2		100			B7	O	
					150	75	0.95	0.2	100	75	1			
O406	645 231 700	G1	4	{	4	90	2	1	100	90	1.3	B7	O	
					4	250	90	1.6	1	250	90			1.5
O1307	023 154 560	G1	4		1.5	200	90	8	3	200	75	1.6	8SC	P
OBC3	041 896 231		12.5	2	250		1	1.1	150		1.1	A08	DDT	
OBF2	206 581 930	G1	9	2	200	100	6	1.8	100	100	1.7	A08	DDP	
OCH4	217 544 630	G1	15	{	100		3.5		100	60	3.5	A08	TH	
					2	200	100	3	0.75	100	100			0.7
OF1	026 510 310	G1	6.3	3	250	100	8.5	1.8	100	100	1.7	A08	P	
OF9	206 501 130	G1	8.5	2.5	200	100	6	2.2	100	100	2	A08	P	
OM1	020 080 310		30				120		REC		30mA	A08	R	
OM3	028 190 310		6						D			A08	DD	
OM4	026 980 310	G1	6	5	250		5.5	2.2	100		2.2	A08	DDT	
OM5	026 510 310	G1	6	2	250	100	3	1.8	100	100	1.8	A08	P	
OM5B	026 510 310	G1	6	2	250	100	3	1.8	100	100	1.6	A08	P	
OM5C	026 510 310		6	2	250	100	3	1.8	100	100	1.8	A08	P	
OM6	026 510 310	G1	6	2.5	250	100	6	2	100	100	2	A08	P	
OM7	026 510 310	G1	6	2.5	250	100	6	2	100	100	2	A08	P	
OM9	026 500 310	G1	6	18	250	250	32	2.8	100	150	2.8	A08	P	
OM10	027 546 310	G1	6	{	2.0	100	5.4	2.2	100	60	2.8	A08	TH	
					2.0	250	100	5.0	2.4	100	100			1.2
OP41	045 231 600		4	12.5	250	250		9.1	100	100	8	B7	P	
OP42	045 231 600		4	6.2	250	250		10.5	100	100	9	B7	P	
OS6/300	642 350 000		4	20	300	150	22	2	100	100		B5	P	
OS18/600	023 114 500	A1	6	14	250	275	72	8.5	100	150	8	8SC	P	
OSW2190	021 414 360		6.3	2	300	150	10	9	No Data Available			A08	P	
OSW2192	120 415 360		6.3	3	300	150	30	11	No Data Available			A08	P	
OSW2600	021 415 360		6.3	2	300	150	10	9	No Data Available			A08	P	
OSW2601	120 415 360		6.3	3	300	150	30	11	No Data Available			A08	P	
OSW3105	041 896 230		6.3	2	250		0.9	1.1	100		1	A08	DDT	
OSW3106	026 540 310		6.3	12.5	250	250	45	4.1	100	150	4	A08	P	
OSW3107	020 809 030		5				60		REC		20mA	A08	RR	

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
OSW3108	026 540 310		6.3	14	250	250	72	6	100	150	5	A08	P
OSW3109	028 190 300		6.3						D			A08	DD
OSW3111	021 415 360		6.3	3	250	100	9.2	2	100	100	2	A08	P
OSW3112	026 040 310		6.3	8	250		9	2.6	100		3	A08	T
P2	642 300 000		2	6	100		12	3.5	100		4	B4	T
P6M0	023 104 560		6.3	14	250	250	72	9	100	100		8SC	P
P4	642 300 000		4	21	250		30	2.8	100		2.8	B4	T
P12/250	642 300 000		4	44	250		60	6	100		6	B4	T
P15/250	642 300 000		4	44	250		60	6	100		6	B4	P
P15/250S	023 004 060		4	44	250		60	6	100		6	8SC	T
P24/450	642 300 000		7.5	70	400		55	2.1	100		2.1	B4	T
P25/400	642 300 000		6	100	350		70	3.7	100		3.7	B4	T
P25/500	642 300 000		6	90	400		65	3	100		3	B4	T
P26/500	642 300 000		4	100	400		62.5	4.2	100		4.2	B4	T
P27/500	642 300 000		4	27	400		62.5	8.5	100		8	B4	T
P30/500	642 300 000		4	100	400		60	4	100		4	B4	T
P41	216 040 030		4	11.8	250		16	4.5	100		4.5	M08	T
P43M	642 350 000		4	17	250	250	26	2.5	100	100		B5	P
P61	216 040 030		6	11.8	250		16	4.5	100		4.5	M08	T
P215	642 300 000		2		150			1.4	100		2.2	B4	T
P220	642 300 000		2	7.5	150		6	3	100		3	B4	T
P220A	642 300 000		2	14	150		15	2.7	100		2.7	B4	T
P222	642 300 000		2	10.5	150		6	3	100		3	B4	T
P225	642 350 000		2	4.5	150	150	5.6	2.2	100	100	2.2	B5	P
P240	642 300 000		2	24	150		18	1.1	100		3.7	B4	T
P248	642 300 000		2	21	150		25	5	100		5	B4	T
P410	642 300 000		4	12	150		7	1.3	100		1.5	B4	T
P414	642 300 000		4	16	100		14	2.8	80		2.8	B4	T
P415	642 300 000		4	25	150		14	1.5	100		1.5	B4	T
P420	642 300 000		4	85	400		50	6	100		6	B4	T
P421	642 350 000		4	11	200	75	12	1.5	100	75		B5	P
P422	642 350 000		4	20	250	250	22	2.5	100	100		B5	P
P425	642 350 000		4	25	300	200	20	1.7	100	150	1.7	B5	P
P425	642 300 000		4	16.5	150		17	1.9	100			B4	T
P430	264 300 000		4	30	200		25	2.2	100		2.2	UX4	T
P434	032 004 560		4	17	250	250	36	2.5	100	100		8SC	P
P435	642 350 000		4	17	250	250	30	3	100	150	3	B5	P
P440	642 350 000		4	30	400	200	45	5	No Data Available			B5	P
P440N	045 231 600		4	22	250	250	26	2.8	100	150	2.8	B7	P
P440N	642 310 000		4		250	250	20	2.5	100	150	2.8	B5	P
P441N	045 231 600		4	22	250	250	36	2.8	100	150	2.8	B7	P
P455	264 300 000		4	15	250		30	5.5	100		5.5	UX4	T
P455	023 100 650		4	25	250	250	36	2.6	100	150	2.8	8SC	P
P460	642 300 000		4	40	200		50	3.5	100		3.5	B4	T
P469	045 231 600		4	14	250	275	72	8.5	100	150	7	B7	P
P495	045 231 600		4	6	200	200	32		100	100		B7	P
P496	045 231 600		4	6	200	200	32	9.5	100	100	8	B7	P
P520	642 350 000		5	17	200	150	12	1.3	100	100		B5	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
P625	642 300 000		6	26	250		24	2.5	100			B4	T
P625A	642 300 000		6	39	200		25	2.3	100			B4	T
P625B	642 300 000		6	1	200			2.8	200		2.8	B4	T
P626	023 100 560	G1	6.3	32	250	250	26	2.5	100	100		8SC	P
P628	023 100 560	G1	6.3	17	250	250	56	2.5	100	100		8SC	P
P650	642 300 000		6	1	100		37	2.7	100		2.7	B4	T
P861	289 130 000		6				30		REC		15mA	UX5	RR
P1320	023 100 560		13	20	250	250	22	1.9	100	100		8SC	P
P2018	642 310 000		20	15	200		20	4	100		4	B5	T
P2020N	642 310 000	G2	20	18	200	200	20	1.7	100	100	1.7	B5	P
P2060	023 140 560		24	19	200	100	40	3.2	100	90	3	8SC	P
P2460	642 310 000	G2	24	19	200	100	40		100	90		B5	P
P3580	045 231 600		33	8.5	200	200	45	8	100	150	7	B7	P
P4100	642 300 000		4	40	400		30		100			B4	T
PA20	642 300 000		2	36	300		49	5.2	100		5	B4	T
PA1	642 310 000		4	10	200		40	5	100		5	B5	P
PA40	642 300 000		4	90	400		200	10	100		9	B4	T
PAB1	023 119 980		6						D			8SC	DDD
PABC80	191 238 146		9.5	2.3	200		1	1.4	100		1.4	B9A	DDDT
PB1	234 600 000		2	4	150		11.5	3.8	150		3.8	B4	T
PB495	892 300 000		4				30		REC		15mA	B4	RR
PBF2	026 895 310	G1	6	3	250	100	5.8	1.2	100	100	1.2	A08	DDP
PC86	641 234 146		3.8	1.5	200		12	14	No Data Available			B9A	T
PC88	414 234 464		4	1.2	150		12.5	14	No Data Available			B9A	T
PC92	602 304 100		3.2	2	250		10	5	100		5	B7G	T
PC93	642 314 600		4.7	4	100		16	8	100		8	B9A	P
PC95	142 360 100		3.6	1.2	200		10	10.5	No Data Available			B7G	T
PC96	412 314 600		3.1	1	200		11.5	6.7	200		6.7	B7G	T
PCC84	147 234 116		7	1.5	90		12	6	100		6	B9A	TT
PCC85	641 237 418		9	2.1	200		10	5.8	150		5.8	B9A	TT
PCC88	641 237 410		7	1.2	90		15	12.5	No Data Available			B9A	TT
PCC89	147 234 116		7.2	1.2	90		15	12	No Data Available			B9A	TT
PCC189	641 237 410		7	1.2	90		15	12.5	No Data Available			B9A	TT
PCC805	146 234 117		7	1.2	90		15	9	100		9	B9A	T
PCC806	146 234 117		7	1.2	90		15	9	100		9	B9A	T
PCF8C	645 237 114		9	{ 2.0	100		14.0	5.0	100	60	5.0	B9A	TP
				{ 2.0	200	175	10.0	6.2	150	150	5.0		
PCF82	645 237 114		9.5	{ 1.0	150	0	18	8.5	100	60	7.0	B9A	TP
				{ 1.0	250	100	10	5.2	100	100	5.0		
PCF84	414 237 516		9	{ 2	100		14	2.5	100	60	3	B9A	TP
				{ 2	200	175	8	2.5	100	100	2.2		
PCF86	141 234 675		8	{ 3	100		14	6	100	60		B9A	TP
				{ 1.2	200	150	10	12	No Data Available				
PCF87	157 236 414		7.4	{	100		15	8.5	100	60	8	B9A	TP
				{	200	150	6.4	15	100	100			
PCF800	157 236 414		9	{	100		6	5	100	60	5	B9A	TP
				{	200	150	7.6	8.5	100	100			

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
PCF801	141 237 564		8	{ 3.1.2	100200		1510	8.510.5	100100	60100	8	B9A	TP
PCL81	451 237 614		12.6	{ 1.56.5	200200	200	0.530	1.28.7	100100	60100	1.2	B9A	TP
PCL82	414 237 516		16	{ 1.511	200200	175	1.741	2.47.5	100100	60100	36	B9A	TP
PCL83	641 237 154		12.5	{ 8.59.0	250200	0175	10.530	2.24.7	100100	60100	2.04.0	B9A	TP
PCL84	461 237 145		15	{ 1.72.9	200200	200	318	410	100100	60100	4	B9A	TP
PCL85	641 237 514		18	{ 0.815	100200	175	541	6.57.5	100100	60100	6.5	B9A	TP
PCL86	415 237 146		14.5	{ 1.75.7	250250	250	1.239	1.610.5	100No Data Available	60	2	B9A	TP
PCL88	414 237 516		16	{	200200	200	10	3.4	100100	60100	3	B9A	TP
PC05-15	023 014 500	A1	4		400	250	40	1.3	No Data Available			8SC	P
PC03/3A	023 014 500	A1	2		300	125		1.4	100	100		8SC	P
PC03/3B	023 014 500	A1	4		300	125		1.4	100	100		8SC	P
PD220	446 230 700		2	1.2	150		0.8	0.9	150		0.9	B7	TT
PD220A	446 230 700		2	3	150		5	1.5	100		1.5	B7	TT
PDD2	264 589 130		6.3	6	250	250	36	9	100	100	8.5	A08	DDP
PE04-10	023 114 500	A1	12		400	300	27	7.5	No Data Available			8SC	P
PE05-15	023 114 500	A1	12				40	1.5	No Data Available			8SC	P
PE05/25	256 130 000	A1	12.6	80	400	200	70		No Data Available			B5B	P
PE1-80	023 114 500	A1	12				40	2.5	No Data Available			8SC	P
PE1-100	245 611 300		12	33	400	250	40	6	No Data Available			B7A	P
Pen4DD	918 236 500	G1	4(5)	6	250	250	36	9.5	100	150	8	B7	DDP
Pen4V	642 310 000	G2	4	10	250	200	35	3	100	150	2.8	B5	P
Pen4VA	642 310 000	G2	4	22	250	250	36	2.8	100	150	2.8	B5	P
Pen4VA	045 231 600		4	20	250	250	36	2.8	100	150	2.8	B7	P
Pen4VB	045 231 600		4	5.8	250	250	36	9.5	100	150	8	B7	P
Pen4VX	642 310 000	G2	4	15	350	200	22	3.5	100	150	3.5	B5	P
Pen13	023 100 560	G1	13	14	200	200	25	2.5	100	100	2.5	8SC	P
Pen13A	023 110 560	G1	33	8.5	200	200	45	8	100	100	6	8SC	P
Pen13C	045 231 600		13	11	250	250	32	6.5	100	150	6	B7	P
Pen20	642 310 000	G2	20	18	200	200	20	1.7	100	150	1.7	B5	P
Pen24	206 540 030		2	3.3	200	125	5	4	100	100	4	M08	P
Pen25	206 540 030		2	3.6	200	125	5	3	100	100	3	M08	P
Pen26	023 100 560	G1	24	19	200	100	40	3.1	100	60	3	8SC	P
Pen36A	145 231 600		35	8.5	200	200	45	8	100	150	7	B7	P
Pen36C	045 231 600		33	8.5	200	200	45	8	100	100	7	B7	P
Pen40DD	918 236 500	G1	44	8.5	200	200	45	8	100	100	7	B7	DDP
Pen44	216 540 030		4	11	300	275	70	10.6	100	150	9	M08	P
Pen45	216 540 030		4	8.5	250	250	40	8.8	100	150	8	M08	P
Pen45AN	216 540 030		4	8.5	250	250	40	8.8	100	150	8	M08	P
Pen45DD	216 590 830	G1	4	8.5	250	250	40	8.8	100	100	8	M08	DDP
Pen46	210 540 030	A1	4(5)	8	300	225	63	8.5	100	100	8	M08	P
Pen141	206 540 030		1.4	9	90	90	5.5	1.4	80	75	1.4	M08	P

VALVE	SELECTOR SWITCH No.	T.C.	Vr	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
Pen220	642 350 000		2	4.9	150	150	9	2.2	100	100	2.2	B5	P
Pen220A	642 350 000		2	9	150	150	18	2.2	100	100	2.2	B5	P
Pen230	642 350 000		2	4.5	150	125	6	2.2	150	125	2.2	B5	P
Pen231	642 350 000		2	2.5	150	125	5	4.4	100	100	5	B5	P
Pen383	216 540 030		38	10	200	175	64	10.5	100	100	9	M08	P
Pen384	216 540 030		38	7	150	125	40	7.8	100	100	12	M08	P
Pen425	642 350 000		4	25	300	200	20	1.7	100	100	1.7	B5	P
Pen428	045 231 600		4(5)	13.8	250	250	72	8.5	250	200	7	B7	P
Pen453DD	216 590 830	G1	45	10	200	175	64	10.5	100	100	9	M08	DDP
Pen650	023 114 500	A1	6	24	400	300	30	5	100	150	5	8SC	P
Pen1340	045 231 600		13	8.6	250	250	41	6.4	100	150	6	B7	P
Pen2020	023 100 560	G1	20	19	200	100	40	3.1	100	60	3.1	8SC	P
Pen3520	045 231 600		35	8	200	200	40	7.3	100	100	7	B7	P
Pen3820	045 231 600		38	10	150	175	64	10.5	100	100	9	B7	P
PenA1	642 350 000		4	16.5	250	250	32	3	100	150	3	B5	P
PenA4	045 231 600		4	5.8	250	250	36	9.5	100	150	9	B7	P
PenA4	005 231 600	G1	4	5	250	250	40	9.1	100	100	8	B7	P
PenB1	642 350 000		2	4.5	150	150	8.5	2.5	100	100	2.5	B5	P
PenB4	045 231 600		4(5)	14	250	275	72	8.5	100	150	7	B7	P
PenDD61	869 231 500	G1	6	5.3	250	250	32	8.5	250	200	8	B7	DDP
PenDD1360	968 231 500	G1	13	5.3	250	250	32	8.2	100	100	8	B7	DDP
PenDD2530	869 231 500	G1	25	7.8	250	250	43	7.8	100	150	7.8	B7	DDP
PenDD4020	968 231 500	G1	40	7.7	250	250	43	7.8	100	100	7	B7	DDP
PenDD4021	968 231 500	G1	45	10	200	175	64	10.5	100	100	12	B7	DDP
PF9	026 510 310	G1	6	3.5	250	100	7.5	1.7	100	100	1.6	A08	P
PF83	501 236 014		4.5	2	60	50	1.9		No Data Available			B9A	P
PF86	501 236 014		4.5	2	250	150	3	2	100	100		B9A	P
PF462	041 230 500	A1	2	1	150	150	3	1.9	150	150	1.9	B7	P
PF472	041 230 500	A1	2	0.5	150	150	2.5	1.7	150	150	1.7	B7	P
PL11	602 301 450		17.5	10.5	200	200	53	9	100	100		F8	P
PL33	026 540 310		19	5.3	250	250	32	9	100	150	8	A08	P
PL36	*2* 540 310	A1	25	21	200	175	100	11	No Data Available			A08	P
PL38	120 540 310	A1	30	5.5	200	200	75	13.5	100	150	10	A08	P
PL81	*41 23* *51	A1	21.5	28	200	200	30	6	100	100	6	B9A	P
PL81F	*41 23* *51	A1	21.5	28	200	200	30	6	100	100	6	B9A	P
PL83	541 231 600		15	2.3	200	175	36	10	100	100	9	B9A	P
PL84	*41 23* 6*5		15	12.5	200	175	70	10	100	100	9	B9A	P
PL82	041 230 605		16	14.2	200	200	45	7.6	100	100	7	B9A	P
PL136	521 441 350	A1	35	12	100	100	90	19	No Data Available			A08	P
PL183	541 231 640		12.6	2.1	150	225	40	25	No Data Available			B9A	P
PL300	521 441 350	A1	35	22.5	200	150	100	10	No Data Available			B8A	P
PL820	041 231 551	A1	21.5	22	200	175	45	6.2	100	100	6	B9A	P
PLL80	546 234 175		12.6		250	250	24		No Data Available			B9A	P
PM04	412 365 100		6.3	1.2	250	100	11	4.4	100	100	4	B7G	P
PM05	412 365 100		6.3	2.3	150	150	7	4.3	100	100	4	B7G	P
PM07	412 361 500		6.3	2	250	250	10	7.5	100	150	5	B7G	P
PM1A	642 300 000		2		100		1	1.2	100		1.2	B4	T
PM1HP	642 300 000		2	3	150		1.5	0.8	100		0.8	B4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE I60					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
PM1HL	642 300 000		2	1.5	150		2.3	1.2	150		1.2	B4	T
PM1LF	642 300 000		2	6	150		3	0.9	100		0.9	B4	T
PM2	642 300 000		2	7	100		4	0.9	100		0.9	B4	T
PM2A	642 300 000		2	6	160		5	2	100		2	B4	T
PM2B	446 230 700		2	1	150		3	2.5	100		2.5	B7	TT
PM2BA	446 230 700		2	1	150		3	2.1	100		2.1	B7	TT
PM2DL	642 300 000		2	4.5	150		2	1.5	100		1.5	B4	T
PM2DX	642 300 000		2	5	150		2.3	1.1	100		1	B4	T
PM2HL	642 300 000		2	1.5	150		2.2	1.4	150		1.4	B4	T
PM3	642 300 000		4		100		2	1.1	100		1	B4	T
PM4DX	642 300 000		4		100		1.5	2	100		2	B4	T
PM12	542 300 000	A1	2		150	75	4	1.1	100	75	1.1	B4	P
PM12A	542 300 000	A1	2	1	150	75	2	1.5	100	75	1.5	B4	P
PM12M	542 300 000	A1	2	1	150	90	1.4	1.4	150	90	1.4	B4	P
PM12V	542 300 000	A1	2		150	90		0.7	100	90	0.7	B4	P
PM14	542 300 000	A1	4		150	75	2.7	0.8	100	75	0.8	B4	P
PM22	642 350 000		2	10	150	150	15	1.3	100	100	1.3	B5	P
PM22A	642 350 000		2	4.5	150	150	5.6	2.2	100	100	2.2	B5	P
PM22C	642 350 000		2	16	150	150	23	3	100	100	3	B5	P
PM22D	642 350 000		2	2.4	150	150	5	3	100	100	3	B5	P
PM24	642 350 000		4	11	150	150	20	1.7	100	100	1.7	B5	P
PM24	642 310 000	G2	4	11	150	150	20	1.7	100	100	1.7	B5	P
PM24A	642 350 000		4	22.5	300	200	20		100	100	2	B5	P
PM24B	642 350 000		4	40	400	300	30	2.1	100	100	2.1	B5	P
PM24C	642 350 000		4	20	400	200		3	100	100		B5	P
PM24D	642 350 000		4(5)	35	400	200	50	4	100	100	4	B5	P
PM24DC	642 350 000		4(5)	42	300	200	20	1.5	100	100	2	B5	P
PM24E	642 350 000		4	40	300	300	83	3.9	100	150	3.9	B5	P
PM24M	642 350 000		4	17	250	250	30	3	100	150	3	B5	P
PM202	642 300 000		2	14	150		14	3.5	100		2.5	B4	T
PM252	642 300 000		2		100		32	3.7	100			B4	T
PM254	642 300 000		4	21	200		15		100			B4	T
PM256	642 300 000		6	27	250		20		100		2.4	B4	T
PN2	642 350 000		2	7.5	150	150	6		100	100		B5	P
PP2	642 300 000	G2	2	5	150	150	7	2.1	100	100	2.1	B4	P
FP2	642 350 000		2	5	150	150	7	2.1	100	100	2.1	B5	P
FP2S	023 004 560		2	5	150	150	7	2.1	100	100	2.1	8SC	P
FP3/250	642 300 000		4	37	300		48	5.2	100		6.5	B4	T
FP4	642 350 000		4	15	250	250	36	3	100	150		B4	P
FP4S	032 004 560		4	15	250	250	36	3	100	150		8SC	P
FP4S	642 350 000		4	15	250	250	36	3	100	150		B5	P
FP5/400	642 300 000		4(5)	32	400		62	8.2	100		6	B4	T
FP6AS	023 104 560		6	18	250	250	32	2.8	100	150	2.8	8SC	P
FP6B	265 413 000		6		250	250	36	10	100	150	9	UX6	P
FP6BG	026 540 310		6	6	250	250	36	10	100	150	9	A08	P
FP6BS	026 540 310		6	6	150	250	36	9	100	150	9	A08	P
FP6C	026 540 310		6	12	250	200	36	10	100	150	9	A08	P
FP6E	045 231 600		6	17	500	275	72	8.5	100	150	8	B7	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
FP13A	045 231 600		13	12	200	200	40	2.6	100	100	2.5	B7	P
FP13S	023 100 560	G1	13	14	200	200	25	3.5	100	100	3.5	8SC	P
PP24	005 231 600	G1	24	19	200	100	40	3	100	75	3	B7	P
PP24S	023 100 560	G1	24	19	200	100	40	3	100	75	3	8SC	P
PP34	005 231 600	G1	35	6.5	200	200	45	8.5	100	100	8	B7	P
PP34S	023 100 560	G1	35	6.5	200	200	45	8.5	100	100	8	8SC	P
PP35	045 231 600		35	6.5	200	200	45	8.5	100	100	8	B7	P
PP36	145 231 600		35	6.5	200	200	45	8.5	100	100	8	B7	P
PP37	005 231 600	G1	35	9.5	200	100	45	8.5	100	75	8	B7	P
PP60	026 540 310		6	15	250	250	85	6.3	100	150	6.3	A08	P
PP215	642 350 000		2	4.5	90	90	8	1.7	100	90	1.7	8SC	P
PP215S	032 004 560		2	4.5	90	90	8	1.7	100	90	1.7	8SC	P
PP220	642 300 000		2	12	150		12.5	3	100		3	B4	T
PP222	642 350 000		2	6	150	150	12	2.5	100	100	2.5	B5	P
PP222	642 300 000	G1	2	6	150	150	12	2.5	100	100	2.5	B4	P
PP225	642 350 000		2	12	150	150	18	2	100	100	2	B5	P
PP225S	023 004 560		2	12	150	125	18	2	100	100	2	8SC	P
PP415	642 350 000		4	12	200	200	12	1.8	100	150	1.8	B5	P
PP416	642 350 000		4	12	200	75	10	2	100	60	2	B5	P
PP430	642 350 000		4	25	200	200	20	2	100	100	2	B5	P
PP431	642 350 000		4	20	250	250	22	1.9	100	150	1.9	B5	P
PP2018	642 310 000	G2	20	18	200	200	20	2.5	100	100	2.5	B5	P
PP2018	045 231 600		20	18	200	200	20	2.5	100	100	2.5	B7	P
PP2101	364 520 000		2	3	150	150	7	2.1	100	100	2.1	UX5	P
PP3521	040 231 600		35	25	200		70	6.3	100		6	B7	T
PP4100	642 350 000		4	40	400	300	30	3	100	150	3	B5	P
PP4101	642 350 000		4	14	250	250	36	3.5	100	150	3.5	B5	P
PP4118	160 452 300		40	10	200	175	35	6.5	100	100	6	C7	P
PT	045 231 600		4	6	250	250	32.5	7.5	100	150	2	B7	P
PT2	642 350 000		2	4.5	150	125	5.3	2.6	100	100	7.6	B5	P
PT2	642 300 000	G2	2	4.5	150	150	6.5	2.5	100	100	2	B4	P
PT2A	642 350 000		2	10.5	150	150	18		100	100		B5	P
PT2K	642 350 000		2	4.5	150	150	9.5	2.5	100	100	2.5	B5	P
PT4	642 350 000		4	17	250	250	30	3	100	150	2.3	B5	P
PT4	045 231 600		4	6	250	250	36	9.5	100	150	7	B7	P
PT4	216 045 300		4	6	250	250	31	7	100	100		B7	P
PT4D	968 231 500	G1	4	6	250	250	32.5	7.5	100	150	7	B7	DDP
PT5	045 231 600		26	7	250	250	36	9	100	100		B7	P
PT10	045 231 600		4	7.5	250	250	40	9	100	150	8	B7	P
PT12	204 531 102	A1	10	15	250	250	62	6	100	150	6	B9	P
PT15	542 310 000	A1	6	25	300	300	40	2.8	100	100	1.2	B5	P
PT16	642 350 000		4	15	300	300	55	4.8	100	150	4.8	B5	P
PT25	642 350 000		4	22	400	200	62	4	100	100	4	B5	P
PT25H	642 350 000		5	16	400	300	62	6.5	100	150	5	B5	P
PT41	642 350 000		4	12.5	250	200	30	3	100	100	3	B5	P
PT41B	642 350 000		4	40	400	300	30	2.2	100	100	2.2	B5	P
PT225	642 350 000		2	6	150	150	8	2.3	100	100	2.5	B5	P
PT225	642 300 000	G2	2	6	150	150	8	2.3	100	100	2.5	B4	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
PT240	642 350 000		2	9	150	150	16	2.5	100	100	1.6	B5	P
PT250	642 350 000		2	15	250	250	40		100	150		B5	P
PT425	642 350 000		4	7.5	150	150	15	2	100	100	2	B5	P
PTA	045 231 600		13	10	250	250	32	4	100	150	4	B7	P
PTAD	968 231 500	G1	4	6	250	250	7	7	100	150	7	B7	DDP
PTS	005 231 600	G1	26	5.5	250	250	40	6	100	150	6	B7	P
PTS	045 231 600		26	8.2	250	250	32	6	100	150	5	B7	P
PTSA	869 231 500	G1	26	5.5	200	200	40		100	150		B7	DDP
PTSD	968 231 500	G1	26	5	250	200	40	6	100	150	6	B7	DDP
PTT120P	641 237 410		18	1.5	250		10	5.5	100			B8D	TT
PTT122P	641 237 410		18	2	250		10	5.5	100		5	B8D	TT
PTT141	602 441 443		6.3	1.2	150		22	25	No Data Available			B9A	T
PTT202	412 356 010		18	2.2	200	200	8	5.5	100	100		B8D	P
PTT202S	412 356 010		18	2.2	200	200	8	5.5	100	100		B8D	P
PTT203	026 510 310	G1	18	5	200	200	35	8.5	No Data Available			A08	P
PTT203P	026 500 310	G1	18	5	200	200	35	8.5	100	100		A08	P
PTT208P	412 356 110		18	4.5	200	200	18	6	100	100		B8D	P
PTT212P	412 356 010		18	1.6	200	200	10.5	8.5	No Data Available			B8D	P
PTT213P	412 356 010		6.3	1.6	200	200	10.5	8.5	No Data Available			B8D	P
PTT214P	412 365 110		6.3	1.8	150	150	12.5	13.5	No Data Available			B8D	P
PTT216	402 106 053		6.3	1.8	150	150	12.5	13.5	No Data Available			B8D	P
PTT217	123 141 516		6.3	1.6	150	150	12.5	16	No Data Available			B9A	P
PTT241P	412 356 *00		6.3	2.9	250	225	34	12.5	No Data Available			B8D	P
PTT244P	615 141 230		18	1.5	150	150	26	27	No Data Available			B8D	P
PTT310A	601 143 210		20	1.8	75	75	2	3.2	80	75	3.2	B8D	P
PTZ	005 231 600	G1	40	5.5	250	200	40	7.5	100	150	7	B7	P
PV06-20	400 235 100	A1	6	40	200	300	40	4	100	100	4	B7	P
PV06-25	401 235 100	A1	6	40	200	300	40	4	100	100	4	B7	P
PV1-35	401 235 100	A1	12	25	250	200	40	2	100	100	2	B7	P
PV4	892 300 000		4				60		REC		20mA	B4	RR
PV25	091 231 800		25				60		REC		20mA	B7	RR
PV29	091 231 800		30				60		REC		20mA	B7	RR
PV29S	123 180 090		30				60		REC		20mA	8SC	RR
PV30	091 231 800		30				30		REC		15mA	B7	RR
PV30A	123 180 090		30				30		REC		15mA	8SC	RR
PV30S	123 190 080		30				60		REC		20mA	8SC	RR
PV75/1000	892 300 000		4				30		REC		17mA	B4	RR
PV100/2000	892 300 000		4				60		REC		18mA	B4	RR
PV200/600	892 300 000		4				120		REC		28mA	B4	RR
PV400	802 300 000		4				30		REC		15mA	B4	R
PV430	892 300 000		4				15		REC		9mA	B4	RR
PV475	892 300 000		4				15		REC		11mA	B4	RR
PV480	802 300 000		4				30		REC		16mA	B4	R
PV495	892 300 000		4				30		REC		17mA	B4	RR
PV3018	190 812 300		30				60		REC		20mA	C7	RR
PV4100	892 300 000		4				30		REC		15mA	B4	RR
PV4200	892 300 000		4				60		REC		27mA	B4	RR
PV4201	892 300 000		4				60		REC		27mA	B4	RR

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
PV4300	892 300 000		4				60		REC	20mA		B4	RR
PVB6	892 310 000		6				60		REC	20mA		B5	RR
PX2	642 300 000		2	22	150		22	1.5	100	1.5		B5	T
PX4	642 300 000		4	43	300		43	6	100	6		B4	T
PX5	642 300 000		4	34	400		62.5	6.5	100	6.5		B4	T
PX25	642 300 000		4(5)	31	400		40	7.5	100	7		B4	T
PX25A	642 300 000		4(5)	100	400		62.5	3.7	100	6.5		B4	T
PX41	642 300 000		4	40	250		49	6	100	6		B4	T
PX230	642 300 000		2	15	150		17.5	3.5	100	3.5		B4	T
PX230SW	602 300 000	G1	2	15	150		18	3.5	100	3.5		B4	T
PX240	642 300 000		2	32	200		25	3	100	3		B4	T
PX2100	642 300 000		7.5	30	400		18	1.6	100	1.6		SM4	T
PY31	020 080 310		17				120		REC	70mA		A08	R
PY32	028 08* 310		29				180		REC	70mA		A08	R
PY71	200 800 030	C	21				120		REC	30mA		B8B	R
PY80	001 230 008		19				180		REC	70mA		B9A	R
PY81	*** 23* **8	C1	32				120		REC	40mA		B9A	R
PY82	**1 23* **8		19				180		REC	70mA		B9A	R
PY83	*** 23* **8	C	20				120		REC	70mA		B9A	R
PY88	*** 23* **8	C1	26				120		REC	40mA		B9A	R
PZ	264 530 000		2.5	16.5	250	250	31	2.5	100	150	2.5	UX5	P
PZ03-3	401 235 000	A1	4	25	300	125	25	1.4	100	100	1.4	B7	P
PZ05-15	401 235 000	A1	4		400	150	40	1.2	100	100	1.2	B7	P
PZ30	029 183 210		26				120		REC	60mA		A08	RR
PZH	265 413 000		2.5	16.5	250	250	34	2.2	100	150	2.2	UX6	P
QA2400	412 361 500		6	2.5	200	200	8	2.5	100	150	2.5	B7G	P
QA2401	6*2 364 100		6	8.5	250		10.5	2.2	100		2.2	B7G	T
QA2402	412 36* 500		6	13.5	250	250	16	2.6	100	150	2.6	B7G	P
QA2403	412 361 500		6	2.0	250	250	10.0	7.5	100	150	5.0	B7G	P
QA2404	192 310 800		6	1.6	200	150	4.0	6.4	100	150	5.0		
QA2405	241 657 143		6	14	250	150	30	3.9	100	100	3.9	B9G	PP
QA2406	471 226 413		6	2	250		10	5.5	100		5	B9A	TT
QA2407	802 309 100		6				30		REC	15mA		B7G	RR
QA2408	481 461 230		6	8	250		9	2.6	100		2.6	A08	TT
QB65	461 471 230		6	8	250		9	2.6	100		2.6	A08	TT
QB309	641 227 413		6	2	250		10	5.5	100	5		B9A	TT
QD77	182 310 900		6						D			B7G	DD
QE04-10	265 511 413		6.3	12	300	150	25	1.9	100	100		B9G	P
QE05	125 141 300	A1	6		200	200	100	7	No Data Available			A08	P
QE06-50	254 130 000	A1	6	14	200	250	83	6.5	100	100		UX5	P
QL77	6*2 364 100		6	8.5	250		10.5	2.2	100	2		B7G	T
QN77	412 360 500		6	12.5	250	250	16	2.6	100	150	2.6	B7G	P
QP21	446 235 700		2	4.5	150	150	11	2.3	100	100	2.3	B7	PP
QP22A	465 230 574		2	12	150	150	3	4	150	150	4	B9	PP
QP22B	446 235 700		2	11.7	150	150	3.8		100	100	3.1	B7	PP
QP25	207 544 630		6	2	150	125	10	3	100	100	3	M08	PP
QP230	446 235 700		2	9.6	150	125	4.6	3	100	100	3	B7	PP

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
QP240	465 230 574		3	5	150	150	25	4	100	100	4	B9	PP
QPT2	476 235 700		2	9	150	150	3.3		100	100		B7	PP
QQ03-12	601 235 144		6		300	250	45	7	100	100		B9A	P
QQC04-15	263 724 540		6	14	200	200	20	2	100	100		B8B	P
QQE02-5	414 226 573		6.3	50	250	250	45	10.5	No Data Available			B9A	PP
QQE03-12	414 226 573		6.3	15	200	200	30	3.3	100	100		B9A	PP
QQE03-20	245 134 200		6	17	400	200	20	2.5	No Data Available			B7A	PP
QQE04-20	245 134 200	A1A2	6	26	400	250	30	3	No Data Available			B7A	PP
QQE06-40	245 134 200	A1A2	6		400	250	30	3.4	No Data Available			B7A	PP
QQV02-6	414 226 573		6.3	5	150	150	22	10.5	100	100		B9A	PP
QQV03-10	414 226 573		6	10	200	150	30	3.3	100	100		B9A	PP
QQV03-20	245 134 200	A1A2	6.3	17	300	200	20	2.5	100	100		B7A	PP
QQV03-20A	245 134 200	A1A2	6.3	17	300	200	20	2.5	100	100		B7A	PP
QQV04-15	245 134 200	A1A2	6.3	27	400	250	30	3	100	100		B7A	PP
QQV04-20	241 531 420	A1A2	6	23	400	200	25	4	100	100		B7A	PP
QQV06-40	245 134 200	A1A2	6.3		400	250	30	3.4	100	100		B7A	PP
QQV06-40A	245 134 200	A1A2	6.3		400	250	30	3.4	100	100		B7A	PP
QQV07-40	245 134 200	A1A2	6.3		300	250	25	1.9	100	100		B7A	PP
QQZ04-15	273 624 540		3	10	300	200	20	2	100	100	2	B8B	PP
Q/U37	023 000 000	D1	1.4						D			B3G	D
QV03-12	601 235 144		6	7.5	250	250	45	7	100	150	7	B9A	P
QV04-7	265 511 413		6	30	300	250	25	1.9	100	100	1.9	B9G	P
QV04-12	601 235 144		6	7.5	250	250	45	7	100	150	7	B9A	P
QV04-15	245 134 200	A1A2	6.3	60	400	250	90		100	100		B7A	PP
QV04-20	241 531 420	A1A2	6	22	400	200	25	4	100	100	4	A08	PP
QV05-25	254 130 000	A1	6	12.5	300	250	83	6.5	100	150	6	UX5	P
QV06-20	125 141 310	A1	6	28	200	200	100	7	100	100		A08	P
QW77	412 361 500		6	2.5	200	200	8	2.5	100	100	2.5	B7G	P
QZ77	412 361 500		6	2	250	250	10	7.6	100	100	5	B7G	P
R1	892 300 000		4				30		REC		15mA	B4	RR
R2	892 300 000		4				60		REC		30mA	B4	RR
R3	892 300 000		4(5)				60		REC		50mA	B4	RR
R4	892 300 000		4				60		REC		40mA	B4	RR
R4A	892 300 000		4				60		REC		40mA	B4	RR
R4B	802 300 000		4				60		REC		40mA	B4	R
R10	112 311 100	D1	4				5		D			B7G	R
R11	002 300 000	D1	4				60		REC		20mA	B4	R
R12	023 000 000	D1	6						D			B3G	D
R13A	028 090 310		13				30		REC		15mA	A08	RR
R14	028 193 210		26				120		REC		60mA	A08	RR
R16	123 000 000		1.4						D			B3G	D
R17	**1 23* ***	D1	6				120		REC		40mA	B9A	R
R18	**1 23* ***	D1	6				120		REC		40mA	B9A	R
R19	230 232 032	D1	1.2						D			B9A	D
R20	23* 232 *32	D1	2						D			B9A	R
R41	892 300 000		4				60		REC		20mA	B4	RR
R42	892 300 000		4				60		REC		20mA	B4	RR

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
R43	892 300 000		4				180		REC	40mA		B4	RR
R52	030 809 020		5				60		REC	20mA		A08	RR
R80	264 300 000		4	24	250		20	4	100	4		UX4	T
R116	026 540 310	G1	10	2.2	200	200	8		100	100		A08	P
R120	026 040 310		6.3		250		60	6.4	100			A08	T
R122N	026 510 310	G1	18		200	200	8	5.5	100	100		A08	P
R123	026 500 310	G1	18		200	200	35	8.5	100	100		A08	P
R125C	026 890 310	G1	18	5.5	250		5	2.5	100		3	A08	DDT
R125N	026 890 310	G1	18		250		5	2.5	100			A08	DDT
R126F	026 510 310	G1	18		200	200	6	1.7	100	100		A08	P
R126N	026 510 310	G1	18		200	200	6	1.7	100	100		A08	P
R128	028 190 310		18						D			A08	DD
R134	026 541 310		18		200	200	18	6	100	100		A08	P
R142	412 360 100		6.3		200	200	10.5	8.5	100	100		B7G	P
R143	412 360 100		6.3		200	200	8	5.5	100	100		B7G	P
R144	412 361 500		6.3	2	250	250	10	7.6	100	100		B7G	P
R145	412 360 100		18		200	200	8	5.5	100	100		B7G	P
R147	412 356 110		18		200	200	18	6	100	100		B8D	P
R148	641 237 410		18		250		10	5.5	100		5.5	B8D	TT
R150	123 141 516		6.3	1.6	150	150	12.5	16	No Data Available			B9A	P
R236	026 510 300	G1	1.2	2	100	100	1	0.5	100	100	0.5	A08	P
R242P	400 123 060		6.3	4.5	150		15	4.3	100		5	B5A	T
R244	402 013 060		6.3		150		13		100			B8D	T
R265	412 360 510		6.3		100	100	7.5	5	100	100	5	B8D	P
R271	412 163 510		6.3	2	150	125	5.2	3.2	100	100		B8D	P
R290	020 080 030		1.2				5		D			A08	D
R2018	642 310 000		20	2.5	200		2.5	3	100		3	B5	T
R5559	6*2 1*1 413		6.3	1.5	150		25	25	No Data Available			B5D	T
RA	892 310 000		13				30		REC	15mA		B5	RR
RA1	364 200 000		15	4.5	90		4.5	1.2	80	1.2		UX4	T
RB350/80	892 300 000		4				30		REC	15mA		B4	RR
RB500/120	892 300 000		4				60		REC	20mA		B4	RR
RB650/250	892 300 000		4				120		REC	30mA		B4	RR
RC5B	023 008 060	G1	12.6		100		24	6	100	6		8SC	DT
RC5C	023 008 060	G1	2.4		100		24	6	100	6		8SC	DT
RE122	264 300 000		2	4.5	150		3	1.3	100		1.3	UX4	T
RE122	642 300 000		2	19	150		7	1.2	100		1.2	B4	T
RE124	642 300 000		4	18	150		11	1.6	100		1.6	B4	T
RE402B	064 234 700		2		150		3		100			B7	TT
RE034	642 300 000		4	3	200		2	1.2	100		1	B4	T
RE052	642 300 000		2	3	150		1	1	100		1	B4	T
RE054	642 300 000		4	4	150		4	1.3	100		1.3	B4	T
RE062	642 300 000		2	9	150		4	1	100		1	B4	T
RE074	642 300 000		4	9	150		3.5	0.9	100		0.9	B4	T
RE074D	642 300 000		4	3	150		3.5	0.5	150		0.5	B5	T
RE074N	642 300 000		4	9	150		3.5	0.9	100		0.9	B4	T
RE076	642 300 000		6	9	150		4	1.5	100		1.4	B4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
RE084	642 300 000		4	4	150		4	1.5	100		1.5	B4	T
RE114	642 300 000		4	15	150		13	1.3	100		1.3	B4	T
RE134	642 300 000		4	17	250		12	2	100		2	B4	T
RE144	642 300 000		4	9	150		2	0.7	100		0.7	B4	T
RE304	642 300 000		4	32	250		20	1.9	100		2	B4	T
RE404	642 300 000		3.5		200			0.6	100		1	B4	T
RE604	642 300 000		4	45	250		40	2.5	100			B4	T
REN704	652 310 000	G1	4		100		2	1.2	100		1.1	B5	P
REN904	642 310 000		4	3.5	200		6	2.4	100		2.4	B5	T
REN914	642 310 000		4	1.5	200		0.2		100			B5	T
REN924	642 310 000	D1	4	3	200		6	2	100		2	B5	DT
REN1004	642 310 000		4		200			1.5	100		1.4	B5	T
REN1104	642 310 000		4	16	200		12	1.3	100		1.3	B5	T
REN1814	642 310 000		20	1.6	200		0.2	1	100		1	B5	T
REN1817D	652 310 000	G1	20		100	100		1.1	100	90	1.1	B5	P
REN1821	642 310 000		20	3	200		6	2.3	100		2.3	B5	T
REN1822	642 310 000		20	18	200		15	1.6	100		1.6	B5	P
REN1826	642 310 000	D1	20	3	200		6	1.8	100		1.8	B5	DT
RENS1204	542 310 000	A1	4	2	200	60	4	1	100	60	1	B5	P
RENS1214	542 310 000	A1	4	2.2	200	100	6	1	100	100		B5	P
RENS1224	164 552 300	G1	4	1.5	200	125	3	0.6	100	100		C7	P
RENS1234	165 452 300	G1	4	2	200	75	3	1.8	100	75	1.8	C7	P
RENS1264	542 310 000	A1	4	2	200	100	3	2	100	100		B5	P
RENS1264B1	542 300 000	A1	4	2	200	100	3	2	100	100		B4	T
RENS1274	542 310 000	A1	4		200	100	3	2	100	100		B5	P
RENS1284	542 310 000	A1	4	2	200	100	3	2.5	100	100		B5	P
RENS1294	542 310 000	A1	4	2	200	100	4.5	2	100	100		B5	P
RENS1374D	642 310 000	G2	4	18	250	250	24	2.5	100	100		B5	P
RENS1384	642 310 000	G1	4	22	250	250	36	2.8	100	150	2.9	B5	P
RENS1818	542 310 000	A1	20	2	200	100	3	2	100	100		B5	P
RENS1819	542 310 000	A1	20		200	60	4	1	100	60		B5	P
RENS1820	542 310 000	A1	20	2	200	60	4	1	100	60	1	B5	P
RENS1823D	642 310 000	G2	20	18	200	200	20	1.7	100	100		B5	P
RENS1884	542 310 000	G2	20	2	200	100	3	2.4	100	100		B5	P
RENS1894	542 310 000	G2	20	2.2	200	100	4	1.8	100	100		B5	P
RES094	542 300 000	A1	4	2	200	75	4	7	100	75		B5	P
RES105	642 300 000	G1	5	15	200	150	12	1.3	150	100	1.3	B4	P
RES164	542 350 000		4	11.5	250	75	12	1.4	100	75		B5	P
RES174D	642 300 000	G2	4	19	250	150	12	1.3	100	100		B4	P
RES212	642 350 000		2	4.4	150	125	6	2.2	150	100	2.2	B5	P
RES364	542 350 000		4	2.5	300	200	20	1.7	100	100		B5	P
RES374	642 350 000		4	42	300	200	20	1.5	No Data Available			B5	P
RES664D	642 350 000		4	40	400	200	30	1.9	100	100	1.9	B5	P
RES964	642 350 000		4	15	250	250	36	2.8	No Data Available			B5	P
RFG5	003 200 000	D1	6						D			F8	R
RFP8/14	041 231 500	A1	4	20	400	250	35	4	100	150	4	B7	P
RFP8/14	542 310 000	A1	4	20	400	250	35	4	100	150	4	B5	P
RG250/1000	002 300 000	D1	4				120		REC		30mA	B4	R

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
RG250/3000	280 300 000		2.5				120		REC		30mA	UX4	R
RGN354	802 300 000		4				15		D			B4	R
RGN504	892 300 000		4				15		D			B4	RR
RGN564	802 300 000		4				30		REC		15mA	B4	RR
RGN1054	892 300 000		4				30		REC		15mA	B4	RR
RGN1064	892 300 000		4				30		REC		15mA	B4	RR
RGN1074	892 300 000		4				60		REC		20mA	B4	RR
RGN1304	802 300 000		4				60		REC		20mA	B4	R
RGN1404	082 300 000		4				120		REC		20mA	B4	R
RGN1503	892 300 000		2.5				30		REC		15mA	B4	RR
RGN2004	892 300 000		4				60		REC		20mA	B4	RR
RGN2504	892 300 000		4				60		REC		20mA	B4	RR
RGN4004	892 300 000		4				120		REC		20mA	B4	RR
RH	061 231 500	G1	4	1.7	250	100	7.9	7	200	100	7.4	B7	P
RK10	265 300 000		7.5	100	350		50		No Data Available			UX4	T
RK15	264 300 000		2.5	33	250		22	2.3	100		2.3	UX4	T
RK16	264 130 000		2.5	28	250		26	2.6	100		2.6	B5	T
RK19	200 300 000	D1D2	7.5				120		REC		30mA	UX4	RR
RK21	200 300 000	D1	2.5				120		REC		30mA	UX4	R
RK24	364 200 000		2	13.5	200		8	1.6	100		1.6	UX4	T
RK39	254 130 000	A1	6	14	300	250	83	6.5	100	150		UX5	P
RK60	200 300 000	D1D2	5				120		REC		30mA	UX4	RR
RL2T2	236 400 000		1.9	1.5	100		15	2.4	100		2.4	5AA	T
RL7	265 114 113		6	1.7	250	250	10	7.7	100	150	7	B9G	P
RL12P2	265 114 113		12.6	6	150	150	15	2.3	100	100		B9G	P
RL15A	510 423 206		2.4	20	350	200	57		No Data Available			B9A	P
RL16	241 600 003		6	2.5	250		10	6.5	100		5	B9G	T
RL18	123 000 000		6	3.3	200		7.5	2.9	100		2.9	B3G	T
RL37	244 664 413		6	1.5	250		10	9	100		7	B9G	T
R0337	892 300 000		2.5				30		REC		15mA	B4	RR
R0423	892 300 000		2.5				30		REC		15mA	B4	RR
R0431	892 300 000		4				60		REC		20mA	B4	RR
R0443	892 300 000		4				60		REC		20mA	B4	RR
R0446	892 300 000		4				30		REC		15mA	B4	RR
R0452	892 300 000		4				60		REC		20mA	B4	RR
R0457	892 300 000		4				60		REC		20mA	B4	RR
R0481	802 300 000		4				120		REC		30mA	B4	R
R0534	892 300 000		5				60		REC		20mA	B4	RR
R0771	802 300 000		7.5				120		REC		30mA	B4	R
RRAF	642 300 000		4	2	100		4	1.4	100		2	B4	T
RRBF	642 300 000		4	2.5	100		10	1.2	100		2	B4	T
RS	802 310 000		3				60		REC		20mA	B5	R
RS1009	245 134 200	A1A2	6	25	400	250	30	3.4	100	100		B7A	PP
RS1019	245 134 200	A1A2	6	20	400	250	20	2.5	100	100		B7A	PP
RSAP	542 300 000	A1	4	1	150	75	4.5	1.2	100	75	1.2	B4	T
RT1-2	642 300 000		4	2.6	150		26	2.5	100		2.5	B4	T
RT2	642 300 000		4	4	200		18	1.7	150		1.7	B4	T
RT3	642 300 000		4	2.3	300		15	2.8	100		2.8	B4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
RTR4141	026 510 310	G1	5.2	3	250	100	2.5	1.2	100	100		A08	P
RTR4142	026 510 310	G1	5.2	8	150	125	15	2.7	100	100		A08	P
RTR4341	061 231 500	G1	21	2.2	150	8	8	8	100	125	8	B4	P
RTR4342	005 231 600	G1	21	5.8	150	125	48	9	100	125	8	B7	P
RV120/250	892 300 000		4				60		REC		20mA	B4	RR
RV120/350	892 300 000		4				60		REC		20mA	B4	RR
RV120/350S	023 080 090		4				60		REC		30mA	8SC	RR
RV120/500	892 300 000		4				60		REC		20mA	B4	RR
RV120/500S	023 080 090		4				60		REC		20mA	8SC	RR
RV200/600	892 300 000		4				120		REC		30mA	B4	RR
RV210	042 310 000	A1	4	53	400		70	5.8	No Data Available			B5	T
RX21	200 030 000	D1	2.5				120		REC		30mA	UX5	R
RX215	389 200 000		2.5				5		D			UX4	RR
RZ	023 100 080		20				60		REC		20mA	8SC	R
S2	542 300 000	A1	2	1	150	60	2.3	1.1	125	60	1.1	B4	P
S2P20	601 225 413		5	10	150	150	28	4.4	100	100		B9A	P
S4V	542 310 000	A1	4	1	200	75	1.5	1.1	100	75	1.1	B5	P
S4VA	542 310 000	A1	4	1.5	200	100	2.8	2	100	100	2	B5	P
S4VB	542 310 000	A1	4	1.5	200	125	4.6	2.5	100	100	2.5	B5	P
S6F12	412 361 500		6	2	250	250	10	7.5	100	100		B7G	P
S6F17	412 361 500		6	2	150	150	46	8.3	100	100		B7G	P
S6F33	412 361 500		6.3	3.3	200	200	7.1	4	100	100		B7G	P
S11A	892 300 000		4				30		REC		15mA	B4	RR
S11D	892 300 000		4				60		REC		20mA	B4	RR
S11E12	*26 541 310		6.3	60	400	300	100	6.3	No Data Available			A08	P
S12	542 300 000	A1	2	1	100	30	2.5	0.7	No Data Available			SM4	P
S12	542 300 000	A1	2	1	100	30	2.5	0.7	No Data Available			SM4	P
S19G6	*12 3** *00	D1	4				30		REC		15mA	B7G	R
S19G6F	*12 3** *00	D1	4				30		REC		15mA	B7G	R
S21	542 300 000	A1	2		150	75	3.6	1.1	100	75	1.1	B4	P
S23	542 300 000	A1	2	1.5	150	75	2.8	1.1	150	75	1.1	B4	P
S24	542 300 000	A1	2	1	150	75	3.2	1.4	150	75	1.4	B4	P
S30C	642 300 000		4	38	300		50	5	100		5	B4	T
S30D	642 300 000		2	38	300		50	5	100		5	B4	T
S207	542 300 000	A1	2	1.5	200	100	3	0.7	100	100	0.7	B4	P
S208	542 3000 000	A1	2		200	100	2	0.8	100	100	0.8	B4	P
S209	023 010 560	G1	2	0.5	150	125	2.4	0.7	125	125	0.7	8SC	P
S210	642 300 000	G2	2	1.5	150	90	3	1.2	100	90	1	B4	P
S213	542 300 000	A1	2	0.5	150	90	3	1.3	100	90	1.3	B4	P
S215	542 300 000	A1	1	1	150	90		0.9	100	90	1.5	B4	P
S215A	542 300 000	A1	2	1	150	60	2	1.1	150	60	1.1	B4	P
S215B	542 300 000	A1	2	1	150	60	1.5	1.2	150	60	1.2	B4	P
S215VM	542 300 000	A1	2	1.4	150	60	1	0.8	150	60	1.4	B4	P
S217	041 230 500	A1	2	0.5	150	150	2.5	1.7	150	150	1.7	B7	P
S217	542 300 000	A1	2	0.5	150	150	2.3	1.7	100	150	1.7	B4	P
S218	041 230 500	A1	2	0.5	150	150	3	1.9	100	150	1.8	B7	P
S220	542 300 000	A1	2		150	75	4	1.1	150	75	1.1	B4	P
S310A	265 113 000	G1	10	3	150	150	5.5	1.9	100	100	1.9	UX6	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
S311A	265 130 000	G1	10	15	150	150	30	2.8	100	100	2.8	UX5	P
S328A	265 113 000	G1	7.5	3	150	150	5.5	1.9	100	100	1.9	UX6	P
S329A	265 130 000	G1	7.5	15	150	150	30	2.8	100	100	2.8	UX5	P
S329L	265 113 000	G1	7.5	50	150	125	30	2.8	No Data Available			UX6	P
S406/7	542 300 000	A1	4	2	200	150	1.5	1	100	100	1	B4	P
S408	542 300 000	A1	4	1.5	200	75	4	0.7	100	75		B4	P
S409	542 300 000	A1	4	1.5	200	75	4	8.8	100	75		B4	P
S410	542 300 000	A1	4	1.5	200	75	4	1	100	75		B4	P
S410N	542 310 000	A1	4	2	200	60	4	1	100	60	1	B5	P
S412N	542 310 000	A1	4	1.3	200	100	1.5	1	100	100	1	B5	P
S415N	542 310 000	A1	4	2	200	100	6	1	100	100	1	B5	P
S420	061 231 500	G1	4	3	250	250	11.5		100	200		B7	P
S423	023 110 560	G1	4	3	250	100	8	1.8	250	100	1.9	8SC	P
S424	023 110 560	G1	4	2	250	100	3	2.1	250	100	2.1	8SC	P
S430N	542 310 000	A1	4	1.3	200	100	1.5	0.9	100	100	3	B5	P
S431N	542 310 000	A1	4	1.5	250	100	3	2	100	100		B5	P
S432N	023 110 560	G1	4	3	250	100	2.5	2.2	100	100		8SC	P
S434N	542 310 000	A1	4	2	200	100	4.5	2.3	100	100	2.3	B5	P
S434N	041 231 500	A1	4	1.5	200	100	4.5	2	100	100	2	B7	P
S435N	041 231 500	A1	4	2	200	100	3	2.3	200	100	2.3	B7	P
S435N	542 310 000	A1	4	2	200	100	3	2.3	100	100	2.3	B5	P
S440	061 231 500	G1	4	2.4	250	250	4.1	3.5	100	200	3.4	B7	P
S493	542 310 000	A1	4	2	200	100	4		100	100		B5	P
S495	542 310 000	A1	4	2	200	100	6	2.5	100	100	2.5	B4	P
S617	023 110 560	G1	6.3	3	250	100	2.5	2.2	100	100		8SC	P
S620	023 110 560	G1	6.3	2.5	250	100	3.5	2	100	100		8SC	P
S629	023 110 560	G1	6.3	2.5	250	100	3.5	2	100	100		8SC	P
S1323	061 231 500	G1	13	3	200	100	8	1.9	100	100	1.9	B7	P
S1323	023 110 560	G1	13	3	200	100	8	1.9	100	100	1.9	8SC	P
S1324	061 231 500	G1	13	2	200	100	3	2.4	100	100	2.3	B7	P
S1327	023 110 560	G1	13	2.5	250	100	3.5	2	100	100		8SC	P
S1328	023 110 560	G1	13	2	200	100	3	2.4	100	100	2.3	8SC	P
S2010N	542 310 000	A1	20	2	200	60	4	1	100	60	1	B5	P
S2012N	542 310 000	A1	20	2	200	60	4	1	150	60	1	B5	P
S2018	041 231 500	A1	20	3	200	60	4	1.2	100	60	1.2	B7	P
S2018	542 310 000	A1	20	3	200	60	4	1.2	100	60	1.2	B5	P
S2030N	542 310 000	A1	20	2	200	100	3	2	150	100	2	B5	P
S2035N	542 310 000	A1	20	2.5	250	100	3.5	2	100	100		B5	P
S2043	542 310 000	A1	20	2.5	250	100	5	2	100	100		B5	P
S4020A	254 300 000		2	1	150		1.3	0.6	100		0.6	UX4	T
S4020B	642 300 000		2	1	150		1.3	0.6	100		0.6	UX4	T
S4021A	264 300 000		4	8	150		20	3	100		3	UX4	T
S4021B	642 300 000		4	8	150		20	3	100		3	B4	T
S4022AR	236 400 000		4	4.5	150		5	2.2	100		2.2	UX4	T
S4022B	642 300 000		4	4.5	150		5	2.2	100		2.2	B4	T
S4045A	642 350 000		5	70	250	75	45	1.5	100	60	1.5	B5	P
SD	892 310 000		5						D			B5	DD
SD2	642 300 000		2	1.5	150		2.2	1.4	150		1.4	B4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
SD6	*82 310 *00		6				5		D		6mA	B7G	R
SD61	123 000 000	D1	6						D			B3G	D
SD917A	402 013 060		6.3	3.6	100		1.4	2.7	100		2.7	B8A	T
SE211	542 300 000	A1	2	1	150	75	1	1.5	150	75	1.5	B4	P
SE211C	542 300 000	A1	2	1	150	75	1	1.5	150	75	1.5	B4	P
SE2018	542 310 000	A1	20	3	200	60	4	1.2	100	60	1.2	B5	P
SE2118	542 310 000	A1	20	24	200	100	3	3	100	60	3	B5	P
SG2	542 300 000	A1	2		150	75	2.5	1	100	75	1	B4	P
SG215	542 300 000	A1	2	1.5	150	75	2.7	1	100	60	1	B4	P
SG215VM	542 300 000		2		150	75		1.5	125	80	1.4	B4	P
SG220SW	652 300 000	G1	2	1.5	150	75	2.4	1.5	150	75	1.5	B4	P
SG2150	542 300 000	A1	2	1.5	150	75	1.5	1.1	125	60	1.1	B4	P
SGA1	542 310 000	A1	4		200	100	6	3	100	100	3	B5	P
SN954	082 813 080		6.3				30		REC		15mA	B8A	R
SN956B	023 990 000		1.2						D			B3G	D
SN1039A	412 365 100		6.3	1.4	100	100	7	5.1	100	100	5	B7G	P
S01	264 300 000		15	40.5	200		21	1.5	100		1.5	UX4	T
S02	264 300 000		7.4	88	400		55	2.1	100		2.1	UX4	T
SP2	041 230 500	A1	2		150	150	3	1.8	150	150	1.8	B7	P
SP2B	061 230 500	G1	2	1	150	150	2.6	0.8	150	150	0.8	B7	P
SP2BS	032 004 560		2	0.5	150	150	2.6	0.8	150	150	0.8	8SC	P
SP2D	061 230 500	G1	2	1	150	150	1.4	1.7	150	150	1.7	B7	P
SP2D	542 300 000	A1	2	1	150	125	1.5	1.7	125	100	1.7	B4	P
SP2V	041 230 500	A1	2		150	75	2.9	1.1	100	75	1	B7	P
SP4 (TUNG)	061 231 500	G1	4	2	200	100	3	2.3	100	100	2.3	B7	P
SP4 (MUL)	041 231 500	A1	4	2	200	100	3	2.3	100	100	2	B7	P
SP4	542 310 000	A1	4	2	200	100	3	2.3	100	100	2.3	B5	P
SP4A	041 231 500	A1	4	2	250	100	3	2.4	100	100	2.4	B7	P
SP4B	061 231 500	G1	4	2.4	250	250	4	3.4	100	100	3.4	B7	P
SP4C	023 110 560	G1	4	2.4	250	250	4	3.4	100	100	3.4	8SC	P
SP4S	023 110 560	G1	4	2	250	100	3	2.5	100	150	2.5	8SC	P
ξ SP6	412 361 500		6	{ 2	250	250	10	7.5	100	PenLF	5	B7G	P
				1.5	200	150	4	6.4	100	PenLF	5		
SP6S	023 110 560	G1	6	2	250	100	3	2	100	100	2	8SC	P
SP13	061 231 500	A1	13	2	200	100	3.3	2.2	100	100	2.2	B7	P
SP13	023 110 560	G1	13	2	200	100	3.3	2.2	100	100	2.2	8SC	P
SP13C	061 231 500	G1	13	2.2	200	200	2.5	2.8	100	150	2.8	B7	P
SP13S	023 110 560	G1	13	2	150	100	3	2.4	100	100	2.4	8SC	P
SP20	542 310 000	A1	20		200	100	4.5	3.5	100	100	3.5	B5	P
SP22	206 510 030	G1	2	1	150	125	1.1	1.2	125	100	1.2	M08	P
SP35	023 110 560	G1	35	8	200	200	41	7	100	150	7	8SC	P
SP41	216 510 030	G1	4	1.5	200	200	10.9	8.5	100	150	8	M08	P
SP42	216 510 030	G1	4	1.3	200	125	20	8.4	100	100	8	M08	P
SP61	216 510 030	G1	6	1.5	200	200	10.9	8.5	100	150	8	M08	P
SP62	216 510 030	G1	6	1.3	200	100	16	9	200	100	8	M08	P
SP65	023 110 560	G1	6	2	250	100	3	2.1	100	100	2.1	8SC	P
SP141	206 500 030	G1	1.4	1	90	90	1.3	0.8	80	90	0.8	M07	P
SP210	041 230 500	A1	2	1	125	125	1.1	1.2	125	100	1.2	B7	P

VALVE	SELECTOR SWITCH No.	T.C.	Vr	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
SP215	041 230 500	A1	2	1.5	150	80	2.1	1.6	100	75	1.6	B7	P
SP220	642 300 000		2	12	150		14	3	100		3	B4	T
SP514	402 106 053		6.3	1.7	150	150	12.3	13.5	No Data Available			B9A	P
SP1320	041 231 500	A1	13	1.5	150	100	4.4	2	100	100	2	B7	P
SP2220	041 231 500	A1	22	3	250	200	4.9	2.7	100	150	2.6	B7	P
SPTA	061 231 400	G1	13	2.5	250	100	2.2	1.4	100	100		B7	T
SPT2	041 230 500	A1	2	1	125	125	2.8	1.5	125	100	1.5	B7	P
SPT4A	041 231 500	A1	4	1.5	250	100	2	2.3	200	100	2.3	B7	P
SPTA	041 231 500		13	2.5	200	100	2.2	1.4	100	100		B7	P
SPTS	041 231 500	A1	13	1.5	250	100	2	3	100	100	3	B7	P
SR2	642 300 000		2	16	200		10	3	100		3	B4	T
SR4	642 310 000		4	20	250		20	4	100		4	B5	T
SRS4451	245 134 200	A1A2	6	25	400	250	30	3.4	No Data Available			B7A	PP
SS210	542 300 000	A1	2	1	150	75	0.6	1.4	150	75	1.4	B4	P
SS210C	542 300 000	A1	2	1	150	175	0.6	1.4	150	75	1.4	B4	P
SS210D	642 300 000		2	4.5	150		2	1.6	100		1.6	B4	T
SS210DDT	682 390 000	G1	2	5.5	150		2.4	1.4	100		1.4	B5	DDT
SS210HF	642 300 000		2	4	150		1	0.8	100		0.8	B4	T
SS210HL	642 300 000		2	1.5	150		21.4	12.5			1.4	B4	T
SS220P	642 300 000		2	12	150		6	1.5	100		1.5	B4	T
SS220PA	642 300 000		2	6	150		8	3.5	100		3.5	B4	T
SS220SP	642 300 000		2	12	150		14	3.5	100		3.5	B4	T
SS240SP	642 300 000		2	12	150		15	3.5	100		3.5	B4	T
SS2018	542 310 000	A1	20	3	200	100	3	3	100	90	3	B5	P
ST507	602 441 443		6.3	1.2	150		23	25	No Data Available			B9A	T
SU25	*2* 0** 3*0	D1	2						D			A08	D
SU45	112 311 100	D1	4				30		REC		15mA	B7G	R
SU42	030 000 020	D1	4						D			A08	R
SU61	023 000 000	D1	6						D			B3G	D
SU2130	002 300 000	D1	2				2		D			B4	R
SU2150	002 300 000	D1	2(2.5)				2		D			B4	R
SU2150A	002 300 000	D1	2(2.5)				5		D		2mA	B4	RR
SU3130	002 300 000	D1	2						D			B4	D
SW1	802 300 000		4				30		REC		15mA	B4	R
SWG2	652 300 000	G1	2		150	75		1.5	100	75	1.5	B4	P
T2	642 300 000		2	1	100			1	100		1	B4	T
T2M05	672 344 100		6	{ 0.85	100		8.5	5.3	100		5.3	B7G	TT
				3	150		5	4.5	100		5.3		
T4D	123 000 000	D1	4						D			B3G	D
T5D	123 000 000	D1	6						D			B3G	D
T6D	213 000 000	D1	6.3				5		D			B3G	R
T13U	023 100 060	G1	13	4	200		5.9	2.6	100		2.6	8SC	T
T41	216 040 030		4		100		30	2kΩ	No Data Available			M08	THY
T134	542 300 000	A1	4	1	150	75	5	1.3	100	75		B4	P
T136	642 300 000		4	8	200		6	1.6	100		1.6	B4	T
T151	642 300 000	G2	4	15	200	150	12	1.8	100	100		B4	P
T204	023 004 060		2	1	150		1.8	0.6	125		0.6	8SC	T
T223	023 004 060		2	2.8	125		3	2.5	100		2.5	8SC	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
T435	023 100 060	G1	4	5	250		6	2.5	100		2.4	8SC	T
T460	023 004 060		4	45	250		60	6	100		6	8SC	T
T635	023 100 060	G1	6.3	16	250		20	2.2	100		3	8SC	T
T1335	023 100 060	G1	13	4.5	225		6	2.5	100		2.4	8SC	T
TB13	802 310 000		13						D			B5	D
TB032	642 300 000		2	30	150		12	1.5	100		1.5	B4	T
TB052	642 300 000		2	15	150		7	1.2	100		1.2	B4	T
TB062	642 300 000		2	10.5	150		13	2	100		2	B4	T
TB102	642 300 000		2	4	150		5	1.3	100		1.2	B4	T
TB122	642 300 000		2	4.5	150		6	3.5	100		3.5	B4	T
TB172	642 300 000		2	4.5	150		4	1.4	100		1.4	B4	T
TB282	642 300 000		2	1.5	150		2	1.3	125		1.3	B4	T
TB402	446 230 700		4		150		6		150			B7	TT
TB452	542 300 000	A1	2		150	75	2	1.5	150	75	1.5	B4	P
TB552	542 300 000	A1	2		150	75	4	1.5	150	75	1.5	B4	P
TB622	542 300 000	A1	2		150	90	2	1.4	100	90	1.4	B4	P
TB9920	642 310 000		20	1.5	200		0.2	4	150		4	B5	T
TBC14	809 231 600	G1	4	7	250		4	2	100		2	B7	DDT
TBC113	809 231 600	G1	13	5	200		4	3.6	100		3.6	B7	DDT
TC05-25	642 300 000		4		400		65	2.2	No Data Available			B4	T
TC432	642 350 000		2	4.5	150	150	9.5	2.5	100	100	2.5	B5	P
TC432	642 300 000	G2	2	4.5	150	150	9.5	2.5	100	100	2.5	B4	P
TD05-12	*21 010 310	A1G1	6		150		10	4	100			A08	T
TD044	642 300 000		4	40	250		40	3	100		3	B4	T
TD2	642 300 000		2	7	150		4	0.9	100		0.9	B4	T
TDD1C	023 189 060		13	5	200		4	2	100		2	B7	DDT
TDD2	682 390 000	G1	2	5.5	150		2.5	1.4	100		1.4	B5	DDT
TDD2A	682 390 000	G1	2	1.5	150		2	1.2	125		1.2	B5	DDT
TDD4	908 231 600	G1	4	7	250		4	2	100		2	B7	DDT
TDD13	023 189 060	G1	13	1	100			2.9	100		2.9	8SC	DDT
TDD13C	809 231 600	G1	13	5	200		4	2	100		2	B7	DDT
TDD25	809 231 600	G1	25	1	100		4	2	100		2	B7	DDT
TE2	028 090 310		26				30		REC		15mA	A08	RR
TE3	028 090 310		12				30		REC		15mA	A08	RR
TE5	028 090 310		6.3				30		REC		15mA	A08	RR
TE094	642 310 000		4	16	200		12	1.3	100		1.3	B5	T
TE104	642 300 000		4	26	400		61	4	100		4	B4	T
TE244	642 310 000		4	3.5	200		6	2.4	150		2.4	B5	T
TE384	642 310 000		4	2	200		3	1.5	150		1.5	B5	T
TE434	642 350 000		4	14	250	250	36		100	150		B5	P
TE464	041 231 500	A1	4		200	100	3	2.5	100	100	2.5	B7	P
TE474	041 231 500	A1	4	1.5	200	100	4.5	2	100	100	2	B7	P
TE534	642 310 000	G2	4	15	250	250	24		100	150		B5	P
TE564	041 231 500	A1	4	1.5	200	100	4.5	2.2	100	100	3.2	B7	P
TE634	045 231 600		4	22	250	250	36		100	100		B7	P
TE994	642 310 000		4	1.6	250		4	4	200		4	B5	T
TF64	061 231 500	G1	4	2.7	250	250	11	2	200	150	2	B7	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
TF104	642 300 000		4	36	400		61	4	100		4	B4	T
TH1	276 454 300		6.3	{ 4	250				100	60		B8B	TH
TH2	645 230 700	G1	2	{ 1.5	150		0.95	1.2	100	60	1.2	B7	TH
TH4	645 231 700	G1	4	{ 1.5	250	75	4		125	60	0.7	B7	TH
TH4A	645 231 700	G1	4	{ 2	150		6	1.2	150	60	1.2	B7	TH
				{ 2	200	100	3.5		200	75	3.0	B7	TH
				{ 4.6	100		5	2.0	125	60	6	B7	TH
				{ 2	250	100	3.5		200	0	3.0	B7	TH
TH4B	645 231 700	G1	4	{ 3	100		9	3.8	100	60	5.5	B7	TH
				{ 2.5	250	100	3.25		200	100	3.5	B7	TH
TH13C	645 231 700	G1	13	{ 2	150		6	1.2	100	60	1.2	B7	TH
				{ 1.5	250	75	4.0	1.8	200	75	3.6	B7	TH
TH21C	645 231 700	G1	21	{ 2	150		6	1.2	100	60	1.2	B7	TH
				{ 1.5	250	75	4	1.8	200	75	3.0	B7	TH
TH22C	645 231 700	G1	29	{ 2	150		5	6	100	60	5	B7	TH
				{ 2	250	100	3.5		200	75	3.0	B7	TH
TH29	645 231 700	G1	29	{ 2	100		12.0	4.5	100	60	5	B7	TH
				{ 2	250	100	3.5		200	75	3.0	B7	TH
TH30	645 231 700	G1	30	{ 2	100		9.5	5.5	100	60	5.5	B7	TH
				{ 2	150				100	60		B7	TH
TH30C	645 231 700	G1	29	{ 2.5	250	100	3.5		100	100		B7	TH
				{ 2.5	250	100	3.25		100	100		B7	TH
TH31	217 640 530	G1	4	{ 3	100		10.2	4	100	60	5.3	MO8	TH
				{ 3	250	100	3	3	100	90	3	MO8	TH
TH41	217 640 530	G1	4	{ 3	100		10.2	4	100	60	5.3	MO8	TH
				{ 3	250	100	3	3.1	100	100	3.1	MO8	TH
TH62	027 546 310	G1	6	{ 2	100		4.4	2.4	100	60	2.2	A08	TH
				{ 2	250	100	3		200	100	1.2	A08	TH
TH232	645 231 700		23	{ 3	75		4.5		100	60		B7	TH
				{ 3	150	100	3		100	100		B7	TH
TH233	217 640 530	G1	23	{ 2	100		14	2.1	100	60	4	MO8	TH
				{ 2	150	100	2.6	3	100	90	3	MO8	TH
TH401	174 652 300	G1	4	{ 2	150		11	2	100	60	2	C7	TH
				{ 2	75	75	2.5		80	75		C7	TH
TH2320	645 231 700	G1	23	{ 3	100		4.5	5.3	100	60	5.3	B7	TH
				{ 3	150	100	3		100	100	3.8	B7	TH
TH2321	645 231 700	G1	23	{ 2	100		4	5.2	100	60	5.3	B7	TH
				{ 2	150	100	2.6	3	100	100	3	B7	TH
TH2620	645 231 700	G1	26	{ 1	100			5.3	100	60	5.3	B7	TH
				{ 1	250	100		3.9	250	100	3.8	B7	TH
TM05	672 344 100		6	{ 0.8	100		8.5	5.3	100		5.3	B7G	TT
				{ 3	150		5	4.5	100		5.3	B7G	TT
TM12	412 344 600		6.3		150		15	12	No Data Available				B7G T
TP4	571 231 640	G1	4	{ 3	150		1.5	1.4	100	60	1.4	B9	TP
				{ 5	250	200	5.5	1.6	200	150	1.5	B9	TP
TP22	571 230 640	G1	2	{ 1	100		0.8	1.2	100	60	1.4	B9	TP
				{ 1	150	60	1.2	1	150	60	1.3	B7	TP
TP23	645 230 700	G1	2	{ 1	100		4.5	2.1	100	60	2.1	B7	TP
				{ 1.5	150	60	1	1	125	60	1.2	B7	TP
TP25	207 640 530	G1	2	{ 1	100		3.7	1.5	100	60	1.7	MO8	TP
				{ 1.5	150	60	1	1	125	60	1	MO8	TP

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
TP26	207 640 530	G1	2	{ 1	150		2.2	1.5	125	60	1.3	N08	TP
				{ 1	150	75	1.5	1.5	125	75	1.5		
TP230	561 230 740	G1	2		100		20	1.7	100	60	1.1	B9	TP
					150	75	4.3	1.3	150	75	1.3		
TP1340	571 231 640	G1	13		200		2	1.4	150	60	1.4	B9	TP
				{ 6	250	250	6.5	2.1	100	100			
TP2620	571 231 640	G1	26	{ 2.5	250		1.5	1.4	100	60	1.4	B9	TP
				{ 4	250	200	6.5	3.4	100	150	3.4		
TS49	261 504 130		20	4.5	250	150	15	6	100	100	5.2	B8B	P
TS51	412 365 100		6	2.3	150	150	7	4.3	100	100	4	B7G	P
TS52	672 344 100		6	{ 0.8	100		8.5	5.3	100		5.3	B7G	TT
				{ 3	150		5	4.5	100		5.3		
TS53	541 236 **1		18	1.8	200	100	15	10	100	100	8	B9A	P
TS54	541 236 **1		6.3	1.7	200	125	10	9	100	100	8	B9A	P
TSE4	061 231 500	G1	4	2.5	250	150	8	14.5	100	100		B7	P
TSP4	061 231 500	G1	4	2.5	200	200	8	4.7	100	150	4.7	B7	P
TT2	222 833 390		4.4						D			A08	DD
TT4	642 310 000		4	16	250		20	3.2	100		3.2	B5	T
TT4A	642 310 000		4	9	250		20	4.1	100		4.1	B5	T
TT11	020 450 310	A1	6	11	250	150	30	3.5	100	100	3.5	A08	P
TT12	204 531 102	A1	19	13	250	250	72	6	100	100	6	B9G	P
TT14	204 051 103	A1	6	13	250	250	72	6	100	100	6	B9G	P
TT15	241 657 143		6	14	250	150	30	3.9	100	100	3.9	B9G	PP
TT19	241 657 143		19	16.5	250	150	30	3.9	100	100	3.9	B9G	PP
TT20	245 134 200	A1A2	6	17	400	200	20	2.5	100	100		B7A	PP
TT21	020 540 310	A1	6.3	30	300	300	80	7	No Data Available			A08	P
TT22	020 540 310	A1	12.6	30	300	300	80	7	No Data Available			A08	P
TT210	023 074 460		2		150		1.5		80			8SC	TT
TV03-10	442 310 000	A1A2	6	17	300		17	3.2	100		3	B5	TT
TW1	802 310 000		20				60		REC		20mA	B5	R
TW2	892 310 000		30				60		REC		20mA	B5	RR
TX4	645 231 700	G1	4	{ 5	150		9	1.5	150	60		B7	TH
				{ 1.5	300	90	5.5		200	90			
TX21	645 231 700	G1	21	{ 2	150		15	2.5	100	60	1.5	B7	TH
				{ 1.5	250	90	5.5		200	75	3		
TX41	645 231 700	G1	4	{ 3	100		9	3.8	100	60	5	B7	TH
				{ 2.5	250	100	3.2		250	100			
TY86F	23* 232 *32	D1	7.5						D			B9A	R
TZ40	204 300 000	A1	7.5	1	100			0.4	100		0.4	UX4	T
U4C	642 300 000		4	12	200		35	3.2	100		3.2	B4	T
U4E	642 300 000		4	40	400		45	4	No Data Available			B4	T
U4F	642 300 000		4	40	400		45	4	No Data Available			B4	T
U5	892 300 000		5				15		REC		15mA	B4	RR
U8	892 300 000		7.5				60		REC		20mA	B4	RR
U9	892 300 000		4				30		REC		15mA	B4	RR
U10	892 300 000		4				30		REC		15mA	B4	RR
U12	892 300 000		4(5)				60		REC		20mA	B4	RR
U12/14	892 300 000		4(5)				60		REC		30mA	B4	RR
U14	892 300 000		4				60		REC		20mA	B4	RR

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
U15	802 300 000		6				120		REC	30mA		B4	R
U16	002 300 000	D1	2				5		REC	5mA		B4	R
U17	002 300 000	D1	5				30		REC	15mA		B4	R
U18	892 300 000		4(5)				120		REC	30mA		B4	RR
U18/20	892 300 000		4(5)				120		REC	30mA		B4	RR
U19	002 300 000	D1	4(5)				120		REC	40mA		B4	R
U19/23	002 300 000	D1	4				120		REC	30mA		B4	R
U20	892 300 000		4(5)				60		REC	20mA		B4	RR
U21	002 300 000	D1	2				5		REC	5mA		B4	R
U22	200 000 030	D1	2(3)				5		D			M08	R
U22FH	200 000 030	D1	2						D			M08	D
U23	002 300 000	D1	4(5)				120		REC	30mA		B4	R
U24	030 000 200	D1	2				1		REC	2mA		A08	R
U25	023 000 000	D1	2						D			B3G	D
U26	391 221 800		13				60		REC	20mA		B7	RR
U26	231 232 132	D1	2						D			B9A	D
U27	002 300 000	D1	4				30		REC	15mA		B4	R
U29	002 300 000	D1	2				15		REC	30mA		B5	R
U30	391 221 800		13				60		REC	30mA		B7	RR
U30/250	802 300 000		4				30		REC	15mA		B4	R
U31	020 080 310		26				120		REC	50mA		A08	R
U33	002 300 000	D1	2				3		D			B4	R
U35	020 000 030	D1	1.4				2		D			A08	R
U37	023 000 000	D1	1.4				0.5		D			B2G	D
U41	*2* 0*0 3*0	D1	1.2				1		D			A08	D
U43	023 000 000	D1	6				0.5		D			B2G	D
U45	230 000 000	D1	6						D			B3G	R
U47	230 000 000	D1	2						D			B3G	R
U49	230 232 032	D1	2						D			B9A	D
U50	020 908 030		5(5.7)				60		REC	30mA		A08	RR
U51	030 908 020		5				120		REC	30mA		A08	RR
U52	030 908 020		5(5.7)				120		REC	30mA		A08	RR
U52IT	008 090 230		5(5.7)				120		REC	30mA		A08	RR
U54	030 908 020		5(5.7)				120		REC	30mA		A08	RR
U60	*2* *** 3*0	D1	6.3						D			A08	D
U60/500	892 300 000		4				60		REC	20mA		B4	R
U65/550	802 300 000		7.5				60		REC	20mA		B4	R
U70	028 090 310		6				30		REC	30mA		A08	RR
U71	020 080 310		30				60		REC	50mA		A08	R
U74	020 080 310		30				120		REC	30mA		A08	R
U76	020 080 310		30				120		REC	60mA		A08	R
U77	*20 809 020		5				180		REC	40mA		A08	RR
U78	802 309 100		6				30		REC	30mA		B7G	RR
U81	009 008 230		6				60		REC	20mA		B8B	RR
U82	209 008 130		6				30		REC	30mA		B8B	RR
U84	009 **8 230		4				30		REC	15mA		B8B	RR
U101	280 008 130		50				120		REC	30mA		B8B	R

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
U107	281 008 300		40				60		REC	20mA	B7G	R	
U118	280 *** 130		40				60		REC	25mA	B8A	R	
U119	**1 23* **8		38				120		REC	30mA	B9A	R	
U120/500	892 300 000		2				120		REC	30mA	B4	R	
U134	028 190 310		13				60		REC	20mA	A08	RR	
U142	280 000 130		31				60		REC	20mA	B8A	R	
U143	020 908 030		4				30		REC	15mA	A08	RR	
U145	280 000 130		40				60		REC	60mA	B8A	R	
U147	028 090 310		6				30		REC	30mA	A08	RR	
U150	280 009 130		6				30		REC	40mA	B8A	RR	
U151	023 000 000	D1	6						D		B3G	D	
U152	001 230 008		19				120		REC	70mA	B9A	R	
U153	*** 23* **8	C	17				120		REC	60mA	B9A	R	
U154	**1 23* **8		19				120		REC	70mA	B9A	RR	
U191	0** 080 230	C1	19						REC		A08	R	
U192	**1 23* **8		19				120		REC	30mA	B9A	R	
U193	*** 23* **8	C1	19				120		REC	40mA	B9A	R	
U201	020 080 310		20				60		REC	60mA	A08	R	
U251	*** 23* **8	C	15				120		REC	30mA	B9A	R	
U281	020 080 310		28				120		REC	80mA	A08	R	
U282	001 000 230	D1	28				120		REC	36mA	A08	R	
U291	028 08* 310		29				180		REC	40mA	A08	R	
U301	0** 080 230	C	30				120		REC	35	A08	R	
U309	**1 23* **8		20				120		REC	70mA	B9A	R	
U319	**1 23* **8		20				120		REC	70mA	B9A	R	
U329	*** 23* **8	C	25				120		REC	60mA	B9A	R	
U339	0** 080 230		19				120		REC	35mA	A08	R	
U381	**1 23* **8		38				120		REC	30mA	B9A	R	
U403	201 080 030		40				120		REC	70mA	M08	R	
U404	280 *** 130		40				60		REC	60mA	B8A	R	
U415	642 300 000		4	10.5	150		5	1.4	100	1.4	B4	T	
U418	642 300 000		4	13	150		10	1.6	100	1.6	B4	T	
U650	802 300 000		6				30		REC	15mA	B4	R	
U709	8*1 23* 9**		6				60		REC	20mA	B9A	RR	
U718	29* **8 130		6.3				60		REC	25mA	B8A	RR	
U801	128 899 310		80				120		REC	30mA	A08	RR	
U2140P	391 221 800		13				60		REC	20mA	B7	RR	
U4020	802 310 000		40				120		REC	70mA	B5	R	
UA55	625 414 537		55	6	90	90	36	7	80	90	B9A	FP	
UAA11	023 189 100		22				5		D		8SC	DD	
UAA91	182 310 900		19				5		D		B7G	RR	
UAA171	120 813 090		25				5		D		B8B	DD	
UABC80	181 239 146		28	1	100		0.8	1.4	100	1.4	B9A	DDDT	
UAF21	265 814 130		20	2	250	100	6	2.8	100	100	B8A	P	
UAF41	268 154 130		13	2	200	90	5	2	100	100	B8A	DP	
UAF42	268 154 130		13	2	200	90	5	2	100	100	B8A	DP	
UB41	201 908 130		19				5		D	6mA	B8A	RR	
UB91	182 310 900		19						D		B7G	DD	

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE			
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V					
UBC1	206 081 930	G1	13	1.7	200		3	2	150		2	A08	DDT			
UBC41	264 098 130		14	1.6	200		1.5	1.6	150		1.6	B8A	DDT			
UBC81	641 238 09*	G1	14	1.5	200		1.5	1.6	100		1.4	B9A	DDT			
UBF2	206 581 930		12.5	2	250	100	5	1.8	100	150	1.8	A08	DDP			
UBF11	892 361 450		20	2	200	75	5	1.8	200	75	1.8	F8	DDP			
UBF15	892 361 450		27	2	250	100	12	5	200	100	5	F8	DDP			
UBF80	541 236 891	G1	17	2	200	125	5	2.2	100	100	2	B9A	DDP			
UBF89	541 236 891		19	2	200	100	9	3.8	100	100	3.5	B9A	DDP			
UBF171	892 541 360		20	3.2	250	75	6	1.8	100	75		B8B	DDP			
UBL1	206 581 930		55	11.5	200	200	55	8.5	100	100	8	A08	DDP			
UBL21	264 598 130		55	13	200	200	55	8	100	100	7	B8B	DDP			
UBL3	023 189 560	G1	55	6	100	100	29	7.5	100	90	7	B8C	DDP			
UBL71	264 589 130		55	5.2	250	250	44	9.5	100	100	0.7	B8B	DDP			
UC88	414 234 464		12		150		12.5	14	No Data Available			B9A	T			
UC92	602 304 100		9.5	1	200		11.5	6.4	200		6.4	B7G	T			
UC95	142 360 100		10.8	1.2	200		10	10.5	No Data Available			B7G	T			
UC96	412 314 600		9.3	1	200		11.5	6.7	100		6	B7G	T			
UCC84	147 234 116		21	1.5	90		12	6	100		6	B9A	TT			
UCC85	641 237 410		26	2.1	200		10	5.8	100		5	B9A	TT			
UCC88	641 237 410		21	1.2	90		15	12.5	No Data Available			B9A	TT			
UCC89	146 234 117		21.6	1.2	90		15	12	80			B9A	TT			
UCC189	641 237 410		21	1.2	90		15	12.5	No Data Available			B9A	TT			
UCF12	642 371 450		20	{	1	100			3	100	60	3	F8	TP		
UCF80	645 237 114		19	2	200	100	5	2	200	100	2					
				2	100		14	5	100	60	5	B9A	TP			
UCH4	217 544 630	G1	20	2	200	175	10	6.2	100	150	6			A08	TH	
				2	100		6	3	80	60	3.2					
UCH5	123 644 570			20	2	100		6.3	2.7	100	60	2.2	B8C	TH		
					2	250	100	6.5	2.6	100	150	2.6				
UCH11	642 371 450		G1	20	2	100		5	2.4	100	60	1.8	F8	TH		
					2	250	100	4.7	2.5	200	100	2.5				
UCH21	276 454 131			20	2	100		6.4	2.2	100	60	3.2	B8B	TH		
					2	200	90	5.2	2.2	100	90	2.2				
UCH41	276 454 130			14	2	100		6.4	2.2	100	60	2.8	B8A	TH		
					2	200	90	2.7	1.5	100	75	1.5				
UCH42	276 454 130			14	2	100		5	2	100	60	2	B8A	TH		
					2	200	75	8	2.2	100	75	2				
UCH43	276 454 130			14	2	100		5	2	100	60	2	B8A	TH		
			2		200	75	8	2.2	100	75	2					
UCH71	276 454 131		20	2	100		16.4	2.2	100	60	3.2	B8B	TH			
				2	200	90	5.2	2.2	100	90	2.2					
UCH80	541 23* 764		14.5	2	75		5.1		75	60		B9A	TP			
				2	250	85	3		100	80						
UCH81	541 237 464		19	3	100		5	2.3	100	60	3.7	B9A	TH			
				2.6	200	125	7.6	2.4	100	100	2.4					
UCH717	642 544 370		20	{	200		3		100	60		B8B	TH			
				2.5	200	100	2	0.7	100	100						
UCL11	452 371 460		60	{	200		2	2.1	150	60	2	F8	TP			
				8.5	200	200	45	9	100	100	7					

VALVE	SELECTOR SWITCH No.	T.C.	Vr	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
UCL81	451 237 614		39	{ 1.5 7	200 200		0.5 30	1.2 8.7	100 100	60 100	1.2	B9A	TP
UCL82	414 237 516		50	{ 1 16	200 200		3.7 35	2.5 6.4	100 100	60 100	2.5 6.8	B9A	TP
UCL83	641 237 154		40	{ 1.5 9.5	200 200		2.4 175	2.5 30	150 100	60 100	2 5	B9A	TP
UCL84	461 237 145		45	{ 1.7 2.1	200 200		3 18	4	100 100	60 100	4	B9A	TP
UCL86	415 237 146		44	{ 1.7 7	250 250		1.2 36	1.6 10	100 100	60 100	1.6	B9A	TP
UDDL71	023 189 560	G1	44	10	200	200	60	9	100	100		8SC	DDP
UDH	802 310 000		20				60		REC	20mA		B5	R
UDP12	023 180 560	G1	40	10	200	200	60	9	No Data Available			8SC	DP
UDP13	026 580 310	G1	40	10	200	200	60	9	No Data Available			A08	DP
UDT1	023 189 060	G1	15	3	200		10.3	3	150		3	8SC	DDT
UE1	023 100 080		25				60		REC	20mA		8SC	R
UE2	123 180 090		50				60		REC	20mA		8SC	RR
UE13	020 080 310		25				60		REC	20mA		A08	R
UE100	208 0*0 130		50						REC			A08	R
UEL11	452 371 540		48	{ 6	100 200	30 200	2.4 22	1.6 5	100 100	60 100	1.6	F8	PP
UF5	023 110 560	G1	12.5	2.5	100	100	3.2	2.2	100	100	2.2	8SC	P
UF6	023 110 560	G1	12.5	20	100	100	3	1.8	100	100	1.8	8SC	P
UF8	206 511 130	G1	12	2	200	200		1.6	100	100		B8B	P
UF9	206 501 130	G1	12.5	2.5	200	100	6	2.2	100	100	2.2	A08	P
UF10	023 110 560	G1	12.5	2.4	200	100	5.5	2.4	100	100	2.3	8SC	P
UF11	602 301 450		15	2	200	75	6	2.2	100	100	2	F8	P
UF15	612 301 450		25	2	200	100	12	5.5	100	100	5.5	F8	P
UF14	612 350 140		25	5	200	200	12	7	100	100	7	F8	P
UF21	265 104 130		12.5	2.5	200	100	6	2.2	100	100	2.2	B8B	P
UF41	26* *54 130		12.5	3	200	125	7.2	2.3	100	150	2.3	B8A	P
UF42	260 154 130		21	2	200	175	10	8.5	100	150	8	B8A	P
UF43	260 154 130		21	2	200	125	15	6.3	100	100		B8A	P
UF80	141 230 651		19	2	200	170	10	7.4	100	100	7	B9A	P
UF81	541 236 000		12.6	2.5	250	125	6	2.2	100	100		B9A	P
UF85	141 231 651		19	2	200	100	9.7	5.9	200	200	6	B9A	P
UF86	501 236 014		12.6	2	200	150	3	1.8	100	100	1.8	B9A	P
UF89	041 230 651		12.6	2	200	100	9	3.8	175	100	4.4	B9A	P
UF172	112 540 360		20	2	200	100	4.5	3	100	100		B8B	P
UF174	112 540 360		30	3	200	150	12	8	100	100		B8B	P
UF175	112 540 360		30	2	200	75	10	5.7	100	75		B8B	P
UF183	141 230 651		18.9	2	200	90	12	12.5	No Data Available			B9A	P
UF184	141 230 651		18.9	2.5	200	200	10	15	No Data Available			B9A	P
UH3	023 110 560		13	3	250	100	8	2.2	100	100		8SC	P
UH4	893 200 000		4				5		D			B5	RR
UEP51	023 110 560		13	2.5	250	100	3.5	2	100	100		8SC	P
UHP52	023 110 560		13	2.5	250	100	3.5	2	100	100		8SC	P
UL1	206 540 130		60	11.5	200	200	55	8.5	100	150	8	A08	P
UL2	023 104 560		35	5	200	200	20	7	100	150	6	8SC	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
UL11	602 310 450		45	14	200	75	6	2.2	100	75		F8	P
UL11	602 301 450		45	14	200	200	45	9	100	100		F8	P
UL12	602 301 450		60	8	200	125	75	12	No Data Available			F8	P
UL21	265 004 130		45	13	200	200	55	8	100	150	7	B8B	P
UL22	265 004 130		46	10	200	175	61	9	100	100	8	B8B	P
UL41	26* *54 130		45	9	200	175	54	9.5	100	100	7	B8A	P
UL43	260 154 130		50	2.6	250	250	36	10	100	100		B8A	P
UL44	200 154 130	A1	45	13.5	200	175	28.5	7	100	100	6.5	B8A	P
UL46	261 054 130		45	9	200	175	54	9.5	100	100	7	B8A	P
UL71	264 500 130		45	5.2	200	200	22	6.5	100	100		B8B	P
UL84	*41 23* 6*5		45	12.5	200	175	70	10	100	100	9	B9A	P
UL171	102 541 360		55	8.5	200	200	45	9	100	100		B8D	P
ULL80	546 234 175		25		250	250	24		100	100		B9A	P
ULP	642 310 000		13	20	250		27	4	100		4	B5	T
ULP51	623 145 000		40	17	250	250	36	2.5	100	100		8SC	P
ULP61	023 100 560	G1	33	8	200	200	55	9	100	100		8SC	P
UN955	213 460 000		6.3	7	250		6.3	2.2	100		2	5AA	T
UP2	023 140 560		25	19	200	100	40	3	100		3	8SC	P
UP6	023 100 560	G1	35	8	200	200	55	9	100	100		8SC	P
UP13	026 540 310		35	8	200	200	55	9	100	100		A08	P
UP13	040 231 500	A1	13	1	200	100		3	200	100	3	B7	P
UP35U	023 100 560	G1	35	8	200	200	55	9	100	100		8SC	P
UPX	642 310 000		25	34	250		38	7	100		7	B5	T
UQ80	541 236 114		12	1	250	20	0.9	7	No Data Available			B9A	P
UR1	023 100 080		20				60		REC		60mA	8SC	R
UR1C	802 310 000		20				60		REC		60mA	B5	R
UR2	123 180 090		30				60		REC		70mA	8SC	RR
UR3	123 180 090		30				60		REC		65mA	8SC	RR
UR3C	091 231 800		30				60		REC		65mA	B7	RR
UT2	023 100 060	G1	15	5	100		6	3	100		3	8SC	T
UTH4	423 164 570	G1	17	{ 2.5	100		4	2	100	60	2	} 8SC	TH
					200	90	3	0.8	100	90			
					100		4	2	100	60	2		
UTH12	423 164 570	G1	17	{ 2.5	250	30	3	0.7	No Data Available			} 8SC	TH
UU2	892 300 000		4				30		REC		15mA	B4	RR
UU3	892 300 000		4				30		REC		30mA	B4	RR
UU4	892 300 000		4				60		REC		35mA	B4	RR
UU5	892 300 000		4(5)				60		REC		20mA	B4	RR
UU6	208 090 030		4				60		REC		40mA	N08	RR
UU7	208 090 030		4				60		REC		20mA	N08	RR
UU8	208 090 030		4				120		REC		50mA	N08	RR
UU9	290 008 130		6				30		REC		15mA	B8A	RR
UU10	892 300 000		4				60		REC		20mA	B4	RR
UU12	8*1 23* 9**		6				60		REC		25mA	B9A	RR
UU30/250	892 300 000		4				15		REC		10mA	B4	RR
UU60/250	892 300 000		4				30		REC		15mA	B4	RR
UU120/250	892 300 000		4				60		REC		20mA	B4	RR
UU120/350	892 300 000		4				60		REC		20mA	B4	RR

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
UU120/500	892 300 000		4				60		REC		20mA	B4	RR
UVG51	123 190 080		30				60		REC		20mA	8SC	RR
UY1	388 028 120		50				120		REC		30mA	A08	R
UY1 (N)	388 028 120		50				120		REC		30mA	A08	R
UY2	023 180 000		26				30		REC		15mA	F8	R
UY3	023 100 080		50				120		REC		30mA	8SC	R
UY4	023 100 080		35				30		REC		15mA	8SC	R
UY11	802 300 100		50				120		REC		50mA	F8	R
UY21	280 80* 130		50				120		REC		70mA	B8B	R
UY22	280 808 130		26				60		REC		20mA	B8B	R
UY31	020 080 310		50				120		REC		30mA	A08	R
UY41	280 000 130		31				60		REC		60mA	B8A	R
UY42	280 *0* 130		31				60		REC		50mA	B8A	R
UY82	**1 23* **8		55				180		REC		35mA	B9A	R
UY85	**1 23* **8		38				120		REC		60mA	B9A	R
UY89	1*1 23* **8		31				60		REC		20mA	B9A	R
UY91	812 380 800		26				60		REC		20mA	B7G	R
UY92	**2 38* 100		26				60		REC		20mA	B7G	R
V2N70	802 309 100		6.3				30		REC		15mA	B7G	RR
V20	802 310 000		20				60		REC		20mA	B5	R
V20/7000	002 300 000	D1	4				15		REC		10mA	B4	R
V20S	023 100 080		20				60		REC		20mA	8SC	R
V22/7000	000 010 100	D1	6.3				5		D			B8B	D
V25	081 231 900		25				60		REC		20mA	B7	RR
V30	802 310 000		30				120		REC		50mA	B5	R
V30/1	002 300 000	D1	2						D			B4	D
V41	*8* **9 230		4				30		REC		15mA	B8B	RR
V51	280 009 130		5				30		REC		15mA	B8A	RR
V61	28* **9 130		6.3				30		REC		15mA	B8A	RR
V99	263 400 000		3	4.5	90		2.5	0.4	80		0.4	UX4	T
V226	041 230 500	A1	6	5	400	250	14	3	100	150	3	B7	P
V245	041 240 500	A1	3		250	250	16	5	100	150	5	B7	P
V248A	200 540 030	A1	2	10	150	150	32	5.2	100	100	5	M08	P
V311	28* *** 130		31				60		REC		20mA	B8A	RR
V312	602 310 000	G1	4	4.8	250		6	2.3	100		2.3	B5	T
V339	000 231 600	G1	4		250			1.7	100		1.7	B7	T
V453	216 510 030	G1	4	1.8	250	100	4.5	2	100	100	2	M08	P
V503	642 300 000		4	85	400		100	4.5	100		4.5	B4	T
V872	216 510 030	G1	6	4	200	200	6.7	3.4	100	150	3.3	M08	P
V884	412 361 500		6.3	2.5	250	200	8	2.5	100	150	2.5	B7G	P
V914	892 310 000		4						D			B5	DD
V960	002 300 000	D1	4				60		REC		20mA	B4	R
V1120	045 231 000	A1	6	9.8	200	200	40	8.7	100	100	7	B7	P
V1120B	040 231 500	A1	4(5)	9.8	200	200	40	8.7	100	100	7	B7	P
V1906	002 300 000	D1	4(5)				60		REC		20mA	B4	R
V1907	002 300 000	D1	4				60		REC		20mA	B4	R
V1920	112 311 100	D1	4				5		D			B7G	R
V2018	002 300 000	D1	20				30		REC		15mA	B4	R

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
V2118	802 310 000		20				60		REC		20mA	B5	R
V4200	802 300 000		4				120		REC		30mA	B4	R
VBF11	892 361 450		35	2	200	75	5	1.9	100	80	1.9	F8	DDP
VC1	023 189 060	G1	55	2	200		6	3	100		3	8SC	DDT
VCH11	642 371 450		40	{ 2.5	100		4	2	100	60	2	F8	TH
					250	90	3	0.7	100	90			
VCL11	452 371 460		90	{ 0.5	100		2	2.4	100	60	2.4	F8	TH
				4.5	200	200	12	5	100	100			
VDS	542 310 000	A1	16	2	200	75		1.6	100	75	1.6	B5	P
VD5B	542 310 000	A1	16	1	200	75	5	3	100	75	3	B5	P
VEG51	026 100 080		20				60		REC		20mA	8SC	R
VEL11	452 371 560		90	{ 6	100	30	2.4	1.6	100	100		F8	PP
					200	200	22	5	100	100			
VF3	023 110 560	G1	55	2.5	250	100	5	2	100	100		8SC	P
VF7	023 110 560	G1	55	2.5	250	100	3.5	2	100	150	6	8SC	P
VF14	612 350 140		60	4.5	250	250	12	7	100	100		F8	P
VG406	892 300 000		4				30		REC		15mA	B4	RR
VG410	892 300 000		4				30		REC		15mA	B4	RR
VG411	892 300 000		4				60		REC		20mA	B4	RR
VG420	892 300 000		4				60		REC		20mA	B4	RR
VG421	892 300 000		4				60		REC		20mA	B4	RR
VG2503	892 300 000		4				30		REC		15mA	B4	RR
VG2908	892 300 000		2.5				30		REC		15mA	B4	RR
VG3008	892 300 000		4				30		REC		15mA	B4	RR
VG3016	892 300 000		4				60		REC		20mA	B4	RR
VG3630	892 300 000		4				120		REC		20mA	B4	RR
VG5006	892 300 000		4				60		REC		20mA	B4	RR
VG5007	023 080 090		4				60		REC		20mA	8SC	RR
VG5107	802 300 090		4				60		REC		20mA	F8	RR
VH2	812 380 100		6				5		D			B7G	D
VH3	142 364 100		6	4.5	150		13	5	100		5	B7G	T
VH5	412 365 100		6	2	200	125	7.7	5.1	100	100		B7G	P
VHP13	041 231 500	A1	13	1.5	200	100	4	2	100	100	4	B7	P
VHT2	645 230 600	G1	2		150	75			100	75		B4	H
VHT2A	645 230 600	G1	2		150	50			100	60		B7	H
VHT4	545 231 600	G1	4	3	200	100	3.6		100	100		B7	H
VHTA	123 164 550	G1	13	1.5	250	100	3.2		100	100		8SC	H
VHTA	545 231 600	G1	13	1.5	200	100	3.2		100	100		B7	H
VHTS	645 231 500	G1	13	3	200	100	2.6		100	100		B7	H
VHTS	545 231 600	G1	13	3	200	100			100	100		B7	H
VL1	023 100 560	G1	55	14	200	200	25	2.2	100	100		8SC	P
VL4	023 100 560	G1	110	8.5	200	200	45	8	100	100		8SC	P
VLS61	002 300 000	D1	2				3		D			B4	R
VM1	2** 00* 300	D1	1.4						D			B7G	D
VM4V	542 310 000	A1	4	1	200	80	14	2.4	200	75	2.4	B5	P
VMP4	041 231 500	A1	4	2	250	100	3	3.5	150	100	3.5	B7	P
VMP4	542 310 000	A1	4	1	250	100	5	3.5	200	100	3.5	B5	P
VMP4G	041 231 500	A1	4	2	250	100	8	2.7	100	100	2.7	B7	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
VMS4	542 310 000	A1	4	1	200	80	11	2.1	200	75	2.4	B5	P
VMS4B	542 310 000	A1	4	1	200	80	5.2	2.4	200	75	2.9	B5	P
V02	645 320 600	G1	2		150	90	1.8		150	90		B7	O
V02S	023 064 560	G1	2		150	50	2		No Data Available			8SC	O
V04	645 231 500	G1	4	1.5	250	75	1.6		100	75		B7	O
V04S	023 154 560	G1	4	1.5	250	75	1.6		100	75		8SC	O
V06	123 164 560	G1	6	3	100	100	4.6		100	100		8SC	O
V013	645 231 500	G1	13	1.5	250	75	1.6		100	75		B7	O
V013S	123 154 560	G1	13	1.5	250	75	1.6		100	75		8SC	O
V0133	023 164 570	G1	13	1 1	100 200		1	1.2 1.7	100 200	60 80	1.2 1.7	B7	TH
VP2	041 230 500	A1	2	1	150	150	3	1.5	150	150	1.5	B7	P
VP2B	061 230 500	G1	2	1.5	150	150	1.6	0.7	80	90	0.5	B7	P
VP2B	065 231 500	G1	2	1.5	150	60	2	1.4	100	60	1.4	B7	H
VP2B	032 004 560		2	15	150	150	2.5	0.7	150	150	0.6	8SC	P
VP2BS	032 010 560	G1	2	1	150	150	2.5	0.7	150	150	0.6	8SC	P
VP2D	061 230 500	G1	2	1.5	150	75	1.3	2	150	75	2	B7	P
VP4	542 310 000	A1	4	2	200	100	4.5	2.3	100	100	2.3	B5	P
VP4	041 231 500	A1	4	2	200	100	4.5	2.3	100	100	2.3	B7	P
VP4A	041 231 500	A1	4	2	200	100	4.3	2.5	100	100	2.5	B7	P
VP4B	061 231 500	G1	4	3	250	250	11.5	2	100	100	1.8	B7	P
VP4C	041 231 500	A1	4	2	250	250	11.5	4	100	150	4	B7	P
VP4S	023 110 560	G1	4	2	250	100	8	1.8	100	90	1.8	8SC	P
VP4S	061 231 500	G1	4	3	250	100	8	1.8	100	90	1.8	B7	P
VP6	412 361 500		6	2.5	250	200	8	2.1	100	150	2.1	B7G	P
VP6	061 231 500	G1	6	3	250	100	7.5	1.7	200	100	1.7	B7	P
VP6S	023 110 560	G1	6	3	250	100	7.5	1.8	200	100	1.7	8SC	P
VP12D	026 985 310	G1	13	3	250	125	9	1.1	100	100	1.1	A08	DDP
VP13	041 231 500	A1	13	1.5	200	100	6.3	3	100	100	3	B7	P
VP13	061 231 500	G1	13	3	200	100	8	2.8	100	100	2.8	B7	P
VP13A	023 110 560	G1	13	2	200	100	4	2.2	100	100	2.2	8SC	P
VP13B	061 231 500	G1	13	2	200	200	9	2.2	200	200	2.2	B7	P
VP13C	061 231 500	G1	13	2	200	200	9	2.2	200	200	2.2	B7	P
VP13K	061 231 500	G1	13	3	200	100	8	2	100	100	2	B7	P
VP13S	061 231 500	G1	13	3	200	100	8	2.8	100	100	2.8	B7	P
VP13S	023 110 560	G1	13	3	200	100	8	2.8	100	100	2.8	8SC	P
VP20	542 310 000	A1	20	2	200	100	4	2.2	200	100	2.2	B5	P
VP21	041 230 500	A1	2	1	150	60	1.8	1.1	150	60	1.1	B7	P
VP22	206 510 030	G1	2	1.5	150	60	1.2	0.8	100	60	0.8	M08	P
VP41	216 510 030	G1	4	2.7	250	250	7.7	2	100	150	2	M08	P
VP41	061 231 500	G1	4	3.3	250	250	11	2	100	200	3.1	B7	P
VP23	206 510 030	G1	2	1.5	150	60	1.4	1	100	60	1	M08	P
VP133	216 510 030	G1	13	2.7	150	150	8	2.1	150	100	2.1	M08	P
VP210	041 230 500	A1	2	1.5	150	60	1.1	0.8	100	60	0.8	B7	P
VP210	542 300 000	A1	2	1.5	150	60	1.1	0.8	125	60	0.8	B4	P
VP215	542 300 000	A1	2	1.5	150	75	2	0.7	150	75	1.3	B4	P
VP215	041 230 500	A1	2	1.5	150	75	2	0.7	150	75	1.3	B7	P
VP215B	061 230 500	G1	2	1.5	150	125	1.5	1	125	100	1.2	B7	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
VP215C	041 230 500	A1	2	1.5	150	125	1.5	1	125	100	1.2	B7	P
VP1320	041 231 500	A1	13	2.7	250	100	5	2	100	100	2	B7	P
VP1321	041 231 500	A1	13	2.8	200	200	7.4	2	150	150	2	B7	P
VP1322	061 231 500	G1	13	2.8	250	200	7.4	2	100	100	2	B7	P
VPT2	542 300 000	A1	2	1.5	150	60	1.5	1.1	125	60	1.1	B4	P
VPT2	041 230 500	A1	2	1.5	150	60	1.5	1.1	125	60	1.1	B7	P
VPT4	542 310 000	A1	4	3	250	100	5.5	2	100	90	2	B5	P
VPT4	041 231 500	A1	4	3	250	100	5.5	2	100	90	2	B7	P
VPT4B	041 231 500	A1	4	3	250	100	6	3.2	100	90	3.2	B7	P
VPTA	041 231 500	A1	13	2	250	100	4.2	2.9	100	100	2.9	B7	P
VPTS	041 231 500	A1	13	3	200	100	5.5	2.6	100	90	2.6	B7	P
VPU1	060 231 500	G1	13	1	250	200		3.5	100	100		B7	P
VS2	542 300 000	A1	2	2.5	150	60	2	1.2	100	60	1.4	B4	P
VS24	542 300 000	A1	2	1	150	75	2.8	1.5	150	75	1.5	B4	P
VS24K	542 300 000	A1	2	1	150	75	2.8	1.5	150	75	1.5	B4	P
VS210	542 300 000		2	2.5	150	60	2	1.4	100	60	1.4	B4	P
VS215	542 300 000	A1	2	1	150	75	6	0.7	150	75	1	B4	P
VSGA1	542 310 000	A1	4	1.5	200	100	7	6.1	100	100	6	B5	P
VT1	642 310 000		4	5	200		5	2	100		2	B5	T
VT2	642 310 000		4	2	200		3	1.9	150		1.9	B5	T
VTP4	542 310 000	A1	4	3	200	100	5.5	2	100	100	2	B5	P
VX2	061 235 500	G1	2	1	150	60	1		150	60		B7	H
VX2S	023 015 560	G1	2	1	150	60	1		150	60		8SC	H
VX4	515 231 600	G1	4	2	250	75	1.8		100	75		B7	H
VX4S	023 115 560	G1	4	2	250	75	1.8		100	75		8SC	H
VX6S	023 115 560	G1	6	3	250	100	1.9	4	100	100	4	8SC	P
VX13	515 231 600	G1	13	2	250	75	1.8		100	75		B7	P
VX13S	023 115 560	G1	13	2	250	75	1.8		100	75		8SC	H
VY1	023 100 080		55				60		REC		20mA	8SC	R
VY2	023 180 000		30				15		D			8SC	R
VY2N	023 100 080		30				15		D			8SC	R
W4	642 300 000		4	7.5	150		3	1.2	100		1.2	B4	T
W4-500	892 300 000		4				60		REC		20mA	B4	RR
W17	265 024 300		1.4	1	90	75	3.5	0.9	80	75	0.9	B7G	P
W21	041 230 500	A1	2	1	150	125	3.3	1	150	100	1.4	B7	P
W21	542 300 000	A1	2	1	150	125	2.3	1	150	100	1.4	B4	P
W25	265 *24 300		1.4		90	60	1.7	0.8	90	60		B7G	P
W30	041 231 500	A1	13	1	250	250	12	4	250	250	4	B7	P
W31	041 231 500	A1	13	3	250	100	8	2.7	100	90	2.7	B7	P
W42	061 231 500	G1	4	3	250	100	7.6	1.5	100	100	1.5	B7	P
W61	026 510 310	G1	6	3	250	75	8.5	2.9	100	75	2.9	A08	P
W63	026 510 310	G1	6	3	250	100	7.6	1.5	100	90	1.5	A08	P
W76	026 510 310	G1	13	3	250	100	7.6	1.5	200	100	1.5	A08	P
W77	412 361 500		6	2	200	200	8	2.5	100	150	2.5	B7G	P
W81	265 104 130		6	3	250	100	8	2.8	100	90	2.8	B8B	P
W101	265 104 130		19	3	250	100	8	2.8	100	90	2.8	B8B	P
W107	412 361 500		12.5	2.5	200	200	8	2.5	100	150	2.5	B7G	P
W118	260 154 130		13	2.5	200	100	7	2.3	100	100	2.5	B8A	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
W119	141 230 651		13	1.3	200	100	13	4.4	100	100	4.4	B9A	P
W142	261 154 130		12	3	250	250	7.2	2.2	100	150	2.2	B8A	P
W143	265 104 130		6	2.5	250	100	6	2.2	100	100	2.2	B8B	P
W145	260 154 130		13	2.5	200	100	7	2.3	100	100	2.3	B8A	P
W147	026 510 310	G1	6	2.5	250	100	6	2.2	100	100	2	A08	P
W148	265 140 130		6	2.5	250	150	9.5	2.8	100	150	3.8	B8B	P
W149	265 104 130		6	3	250	100	8.5	1.8	100	90	1.7	B8B	P
W150	261 154 130		6	2.5	250	100	6	2.2	100	150	2.2	B8A	P
W213	642 300 000		2	2.5	150		1	1.2	150		1.2	B4	T
W216	040 120 560		2	1.5	150	90	3	1.2	100	90	1.2	B7	P
W318	809 231 600	G1	4	2	100		3.5	2.5	100		2.5	B7	DDT
W406	642 300 000		4	7.5	150		3	1.2	100		1.2	B4	T
W411	642 300 000		4	2.5	150		3	2.2	100		2.2	B4	T
W412	642 300 000		4	7.5	150		3	1.2	100		1.2	B4	T
W415N	642 310 000		4	2.5	200		2.5	1	100		1	B5	T
W420	642 300 000		4	4	150		4	1.3	100		1.2	B4	T
W719	141 230 651		6	2	250	100	10	6	150	100	5	B9A	P
W729	141 230 651		6	2	200	175	8	5.7	100	100		B9A	P
W727	412 365 100		6	1	250	100	11	4.4	100	100	4.4	B7G	P
W739	141 230 651		6.3	1.3	175	100	12	4.4	100	100	4	B9A	P
W4080	642 310 000		4	2.5	200		2.5	1	100		1	B5	T
W4110	642 310 000		4	1.5	200		1	3	100		2.5	B5	T
WD2	642 300 000		2	2.5	150		1	1	100		1.2	B4	T
WD30	560 231 890	G1	13	1	250	100	7	2.6	250	100	2.6	B9	DDP
WD40	560 231 890	G1	4	1	250	100	7	3.5	100	100	3.5	B9	DDP
WD70	541 236 891		6	2	250	90	5	2.2	100	90	2.2	B9A	DDP
WD119	541 236 891		19	1.5	200	100	11	4.5	100	100	4.5	B9A	DDP
WD142	268 154 130		13	2	200	90	5	2.1	100	100	1.9	B8A	DP
WD150	268 154 130		6	2	250	100	5	2.1	100	100	2	B8A	DP
WD709	541 236 891		6	2	250	90	5	2.2	100	90	2.2	B9A	DDP
WE23	542 310 000	A1	4	2	200	100	3	2.5	100	100		B5	P
WE24	542 310 000	A1	4		200	100	3	2.5	100	100		B5	P
WE27	642 310 000		4	3.5	200		6	2.4	100		2.2	B5	T
WE28	642 310 000		4	1.5	200		1	2.5	100		2.2	B5	T
WE29	642 310 000	D1	4	3	200		6	2	100		2	B5	DT
WE33	023 110 560		4	3	100	250	8	1.9	100	100		8SC	P
WE30	642 350 000		4	15	250	250	36	2.8	No Data Available			B5	P
WE35	023 004 560		4	15	250	250	15	2.8	100	100		8SC	P
WE37	023 189 060	G1	4	7	250		4	2	100		2	8SC	DDT
WE38	023 104 560		4	6	250	250	36	9	100	100		8SC	P
WE39	023 100 060	G1	4	5.5	250		6	2.5	100			8SC	P
WE51	892 300 000		4				30		REC		15mA	B4	RR
WE52	892 300 000		2				60		REC		20mA	B4	RR
WE53	023 080 090		4				60		REC		25mA	8SC	RR
WE54	023 080 090		4				30		REC		12mA	8SC	RR
WE350A	254 130 000	A1	6	4.5	400	250	83	6.5	100	150	6	UX5	P
WE377	029 180 310		117				60		REC		20mA	A08	RR
WE403A	412 365 100		6	2.3	150	150	7	4.3	100	100	4	B7G	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
WHTS	745 231 600	G1	13	{ 1 1	150 250			0.6 1.5	150 250	60 75	0.6 1.4	B7	TH
WT389	036 540 320		1.4	4.6	90	90	8	2	80	75	2		P
WT210-0006	029 180 310		6						D			A08	DD
WT210-0007	026 540 310		6	18	350	250	54	5.2	100	150	5.2	A08	P
WT210-0012	298 300 000		5				60		REC		20mA	UX4	RR
WT210-0013	289 300 000		5				120		REC		30mA	UX4	RR
WT210-0019	289 300 000		5				120		REC		30mA	UX4	RR
WT210-0021	028 090 310		6				30		REC		15mA	A08	RR
WT210-0025	029 180 310		117				60		REC		20mA	A08	RR
WT210-0029	026 040 310		6	8	250		8	2	100		2	A08	T
WT210-0037	126 458 310		117	{ 5.2	100	100	60 43		REC 100		20mA 5.3	A08	RP
WT210-0040	802 309 100		6				30	5.3	REC	90	15mA		RR
WT210-0042	030 809 020		5				60		REC		20mA	A08	RR
WT210-0048	020 809 030		5				120		REC		30mA	A08	RR
WT210-0081	021 415 360		6	2	250	100	3	1.7	100	100	1.6	A08	P
WT210-0082	026 540 310		6	12.5	250	250	45	4.1	100	150	4.1	A08	P
WT210-0083	216 498 130		6	2	250		2.3	1.6	200		1.6	B8B	DDT
WT210-0084	027 446 310		6	5	250		3	1.6	100		1.6	A08	TT
WT210-0085	412 365 400		50	7.5	150	100	49	7.5	100	90	6	B7G	P
WT210-0087	027 546 310	G1	6	{ 1 3	100 250		8 4	2.5 1.2	100 100	60 100	3 1.6	A08	TH
WT210-0089	026 540 310		6	9	200	175	15	2.3	100	100	2.3		P
WT210-0090	265 113 000	G1	6	3	250	100	2	1.2	100	100	1.2	UX6	P
WT210-0094	461 471 230		6	8	250		9	2.6	100		2.6	A08	TT
WT210-0148	029 080 310		6				60		REC		20mA	A08	RR
WT390	026 040 310		6	{ 8	250 150		8 5.5	2	100 100		2	A08	T
WT-T102	020 809 030		5				60		REC		20mA	A08	RR
WT-T122	021 415 360		6	3	250	100	3	1.6	100	100	1.6	A08	P
WT-T123	026 540 310		6	12.5	250	250	45	4.1	100	150	4	A08	P
WT-T124	216 498 130		6	2	250		2.3	1.6	200		1.6	B8B	DDT
WT-T125	027 446 310		6	5	250		3	1.6	100		1.6	A08	TT
WT-T126	412 365 400		50	7.5	150	100	49	7.5	100	90	6	B7G	P
WT-T128	027 546 310	G1	6	{ 1 3	100 250		8 4	2.5 1.2	100 100	60 100	3 1.6	A08	TH
WT-T130	026 540 310	G1	6	9	200	175	15	2.3	100	100	2.3		TH
WT-T131	265 113 000	G1	6	3	250	100	2	1.2	100	100	1.2	UX6	P
WT-T135	020 809 030		5				120		REC		30mA	A08	RR
X14	026 546 300	G1	1.4		90	50	1.8	0.5	80	60	0.5	A08	H
X17	266 424 300		1.4	4	75		4.5	1.2	80		1.2	B7G	H
X18	266 464 300		1.4	4	75		4	1.2	80		1.4	B7G	H
X21	645 230 600	G1	2		150	75			100	75		B7	H
X22	645 320 600	G1	2		150	75			100	75		B7	H
X23	645 231 700	G1	2	{ 1.5	100 150		2.1 0.7		100 150	60 60	1.1 1.5	B7	TH
X24	645 231 700	G1	2	{ 1.5	100 150		2.1 0.7		100 150	60 60	1.3 1.6		TH

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
X25	265 461 300		1.4	1.5	75	50	1	0.4	80	60	0.4	B7G	H
X30	645 231 600	G1	13	3	150	75	7		100	75		B7	H
X31	645 231 700	G1	13	{	150		2.2		100	60	2	B7	TH
					250	75	2.3		250	75	3		
X41	645 231700	G1	4	{	150		5	1.4	150	60	1.8	B7	TH
					250	75	2.3	1.4	100	75	2		
X42	642 231 600	G1	4	3	250	100	7	2	100	100	2	B7	H
X61	027 546 310	G1	6	{	2	100	5.4	2.2	100		2.2	A08	TH
					2	250	3	0.7	150	100	0.7		
X63	026 545 310	G1	6	3	250	100	6	1.6	100	100	1.6	A08	H
X64	026 540 310	G1	6	3	250	100	5.3	1.1	100	100	1.1	A08	H
X65	027 546 310	G1	6	{	1	100	8	2.5	100	60	1	A08	TH
					3	250	4	1.2	100	100	0.5		
X66	027 546 310	G1	6	{	1	100	8	2.5	100	60	1.3	A08	TH
					3	250	4	1.2	100	100	1		
X71	027 546 310	G1	15	{		100			100	60	1.5	A08	TH
					3	250	100		150	100	3		
X73	026 546 310	G1	6	3	150	75			100	75		A08	H
X75	026 546 310	G1	15		150	75			100	75		A08	H
X76	027 546 310	G1	13	{	1	100	8	2.5	100	60	0.6	A08	TH
					3	250	4	1.2	100	100	1.6		
X77	412 366 100		6	2	100		12	6.5	100		6.5	B7G	H
X78	542 376 400		6	{	2	100	5	2.2	100	60	2.8	B7G	TH
					1	150	5.3	2.2	100	75	2		
X79	541 237 46*		6	{	2	100	5	2.2	100	60	2.8	B9A	TH
					3	250	10	3	100	75	6		
X81	276 454 130		6	{	1	100	4.8	1.4	100	60	1.7	B8B	TH
					2	250	4	2	100	100	2		
X99	264 300 000		3	4.5	90		2.5	0.4	80		0.4	UX4	T
X101	276 454 130	G1	19	{	2	100	3		100	60		B8B	TH
						250	3		100	100			
X107	412 365 400		19		100	250	4					B7G	O
X108	542 376 400		19	{	2	100	5	2.2	100	60	2.2	B7G	TH
					1	250	5.3	2.2	100	75	1.6		
X109	541 237 46*		19	{	2	100	5	2.2	100	60	2.8	B9A	TH
					3	250	2.9		100	75			
X118	276 454 130		28	{		100	5	4	100	60	3.5	B8A	TH
					2.5	200	3	2.5	100	100	2.5		
X119	541 237 164		19	{	1	100	13.5	3.7	100	60	3.5	B9A	TP
					2.2	200		2.3	100	100	2		
X142	276 454 130		14	{	2	100	5	2	100	60	2.2	B8A	TH
					2	200	8	2.2	100	75	2		
X143	276 454 131		6	{	2	100	6.3	2.4	100	60	3.2	B8B	TH
					2	250	5.3	2.2	100	100	2.2		
X145	276 454 130		28	{	3.3	100	6	2	100	60	3	B8A	TH
					2.5	200	8	2.5	100	100	2.5		
X147	027 546 310	G1	6	{	2	100	5.4	2.2	100	60	2.8	A08	TH
					2	250	5	2.4	100	100	1.2		
X148	276 454 130		6	{	1	100	4.8	1.4	100	60	1.6	B8B	TH
					2	250	4	2	100	100	2		
X150	276 454 130		6	{	2	100	5	2.6	100	60	2.8	B8A	TH
					2	250	8	2.2	100	100	3.5		

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
X719	541 237 164		6	{ 3	100		5	2.3	100	60	2.3	B9A	TH
X727	412 366 100		6	2	250	100	6.5	2.3	150	100	2.4		H
X6030	020 880 330		3	2	100		11	7	100		5		D
XC88	414 234 464		2		150		12.5	14	No Data Available			B9A	T
XC95	142 360 100		1.8	1.2	200		10	10.5				B7G	T
XCC82	641 227 413		6.3		100		11.8	3.1	100		3.1	B9A	T
XCC82	641 227 413		3.5	8.5	250		10.5	2.2	100		2	B9A	TT
XCC89	146 234 117		3.6	1.2	90		15	12	No Data Available			B9A	T
XCC189	741 236 410		4.5	1.2	90		15	12.5	No Data Available			B9A	TT
XD	642 300 000		2	1.5	75		0.7	0.8	80		0.7	SM4	T
XD1.5V	642 300 000		1.5		50		0.4	0.4	80			SM4	T
XD2.0V	642 300 000		2	1	60		0.5	0.6	No Data Available			SM4	T
XF80	141 230 651		3.4	2	200	175	10	7.2	100	100	6	B9A	P
XF85	141 230 651		3.4	2	250	100	10	6	150	100	5	B9A	P
XF86	501 236 014		2.5	2	250	150	3	2.3	100	100	1.8	B9A	P
XF183	141 230 651		3.6	2	200	90	12	12.5	No Data Available			B9A	P
XF184	141 230 651		3.6	2.5	200	200	10	15	No Data Available			B9A	P
XFR1	652 430 000		1.2		40	40	3	2	No Data Available			B5A	P
XFR2	652 430 000		1.2		60	60	1.8	1.1	No Data Available			B5A	P
XFR3	624 300 000		1.2	5	150		4	1.7	125		1.7	B5	T
XFR5	652 430 000		1.2		60	60	1.8	1.1	No Data Available			B5A	P
XFW10	653 120 000		0.6		20	20			No Data Available			B5A	P
XFW20	652 430 000		0.6		20	20			No Data Available			B5A	P
XFW30	653 420 000		0.6		20	20			No Data Available			B5A	P
XFW40	653 420 000		0.6		20	20			No Data Available			B5A	P
XFW50	653 520 000		0.6		20	20			No Data Available			B5A	P
XFY10	653 420 000		1.3	1.3	20	20	0.5	0.4	No Data Available			B5A	P
XFY11	653 420 000		1.2		20	20	0.3	0.4	No Data Available			B5A	P
XFY12	653 420 000		1.2	0.5	20	20	0.3	0.4	No Data Available			B5A	P
XFY14	653 420 000		1.2	6.5	60	60	3.1	0.6	No Data Available			B5A	P
XFY15	653 420 000		1.2	6.5	60	60	3	0.6	No Data Available			B5A	P
XFY20	653 420 000		0.6		20	20			No Data Available			B5A	P
XFY21	653 420 000		1.2		20	20	0.4	0.4	No Data Available			B5A	P
XFY22	653 420 000		1.2	1.2	20	20	0.3	0.4	No Data Available			B5A	P
XFY23	653 420 000		1.2	2	20	20	0.4	0.3	No Data Available			B5A	P
XFY31	653 420 000		1.2		20	20	0.4	0.4	No Data Available			B5A	P
XFY32	653 420 000		1.2	1.5	20	20	0.4	0.3	No Data Available			B5A	P
XFY33	653 420 000		1.2	2	20	20	0.4	0.3	No Data Available			B5A	P
XFY34	653 420 000		1.2	4	40	40	1.5	0.6	No Data Available			B5A	P
XFY35	653 420 000		1.2	1.5	40	40	0.7	0.6	No Data Available			B5A	P
XFY41	653 420 000		1.2	1.2	40	30	0.3	0.4	No Data Available			B5A	P
XFY43	653 420 000		1.2	2	20	20	0.4	0.3	No Data Available			B5A	P
XFY51	653 420 000		1.2		20	20	0.2	0.3	No Data Available			B5A	P
XFY53	653 420 000		1.2	3	20	20	0.5	0.3	No Data Available			B5A	P
XFY53M	653 420 000		1.2	3	20	20	0.5	0.3	No Data Available			B5A	P
XFY54	653 420 000		1.2	2	20	20	0.3	0.3	No Data Available			B5A	P
XH1.5V	642 300 000		1.5		50		0.4	0.4	80			SM4	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
XH2.0V	642 300 000		2	1	60		0.5	0.6	No Data Available			SM4	T
XL	642 300 000		2	1.5	75		1.5	0.9	80		0.8	SM4	T
XL01.5	642 300 000		1.5	1	60		0.9	0.7	No Data Available			SM4	T
XL01.5V	*41 23* 6*5		8	7.3	250	250	48	11.3	100	150	10	B9A	P
XL1.5	642 300 000		1.5	1	60		0.7	0.6	No Data Available			SM4	T
XL02.0V	642 300 000		2	1	60		1.1	0.9	No Data Available			SM4	T
XL2.0V	642 300 000		2	1	60		1	0.8	No Data Available			SM4	T
XL36	642 300 000		1.5	4.5	50		1.7	0.7	80			SM4	T
XL84	6*2 364 100		2	1	50		1.1	0.9	80			B7G	T
XL86	*2* 540 310	A1	12.8	8.3	100	100	77	11	100	150	10	A08	P
XP	642 300 000		2	4.5	100		9.5	1	80		1	SM4	T
XP1.5V	642 300 000		1.5	4	60		1.8	0.8	No Data Available			SM4	T
XP2	642 300 000		2	4.5	75		4	1	80		1	SM4	T
XPH1.5	264 730 000	G1	1.5	{ 4.5	40		0.5	0.5	60			} SM5	TT
					40		1.7	0.7	60				
XR2	206 035 240		1.2	7.5	150	125	7	1.9	125	100		B8D	P
XR4	206 035 240		1.2	7.5	150	125	7	1.9	100	100		B8D	P
XR6	412 163 510		6.3	1.4	100	100	7	5	100	100	5	B8D	P
XR7	412 653 160		6.3	2	100	100	7.5	5.5	100	100	5.5	B8D	P
XR8	462 603 160		6.3	2.5	100		8	4.2	100		4.2	B8D	T
XR9	742 113 460		6.3	1.8	100		8.5	5	100		5	B8B	TT
XSG	542 300 000	A1	2	1	150	60	1.4	0.7	100	60	0.6	SM4	P
XSG1.5V	542 300 000	A1	1.5		50	30	0.5	0.3	No Data Available			SM4	P
XSG2.0V	542 300 000	A1	2		60	30	0.6	0.4	No Data Available			SM4	P
XVS2.0V	542 300 000	A1	2		60	30	0.4	0.3	No Data Available			SM4	P
XW1.5	254 630 000		1.5		60	30	0.7	0.5	No Data Available			SM5	P
XW1.5V	251 630 000	G1	1.5		50	50	0.7	0.5	No Data Available			SM5	P
XW2.0V	254 630 000		2		60	50	0.9	0.6	No Data Available			SM5	P
XW075A	653 420 000		0.6		40	30	0.3	0.2	No Data Available			B5A	P
XW075B	653 420 000		0.6		40	30	0.2	0.2	No Data Available			B5A	P
XXB	206 447 320		1.4		90		4.5	1.3	90		1.3	B8B	TT
XXD	216 447 130		12.5	10	250		9	2.1	100		2.1	B8B	TT
XXFM	264 189 130		6.3	2	250		1.5	1.5	100		1.4	B8B	DDT
XXL	260 004 130		6	8	250		8	2.3	100		2.3	B8B	T
XY	254 630 000		2	3	75	75	4	1.2	80	75	1.2	SM5	P
XY1.4A	653 420 000		1.4	4.5	40	40	1.8	0.5	No Data Available			B5A	P
XY1.4B	653 420 000		1.2	4.5	40	40	1.6	0.6	No Data Available			B5A	P
XY1.4C	653 420 000		1.2	1.5	40	40	0.5	0.5	No Data Available			B5A	P
XY1.5	254 630 000		1.5	1.5	40	40	1.7	1	No Data Available			SM5	P
XY2.0V	246 530 000		2	2	60	50	1.7	1.4	No Data Available			SM5	P
XY14B	653 420 000		1.2	4.5	40	40	0.3	0.6	No Data Available			B5A	P
XY14CC	653 420 000		1.2	1.5	40	40	0.5	0.5	No Data Available			B5A	P
XY88	*** 23* **8	C	16				120		REC		40mA	B9A	R
Y13	045 231 600		13	20	250	250	40	3.9	100	150		B7	P
Y220	642 300 000	G2	2	4.5	150	150	10.5	2.5	100	100	2.5	B4	P
Y220	642 350 000		2	4.5	150	150	10.5	2.5	100	100	2.5	B5	P
Y230	642 350 000		2	3	150	150	5		100	100		B5	P
YC88	414 234 464		2.6		160		12.5	14	No Data Available			B9A	T

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
YCC89	146 234 117		4.8	1.2	90		15	12	No Data Available			B9A	TT
YD2	642 300 000		2	4.5	150		6	3	100		2	B4	T
YL84	*41 23* 6*5		8	7.3	250	250	48	11.3	No Data Available			B9A	P
YL86	041 23* 6*5		8	12.5	200	175	70	10	No Data Available			B9A	P
Z14	036 500 200	G1	1.4	1	90	90	0.5	0.6	80	90	0.7	A08	P
Z21	542 300 000	A1	2	1	150	125	1.1	1.2	150	100	1.2	B4	P
Z21	041 230 500	A1	2	1	150	125	1.1	1.2	150	100	1.2	B7	P
Z22	041 230 500	A1	2		150	125	2.5	1.4	100	100		B7	P
Z22Met	041 230 500	A1	2		150	125	2.5	1.4	100	100		B7	P
Z26	045 231 600		26	5.5	250	250	32	7.5	100	100	8	B7	P
Z62	026 510 310	G1	6	2	300	150	10	7.5	100	100	7.5	A08	P
Z63	026 510 310	G1	6	3	250	100	2	1.2	100	100	1.2	A08	P
Z66	026 510 310	G1	6	1.5	200	200	10.9	8.5	100	150	8	A08	P
Z73	026 510 310	G1	6	3	250	100	6.5	1.7	100	90	1.8	A08	P
Z77	412 361 500		6	{ 2 1.5	250 200	250 150	10 4	7.5 6.4	100 100	150 150	5 5	B7G	P
Z90	256 101 403		6	2	250	250	10	6	100	150	6	B9G	P
Z142	260 154 130		21	2	200	175	10	8.5	100	150	8	B8A	P
Z145	261 514 130		22	1.8	200	200	10	9	100	150	7	B8A	P
Z152	141 230 651		6	2	200	175	10	7.4	100	100	6	B9A	P
Z220	642 300 000	G2	2	7.5	150	150	15	2	100	100	2	B4	P
Z220	642 350 000		2	7.5	150	150	15	2	100	100	2	B5	P
Z309	141 223 651		6	2	250	250	20	15	No Data Available			B9A	P
Z319	141 321 655		6	2	350	250	12.5	11.5	No Data Available			B9A	P
Z329	141 230 651		7.3	1.9	200	175	10	8.8	100	100		B9A	P
Z359	141 230 651		12	2	250	250	20	15	100	100		B9A	P
Z719	141 230 651		6	2	200	175	10	7.4	100	150	6	B9A	P
Z729	501 236 014		6	1	250	100	3	1.8	100	100	1.8	B9A	P
Z749	141 230 651		6.3	1.9	200	175	10	9.2	No Data Available			B9A	P
Z759	141 023 651		6	2	250	250	15	15	100	100		B9A	P
ZD	892 310 000		13						D			B5	DD
ZD2	642 300 000		2	12	150		7	1	100		1.2	B4	T
ZD17	208 564 300		1.4	1	90	90	2.7	0.6	80	90	0.6	B7G	DP
ZD25	2*8 564 300		1.4	1.5	60	60	0.2	0.2	No Data Available			B7G	DP
Z150	260 154 130		6	2	250	250	10	9.5	100	150	8	B8A	P
ZD152	541 236 891		6	2	250	90	5	2.2	100	90	2.2	B9A	DDP

APPENDIX I.

TEST DATA FOR TUNING INDICATORS

Tuning indicators are tested with the controls set according to the figures given in the table below; using the screen switch for obtaining the target voltage and inserting the anode load, as shown in column marked "Ra" by means of the link on the panel of the instrument. At the approximate bias given in the table the triode section should be at cut-off and the "eye" fully closed. On reducing the grid bias to zero the "eye" should open fully and the anode current should be approximately that given in the table. In the case of double sensitivity indicators giving multiple images corresponding to the different sensitivities, two sets of data (wherever possible) are given, the first set relating to the sensitive indication.

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					BASE
				Neg. Grid Volts.	Anode Volts	Target Volts	Ia mA	Ra MΩ	
1M1	4*0 230 060		1.4	34	250	0	0.09	2.2	B8D
1M3	4*0 230 060		1.4	23	200	0	0.1	1	B8D
2E5	264 513 000		2.5	8	250	250	0.2	1	A08
2G5	264 513 000		2.5	22	250	250	0.2		UX6
6AB5	264 513 000		6	15.5	150	150	0.13	1	UX6
6AD6	026 540 310		6	{ 3	150				A08
				50	150	150			
6AF6	026 540 310		6	81	150	125			A08
6AF7	026 457 310		6	{ 4.5	200	200	0.16	1	A08
				15	200	200	0.15	1	
6BR5	41* 23* 6*5		6	14	200	200	0.4	0.5	B9A
6CD7	026 546 310		6	{ 4.2	250	250		1	A08
				12.5	250	250	1.0	1	
6E5	264 513 000		6	7.5	250	250	0.2	1	UX6
6G5	264 513 000		6	22	250	250	0.2	1	UX6
6H5	264 513 000		6	22	250	250	0.2	1	UX6
6M1	026 540 310		6	22.5	250	250	0.2	1	A08
6M2	*25 456 310		6	{ 4	250	250	0.12	0.2	A08
				2	250	250	0.25	0.1	
6N5	264 513 000		6	15.3	150	150	0.2	1	UX6
6T5	264 513 000		6	22	250	250		1	UX6
6U5/6G5	264 513 000		6	22	250	250	0.2	1	UX6
6X6	025 540 310		5		250	250			A08
10M1	026 540 310		18	19	200	175	0.2	1	A08
10M2	2*6 456 130		12.6	{ 3	200	200	0.1	0.2	A08
				20	200	200	0.19	0.1	
12U5	264 513 000		12.6	22	250	250	0.2	1	UX6
41ME	023 104 560		4	5	250	250		1	8SC
63ME	026 540 310		6	22	250	250	0.3	1	A08
64ME	026 457 310		6	{ 16	250	250		1	A08
				2.5	250	250		1	
65ME	41* 23* 6*5		6		250	250			B9A
1629	026 540 310		12.5	8	250	250	0.2	1	A08
4678	023 104 560		6	5	250	250	0.1	2	8SC
AC/ME	045 231 600		4	22	250	250	0.2	1	B7
AM1	023 104 560		4	5	250	250	0.1	2	8SC

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					BASE
				Neg. Grid Volts.	Anode Volts	Target Volts	Ia mA	Ra MΩ	
DM21	026 540 030		1.4		90	90	0.03	2	A08
DM70	4*0 230 060		1.4	23	200	0	0.1	1	B8D
6ZE1	264 513 000		6.3	7	250			1	UX6
DM71	4*0 23* 060		1.4	23	200	0	0.1	1	B8D
E130	026 540 310		6	15	250	250		1	A08
E1320	026 540 310		6	11	250	250	1		A08
EM1	023 104 560		6	5	250	250	0.1	2	8SC
EM3	023 104 560		6	18	200	200	0.2	1	8SC
EM4	023 164 560		6	{ 4.2	200	200		1	8SC
				{ 12.5	200	200		1	
EM11	026 546 310		6	{ 5	250	250		1	A08
				{ 16	250	250		1	
EM31	026 540 310		6	5	250	250		2	A08
EM34	026 456 310		6	4.2	250	250		1	A08
				12.5	250	250	1	1	
EM35	026 540 310		6	22	250	250		1	A08
EM71	251 064 130		6	20	250	250	0.5		B8B
EM80	41* 23* 6*5		6	14	250	250	0.4	0.5	B9A
EM81	41* 23* 6*5		6	10.5	250	250	0.4	0.5	B9A
EM84	4*1 235 6*6		6	22	250	250	0.5	0.5	B9A
EM87	4*1 235 6*6		6.3	14	250	250	1.1	1	B9A
EM840	4*1 235 6*6		6	22	250	250	0.5	0.5	B9A
FT4	026 540 310		4	6	250	250		1	A08
ME4S	023 104 560		4	5	250	250		2	8SC
ME6S	023 104 560		6	5	250	250		2	8SC
ME41	216 040 530		4	22.5	250	250	0.2	1	M08
ME91	216 040 530		9	17	150	150	0.2	1	M08
ME920	045 231 600		9	19	200	175	0.2	1	B7
PM5	206 546 130		6	{ 15	200	200		1	A08
				{ 5	200	200		1	
PM84	4*1 235 6*6		4.2	22	250	250	0.5	0.5	B9A
TK406	023 104 560		4	5	250	250	0.1	2	8SC
TV4	023 140 560		4	5	250	250		1	8SC
UM4	206 546 130		12.6	{ 4.2	200	200		1	A08
				{ 12.5	200	200		1	
UM11	206 546 130		15	{ 4.2	200	200		1	A08
				{ 12.5	200	200		1	
UM34	026 456 310		12.5	{ 4.2	250	250		1	A08
				{ 12.5	250	250	1	1	
UM80	41* 23* 6*5		19	14	200	200	0.4	0.5	B9A
UM81	41* 23* 6*5		19	14	200	200	0.4	0.5	B9A
UM84	4*1 235 6*6		12.6	22	250	250	0.4	0.5	B9A
VFT4	026 540 310		4	20	250	250		1	A08
VME4	045 231 600		4	22	250	250		1	B7
VTF6	026 540 310		6	22	200	200	0.2	1	A08
Y25	4*0 320 060		1.4	34	250		0.09	2.2	B8A
Y61	026 540 310		6	22	250	250	0.2	1	A08
Y62	026 540 310		6	22	250	250		1	A08
Y63	026 540 310		6	22	250	250	0.2	1	A08
Y64	026 540 310		6	22	250	250		1	A08
Y65	026 540 310		6	11	250	250		1	A08

APPENDIX II.

Test Data for High Voltage Rectifiers.

The following procedure should be adopted when testing high voltage rectifiers.

Make insulation checks with valve cold and hot as stated in paragraphs 1 and 2 of the Abbreviated Working Instructions.

Then set Anode and Screen Voltage switches to their minimum value (i.e. 20) and Anode Current Controls to figure shown in Data column. With Circuit Selector set to TEST and Anode Selector at A₁ increase Anode Volts setting until indicating meter reads in a forward direction.

The setting of the Anode Voltage switch for a good valve should not exceed the figure given in column headed Anode Volts.

When checking full wave or voltage doubler rectifiers, check second Anode with Anode Selector at A₂.

NOTE the valve should be heated to working temperature before setting Circuit Selector to position TEST and only left at this position for sufficient time to take a reading.

VALVE	SELECTOR SWITCH No.	T.C.	Vf.	Anode Volts (Max.)	Ia mA (Min.)	Valve Holder	Type	REMARKS
1B3	020 000 300	A1	1.25	200	6	A08	R	
1Z2	232 232 300	A1	1.4			B7G	R	
2V3	020 000 300	A1	2.5(3)			A08	R	
2V3G	020 000 300	A1	2.5(3)			A08	R	
2X2	200 300 000	A1	2.5(3)	100	10	UX4	R	
2Y2	200 300 000	A1	2.5	100	10	UX4	R	
3B24	320 200 000	A1	2.5	60	10	UX4	R	
6W2	230 000 000	A1	6	100	9	Ni1	R	
225DU	072 323 600		2	40	20	B7	RR	Test A1 & A2
405BU	672 300 000		4	40	20	B4	RR	Test A1 & A2
732A	230 300 000	A1	2.5	60	10	UX4	R	
879	200 300 000	A1	2.5	100	10	UX4	R	
1876	123 000 700		4			8SC	R	
1877	002 300 000	A1	4	100	10	B4	R	
8016	020 000 300	A1	1.25	200	6	A08	R	
GE230	320 200 000	A1	2.5	60	10	UX4	R	
EY51	230 000 000	A1	6	100	9	B3G	R	
HVR2	002 300 000	A1	4	100	10	B4	R	
HVR2A	002 300 000	A1	2(2.5)	100	10	B4	R	
R12	230 000 000	A1	6.3	100	9	B3G	R	
SU61	230 000 000	A1	6.3	100	9	B3G	R	
SU2150	002 300 000	A1	2(2.5)	60	4	B4	R	
SU2150A	002 300 000	A1	2	200	50	B4	R	
U17	002 300 000	A1	4	40	35	B4	R	
U19	002 300 000	A1	4(5)	40	70	B4	R	
U21	002 300 000	A1	2	60	4	B4	R	
U22	200 000 030	A1	2(3)	60	4	M08	R	
U23	002 300 000	A1	4(5)	40	100	B4	R	
U24	020 000 300	A1	2	20	0.5	A08	R	
U41	020 300 000	A1	1.25	200	6	A08	R	
U43	230 000 000	A1	6.3	100	9	Ni1	R	
U151	230 000 000	A1	6.3	100	9	Ni1	R	
V21/7000	002 300 000	A1	4	100	10	B4	R	
V960	002 300 000	A1	4	80	90	B4	R	
V1906	002 300 000	A1	4(5)	60	100	B4	R	
V1907	002 300 000	A1	4	150	70	B4	R	
V1913	002 300 000	A1	4(5)	40	100	B4	R	
V1920	002 300 000	A1	4(5)	100	90	B4	R	
VL51	002 300 000	A1	4	100	10	B4	R	
CV317	322 322 222	A1	4	60	80	B9G	R	
CV121	002 300 000	A1	4(5)	100	90	B4	R	

APPENDIX III.

Test Data for 'Service' Type Valves

NOTES REFERRED TO IN THE REMARKS COLUMN.

- A The heater/cathode lead identified with red marking should be connected to Pin No. 1.
 B The grid top cap is situated over Pins No. 7 and 8.
 C This valve does not fit special valve holders supplied, and roller selector Data will depend on connections made to valve electrodes.
 D Pin No. 1 on the flat pinch type of base is the lead adjacent to the coloured blob the remaining pins being directly numbered across the base from Pin No. 1.
 E Alternative test figures are given for use when valve shows signs of back emission from anode to G₃. This phenomenon can be recognised by the anode current apparently decreasing as the valve heats.
 G Valves on the B8D base when leads are cut, should be tested either by insertion in a B8D Adaptor, or leads lengthened and tested in the same way as those with flexible leads, by using the special 9 clip valve holder.
 H Tests on tuning indicators should not be made until the resistor value (Ra), indicated in the remarks column, has been inserted across the link(s) on valve panel
 J Use special 9 clip valve holder fitted to Valve Tester type 160

VALVE	SELECTOR SWITCH No.	T.C.	Vf.	Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Base	Type	REMARKS	Clv. Equiv.
CV16	234 000 000	A ₁	4	1	250		6	4.2	Disc seal	T	min slope See Note A	
CV53	234 000 000	A ₁	4	1	250		6	4.2	Disc seal	T	min slope See Note A	
CV82	234 000 000	A ₁	4	3	250		20	3.7	Disc seal	T	See Note A min slope	3A/141J
CV88	See Note C		6	0	250		4	5	Disc seal	T	See Note C	3A/148J
CV93	See Note C		1.4	0	20			0.7	Disc seal	T	See Note C	V625
CV105	020 000 030	D ₁	6				30		A08	R		
CV122	632 400 000		1.4	0	100			0.8	Special	T	See Note D	
CV132	412 361 500		6	1.8	250	100	6.3	2	B7G	H		
CV201	021 540 300	A ₁	(2.5)	10	250	150	25	3.3	A08	P		
CV229	623 400 000		1.4	0	100			0.8	Special	T	See Note D	
CV243	042 350 000		(5)	40	75	75	45	1.5	B5	P		4045A
CV273	346 000 000	H—	6	4	250		28	8.5	Disc seal	T		DET22
CV354	346 000 000	H—	6	2	250		10	6.5	Disc seal	T		
CV384	642 300 000		(5)	30	400		62	7.5	B4	T		DET5
CV1155	642 300 000		4	0	75		0.7	0.2	B4	T		
CV1223	642 300 000		(5)	30	400		62	7.5	B4	T		DET5
CV1508	002 300 000	A ₁	(5)	40	100				B4	R		
CV1584	642 310 000		4	3.5	200		5.4	3.1	B5	T		

VALVE	SELECTOR SWITCH No.	T.C.	Vf.	Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Base	Type	REMARKS	Civ. Equiv.
CV2000	412 361 500		6	{ 2 2	250 200	250 150	10 4	{ 7.5 6.4	B8D	P	See Notes J & E	
CV2001	412 361 500		6	{ 2 1.5	250 200	250 150	10 4	{ 7.5 6.4	B8D	P	See Notes J & E	
CV2002	412 360 500		6	13.5	250	250	16	2.6	Spec	P	See Note J	
CV2003	412 360 500		6	13.5	250	250	16	2.6	Spec	P	See Note J	
CV2004	192 310 800		6				5		Spec	RR	See Note J	
CV2005	192 310 800		6				5		Spec	RR	See Note J	
CV2007	741 226 413		6	8.5	250		10.5	2.2	Spec	TT	See Note J	
CV2008	412 300 600		6	2.2	150		10	8	Spec	TT	See Note J	
CV2009	412 314 600		6	1.5	250		10	8.5	Spec	T	See Note J	
CV2010	762 344 100		6	1	100		8.5	5.6	Spec	TT	See Note J	
CV2101	741 226 413		6	2	250		1.2	1.6	Spec	TT	See Note J	
CV2013	041 230 651		6	4.5	250	250	40	11	Spec	P	See Note J	
CV2014	601 235 144		6	7.5	250	250	45	7	Spec	P	See Note J	
CV2015	256 101 403		6	7	250	250	10	6	B9G	P	See Note J	
CV2016	741 226 413		6	2	250		10.5	5.5	Spec	TT	See Note J	
CV2017	412 361 500		6	4	200	200	5.8	3.5	Spec	P	See Note J	
CV2020	412 365 100		6	2	150	125	7.5	5	Spec	P	See Note J	
CV2021	902 308 100		6				30		Spec	R	See Note J	
CV2022	441 230 561		6	12.5	250	250	45	4.1	Spec	P	See Note J	
CV2023	412 361 500		6	2.5	250	200	8	2.5	Spec	P	See Note J	
CV2024	412 366 100		6	2	100		11	7	Spec	H	See Note J	
CV2025	412 361 500		6	{ 2 1.5	250 200	250 150	10 4	{ 7.5 6.4	Spec	P	See Note J	
CV2101	040 230 650		1.25	0	75	75	2	1	B8D	P	See Note J	
CV2156	241 7 143		20	14	250	150	30	3.9	B9G	PP		
CV2204	346 000 000	H—	6	1	250		20	3	Disc seal	T	mIn slope	DET22
CV2207	346 000 000	H—	6	1	250		20	3	Disc seal	T	min slope	
CV2231	*41 23* *51	A ₁	6	12.5	150	150	50	8.5	B9A	P		
CV2243	041 230 651		6	2	200	125	17	8.4	B9A	P		
CV2267	Not known		6				30		Spec	RR	See Note C	
CV2268	Not known		6	2	250	250	10	7.5	Spec	P	See Note C	
CV2277	*41 23* 651		26.5	13	100	100	90	9.5	B9A	P		
CV2838	Not known	A ₁ G ₁	2		60			0.3	Special	T	See Note C	
CV4036	001 230 000	D ₁	6				120		B9A(F)	R		
CV4046	241 756 143		6	14	250	125	30	3.9	B9G	PP		
VU508	002 300 000	A ₁	(5)		40		100		B4	R		

APPENDIX IV.

Test Data for Russian Valves

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	Ia mA	mA/V	Anode Volts	Screen Volts	mA/V		
1K1Π	265 024 300		1·2	0·5	60	40	1·7	·65	No Data Available			B7G	P
1B1Π	208 564 300		1·2	0	60	40	1·0	·25	No Data Available			B7G	DP
2Π1Π	264 536 200		1·2	3·5	60	60	2·8	0·9	No Data Available			B7G	P
6B2Π	452 368 100		6·3	1·5	250	100	6·5	2·0	100	100	2	B7G	DP
6K1Π	412 365 100		6·3	3	250	100	6·7	1·85	100	100	1·9	B7G	P
6K4Π	412 365 100		6·3	1·0	250	100	11	4·4	100	100	4·4	B7G	P
6H2Π	412 365 100		6·3	2·2	125	125	7·5	5·2	100	100		B7G	P
6H1Π	412 365 100		6·3	2·2	125	125	5·5	3·55	100	100		B7G	P
6H3Π	412 365 100		6·3	2	250	150	7	5	100	100		B7G	P
6H4Π	412 365 100		6·3	1	250	100	11	4·4	100	100	4	B7G	P
6H5A	412 365 100		6·3	2·0	250	100	10	9	100	100		B7G	P
Γ837	205 411 300	A ₁	12·6	85	400		60	3·5	No Data Available			B7G	P
6C1Π	612 364 100		6·3	7	250		6·3	2·2	100		2·2	B7G	T
6C2Π	412 344 600		6·3	1·0	100		10	11	No Data Available			B7G	T
6H15Π	672 344 100		6·3	2	100		8·5	5·6	100		5·6	B7G	TT
6H1Π	641 237 410		6·3	4·8	250		8	4·3	100		8	B9A	T
6H2Π	641 227 413		6·3	1·5	250		2·3	2	100		2	B9A	T
6X2Π	182 310 900		6·3				5		D			B7G	RR
6Π4Π	802 310 900		6·3				30		REC		15	B7G	RR
6Π2Π	412 365 100		6·3	5·5	125	125	35	8	100	100	6	B7G	P
6Π1Π	651 236 415		6·3	12·5	250	250	45	4·5	100	PenLF	4	B9A	P

STOP PRESS

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
3FS5	412 365 100		2.9	0.2	300	150	9	10	No Data Available			B7G	P
3HS8	157 231 461		3.1		100	75	2	0.4	100	75	0.4	B9A	PP
4D1	000 231 600	G1	13	3	250		10	5	100		4	B7	T
4X150A	512 1*1 314	A1	6		400	300			100	100		B9A	P
6AZ6	083 113 900		6						D			B8A	DD
6B32	821 013 900		6.3						D			B7G	DD
6CF8	501 236 014		6	2	250	150	3	1.85	100	100		B9A	P
6F25	141 320 651		6.3	1.5	150	90	11.5	12.5	No Data Available			B9A	P
6FS5	412 365 100		6.3	0.2	300	150	9	10	No Data Available			B7G	P
6GC5	514 234 156		6.3	7.5	100	100	50	8	100	100		B9D	P
6HW8	165 234 161		6.3	3.5	250	250	13	4	100	100		B9A	P
6JB8	645 237 114		6	{ 8.5	250		10.5	2.2	100	60		B9A	TP
6JP8	210 541 380	A1	6.3	3	250	100	3	1.6	100	100			
6JH8	115 324 166		6.3	22.5	250	150	75	6.6	100	100		A08	DP
			6.3		250	250	14	4.4	100	100		B9A	P
6S2	230 232 032	D1	6.3						D			B9A	R
10JY8	146 231 457		10.5	{	125		15	10.4	100	60		B9A	TP
					200	150	24	11	100	100			
12FK6	412 389 600		12.6		12		1.3	1.2	No Data Available			B7G	DDT
18FY6	412 389 600		18	1	100		0.6	1.3	100		1.3	B7G	DDT
21EX6	021 040 350		21.5	30	175	175	67	7.7	100	100		A08	P
34GD5	142 315 600		34	7.5	100	100	35	5.7	100	100		B7G	P
245A	265 130 000	G1	2	1.5	150	50	4.8	0.6	100	60		UX5	P
5642	230 000 000	D1	1.2						D			B3G	D
5654	412 365 100		6.3	2	100	100	7.5	5	100	100	5	B7G	P
6146W	125 141 300	A1	6.3		200	200	100	7	100	100		A08	P
7054	141 23* 651		13.5	2.7	250	150	19	11.5	100	100		B9A	P
7701	141 236 515		13.6	12.5	250	250	28	3.6	100	100		B9A	P
8068	021 040 350		6.3	8	400	125	36	5.2	100	100		A08	P
8077	141 23* 651		13.5	2.7	250	150	19	11.5	100	100		B9A	P
824476	461 471 230		12.5	8	250		9	2.6	100		2.6	A08	TT
A70D	642 350 000		4	5.8	250	250	36	9.5	100	150	8	B5	P
A2226	*41 23* *51	A1	6.3	12.5	150	150	50	8.5	100	100		B9A	P
A2738	*26 541 310		6.3	19	250	200	50	10	100	100		A08	P
A3042	*41 23* *51	A1	6.3	12.5	150	150	50	8.5	100	100		B9A	P
A3064	412 361 500		6.3	1.6	250	250	10	7.6	100	100		B7G	P
CK6414	741 226 413		6.3	2	175		8	5.5	100		5	B9A	TT
CK7994	346 441 430		6.3	1	100		13	18	No Data Available			B8D	T
CK7995	214 311 650		6.3	1.6	150	150	8	13	100	100		B8D	P
E88C	414 234 464		6.3	1.2	150		12.5	13.5	No Data Available			B9A	T
E186F	141 23* 615		6.3	1.25	200	150	13	16.5	No Data Available			B9A	P
E282F	141 23* 615		6.3	14.4	150	100	30	25	No Data Available			B9A	P
E288CC	741 236 410		6.3	1.5	100		30	18	No Data Available			B9A	TT
ECC807	147 231 164		6.3	1.2	250		2.2	3.3	100		3	B9A	TT
ECF805	657 231 414		6.3	{ 3	100		14	5.5	100		6	B9A	TP
				1.5	100	100	10	11	100	100			
EE80	*41 231 650		6.3		200	200	10	12.5	No Data Available			B9A	P
EF183	141 230 651		6.3	2	200	90	12	12.5	100	100		B9A	P

VALVE	SELECTOR SWITCH No.	T.C.	Vf	DATA FOR VALVE CHARACTERISTIC METER & VALVE TESTER TYPE 160					DATA FOR AVO VALVE TESTER			BASE	TYPE
				Neg. Grid Volts	Anode Volts	Screen Volts	la mA	mA/V	Anode Volts	Screen Volts	mA/V		
HL4+	642 310 000		4	4.5	250		5	4.9	100		5	B5	T
HP1018	160 152 300	G1	10	3	250	100	2.3	1.3	100	150	1.3	C7	P
HP1118	160 152 300	G1	10	3	250	100	8.2	1.7	100	100	1.7	C7	P
M0465	645 231 700	G1	4	{ 1.5	75		2		80			B7	O
PC97	412 361 100		4.5	1	250	75	21.6		100	75			
					150		11	13	No Data Available			B7G	T
PC900	412 361 100		4	1	125		11.5	14.5	No Data Available			B7G	T
PCE82	641 237 541		10	{	150		10	3.7	100		3.7	B9A	TP
					200	200	10	12.5	100	100			
PCF805	657 231 414		7.4	{ 3	100		14	5.5	100		6	B9A	TP
				{ 1.5	100	100	10	11	100	100			
PCF806	141 237 564		8	{ 3	100		14	5.5	100	60	6	B9A	TP
				{ 1.2	200	150	10	12	100	100			
PL500	441 235 51*	A1	27	18	150	150	100	15	No Data Available			B9A	P
PY33	028 090 310		29				120		REC		30mA	A08	RR
PY800	*** 23* **8	C1	19				180		REC		40mA	B9A	R
Q/U452	230 000 000	D1	2						D			B3G	D
QQC03/14	412 657 240		3.1		200	200	30	3.2	100	100	3	B9A	PP
TT23	414 226 573		6.3		150	150	25	10.5	100	100		B9A	PP
TT24	414 226 573		6.3		250	200	30	3.3	100	100		B9A	PP
TT25	245 617 342	A1A2	6.3		400	250	30	3.4	No Data Available			B7A	PP
TT25	245 617 342 A1	A1A2	6.3		400	250	30	3.4	No Data Available			B7A	PP
YL1060	245 134 200	A1A2	6.3		400	200	30	4.5	100	100		B7A	PP

