


POWER — VBAT (2–6S) > 5V buck > 3.3V LDO

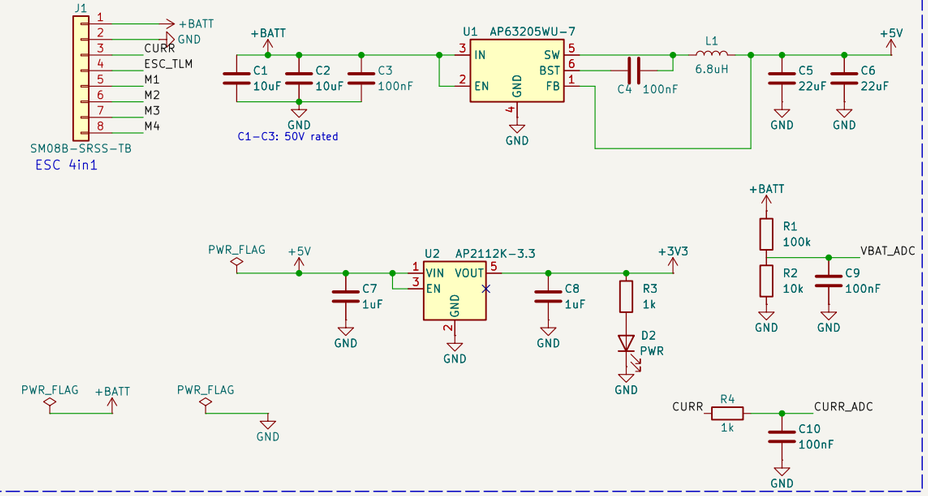


USB-C — full-speed device, ESD protected

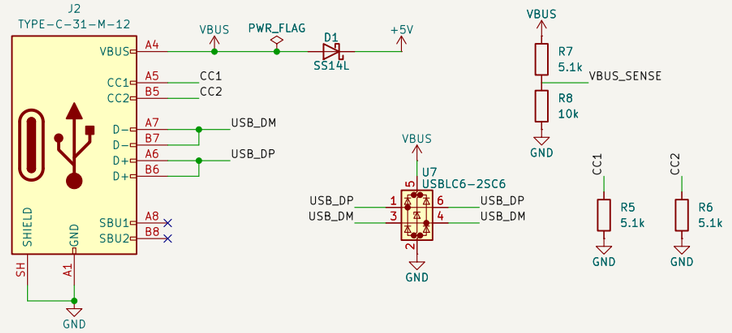


MCU — STM32F405RGT6

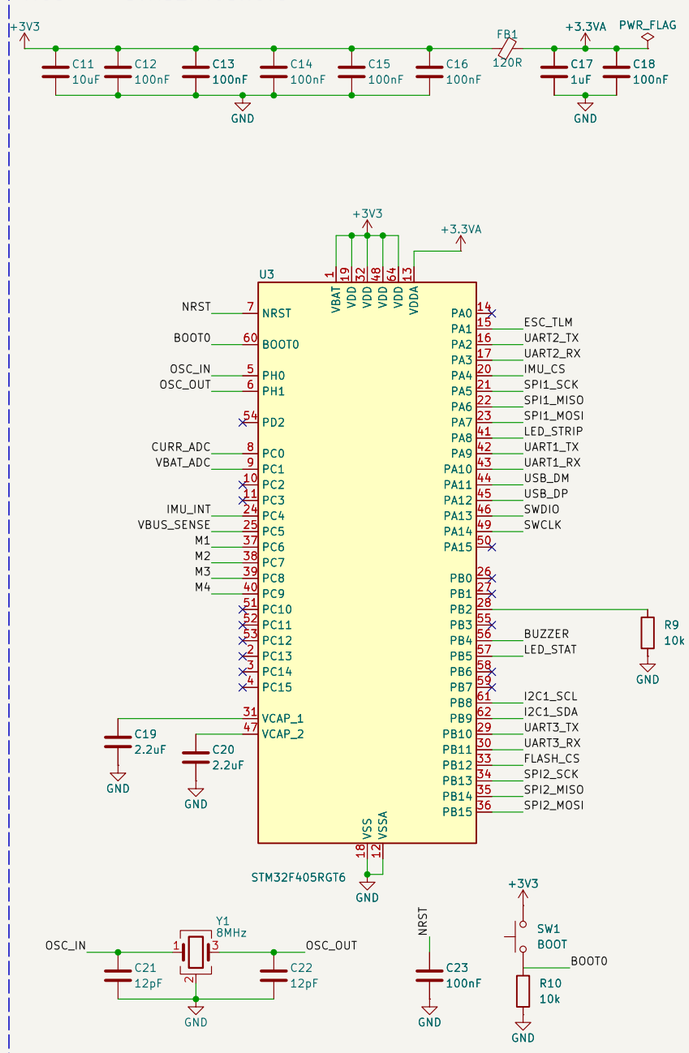


SENSORS — IMU (SPI1) + barometer (I2C1)

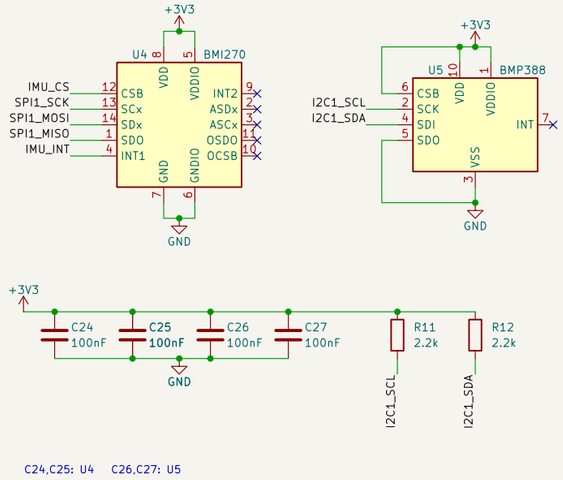


BLACKBOX FLASH (SPI2) — STATUS LED — BUZZER

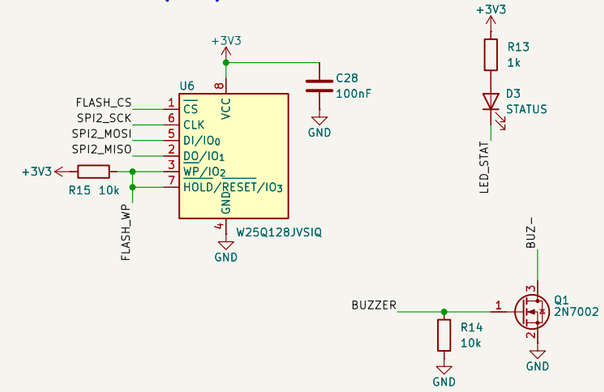

CONNECTORS (JST-SH 1.0mm) + SOLDER PADS

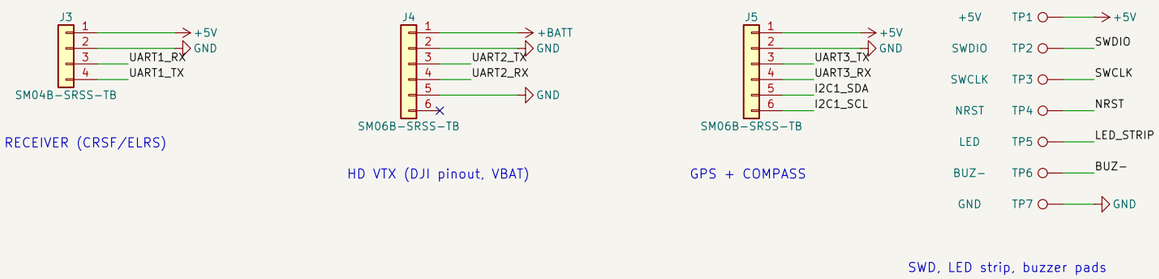

MECHANICAL — 4x M3, 30.5 x 30.5 mm



All parts sourced from LCSC — see LCSC field on each symbol
STM32F405 flight controller, 30.5x30.5 mm mount

Sheet: /		
File: FC.kicad_sch		
Title: FC — STM32F405 Flight Controller		
Size: A3	Date: 2026-11-12	**Rev: A**
KiCad E.D.A. 10.0.7		Id: 1/1