

USB-C INPUT

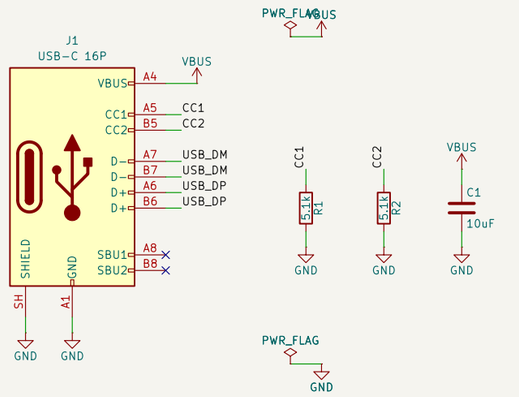

5.1k on CC1/CC2: device (sink) mode

POWER PATH (USB or battery -> VSYS)

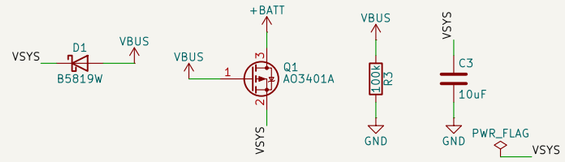


Q1 disconnects battery while USB is present

BATTERY + POWER SWITCH




Check LiPo polarity! Pin 1 = +


OLED (0.96 inch SSD1306 I2C module)

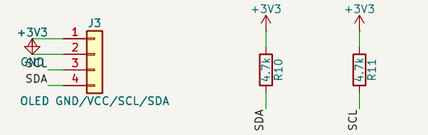


LIPO CHARGER (~200 mA)

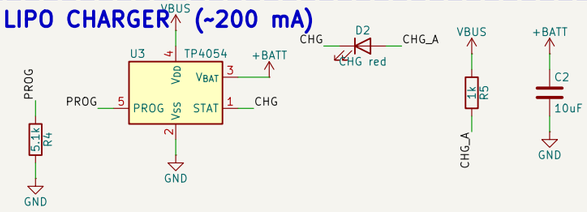

3.3 V REGULATOR

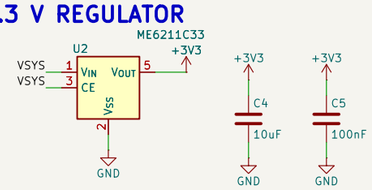


MCU (ESP32-C3-WROOM-02)

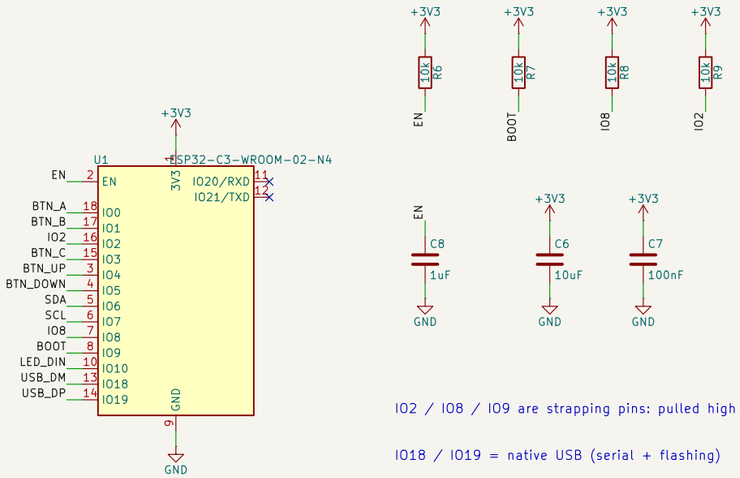


IO2 / IO8 / IO9 are strapping pins: pulled high

IO18 / IO19 = native USB (serial + flashing)

BUTTONS (active low, internal pull-ups)

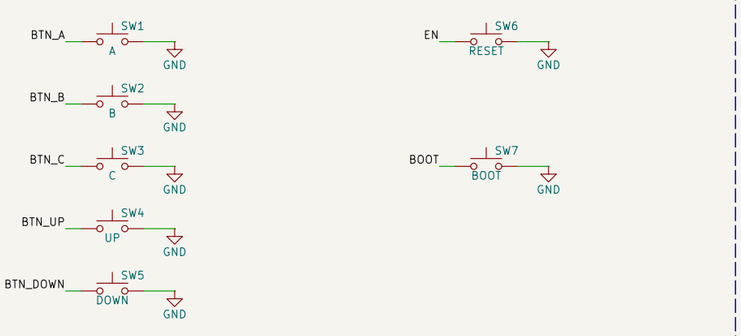

RGB LEDS (6x WS2812B on battery rail)

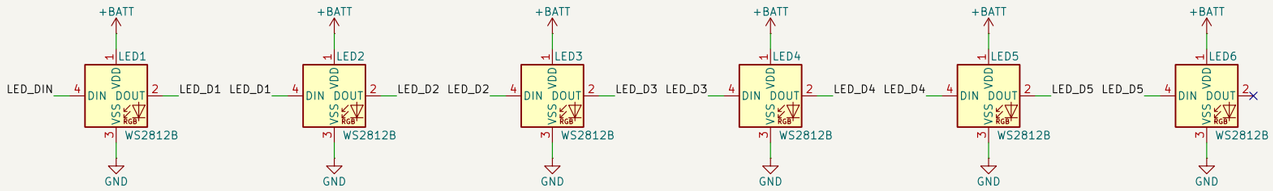



ESP32-C3 conference badge: OLED, 5 buttons, 6 RGB LEDs, LiPo

Sheet: /
File: glitch.kicad_sch

Title: glitch badge

Size: A3	Date: 2026-11-12	**Rev: 1.0**
KiCad E.D.A. 10.0.7		Id: 1/1