

CX Series Certified CATx High Performance Cable



- CAT6A (UTP) cable system
- Shielded connector and 4 shielded twisted pairs (U/FTP)
- Optimized for HDBaseT® installations
- Pre-terminated lengths or bulk reels of 1,000 ft.
- Lifetime Warranty
- LSZH

Item No.	Length	
CX-010	33ft	10m
CX-020	66ft	20m
CX-030	98.4ft	30m
CX-040	131.2ft	40m
CX-050	165ft	50m
CX-070	230ft	70m
CX-100	330ft	100m
CX-1000	1000ft	300m

CX-Connector Certified CATx Connector for CX Cable



- Field installable plug for cable conductors up to 0.048" and overall diameters up to .295"
- Suitable for CAT6a and CAT6 applications delivering 10G Base-T and Gigabit Ethernet
- Low profile design allows for use in high density switches and routers
- Anti-snap boot prevents plug tab damage during installation
- Packaging available for both field installation and factory terminations
- Can be used to terminate both shielded and unshielded cabling


Item No.	Performance	Conductor Diameter	Cable Diameter	Packaging
CX-Connector	CAT6a	.042"-.048" [1.07-1.22]	.270"-.295" [6.86-7.49]	Individually Bagged

EZ-Terminator Tools-Less CATx/HDBaseT Termination Kit



- Fast, accurate and reliable termination of Gigabit Ethernet cables
- Locate and terminate all 8 wires using easy color codes
- Detachable wiring bridge for ease of use
- Robust snap fit outer casing
- Delivers exceptional performance while streamlining installations

Item No.	Length	
HBM-01	3 in	76.2 mm

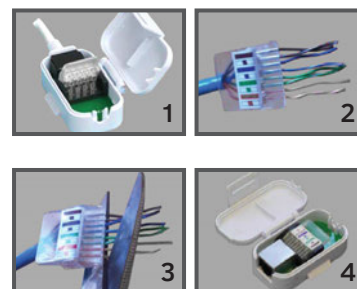

EZH Series Certified Integrated HDMI Over Fiber Cable



- Supports all PC and HDTV resolutions up to 4K / Ultra HD
- 3D Support with 36-bit Deep Color
- Pre-terminated lengths up to 100 meters (328 ft.)
- Incorporates active transceivers inside connectors
- Immune from electrical noise (EMI & RFI)
- Plug-n-play (no additional power supply required)
- HDMI 1.4
- Plenum Rated

Item No.	Length	
EZH-010	33ft	10m
EZH-020	66ft	20m
EZH-030	98.4ft	30m
EZH-040	131.2ft	40m
EZH-050	165ft	50m
EZH-070	230ft	70m
EZH-100	330ft	100m

EZH2.0 Series Certified Integrated HDMI Over Fiber Cable



- Supports all PC and HDTV resolutions up to 4K / Ultra HD
- 3D Support with 36-bit Deep Color
- Pre-terminated lengths up to 100 meters (328 ft.)
- Incorporates active transceivers inside connectors
- Immune from electrical noise (EMI & RFI)
- Plug-n-play (no additional power supply required)
- HDMI 2.0
- Plenum Rated

Item No.	Length	
EZH2-010	33ft	10m
EZH2-020	66ft	20m
EZH2-030	98.4ft	30m
EZH2-040	131.2ft	40m
EZH2-050	165ft	50m
EZH2-070	230ft	70m
EZH2-100	330ft	100m

EZD Series Certified Integrated DVI Over Fiber Cable



- Supports all PC and HDTV resolutions up to 1080p
- Detachable connectors for convenient, no-hassle installation
- Incorporates active transceivers inside connectors
- Plug-n-play (no additional power supply required)
- HDCP compliant
- Plenum rated

Item No.	Length	
EZD-010	33ft	10m
EZD-020	66ft	20m
EZD-030	98.4ft	30m
EZD-040	131.2ft	40m
EZD-050	165ft	50m
EZD-070	230ft	70m
EZD-100	330ft	100m

EZS Tx/Rx EZ-S Optical Cable Assembly for 3G/HD-SDI – Tx/Rx Modules



- Fully integrated passive optical assembly
- Extends up to 1900ft (600M)
- Supports multi-rate SDI, HD-SDI, and 3G-SDI signals
- Video Pathological Test Code compliant
- ST connector for optical in/out

FLC2 Multi-Mode 2 LC Fiber Optic Cable with TotalWire Technology



- Pre-terminated 50/125 multimode fiber
- RJ-style push-pull housing
- Terminated with LC connectors
- PVC jacket
- RoHS compliant
- Available in various lengths from 10m (33 ft) to 100m (330 feet)

Item No.	Length	
FLC2-010	33ft	10m
FLC2-020	66ft	20m
FLC2-030	98.4ft	30m
FLC2-040	131.2ft	40m
FLC2-050	165ft	50m
FLC2-070	230ft	70m
FLC2-100	330ft	100m

FLC4 Multi-Mode 4 LC Fiber Optic Cable with TotalWire Technology



- Individually color-coded, 62.5/125 simplex sub cables
- RJ-style push-pull housing
- Terminated with LC connectors
- PVC jacket
- RoHS compliant
- Available in various lengths from 10m (33 ft) to 100m (330 feet)

Item No.	Length	
FLC4-010	33ft	10m
FLC4-020	66ft	20m
FLC4-030	98.4ft	30m
FLC4-040	131.2ft	40m
FLC4-050	165ft	50m
FLC4-070	230ft	70m
FLC4-100	330ft	100m

PI1000 Certified High Speed HDMI Cable with Ethernet



- High Speed HDMI for 3D and Ultra HD/4K (2160p)
- HDMI v. 2.0 compatible
- Triple shielded for superior noise immunity
- SLS™ Locking Technology

Item No.	Length	
PI1000-005	1.65ft	0.5m
PI1000-010	3.3ft	1m
PI1000-015	4.9ft	1.5m
PI1000-020	6.6ft	2m
PI1000-030	10ft	3m
PI1000-050	16.5ft	5m
PI1000-075	24.6ft	7.5m
PI1000-100	33ft	10m
PI1000-150	49.5ft	15m
PI1000-200	66ft	20m
PI1000-250	82ft	25m
PI1000-300	98.4ft	30m

PI1100 Certified High Speed HDMI Extension Cable



- High Speed HDMI for 3D and Ultra HD/4K (2160p)
- HDMI v. 2.0 compatible
- Triple shielded for superior noise immunity
- SLS™ Locking Technology

Item No.	Length	
PI1100-010	3.3ft	1m
PI1100-020	6.6ft	2m
PI1100-030	10ft	3m
PI1100-050	16.5ft	5m

PI1200 Certified High Speed Mini HDMI Cable with Ethernet



- High Speed HDMI for 3D and Ultra HD/4K (2160p)
- HDMI v. 2.0 compatible
- Triple shielded for superior noise immunity
- SLS™ Locking Technology

Item No.	Length	
PI1200-010	3.3ft	1m
PI1200-015	4.9ft	1.5m
PI1200-020	6.6ft	2m
PI1200-030	10ft	3m

PI1300 Certified High Speed Micro HDMI Cable with Ethernet



- High Speed HDMI for 3D and HDTV resolutions up to 4K (2160p)
- Integrated Ethernet channel for 100 MBit network transmission via HDMI
- High-purity OFC tinned copper conductor and 3-way shielding
- Innovative Secure Lock System™ for HDMI connections
- Especially suitable for professional applications as well as mobile devices

Item No.	Length	
PI1300-010	3.3ft	1m
PI1300-015	4.9ft	1.5m
PI1300-020	6.6ft	2m
PI1300-030	10ft	3m

PI2000 Active Certified High Speed HDMI Extension Cable with Ethernet



- High Speed HDMI for 3D and Ultra HD/4K (2160p)
- HDMI v. 2.0 compatible
- Triple shielded for superior noise immunity
- SLST™ Locking Technology
- APO™ technology (Active Performance Optimizer™)

Item No.	Length	
PI2000-150	49.5ft	15m
PI2000-200	66ft	20m
PI2000-250	82ft	25m
PI2000-300	98.4ft	30m
PI2000-350	114.8ft	35m
PI2000-400	131.2ft	40m

PI3000 Certified High Speed Mini HDMI Cable with Ethernet



- HDMI-A male to DVI-D male (18+1)
- Triple shielded for superior noise immunity
- SLST™ Locking Technology

Item No.	Length	
PI3000-005	1.65ft	0.5m
PI3000-010	3.3ft	1m
PI3000-015	4.9ft	1.5m
PI3000-020	6.6ft	2m
PI3000-030	10ft	3m
PI3000-050	16.5ft	5m
PI3000-075	24.6ft	7.5m
PI3000-100	33ft	10m
PI3000-150	49.5ft	15m

PI4000 Certified DVI Single-Link Cable



- DVI-D male (18+1) to DVI-D male (18+1)
- Supports resolutions up to 1600x1200
- Triple shielded for superior noise immunity

Item No.	Length	
PI4000-005	1.65ft	0.5m
PI4000-010	3.3ft	1m
PI4000-015	4.9ft	1.5m
PI4000-020	6.6ft	2m
PI4000-030	10ft	3m
PI4000-050	16.5ft	5m
PI4000-075	24.6ft	7.5m
PI4000-100	33ft	10m
PI4000-150	49.5ft	15m
PI4000-200	66ft	20m
PI4000-250	82ft	25m
PI4000-300	98.4ft	30m

PI4100 Certified DVI Single-Link Extension Cable



- Single Link DVI-D video resolutions up to WUXGA / FullHD (1920x1200)
- Optimal signal quality - connection by high quality PCB
- Precision fit and gilded Premium Contacts
- High-purity OFC tinned copper conductor and 3-way shielding
- Especially suitable for professional applications and installations

Item No.	Length	
PI4100-010	3.3ft	1m
PI4100-020	6.6ft	2m
PI4100-030	10ft	3m
PI4100-050	16.5ft	5m

PI4200 Certified DVI Dual-Link Cable



- Dual Link DVI-D connection for video resolutions up to QXGA (2560x1600)
- Optimal signal quality - connection by high quality PCB
- Precision fit and gilded Premium Contacts
- High-purity OFC tinned copper conductor and 3-fold shielding
- Especially suitable for professional applications and installations

Item No.	Length	
PI4200-005	1.65ft	0.5m
PI4200-010	3.3ft	1m
PI4200-015	4.9ft	1.5m
PI4200-020	6.6ft	2m
PI4200-030	10ft	3m
PI4200-050	16.5ft	5m
PI4200-075	24.6ft	7.5m
PI4200-100	33ft	10m
PI4200-150	49.5ft	15m
PI4200-200	66ft	20m
PI4200-250	82ft	25m
PI4200-300	98.4ft	30m

PI4300 Certified DVI Dual-Link Extension Cable



- Dual Link DVI-D video resolutions up to QXGA / FullHD (2560x1600)
- Optimal signal quality - connection by high quality PCB
- Precision fit and gilded Premium Contacts
- High-purity OFC tinned copper conductor and 3-fold shielding
- Especially suitable for professional applications and installations

Item No.	Length	
PI4300-010	3.3ft	1m
PI4300-020	6.6ft	2m
PI4300-030	10ft	3m
PI4300-050	16.5ft	5m

PI5000 Certified DisplayPort Cable



- DisplayPort connection for video resolutions up to 4K / UltraHD @ 60Hz
- Full audio support including. DTS-HD™ and Dolby TrueHD™
- Optimal signal quality - connection by high quality PCB
- High-purity OFC tinned copper conductor and 3-way shielding
- Especially suitable for professional applications and installations

Item No.	Length	
PI5000-010	3.3ft	1m
PI5000-015	4.9ft	1.5m
PI5000-020	6.6ft	2m
PI5000-030	10ft	3m

PI5100 Certified DisplayPort to HDMI Cable



- DisplayPort to HDMI signal for HDTV resolutions up to 1920x1200 (WUXGA)
- High-purity OFC tinned copper conductor and 3-way shielding
- Innovative Secure Lock System™ for HDMI connections
- Optimal signal quality - connection by high quality PCB
- Especially suitable for professional applications and installations

Item No.	Length	
PI5100-010	3.3ft	1m
PI5100-015	4.9ft	1.5m
PI5100-020	6.6ft	2m
PI5100-030	10ft	3m

PI5200 Certified DisplayPort to DVI Cable



- DisplayPort to DVI-D signal for HDTV resolutions up to 1920x1200 (WUXGA)
- High-purity OFC tinned copper conductor and 3-way shielding
- Optimal signal quality - connection by high quality PCB
- Precision fit and gilded Premium Contacts
- Especially suitable for professional applications and installations

Item No.	Length	
PI5200-010	3.3ft	1m
PI5200-015	4.9ft	1.5m
PI5200-020	6.6ft	2m
PI5200-030	10ft	3m

PS1500 SuperThin High Speed HDMI Cable with Ethernet



- High Speed HDMI for 3D and Ultra HD/4K (2160p)
- Integrated Ethernet channel for 100 Mbps transmission over HDMI
- Gold plated connectors for optimal transmission quality and durability
- High-purity OFC copper and 3-fold shielding

Item No.	Length	
PS1500-010	3.3ft	1m
PS1500-015	4.9ft	1.5m
PS1500-020	6.6ft	2m
PS1500-030	10ft	3m

PS1700 SuperThin High Speed HDMI Cable with Ethernet



- High Speed HDMI for 3D and Ultra HD/4K (2160p)
- Integrated Ethernet channel for 100 Mbps transmission over HDMI
- Gold plated connectors for optimal transmission quality and durability
- High-purity OFC copper and 3-fold shielding

Item No.	Length	
PS1700-01	3.3ft	1m
PS1700-015	4.9ft	1.5m
PS1700-02	6.6ft	2m
PS1700-03	10ft	3m
PS1700-05	16.5ft	5m

PS1720 SuperThin High Speed Mini HDMI Cable with Ethernet



- High Speed Mini HDMI with Ethernet for resolutions up to 4K (2160p)
- Lean "Super Thin" design: only 3.6 mm cable diameter
- Extremely small bending radius for hard to reach places: 30-35mm
- High-purity, silver plated OFC copper conductor and 3-fold shielding
- Especially suitable for professional applications as well as mobile devices

Item No.	Length	
PS1720-015	4.9ft	1.5m
PS1720-03	10ft	3m

PS1740 SuperThin High Speed Micro HDMI Cable with Ethernet



- High Speed HDMI for 3D and HDTV resolutions up to 4K(2160p)
- Integrated Ethernet channel for 100 Mbit transmission via HDMI
- High-purity OFC tinned copper conductor and 3-fold shielding
- Perfect for smartphones, tablets, mobile devices with micro HDMI port
- Especially suitable for professional applications as well as mobile devices

Item No.	Length	
PS1740-015	4.9ft	1.5m
PS1740-03	10ft	3m

PS2000 Certified High Speed HDMI with Ethernet (Active, APO™)



- High Speed HDMI for 3D and HDTV resolutions up to 4K(2160p)
- Integrated Ethernet channel for 100 Mbit transmission via HDMI
- High-purity silver-plated OFC copper conductor and 3-fold shielding
- APO™ technology (Active Performance Optimizer™)
- Gold plated connectors for optimal transmission quality and corrosion protection

Item No.	Length	
PS2000-05	16.5ft	5m
PS2000-075	24.6ft	7.5m
PS2000-10	33ft	10m
PS2000-125	41.0ft	12.5m


ULS1000 Certified High Speed HDMI Cable with Security Lock



- High-speed with Ethernet
- HDMI 2.0 for 3D and Ultra HD/4K support
- Innovative ULS™ (Ultra Lock System) technology
- High-purity OFC copper wire, 3-fold shielding
- APO Technology (Active Performance Optimizer)
*for 5m, 7.5m, and 10m lengths only

Item No.	Length	
ULS1000-005	1.65ft	0.5m
ULS1000-010	3.3ft	1m
ULS1000-015	4.9ft	1.5m
ULS1000-020	6.6ft	2m
ULS1000-030	10ft	3m
ULS1000-050 (w/ APO™)	16.5ft	5m
ULS1000-075 (w/ APO™)	24.6ft	7.5m
ULS1000-100 (w/ APO™)	33ft	10m

ULTRA-LOCK SYSTEM THE SAFEST LOCKING SYSTEM FOR HDMI

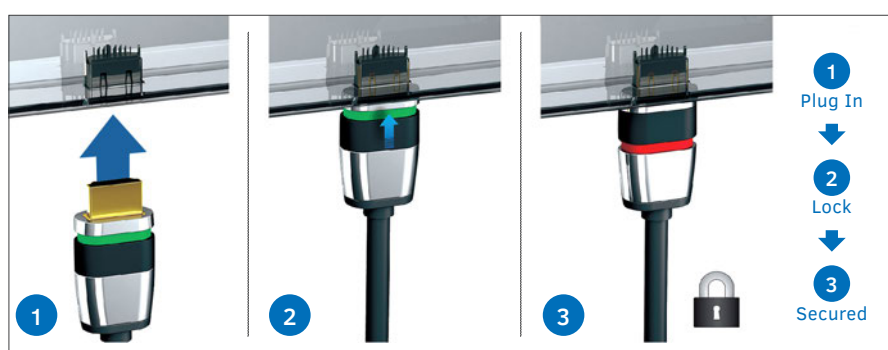

As more and more devices are designed with awkwardly positioned HDMI sockets, any accidental movement or pulling weight of the cable can easily disengage the connector, contributing to partial or even complete signal loss. The Ultra-Lock System (ULS™) features a patented locking mechanism that extends and holds the connector in place. The universal 360 ° locking switch is fully compatible with existing HDMI receptacles and allows easy on/off locking positions with color indicators.

PI010

DVI-D Male to HDMI-A Female Adapter



- Certified High Speed

PI015

HDMI-A Male to DVI-D Female Adapter



- SLS™ Technology
- Certified High Speed

PI020

HDMI-A Female to HDMI-A Female Gender Changer



- Certified High Speed

PI030

HDMI-A Male to HDMI-A Female Port Saver Adapter



- Certified High Speed w/ Ethernet

PI035

HDMI-A Male to HDMI-A Female Right-Angle Adapter



- 90° Tilted
- SLS™ Technology
- Certified High Speed w/ Ethernet

PI040

HDMI-A Male to HDMI-A Female 270° Adapter



- 270° Tilted
- SLS™ Technology
- Certified High Speed w/ Ethernet

PI045

HDMI-A Female to DVI-D Female Adapter



- Certified High Speed

PI050

HDMI-A Male to Mini HDMI-C Female Adapter



- SLS™ Technology
- Certified High Speed w/ Ethernet

PI055

HDMI-A Male to Mini HDMI-C Female Adapter



- SLS™ Technology
- Certified High Speed w/ Ethernet

PI060

HDMI-A Male to DVI-D Female Port Saver Adapter



- SLS™ Technology
- Certified High Speed

PI065

DVI-D Male (18+1) to HDMI-A Female Port Saver Adapter



- Certified High Speed

PI070

DVI-D Male (18+1) to DVI-D Female (24+1) Port Saver Adapter



- Certified High Speed

PI075

HDMI-A Male to HDMI-A Female Power Adapter



- 6V 1A Power Adapter
- Ideal for long distance HDMI connections and active cables
- SLS™ Technology
- Certified High Speed
- w/ Ethernet

PI080

Micro HDMI-D Male to HDMI-A Female Adapter



- SLS™ Technology
- Certified High Speed w/ Ethernet

PI085

HDMI-A Male to Micro HDMI-D Female Adapter



- SLS™ Technology
- Certified High Speed w/ Ethernet

PI090

HDMI-A Female to HDMI-A Female Adapter



- Certified High Speed

PI100

HDMI-A Female wall socket 1 port



- Certified High Speed w/ Ethernet
- Space-saving, clean and simple transmission of HDMI signals
- Concealed installation instead of disturbing cable

PI105

HDMI-A Female wall socket 2 ports



- Certified High Speed w/ Ethernet
- Space-saving, clean and simple transmission of HDMI signals
- Concealed installation instead of disturbing cable

PI150

DisplayPort to HDMI Adapter



- DisplayPort to HDMI Adapter for resolutions up to WUXGA (1920x1200)
- Precision fit and gilded Premium Contacts
- Compact size
- Especially suitable for professional applications and installations

PI155

DisplayPort to HDMI Port Saver Adapter



- DisplayPort to HDMI Adapter for resolutions up to WUXGA (1920x1200)
- Precision fit and gilded Premium Contacts
- Port Saver for relieving DisplayPort sockets and larger bend radius

PI160

DisplayPort to DVI Adapter



- DisplayPort to DVI Adapter for resolutions up to WUXGA (1920x1200)
- Precision fit and gilded Premium Contacts
- Compact size

PI170

DisplayPort to DVI Adapter Port Saver



- DisplayPort to DVI Adapter for resolutions up to WUXGA (1920x1200)
- Precision fit and gilded Premium Contacts
- Port Saver for relief of DVI connectors and larger bend radius