

# Overview of work for the past week











- Had an accident last week, so could not do a whole lot :(
- A second look at b888 logs

# B888 logs


- Previously I was just looking for an indication of Carrier Aggregation in the logs.
- Now I have done a first principles analysis of the logs.
- Since b888 is a cumulative log and each field is byte-aligned, we can ascertain the range of values and their progression by splicing at semi-random points in the payload. Semi-random because we are making an educated guess based on the previous version of the logs that we get from MobileInsight.
- The methodology did not work previously for other log types because for bit-level aligned values we can get a very large number of combinations and going through all of them would be too tedious.

| Abs Offset | Field Name        | Type & Size    |
|------------|-------------------|----------------|
| 41 (0x29)  | Carrier ID        | uint32 LE (4B) |
| 45 (0x2D)  | Num Slots Elapsed | uint32 LE (4B) |
| 49 (0x31)  | Num PDSCH Decode  | uint32 LE (4B) |
| 53 (0x35)  | Num CRC Pass TB   | uint32 LE (4B) |
| 57 (0x39)  | Num CRC Fail TB   | uint32 LE (4B) |
| 61 (0x3D)  | Num ReTx          | uint32 LE (4B) |
| 65 (0x41)  | ACK as NACK       | uint32 LE (4B) |
| 69 (0x45)  | HARQ Failure      | uint32 LE (4B) |
| 73 (0x49)  | CRC Pass TB Bytes | uint64 LE (8B) |
| 81 (0x51)  | CRC Fail TB Bytes | uint64 LE (8B) |
| 89 (0x59)  | TB Bytes          | uint64 LE (8B) |
| 97 (0x61)  | Padding Bytes     | uint64 LE (8B) |
| 105 (0x69) | ReTx Bytes        | uint64 LE (8B) |

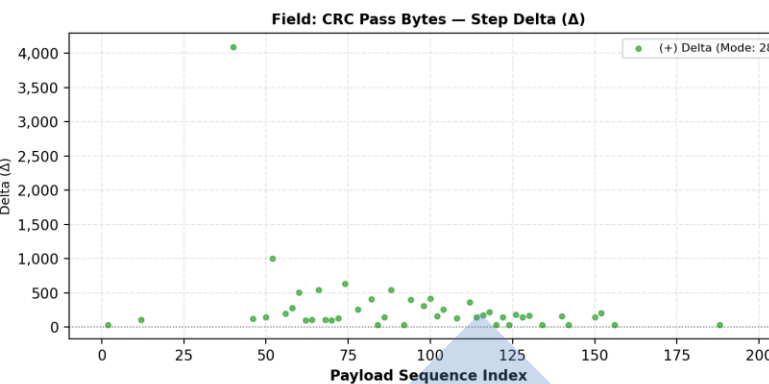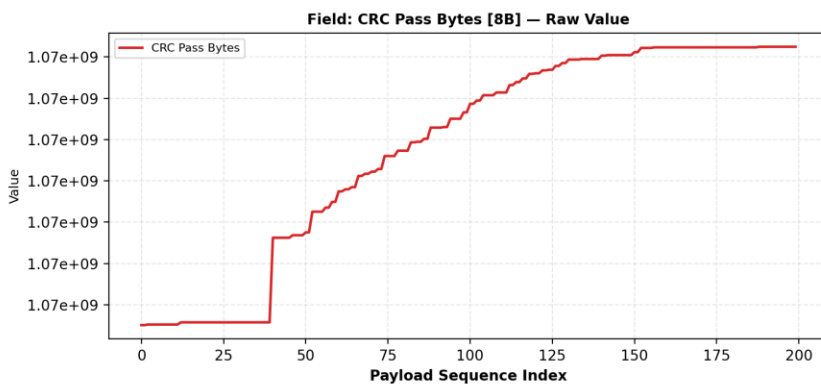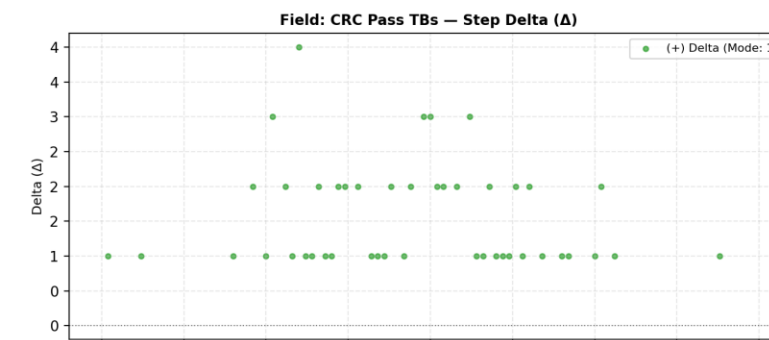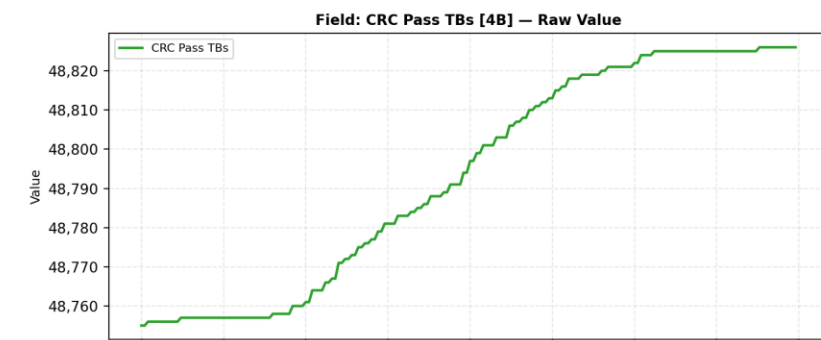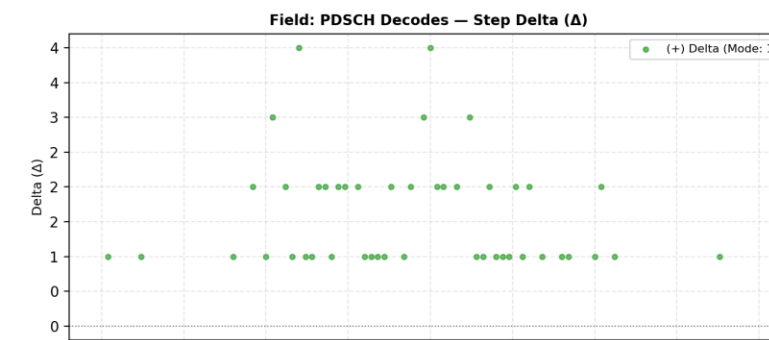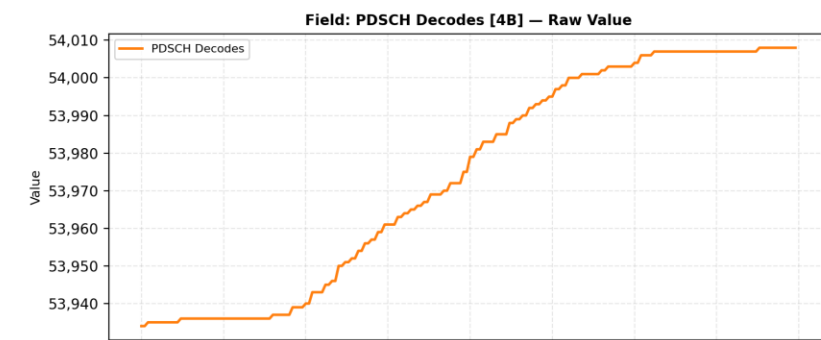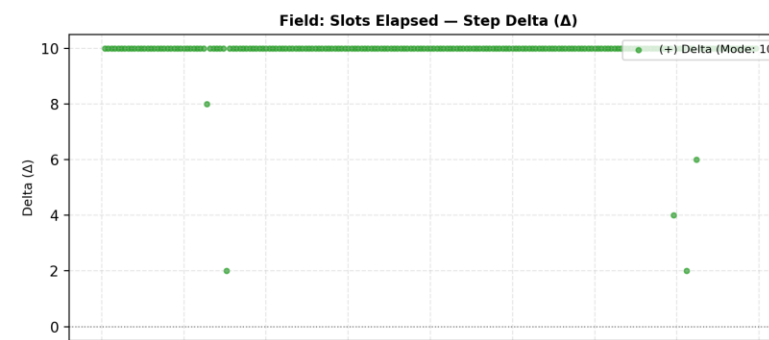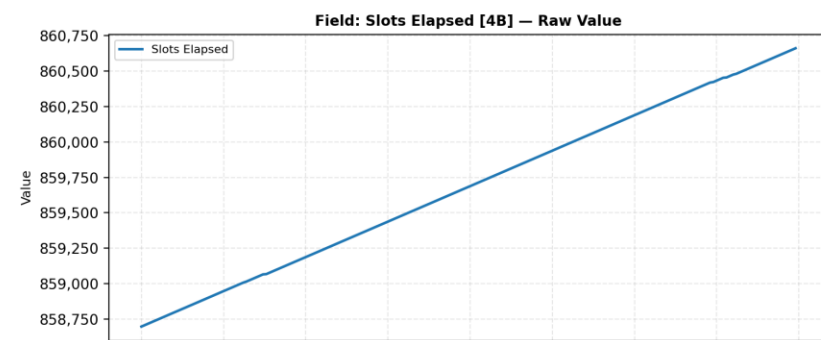

# The disappointing part

- The bytes that are supposed to correlate to carrier aggregation are still constantly zero.

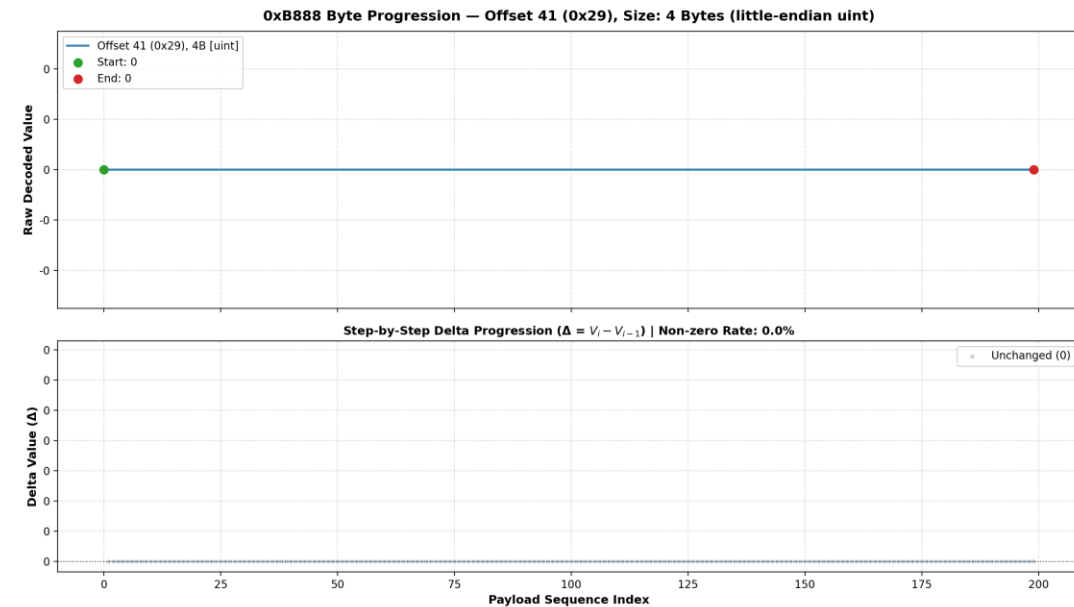

# What to do next

- I am not sure

