
993 TURBO · COMPLETE SEVEN-EDGE LAW · COARSE LINEAR CASES

Stress and displacement on the actual T10 mesh

Fz = −4 000 N · My = +850 000 N·mm · common camera, mm axes and field scales

89 485 C3D10 · 166 263 nodes · true deformation ×1 · raw BREP 07b354e3716b…

Rigid: 4 548 nodes fixed in XYZ. K1000: 1 000 N/mm TOTAL per eye and axis, distributed over 2 274 nodes at each end.

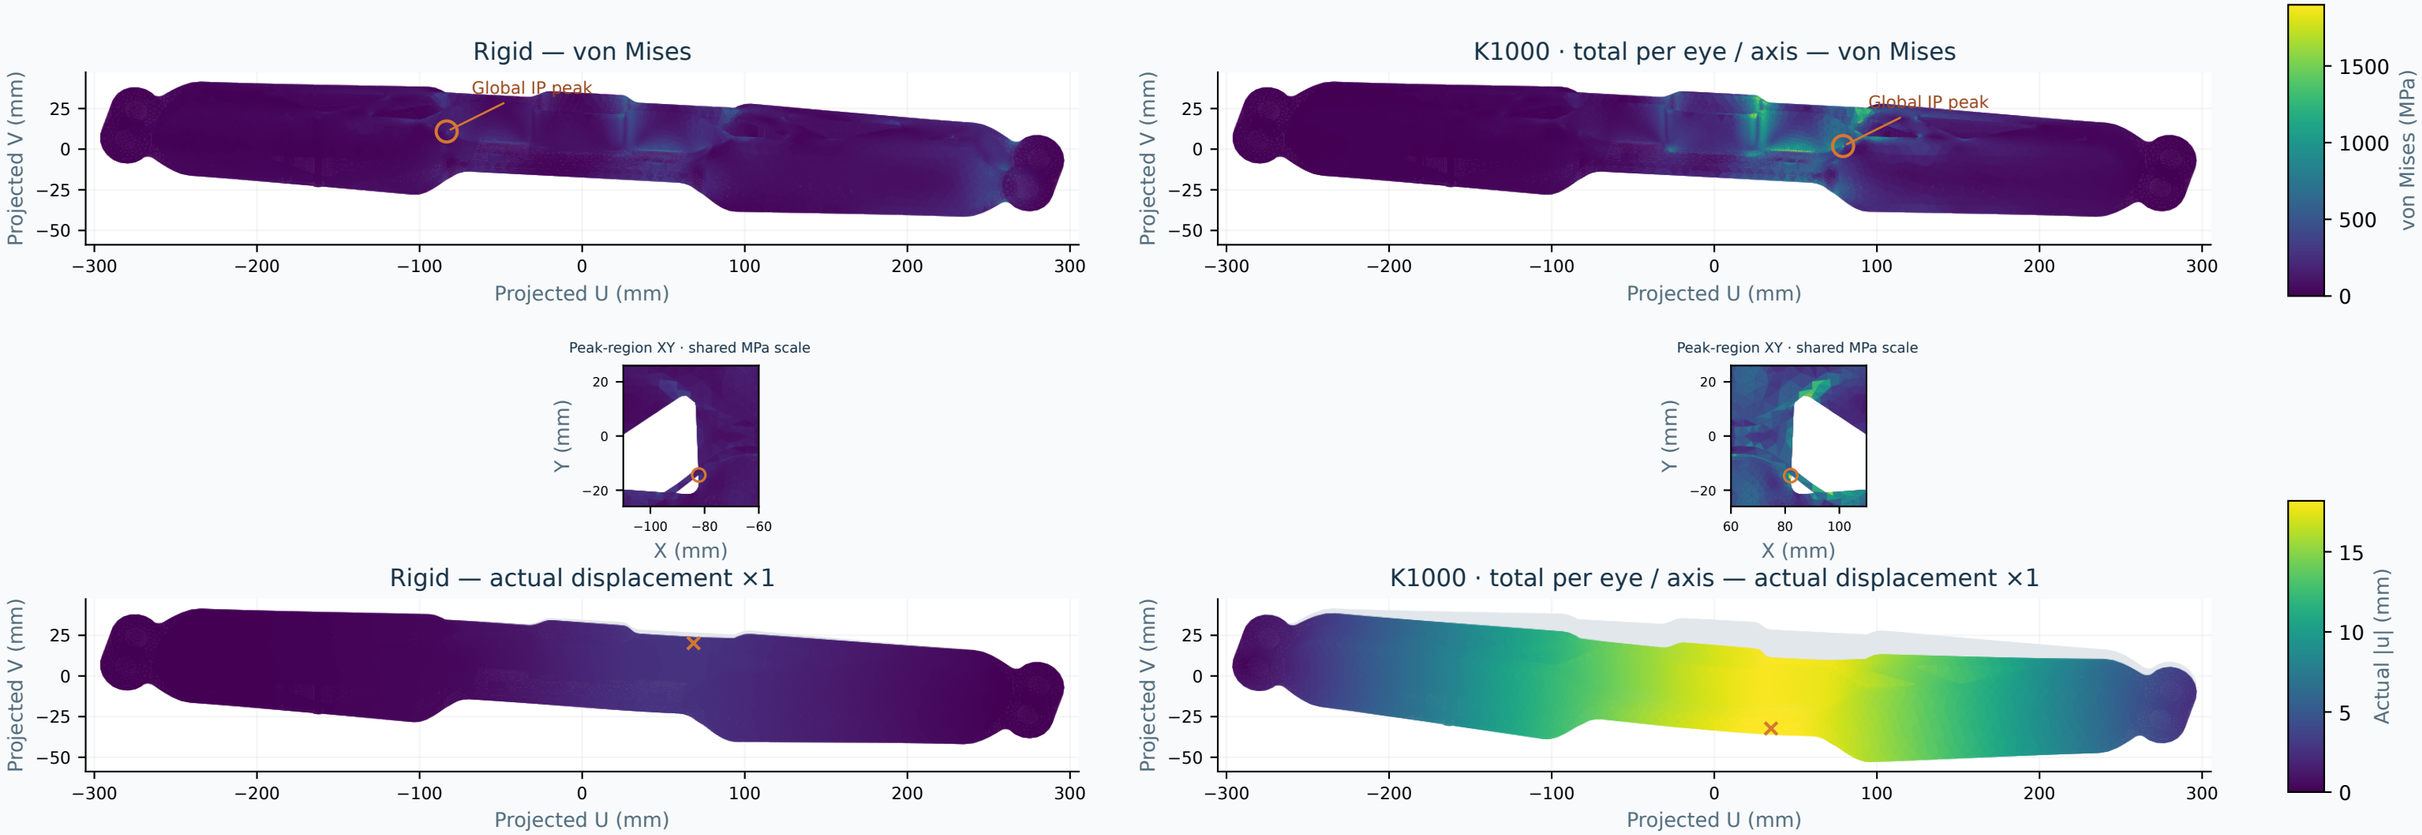

Case	Global IP peak (MPa)	Boundary max (MPa)	All-node |u| (mm)	Element / IP	Reference IP XYZ (mm)
Rigid	690.251	690.251	2.794908	84247/1	-82.13633, -14.38885, 12.86028
K1000	1898.691	1898.691	18.181958	54939/2	82.05313, -14.63425, 12.51981

Stress colours: maximum of 4 IPs in each boundary-adjacent element, without nodal extrapolation. Orange circles: every global IP peak.

Linear C3D10 corner facets; actual corner displacement ×1. Grey: reference shape. Crosses: every all-node maximum of |u|.

Displacement colours use the largest of each facet’s 3 corner values; the global maximum also includes midside nodes.

Coarse T10 mesh: support-model comparison. Stress convergence has not been established.

Complete seven-edge function · E = 107 000 MPa, ν = 0.31 · orthographic view 8° / 22°.