993 TURBO · CURRENT 24af · ACTUAL NATIVE SECTION

Geometry at the current all20 worst stress peak

X = -87.46369361992110 mm · element 81426 / IP3 · reverse-torque combined / spring support

Whole native section

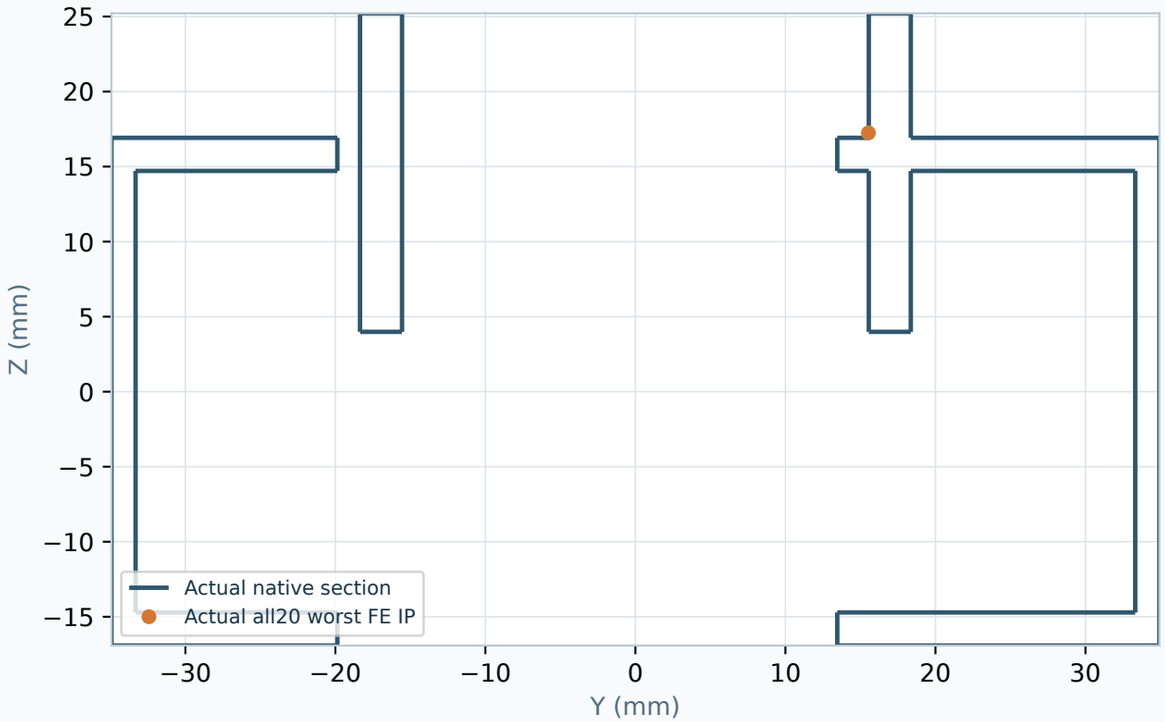

Actual peak-element bounds Y–Z projection

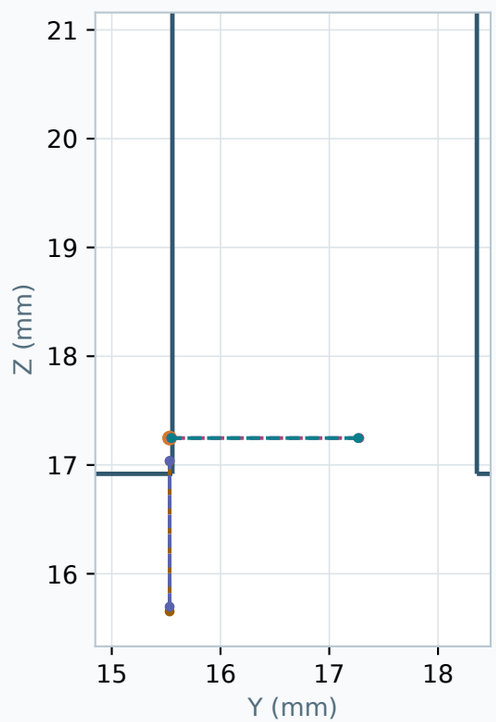

Dashed segments show both qualified reciprocal pairs at the actual IP.

These are Y–Z projections of measured 3D normal chords, not thicknesses of the displayed section; endpoint X values differ.

Face 40 → 36: 3D normal chord 2.196040840 mm; endpoint X = -87.451403776 → -86.096814053 mm

Face 36 → 40: 3D normal chord 2.195968387 mm; endpoint X = -86.082818324 → -87.451277131 mm

Face 42 → 85: 3D normal chord 1.705491771 mm; endpoint X = -87.619881652 → -88.623399608 mm

Face 85 → 42: 3D normal chord 1.704017387 mm; endpoint X = -88.678608423 → -87.627529951 mm

All 28 native curves / 708 samples retained · 4 local NULL rows at this IP and all five-probe unresolved rows kept in receipt · no new CAD or FEA