
993 TURBO · FIRST-WINDOW STOCK · COARSE LINEAR CASES

Stress and displacement on the actual T10 mesh

Fz = −4 000 N · My = +850 000 N·mm · common camera, mm axes and field scales

84 903 C3D10 · 158 156 nodes · true deformation ×1 · raw BREP 42da92ccbcf0…

Rigid: 4 552 nodes fixed in XYZ. K1000: 1 000 N/mm TOTAL per eye and axis, over 2 278 / 2 274 end nodes.

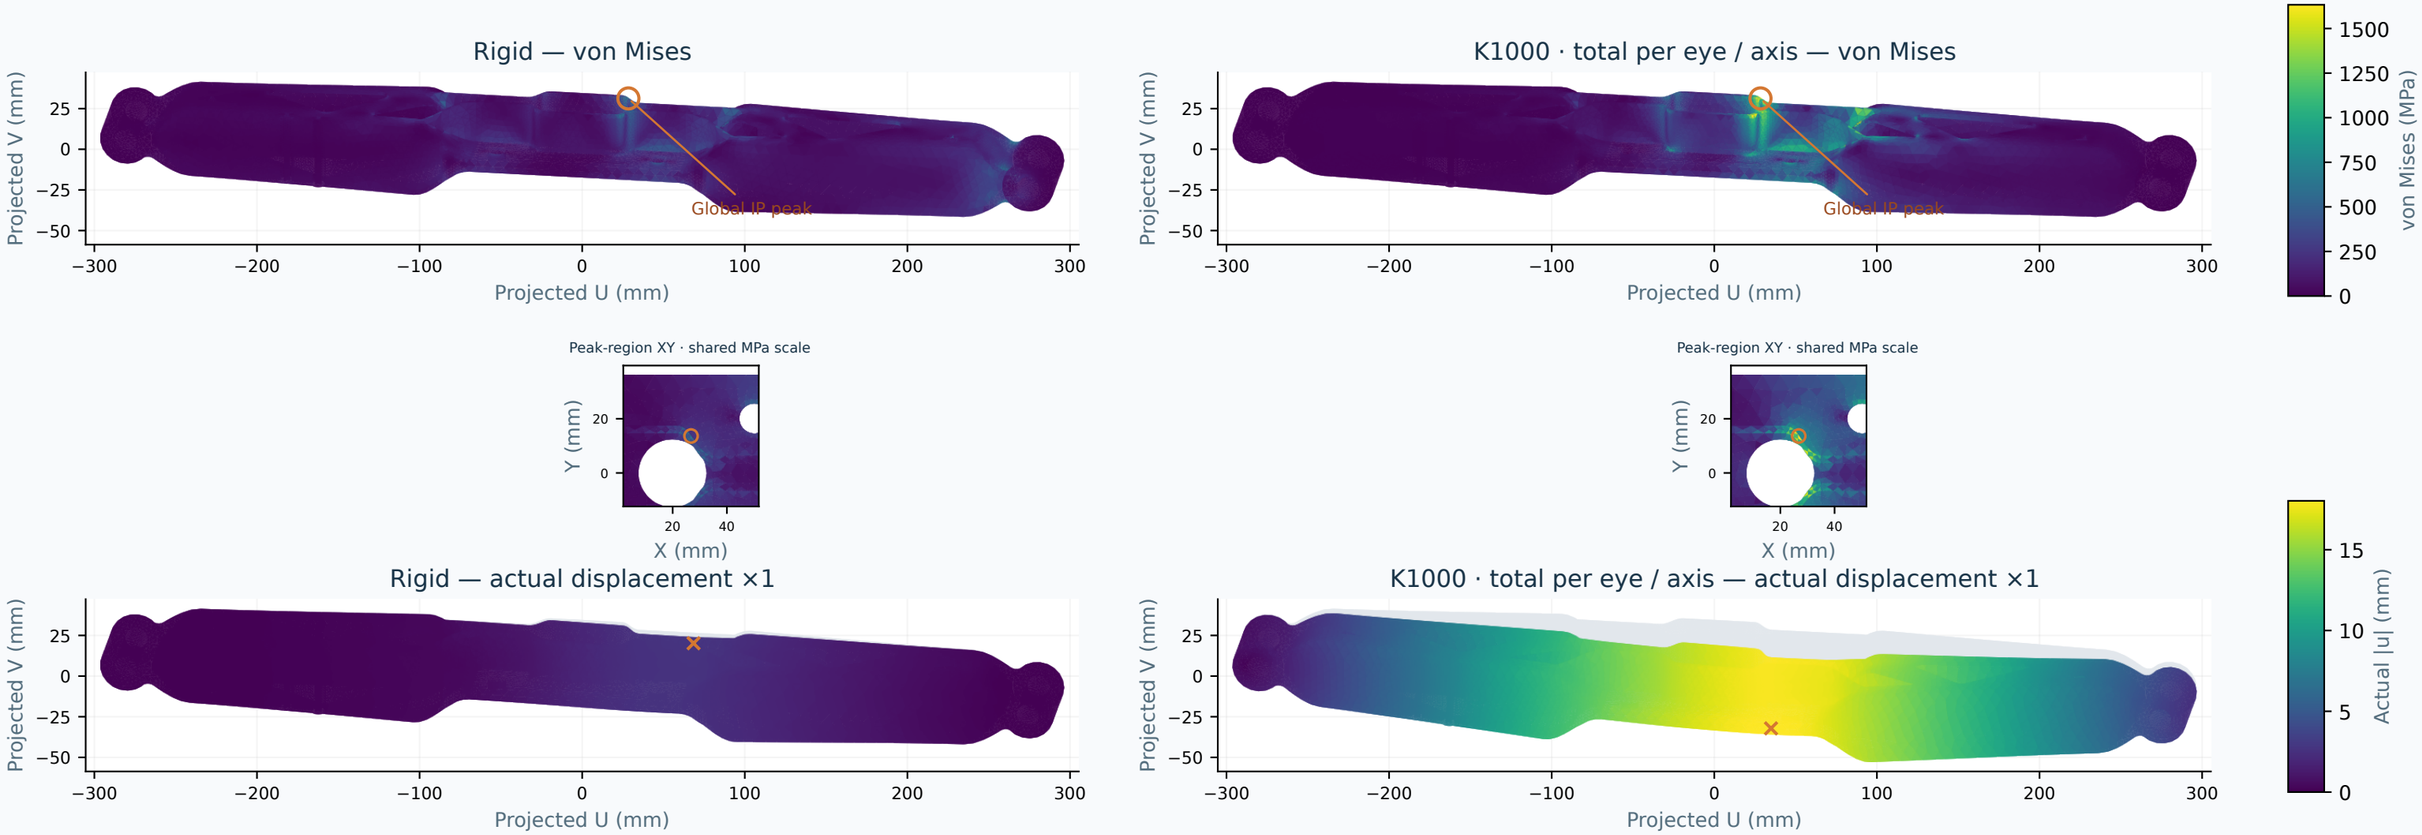

Case	Global IP peak (MPa)	Boundary max (MPa)	All-node |u| (mm)	Element / IP	Reference IP XYZ (mm)
Rigid	621.141	621.141	2.771585	39298/1	26.77366, 13.63043, 29.77867
K1000	1633.129	1633.129	18.025226	39298/1	26.77366, 13.63043, 29.77867

Stress colours: maximum of 4 IPs in each boundary-adjacent element, without nodal extrapolation. Orange circles: every global IP peak.

Linear C3D10 corner facets; actual corner displacement ×1. Grey: reference shape. Crosses: every all-node maximum of |u|.

Displacement colours use the largest of each facet’s 3 corner values; the global maximum also includes midside nodes.

Coarse T10 mesh: support-model comparison. Stress convergence has not been established.

First-window cut inset 2.8 mm (not wall thickness) · E = 107 000 MPa, ν = 0.31 · orthographic view 8° / 22°.