
993 TURBO · CORNER-SLIDE CANDIDATE · COMBINED LOAD

# Stress and displacement on the actual T10 mesh

Fz = −4 000 N · My = +850 000 N·mm · common camera, mm axes and field scales

85 958 C3D10 · 160 005 nodes · true deformation ×1 · raw BREP 24af058467fd…

Rigid: 4 556 nodes fixed in XYZ. K1000: 1 000 N/mm TOTAL per eye and axis, over 2 278 / 2 278 end nodes.

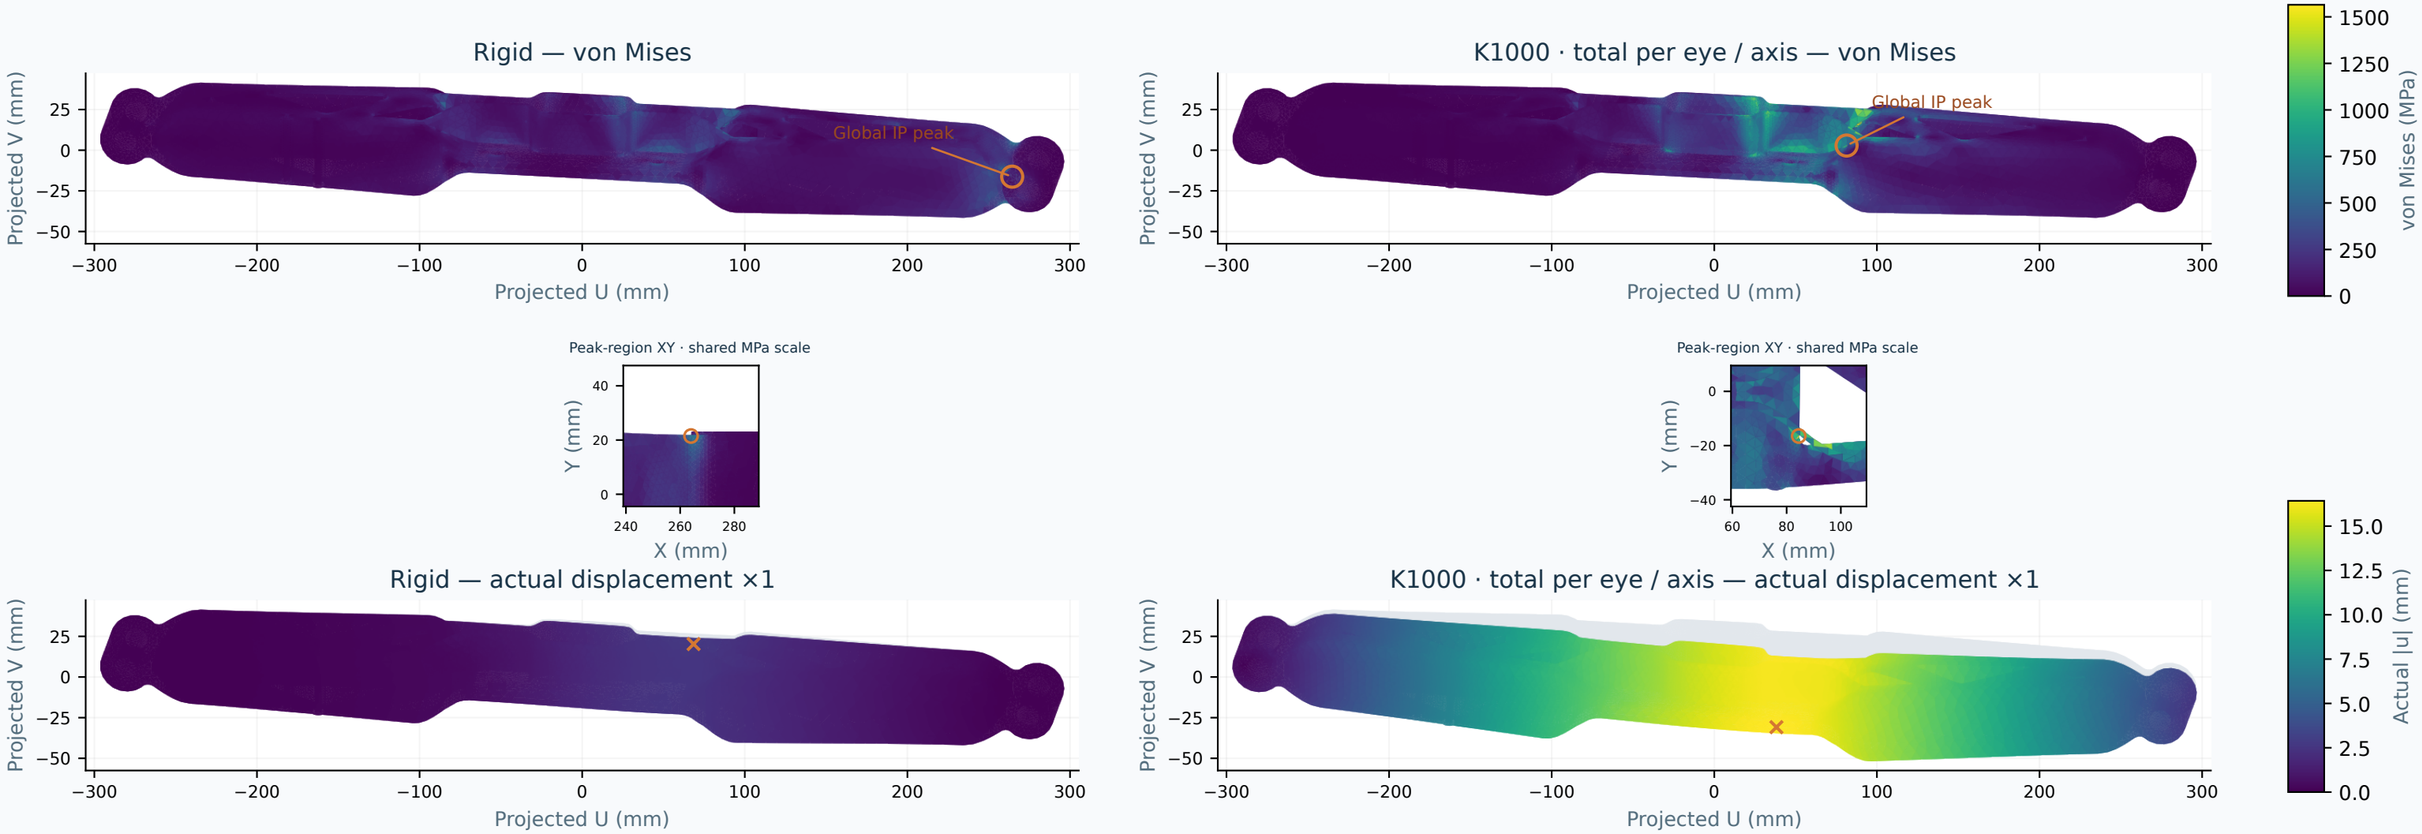


| Case | Global IP peak (MPa) | Boundary max (MPa) | All-node \|u\| (mm) | Element / IP | Reference IP XYZ (mm) |
|---|---|---|---|---|---|
| Rigid | 602.291 | 602.291 | 2.701142 | 35426/2 | 264.01521, 21.48504, -11.31000 |
| K1000 | 1564.898 | 1564.898 | 16.425420 | 81055/2 | 84.46151, -16.47188, 14.42128 |

Stress colours: maximum of 4 IPs in each boundary-adjacent element, without nodal extrapolation. Orange circles: every global IP peak.

Linear C3D10 corner facets; actual corner displacement ×1. Grey: reference shape. Crosses: every all-node maximum of |u|.

Displacement colours use the largest of each facet’s 3 corner values; the global maximum also includes midside nodes.

Coarse T10 mesh: support-model comparison. Stress convergence has not been established.

First-window scaled corner shift (+1.5, +15/136) mm · E = 107 000 MPa, ν = 0.31 · view 8° / 22°.