STM32 CubeMX

1. Description

1.1. Project

Project Name	LED Controller
Board Name	custom
Generated with:	STM32CubeMX 6.4.0
Date	12/26/2022

1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F411
MCU name	STM32F411CCUx
MCU Package	UFQFPN48
MCU Pin number	48

1.3. Core(s) information

Core(s)	Arm Cortex-M4

2. Pinout Configuration
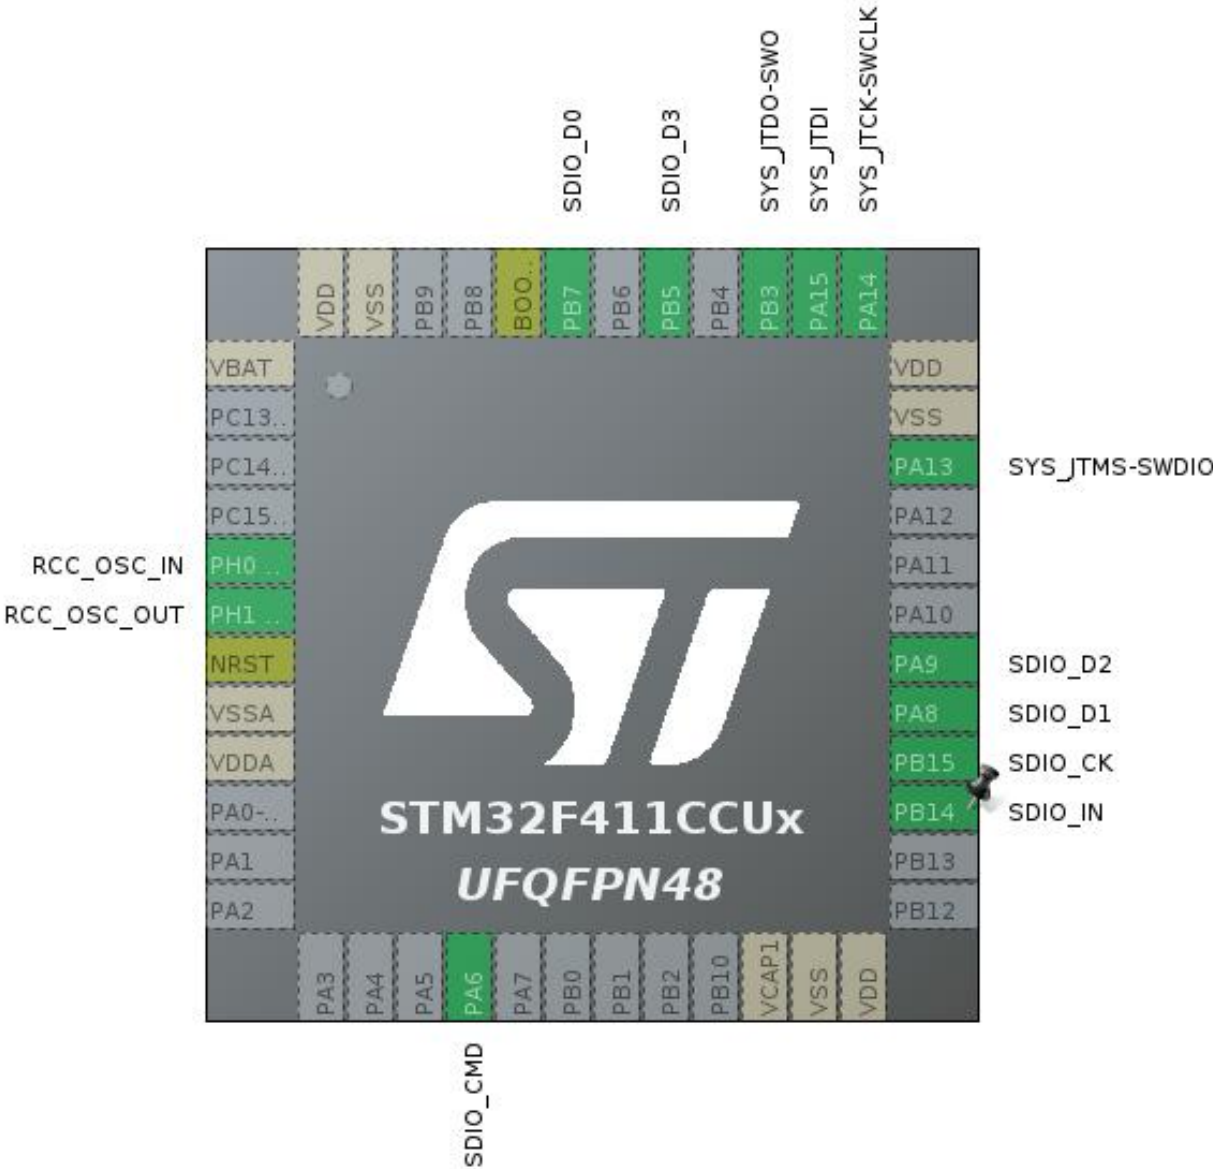
3. Pins Configuration

Pin Number UFQFPN48	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
5	PH0 - OSC_IN	I/O	RCC_OSC_IN	
6	PH1 - OSC_OUT	I/O	RCC_OSC_OUT	
7	NRST	Reset		
8	VSSA	Power		
9	VDDA	Power		
16	PA6	I/O	SDIO_CMD	
22	VCAP1	Power		
23	VSS	Power		
24	VDD	Power		
27	PB14 *	I/O	GPIO_Input	SDIO_IN
28	PB15	I/O	SDIO_CK	
29	PA8	I/O	SDIO_D1	
30	PA9	I/O	SDIO_D2	
34	PA13	I/O	SYS_JTMS-SWDIO	
35	VSS	Power		
36	VDD	Power		
37	PA14	I/O	SYS_JTCK-SWCLK	
38	PA15	I/O	SYS_JTDI	
39	PB3	I/O	SYS_JTDO-SWO	
41	PB5	I/O	SDIO_D3	
43	PB7	I/O	SDIO_D0	
44	BOOT0	Boot		
47	VSS	Power		
48	VDD	Power		

* The pin is affected with an I/O function

4. Clock Tree Configuration
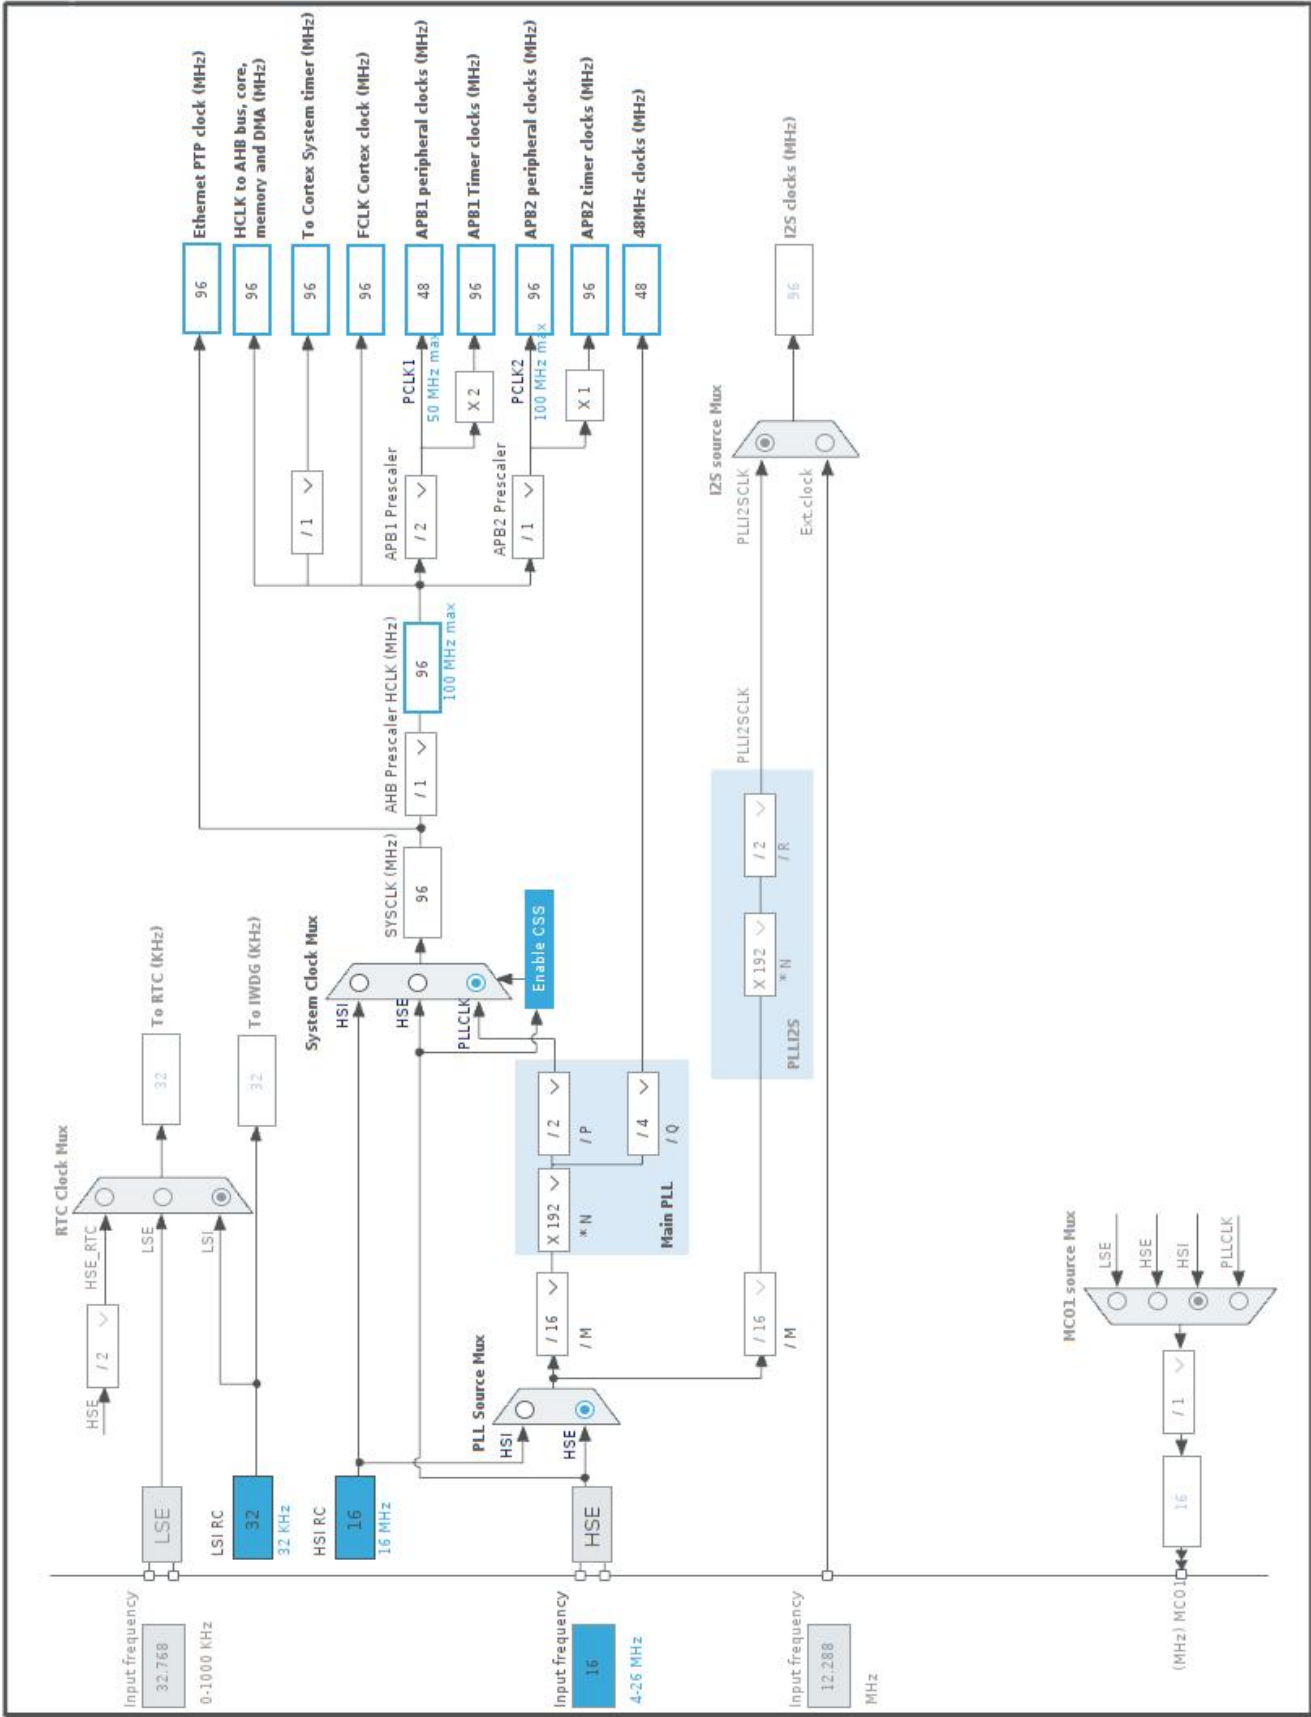
5. Software Project

5.1. Project Settings

Name	Value
Project Name	LED Controller
Project Folder	/home/charliew/Documents/dev/led-controller/firmware
Toolchain / IDE	STM32CubeIDE
Firmware Package Name and Version	STM32Cube FW_F4 V1.26.2
Application Structure	Advanced
Generate Under Root	Yes
Do not generate the main()	No
Minimum Heap Size	0x200
Minimum Stack Size	0x400

5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No
Enable Full Assert	No

5.3. Advanced Settings - Generated Function Calls

Rank	Function Name	Peripheral Instance Name
1	SystemClock_Config	RCC
2	MX_GPIO_Init	GPIO
3	MX_CRC_Init	CRC
4	MX_SDIO_SD_Init	SDIO
5	MX_FATFS_Init	FATFS

6. Power Consumption Calculator report

6.1. Microcontroller Selection

Series	STM32F4
Line	STM32F411
MCU	STM32F411CCUx
Datasheet	DS10314_Rev6

6.2. Parameter Selection

Temperature	25
Vdd	1.7

6.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1

6.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP
Vdd	1.7	1.7
Voltage Source	Battery	Battery
Range	Scale1-High	No Scale
Fetch Type	SRAM	n/a
CPU Frequency	100 MHz	0 Hz
Clock Configuration	HSE PLL	Regulator_LPLV Flash-PwrDwn
Clock Source Frequency	4 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	12.7 mA	9 µA
Duration	0.1 ms	0.9 ms
DMIPS	125.0	0.0
Ta Max	104.31	105
Category	In DS Table	In DS Table

6.5. Results

Sequence Time	1 ms	Average Current	1.28 mA
Battery Life	3 months, 19 days, 6 hours	Average DMIPS	125.0 DMIPS

6.6. Chart
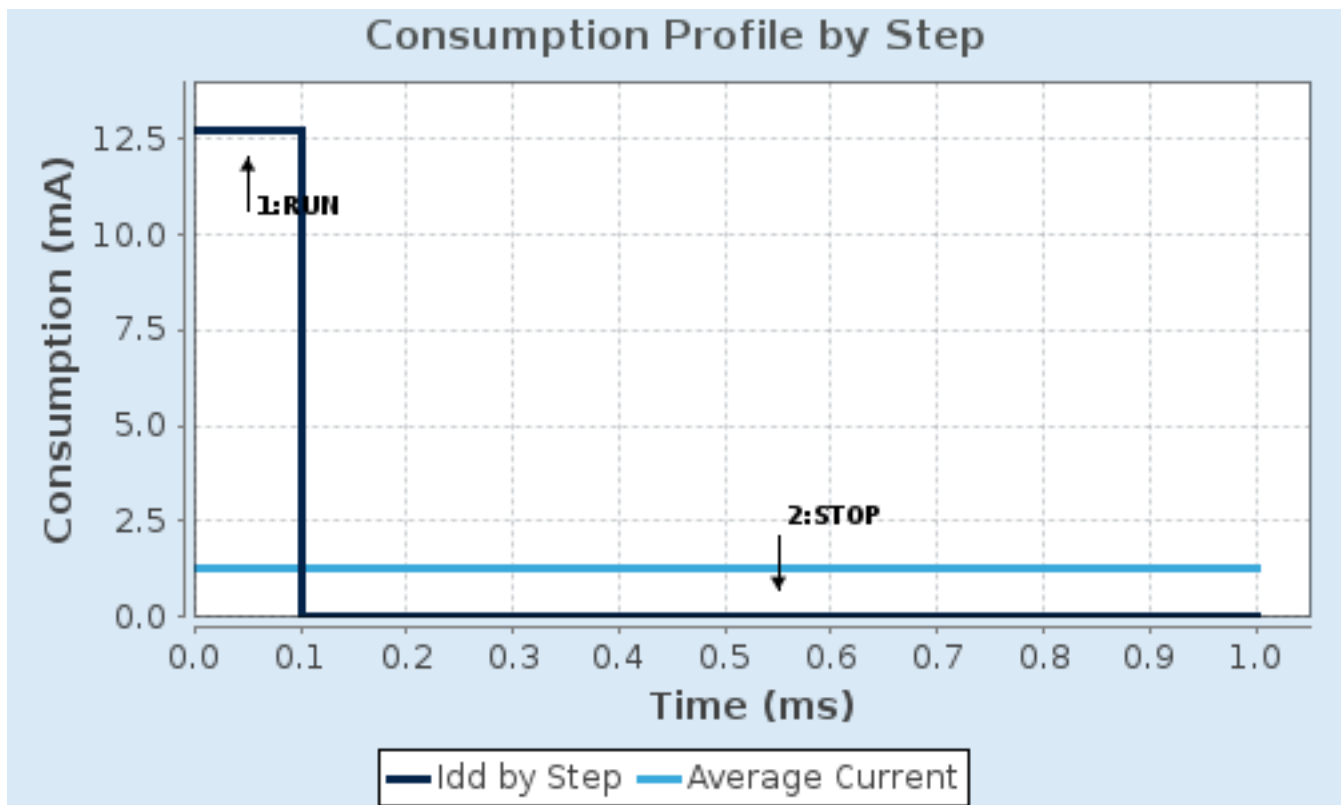
7. Peripherals and Middlewares Configuration

7.1. CRC

mode: Activated

7.2. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

7.2.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Enabled
Data Cache	Enabled
Flash Latency(WS)	3 WS (4 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
TIM Prescaler Selection	Disabled
HSE Startup Timout Value (ms)	100
LSE Startup Timout Value (ms)	5000

Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 1

7.3. SDIO

Mode: SD 4 bits Wide bus

7.3.1. Parameter Settings:

SDIO parameters:

Clock transition on which the bit capture is made	Rising transition
SDIO Clock divider bypass	Disable
SDIO Clock output enable when the bus is idle	Disable the power save for the clock
SDIO hardware flow control	The hardware control flow is disabled
SDIOCLK clock divide factor	0

7.4. SYS

Debug: JTAG (4 pins)

Timebase Source: TIM1

7.5. FATFS
mode: SD Card
7.5.1. Set Defines:

Version:

FATFS version	R0.12c

Function Parameters:

FS_READONLY (Read-only mode)	Disabled
FS_MINIMIZE (Minimization level)	Disabled
USE_STRFUNC (String functions)	Enabled with LF -> CRLF conversion
USE_FIND (Find functions)	Disabled
USE_MKFS (Make filesystem function)	Enabled
USE_FASTSEEK (Fast seek function)	Enabled
USE_EXPAND (Use f_expand function)	Disabled
USE_CHMOD (Change attributes function)	Disabled
USE_LABEL (Volume label functions)	Disabled
USE_FORWARD (Forward function)	Disabled

Locale and Namespace Parameters:

CODE_PAGE (Code page on target)	Latin 1
USE_LFN (Use Long Filename)	Disabled
MAX_LFN (Max Long Filename)	255
LFN_UNICODE (Enable Unicode)	ANSI/OEM
STRF_ENCODE (Character encoding)	UTF-8
FS_RPATH (Relative Path)	Disabled

Physical Drive Parameters:

VOLUMES (Logical drives)	1
MAX_SS (Maximum Sector Size)	512
MIN_SS (Minimum Sector Size)	512
MULTI_PARTITION (Volume partitions feature)	Disabled
USE_TRIM (Erase feature)	Disabled
FS_NOFSINFO (Force full FAT scan)	0

System Parameters:

FS_TINY (Tiny mode)	Disabled
FS_EXFAT (Support of exFAT file system)	Disabled
FS_NORTC (Timestamp feature)	Dynamic timestamp
FS_REENTRANT (Re-Entrancy)	Enabled
FS_TIMEOUT (Timeout ticks)	1000
USE_MUTEX	**Enabled ***
SYNC_t (O/S sync object)	osMutexId_t

FS_LOCK (Number of files opened simultaneously)   **5** *

7.5.2. Advanced Settings:

SDIO/SDMMC:

SDIO instance	SDIO
Use dma template	Enabled
BSP code for SD	Generic

7.5.3. Platform Settings:

Detect_SDIO	PB14

7.6. FREERTOS
Interface: CMSIS_V2
7.6.1. Config parameters:

API:

FreeRTOS API	CMSIS v2

Versions:

FreeRTOS version	10.3.1
CMSIS-RTOS version	2.00

MPU/FPU:

ENABLE_MPU	Disabled
ENABLE_FPU	Disabled

Kernel settings:

USE_PREEMPTION	Enabled
CPU_CLOCK_HZ	SystemCoreClock
TICK_RATE_HZ	1000
MAX_PRIORITIES	56
MINIMAL_STACK_SIZE	128
MAX_TASK_NAME_LEN	16
USE_16_BIT_TICKS	Disabled
IDLE_SHOULD_YIELD	Enabled
USE_MUTEXES	Enabled
USE_RECURSIVE_MUTEXES	Enabled
USE_COUNTING_SEMAPHORES	Enabled
QUEUE_REGISTRY_SIZE	8

USE_APPLICATION_TASK_TAG	Disabled
ENABLE_BACKWARD_COMPATIBILITY	Enabled
USE_PORT_OPTIMISED_TASK_SELECTION	Disabled
USE_TICKLESS_IDLE	Disabled
USE_TASK_NOTIFICATIONS	Enabled
RECORD_STACK_HIGH_ADDRESS	Disabled

Memory management settings:

Memory Allocation	Dynamic / Static
TOTAL_HEAP_SIZE	15360
Memory Management scheme	heap_4

Hook function related definitions:

USE_IDLE_HOOK	Disabled
USE_TICK_HOOK	Disabled
USE_MALLOC_FAILED_HOOK	Disabled
USE_DAEMON_TASK_STARTUP_HOOK	Disabled
CHECK_FOR_STACK_OVERFLOW	Disabled

Run time and task stats gathering related definitions:

GENERATE_RUN_TIME_STATS	Disabled
USE_TRACE_FACILITY	Enabled
USE_STATS_FORMATTING_FUNCTIONS	Disabled

Co-routine related definitions:

USE_CO_ROUTINES	Disabled
MAX_CO_ROUTINE_PRIORITIES	2

Software timer definitions:

USE_TIMERS	Enabled
TIMER_TASK_PRIORITY	2
TIMER_QUEUE_LENGTH	10
TIMER_TASK_STACK_DEPTH	256

Interrupt nesting behaviour configuration:

LIBRARY_LOWEST_INTERRUPT_PRIORITY	15
LIBRARY_MAX_SYSCALL_INTERRUPT_PRIORITY	5

Added with 10.2.1 support:

MESSAGE_BUFFER_LENGTH_TYPE	size_t
USE_POSIX_ERRNO	Disabled

CMSIS-RTOS V2 flags:

USE_OS2_THREAD_SUSPEND_RESUME	Enabled
USE_OS2_THREAD_ENUMERATE	Enabled
USE_OS2_EVENTFLAGS_FROM_ISR	Enabled
USE_OS2_THREAD_FLAGS	Enabled
USE_OS2_TIMER	Enabled
USE_OS2_MUTEX	Enabled

7.6.2. Include parameters:

Include definitions:

vTaskPrioritySet	Enabled
uxTaskPriorityGet	Enabled
vTaskDelete	Enabled
vTaskCleanUpResources	Disabled
vTaskSuspend	Enabled
vTaskDelayUntil	Enabled
vTaskDelay	Enabled
xTaskGetSchedulerState	Enabled
xTaskResumeFromISR	Enabled
xQueueGetMutexHolder	Enabled
xSemaphoreGetMutexHolder	Disabled
pcTaskGetTaskName	Disabled
uxTaskGetStackHighWaterMark	Enabled
xTaskGetCurrentTaskHandle	Enabled
eTaskGetState	Enabled
xEventGroupSetBitFromISR	Disabled
xTimerPendFunctionCall	Enabled
xTaskAbortDelay	Disabled
xTaskGetHandle	Disabled
uxTaskGetStackHighWaterMark2	Disabled

7.6.3. Advanced settings:

Newlib settings (see parameter description first):

USE_NEWLIB_REENTRANT	**Enabled ***

Project settings (see parameter description first):

Use FW pack heap file	Enabled

* User modified value

8. System Configuration

8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
RCC	PH0 - OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PH1 - OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SDIO	PA6	SDIO_CMD	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PB15	SDIO_CK	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PA8	SDIO_D1	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PA9	SDIO_D2	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PB5	SDIO_D3	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PB7	SDIO_D0	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
	PA15	SYS_JTDI	n/a	n/a	n/a	
	PB3	SYS_JTDO-SWO	n/a	n/a	n/a	
GPIO	PB14	GPIO_Input	Input mode	**Pull-up ***	n/a	SDIO_IN

8.2. DMA configuration

nothing configured in DMA service

8.3. NVIC configuration

8.3.1. NVIC

| Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	15	0
System tick timer	true	15	0
TIM1 update interrupt and TIM10 global interrupt	true	15	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
SDIO global interrupt	unused		
FPU global interrupt	unused		

8.3.2. NVIC Code generation

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Non maskable interrupt	false	true	false
Hard fault interrupt	false	true	false
Memory management fault	false	true	false
Pre-fetch fault, memory access fault	false	true	false
Undefined instruction or illegal state	false	true	false
System service call via SWI instruction	false	false	false
Debug monitor	false	true	false
Pendable request for system service	false	false	false
System tick timer	false	false	true
TIM1 update interrupt and TIM10 global interrupt	false	true	true

* User modified value

9. System Views

9.1. Category view

9.1.1. Current

10. Docs & Resources

Type	Link
Datasheet	http://www.st.com/resource/en/datasheet/DM00115249.pdf
Reference manual	http://www.st.com/resource/en/reference_manual/DM00119316.pdf
Programming manual	http://www.st.com/resource/en/programming_manual/DM00046982.pdf
Errata sheet	http://www.st.com/resource/en/errata_sheet/DM00137034.pdf
Application note	http://www.st.com/resource/en/application_note/CD00211314.pdf
Application note	http://www.st.com/resource/en/application_note/CD00249778.pdf
Application note	http://www.st.com/resource/en/application_note/CD00259245.pdf
Application note	http://www.st.com/resource/en/application_note/CD00264321.pdf
Application note	http://www.st.com/resource/en/application_note/CD00264342.pdf
Application note	http://www.st.com/resource/en/application_note/CD00264379.pdf
Application note	http://www.st.com/resource/en/application_note/DM00024853.pdf
Application note	http://www.st.com/resource/en/application_note/DM00040802.pdf
Application note	http://www.st.com/resource/en/application_note/DM00040808.pdf
Application note	http://www.st.com/resource/en/application_note/DM00042534.pdf
Application note	http://www.st.com/resource/en/application_note/DM00046011.pdf
Application note	http://www.st.com/resource/en/application_note/DM00072315.pdf
Application note	http://www.st.com/resource/en/application_note/DM00073742.pdf
Application note	http://www.st.com/resource/en/application_note/DM00073853.pdf
Application note	http://www.st.com/resource/en/application_note/DM00080497.pdf
Application note	http://www.st.com/resource/en/application_note/DM00081379.pdf
Application note	http://www.st.com/resource/en/application_note/DM00115714.pdf
Application note	http://www.st.com/resource/en/application_note/DM00129215.pdf
Application note	http://www.st.com/resource/en/application_note/DM00144612.pdf
Application note	http://www.st.com/resource/en/application_note/DM00156364.pdf
Application note	http://www.st.com/resource/en/application_note/DM00160482.pdf

Application note   http://www.st.com/resource/en/application_note/DM00213525.pdf

Application note   http://www.st.com/resource/en/application_note/DM00220769.pdf

Application note   http://www.st.com/resource/en/application_note/DM00226326.pdf

Application note   http://www.st.com/resource/en/application_note/DM00236305.pdf

Application note   http://www.st.com/resource/en/application_note/DM00257177.pdf

Application note   http://www.st.com/resource/en/application_note/DM00272912.pdf

Application note   http://www.st.com/resource/en/application_note/DM00281138.pdf

Application note   http://www.st.com/resource/en/application_note/DM00296349.pdf

Application note   http://www.st.com/resource/en/application_note/DM00315319.pdf

Application note   http://www.st.com/resource/en/application_note/DM00325582.pdf

Application note   http://www.st.com/resource/en/application_note/DM00327191.pdf

Application note   http://www.st.com/resource/en/application_note/DM00354244.pdf

Application note   http://www.st.com/resource/en/application_note/DM00380469.pdf

Application note   http://www.st.com/resource/en/application_note/DM00395696.pdf

Application note   http://www.st.com/resource/en/application_note/DM00431633.pdf

Application note   http://www.st.com/resource/en/application_note/DM00493651.pdf

Application note   http://www.st.com/resource/en/application_note/DM00536349.pdf

Application note   http://www.st.com/resource/en/application_note/DM00725181.pdf