


CARPATHIAN FORTIFICATION WORKS · DOMESTIC DIVISION

OPERRATOR'S MANUAL

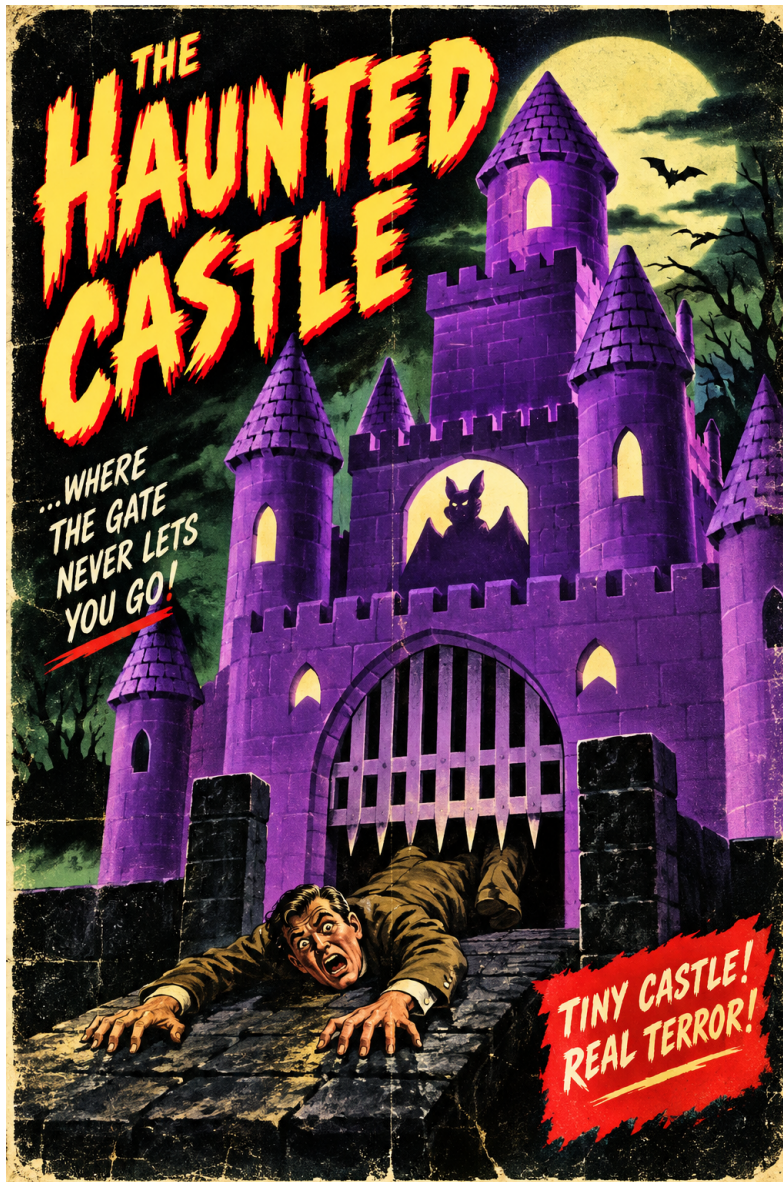

Please read these instructions carefully before admitting guests.

Keep this booklet in a cool, dark place for future reference.

MODEL VC-2 · WITH MOATED PLINTH, DRAWBRIDGE & SIX-LAMP ILLUMINATION PACKAGE

in Glorious Imperial Purple or Flamingo Pink

WELCOME TO CASTLE OWNERSHIP

Congratulations on acquiring the Mark II Vampire Castle! Your castle is designed to give you many years of faithful service scaring off intruders and “welcoming” guests. These instructions will help you get the maximum enjoyment possible.

The Mark II is the product of a long and exacting program of development. Its predecessor, the Mark I, was a half-scale pilot model, and it was withdrawn when our engineers found that no tea light could be fitted into it. Every lesson of that program went into the castle you now own. Each Mark II is printed individually, one layer at a time, over a period of approximately eleven hours, and no two are precisely alike.

Your castle will not require much of you. It asks only to be lit, to be dusted now and then, and to have its batteries changed when it grows dim. In return it will watch over your home with an attentiveness you may, at first, find unsettling. This is normal, and most owners come to find it a comfort.

We are proud to count you among the owners of the Mark II.

Yours faithfully,

The Management

Carpathian Fortification Works, Domestic Division

IN THIS BOOKLET

Important Safeguards..... 5

Getting to Know Your Castle 6

Architectural Drawings 9

The Vampire Bat: His Care and Feeding..... 10

The Portcullis: Its Care and Feeding 12

The Diffusers, and Their Replacement 13

Tea Light Placement and the Use of Sleeves 15

Replacing the Batteries 17

The Drawbridge..... 19

Filling the Moat..... 20

Repelling Intruders 22

If Your Castle Does Not Operate Properly..... 24

Specifications..... 25

Limited Warranty..... 26

Genuine Replacement Diffuser Templates..... 27

IMPORTANT SAFEGUARDS

When operating your castle, basic precautions should always be followed, including the following:

1. **Never use a real candle.** The Mark II is illuminated only by the battery-operated flame units supplied. Its stonework is a plant-derived material which begins to soften at approximately 140 °F (60 °C). A wax tea light will not frighten your castle. It will melt it.
2. **Keep out of direct sunlight** and away from radiators, sunny windowsills, and the rear shelf of a parked automobile, for the reason given above and for reasons traditional to the product line.
3. **The turret tips are sharp.** Each of the five turret roofs rises to a fine point, finer than a darning needle. Lift and carry the castle by its walls, never by its turrets.
4. **Remove all six flame units before moving the castle.** The chambers are open at the back so that the units can be reached, and a unit will leave by the same opening if the castle is tipped or jarred.
5. **Keep coin cell batteries away from children and pets.** A swallowed CR2032 battery can cause serious internal injury within hours. Store spare and spent batteries out of reach, and seek medical attention at once if one is swallowed. *This warning is entirely serious.*
6. **Do not lift the castle by the drawbridge chains.** They are ornamental and are not rated for load.
7. **The castle's bat is a tenant, not a pet.** Do not attempt to remove him from his window, and do not introduce other bats into the castle. (See Section 2.)

SAVE THESE INSTRUCTIONS

Your castle may pass to other owners in the course of its long service. Please give them this booklet along with it.

GETTING TO KNOW YOUR CASTLE

Your Mark II is a complete fortified residence in four tiers, rising from the **curtain wall** at the front, through the **keep** and the **great tower**, to the **top turret** 130 feet above the ground. Four corner turrets stand at the flanks. Every turret carries a conical roof of tiles, laid in courses that grow finer as the roof closes toward its point.

The stonework is megalithic, in blocks nine feet long and four and a half feet high. The courses are deliberately irregular, with every block a different length. A perfectly regular wall looks like bathroom tile, and the Works does not build bathrooms.

The castle has a face. Owners sometimes need this pointed out, and afterwards cannot stop seeing it. The two windows of the ground floor are its **eyes**, each with an oval pupil set low and turned slightly inward. The gate, with its portcullis, is its **mouth**. This is not an accident of architecture. It is the design, and everything else on the castle has been arranged to serve it.

The castle is inhabited. Above the face, in the great window of the second storey, lives the castle's resident vampire bat. He came with the castle, and his care is described in Section 2.

The castle is not symmetrical, and nothing on it is meant to be. The gate stands about a foot and a half east of centre, the upper works lean to the right, and the face is built around the gate rather than around the middle of the building. A castle of this type owes nothing to a mirror.

The walls glow. The stone of the Mark II admits light. When the castle is lit, the whole façade shines softly from within, like a building with people in it, and not merely a dark wall with holes. This is a property of the stone and is correct. The four **corner turrets are unlit** by design (see Section 9).

The back of the castle is open. It is the service side. Through it you place and retrieve the flame units, reach the diffusers, and change batteries. It is not a show side and should face the wall.

THE MOATED PLINTH

Your castle stands in a plinth of rough-dug ground, sunk into a seat cut to its exact footprint. The seat is exactly as deep as the castle's own floor, so the floor inside the gate is level with the ground outside it and no guest need trip on the threshold. A **moat** wraps the front and both flanks. It is a broad pond at the gate, about twenty feet across, and narrows to a channel down the sides before tapering away toward the rear.

Before the gate lies a **paved forecourt**, flanked by two **gate posts** of dressed stone. From these the **drawbridge** crosses the moat to a paved **causeway**, which climbs to meet it from the front edge of the plinth. A **signboard** stands at the left of the approach on two pegs, and lifts off for repainting.

A note on finish. The Mark II is offered in two standard finishes: **Imperial Purple on an Obsidian plinth** and **Flamingo Pink on a Charcoal Grey plinth**. The illustrations in this booklet show the Imperial Purple. Other combinations may be possible upon consultation with the Management of the Works. Each finish is equally effective against intruders.



Fig. 1: The Mark II seated in its moated plinth, with forecourt, gate posts and drawbridge. Shown in Imperial Purple on an Obsidian plinth.

CONTENTS OF THE PACKAGE


ITEM	QTY
Castle, four-tier	1
Vampire bat, resident (not removable)	1
Moated plinth	1
Drawbridge, timber pattern, factory-installed	1
Drawbridge chains, ornamental	2
Signboard, on two pegs	1
Flame units, battery-operated, CR2032	6
Flame unit sleeves, fitted to the ground-floor units	3
Paper diffusers, factory-installed	2
This manual	1

ORIENTATION

Position the castle with its face toward the room and its open back toward the wall. It reads best at eye level, from across a room, in the evening, with the room lights low.

NOTE The castle simply rests in its seat and can be lifted straight out, for instance to give the plinth a thorough dusting. Remove the flame units first.

ARCHITECTURAL DRAWINGS

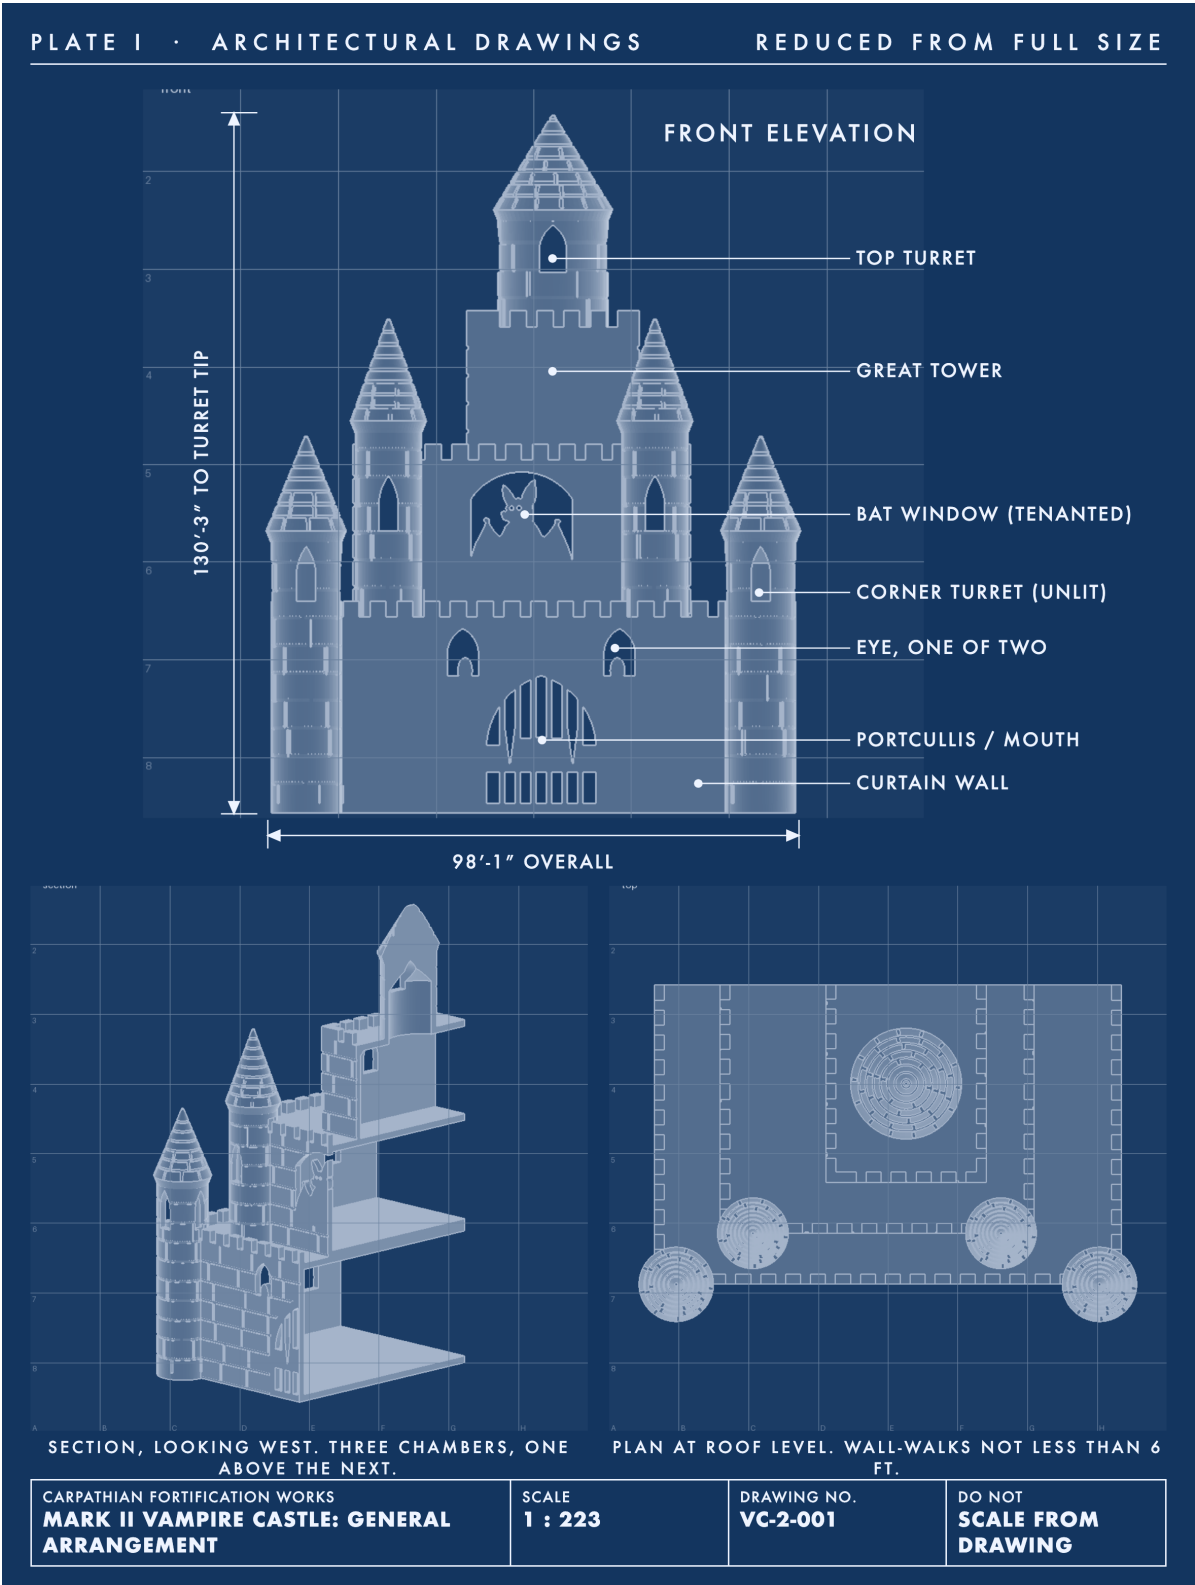

THE VAMPIRE BAT: HIS CARE AND FEEDING

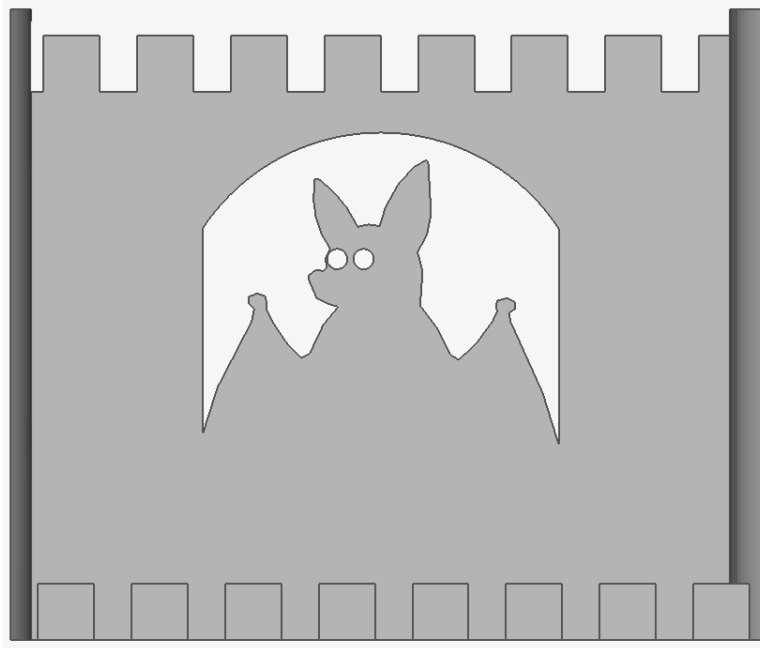


Fig. 2: Your bat at his roost in the great window of the second storey. Drawn from life.

Your castle comes with one resident vampire bat. He took up residence in the great window of the second storey while the castle was still at the Works, and has declined every invitation to leave since. He is included in the purchase price, although it should be understood that he does not regard himself as property.

HABITS

Like all bats, he is nocturnal. By day he roosts in his window with his wings spread and his ears up, which is the posture in which you will almost always find him. He is at his most alert after dark, when the lights of the second storey come up behind him. Owners often remark that he seems more awake in the evening. He is.

He favours the second-storey window because the two flame units behind it keep it pleasantly warm. He is a creature of fixed habits and may not appear to move for months at a time. This is normal for a roosting bat, and he should not be woken to check.

FEEDING

The vampire bat's diet is, as the name suggests, specialised. Your bat is entirely self-provisioning, and the Works supplies no food for him. Do not attempt to feed him by hand. Do not offer him jelly beans from the moat: he does not eat them, and they are required for defense (Section 9). His arrangements with guests who cross the drawbridge are his own affair, and the Works considers it best not to enquire into them.

GROOMING

Bats groom themselves fastidiously, and he needs little help. From time to time, dust his window with a soft, dry artist's brush, working from the inside of the window outward. Never use a cloth: he objects to lint. His eyes are very small, about a millimetre across, and sensitive. Do not poke them.

SIGNS OF GOOD HEALTH

Every bat is inspected for the following before his castle leaves the Works:

- Both ears fully erect.
- Both eyes open.
- The muzzle clearly visible.
- Wings spread evenly to the edges of his window.

If he appears dim, he is not unwell: the batteries of the second storey need replacing (Section 6). If the light behind him looks patchy or spotted, the paper screen behind his window has come loose. Replace it during the day, while he is asleep, working quietly (Section 4).

HANDLING

Do not attempt to remove him from his window. He will not come out, and a bat who does not wish to be handled will make his feelings known.

COMPANY

One bat per castle. Do not introduce a second bat. He is territorial, and the window was sized for one.

A NOTE ON NAMES He has no name. Owners are welcome to give him one, and most do. Bats appreciate alliteration, so names like “Biter”, “Bathsheba”, or “Bob” work well.

THE PORTCULLIS: ITS CARE AND FEEDING

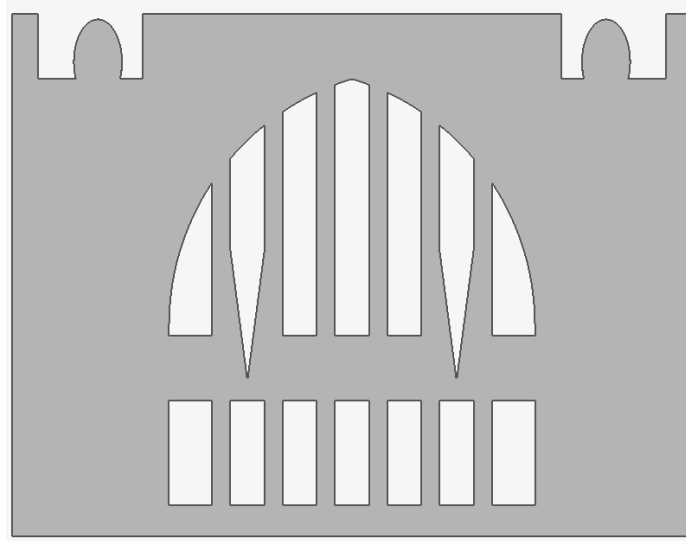


Fig. 3: The portcullis in its lowered position. Note the canines, second and sixth.

The gate of your castle is closed by a portcullis of wrought iron. It is forged at the finest gauge our foundry can produce: bars three extrusions wide, and thin enough that light passes cleanly between them, so that they read as iron and not as a perforated panel.

The portcullis is fitted with **seven upper and seven lower teeth**, the second and sixth upper teeth being drawn down into **canines**. Owners occasionally report that the gate looks as though it is about to say something. It is not. It is about to bite something, which is its purpose.

Operation. The portcullis of the Mark II is permanently lowered, for your security. No attempt should be made to raise it.

Feeding. The portcullis is fed by intruders, in the ordinary way (Section 9). It should not be fed by hand, and fingers should not be inserted between the bars.

Care. Dust with a soft, dry brush, drawing the brush along the bars rather than across them. Never use a cloth: the fibres catch on the teeth and are very difficult to recover.

THE DIFFUSERS, AND THEIR REPLACEMENT

Each lit storey of your castle is fitted at the Works with a **paper diffuser**: a sheet of ordinary white printer paper, glued to the inside of the wall behind its openings. The paper takes the light of the flame units and spreads it evenly across every opening, so that the eyes and mouth read as one face and not as three hot spots, and so that the bat is seen against an even field.

DIFFUSER	LOCATED BEHIND	CUT SIZE
First floor	Both eyes and the mouth, in a single sheet	111.4 × 58.0 mm
Second floor	The bat's window	64.5 × 50.0 mm

With ordinary care the diffusers last indefinitely. Should one become torn, stained or detached, it is easily replaced.

YOU WILL NEED

- The template in Appendix A
- Plain white printer paper
- Scissors, and a ruler
- A glue stick of any kind: whatever is in the crafts drawer is correct

REPLACEMENT PROCEDURE

1. Remove all flame units from the storey concerned (Section 5). If it is the second storey, work during the day, while the bat is asleep.
2. **Print Appendix A at 100%, with no page scaling.** Measure the 50 mm bar at the foot of the page. If it measures anything else, the page was scaled; do not proceed.
3. Cut along the **solid** line. The template is deliberately 4 mm oversize all round, because trimming paper is easy and adding it is not.
4. Peel away the remains of the old sheet, and rub off any old glue.
5. Apply glue stick to the inside face of the wall around the openings, not to the paper.
6. Reaching through the open back, press the sheet flat against the wall with **TOP** uppermost, and smooth it outward from the centre.
7. Trim back toward the **dashed** line only where the sheet fouls a corner. The dotted grey outlines show where the openings fall, for alignment only.

TWO CAUTIONS

CAUTION: THE SHEET HAS A RIGHT WAY ROUND The face of your castle is built around its gate, which is not at the middle of the wall (Section 1). The first-floor sheet is therefore **not symmetrical**, and is marked TOP, LEFT and RIGHT *as seen from the back*. Installed reversed, it overhangs one side and falls short of the other.

CAUTION: RUN THE SHEET FULL WIDTH Because the walls of the Mark II admit light, anything behind them shows through as a shadow, and **the edge of a diffuser is visible across the room** as a dark line through the lit masonry. The templates run the full width of the wall so that their edges fall into the corners, where the eye cannot find them. Do not cut a diffuser narrower to save paper.

OWNER'S TIP

REFLECTORS A plain sheet of paper laid on each chamber floor, or glued to its rear wall, reflects additional light forward through the façade. This practice is approved.

TEA LIGHT PLACEMENT AND THE USE OF SLEEVES

Your castle is illuminated by **six battery-operated flame units**, arranged over three storeys as shown in Fig. 4. Each unit is a small cylinder with an opaque base, which houses the battery and switch, and a flickering flame at its top. At the castle's scale it is a little under 26 feet across, which makes it, strictly speaking, the largest thing in the building.

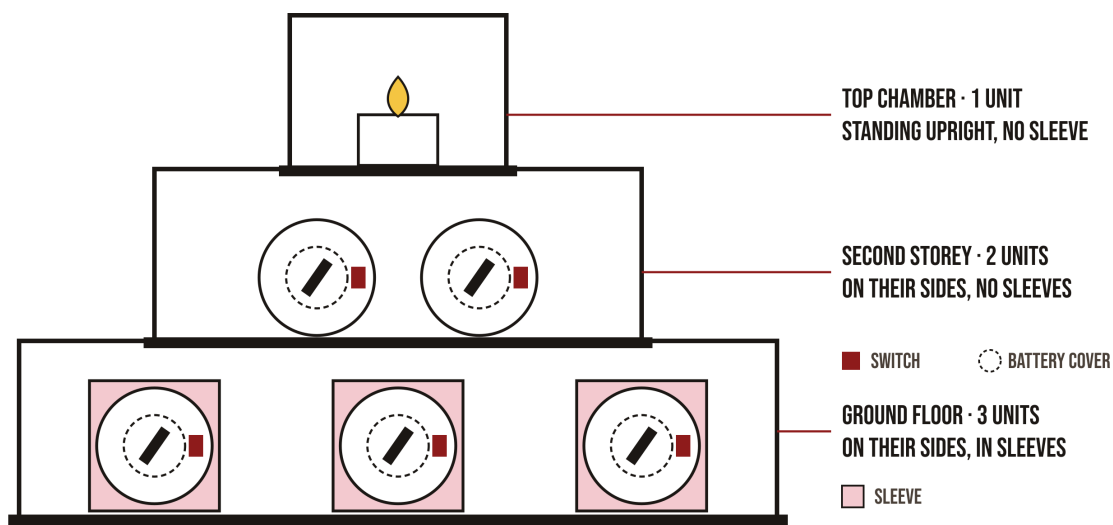


Fig. 4: The castle seen from the back, showing the six flame units in their stations.

PLACING THE UNITS

1. Switch each unit on at the switch on its underside.
2. **Ground floor:** lay each of the three sleeved units on a flat side of its sleeve, **flame toward the façade**, so that the switch and battery cover face you through the open back. Space them evenly across the chamber, as in Fig. 4.
3. **Second storey:** lay the two unsleeved units on their sides in the same way, flame toward the façade. Having no sleeves, they will roll if given the chance: settle each one until it lies still before letting go.
4. **Top chamber:** stand the single unit **upright**. Its flame is meant to be seen directly through the turret window.
5. To retire for the evening, reach in and switch each unit off, or simply leave them and change batteries more often.

THE SLEEVES

A cylinder laid on its side will roll, and a flame unit that rolls will aim itself wherever it pleases. The three ground-floor units are therefore each fitted with a **sleeve**: a square collar, open at both ends, glued once around the unit's base and left there. The sleeve gives the unit four flat sides to rest on, so it stays where it is put. It covers only the opaque base and never the flame.

The second storey takes no sleeves. Its chamber has too little headroom for a sleeved unit, and its two units are supplied bare. Do not fit sleeves to them: a sleeved unit will not go in.

The sleeves need not be removed, even for battery replacement: the switch and battery cover remain exposed at the open end. Should a sleeve ever come away, a wipe of glue stick around the unit's base will restore it.

NOTE Lying on their sides, the units throw their light forward at the walls rather than up at the ceilings. The Works found this so superior that it is now the standard arrangement.

REPLACING THE BATTERIES

Each flame unit is powered by a single **CR2032** lithium coin cell, obtainable wherever watch and camera batteries are sold. When a storey grows dim or a flame falters, it is time to replace the battery in that storey's units. Owners of the Mark II generally find it convenient to replace all six at once.

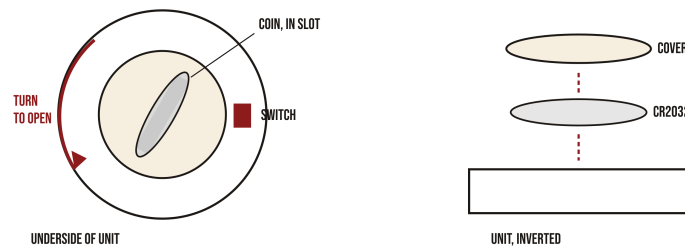


Fig. 5: The battery cover is opened with a coin. A nickel is ideal.

PROCEDURE

1. Reach in through the open back and withdraw the unit. Sleeved units come out sleeve and all.
2. Turn the unit over. The **circular cover** on its underside is the battery cover.
3. Set the edge of a coin in the slot of the cover and turn it until the cover releases. A United States nickel fits best; any coin will serve.
4. Lift off the cover and tip out the spent battery. **Note which face of the battery was showing**; the new one goes in the same way up.
5. Fit the fresh CR2032, replace the cover, and turn it back with the coin until it is snug.
6. Test the switch, then return the unit to its station (Section 5).

WARNING Keep new and used coin cells out of the reach of children and pets. If a battery may have been swallowed, seek medical attention immediately. Dispose of spent cells at a battery recycling point, not in household waste.

SILVER COINS

Owners sometimes ask whether a silver coin may be used. Silver is entirely suitable for the purpose. The Works takes no position on its other traditional applications.

SEASONAL STORAGE

If the castle is to be stored for the season, remove the batteries from all six units, and wrap the castle loosely in tissue, turrets first. Store it somewhere dark. It will prefer this, and so will the bat.

THE DRAWBRIDGE

The drawbridge of the Mark II is built in the traditional manner: timber planks laid across the span, so that the seams run crosswise to the direction of travel, carried on a pin hinge at the forecourt's edge. Lowered, its deck meets the forecourt exactly level, with no step at the gate.

Two **chains** run from the gate posts to the outer corners of the deck. On the Mark II these are **ornamental**. They illustrate the mechanism for the benefit of guests, but do no work. The drawbridge is **secured in the open position at the Works**, with a light application of adhesive, as a gesture of hospitality (see Section 9).

CAUTION Do not attempt to raise the drawbridge, lift it by its chains, or pry it from its landing. Raising the drawbridge is a factory service procedure. The adhesive is stronger than the timber, and the timber will be the one to give way.

Care. Dust along the planks with a soft brush. If a chain is dislodged, rehang it from its gate post with the links hanging free. A chain need not be taut to look purposeful.

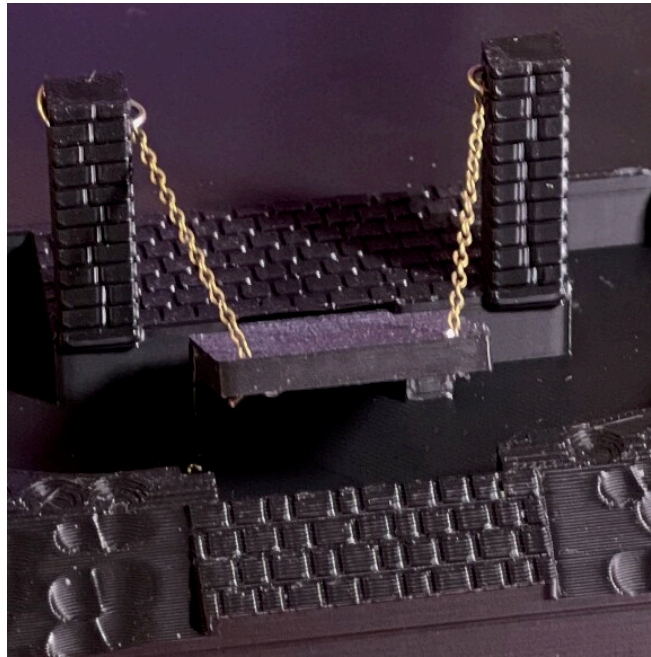


Fig. 6: The drawbridge in its standard open position, between the gate posts, with ornamental chains.

FILLING THE MOAT

The moat of the Mark II is supplied empty, so that the owner may choose its contents. Two fillings are approved by the Works.

FILLING	CHARACTER	RECOMMENDED FOR
Jelly Belly® jelly beans	Cheerful and colourful, and aromatic in warm weather. Of considerable defensive value (Section 9). Gourmet beans are specified: lesser beans lack the density required to deter.	Households expecting intruders. The forward moat only (see Note).
Small glass beads	In dark blue, green or black, glass beads read convincingly as deep, still water, and they catch the light of the castle at night. Permanent, washable, and not attractive to intruders or to mice.	Households preferring a quiet life. The entire moat, flanks included.

NOTE The forward moat is about twenty feet across, but the channels down the flanks are under six feet wide, and a jelly bean may not lie flat in them. Owners using jelly beans are advised to fill the flanks with glass beads, or to accept beans standing on end, which is considered an aggressive posture.

FILLING PROCEDURE

1. Lift the castle out of its seat, having first removed the flame units.
2. Pour the filling into the broad forward moat before the gate, a little at a time, and spread it with a finger toward the flanks.
3. Keep the filling clear of the drawbridge landing and of the castle's seat, so that the castle sits flat when returned.
4. Return the castle to its seat.

REPLENISHMENT A jelly bean moat should be refreshed each season, and more often if the level is observed to fall. See *If Your Castle Does Not Operate Properly*.

REPELLING INTRUDERS

The Mark II provides three independent lines of defense, which may be employed singly or in combination. No special training is required. The bat does not participate, and should not be asked to.

9.1 THE DRAWBRIDGE

In a castle of the ordinary type, the first line of defense is to raise the drawbridge. The Mark II takes a more sophisticated view. Its drawbridge is fixed open, and its chains hang slack with apparent negligence. An intruder who finds the way in unguarded will not trouble to look for another. He crosses the moat directly, into a forecourt enclosed on three sides, where he stands in full view of the portcullis, both eyes, and every crenel on the curtain wall.

The Works regards this as the finest drawbridge defense yet devised, and notes that it has never once jammed.

9.2 CARBOHYDRATE DETERRENCE

Jelly bean moats only. An intruder confronted with a moat of gourmet jelly beans will, in the great majority of cases, stop to eat them. Consumption proceeds rapidly and without discrimination, and the onset of carbohydrate stupor follows within the hour. The intruder may then be removed at leisure, although the bat, if hungry, may remove the intruder for you.

FLAVOUR	LURE VALUE
Buttered Popcorn	Very high
Very Cherry	High
Juicy Pear	Moderate
Licorice	Selective: attracts only the most determined

Owners are reminded that the moat is not a food-contact surface, and that its contents are defensive stores. A household member found asleep beside the moat has not been defending it.

9.3 DEFENSE FROM THE CRENELLATIONS

Every roof of the Mark II is enclosed by a crenellated parapet, and behind every parapet runs a wall-walk **not less than six feet wide**, as required by the Works' own standard. The raised portions of the parapet are the **merlons**. Each is cut from a single stone and will stop anything short of a trebuchet. The gaps between them are the **crenels**.

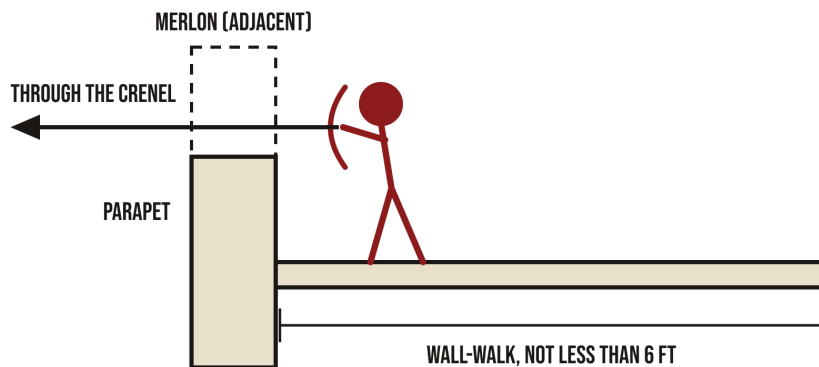


Fig. 7: Section through the parapet. The defender takes cover behind the merlon and fires through the adjacent crenel.

1. Take position on the wall-walk, behind a merlon.
2. Rise, and discharge through the adjacent crenel.
3. Return at once to cover behind the merlon.

The longbow and the crossbow are the approved arms.

The four corner turrets are **deliberately left unlit**, so that a sentry posted in one is not silhouetted against his own window. Owners who report that the corner turrets are dark may be assured that this is intended, and that the turrets are occupied.

DO NOT USE BOILING OIL The stonework of the Mark II begins to soften at approximately 140 °F, well below the temperature at which oil becomes persuasive. A castle defended with boiling oil will be found afterwards to have drooped.

IF YOUR CASTLE DOES NOT OPERATE PROPERLY

Before calling for service, please consult the following table. Most conditions can be corrected by the owner in a few minutes.

CONDITION	PROBABLE CAUSE	REMEDY
Castle does not light	Flame units switched off, or batteries exhausted	Check the switches; replace the batteries (Section 6).
One storey noticeably dimmer than the others	Batteries in that storey exhausted	Replace the batteries in that storey's units.
Face appears as three bright spots rather than one face	First-floor diffuser missing or detached	Replace the diffuser (Section 4).
A dark line or edge visible through the lit wall	Diffuser cut short, or installed reversed	Fit a full-width diffuser, TOP uppermost, LEFT and RIGHT as seen from the back.
A unit aimed at the ceiling, or rolled into a corner	Unit placed upright, sleeve missing, or a second-storey unit not settled	Lay the unit on its side, flame to the façade, and let it settle (Section 5).
A flame unit found on the shelf behind the castle	Castle moved or jarred with units installed	Return the unit to its station. Remove all units before moving the castle.
Four corner turrets are dark	Normal operation	None. The turrets are unlit by design and are occupied (Section 9).
Castle appears to be watching you	Normal operation	None. The pupils are set to converge slightly inward, which gives the castle the appearance of looking at something close to it. This is usually you.
Bat appears dim	Second-storey batteries low	Replace them (Section 6). He is not unwell.
Bat has not moved in several weeks	Normal operation. He is roosting.	None. Do not wake him.
Pricked finger	Castle lifted by a turret	Lift the castle by its walls (Important Safeguards, item 3).
Moat level falling	Unauthorised consumption of jelly beans	Replenish. Examine household members and guests for signs of carbohydrate stupor.
Castle sits unevenly in its seat	Moat filling spilled into the seat	Lift out the castle, clear the seat, return the castle.
Drawbridge will not raise	Normal operation	None. The drawbridge is fixed open (Section 7).

SPECIFICATIONS

ITEM	MARK II VAMPIRE CASTLE, MODEL VC-2
Height, to top turret tip	130 ft 3 in (178 mm)
Width across corner turrets	98 ft 1 in (134 mm)
Depth	67 ft 4 in (92 mm)
Plinth	115 ft 7 in × 116 ft 4 in (158 × 159 mm)
Finishes	Imperial Purple on an Obsidian plinth; or Flamingo Pink on a Charcoal Grey plinth. Others by consultation with the Management.
Scale	1 : 223 (1 ft = 1.37 mm)
Tiers	Four: curtain wall, keep, great tower, top turret
Turrets	Five, with tiled conical roofs; four unlit by design
Masonry	Megalithic, blocks 9 ft × 4 ft 6 in, irregular bond
Wall-walks	Not less than 6 ft behind every parapet
Moat	About 20 ft across at the gate, not less than 4 ft deep
Portcullis	Wrought iron pattern; 7 upper and 7 lower teeth, 2 canines
Resident fauna	One vampire bat
Illumination	Six flame units, one CR2032 lithium coin cell each
Sleeves	Three, ground floor only
Diffusers	Two, white paper, glue-stick mounted
Construction	Polylactic acid (a plant-derived stone substitute), printed in layers of 0.2 mm; approx. eleven hours per castle

LIMITED WARRANTY

Carpathian Fortification Works warrants the Mark II Vampire Castle against defects in materials and workmanship for a period of **one hundred years**, or the lifetime of the original owner, whichever is the longer.

This warranty does not cover damage resulting from: exposure to direct sunlight; the use of wax or open-flame candles; boiling oil; garlic; running water (the moat excepted); holy water; stakes, wooden or otherwise; the introduction of a second bat; attempts to raise the drawbridge; or lifting the castle by its turrets.

The Works accepts no liability for intruders who cross the drawbridge, for jelly beans consumed from the moat by persons other than intruders, for the bat's arrangements with guests, or for the castle's opinion of your guests generally.

The dark corner turrets, the asymmetry of the upper works, the inward gaze of the eyes, the translucency of the stone, and the bat's reluctance to move are features of the design and are not defects under this warranty.

This warranty is transferable to subsequent owners, provided this booklet accompanies the castle. The bat transfers with the castle and is not separately warranted.

REPLACEMENT PARTS Genuine replacement parts, including flame units, sleeves, diffusers, drawbridge chains and signboards, may be obtained from the factory upon request. Please quote the model number, VC-2, and the finish of your castle when ordering, so that parts are supplied to match. Replacement bats are not available (see Section 2).

GENUINE REPLACEMENT DIFFUSER TEMPLATES

The following page is the Works' official diffuser template, reproduced at full size. It may be printed as many times as required.

PRINT AT 100% Select “Actual size” or “100%” in your printer's dialogue, and switch off any “Fit to page” or “Shrink to fit” option. Before cutting, measure the 50 mm bar at the foot of the template page. If it measures anything else, every template on the page is the wrong size.

LINE	MEANING
Solid	Cut here. 4 mm oversize all round, deliberately.
Dashed	The largest sheet that still lands on wall. Trim back to it only where the sheet fouls a corner.
Dotted grey	The openings, for alignment only. Do not cut.

NOTE FOR OWNERS OF THE MARK II Use the **upper pair** of templates, marked *castle (scale 1x)*. The lower pair, marked *scale 0.5x*, are for the half-scale Junior model and will not fit your castle.


Castle paper diffusers — cutting templates

PRINT AT 100%, NO PAGE SCALING. Check the 50 mm bar at the bottom before cutting anything.

SOLID = cut this. It is deliberately 4 mm oversize all round: trimming paper is easy, adding it is not.


DASHED = the largest that still lands on wall. Trim back to it only where the sheet fouls. DOTTED grey = the openings, for alignment only.

castle (scale 1x)

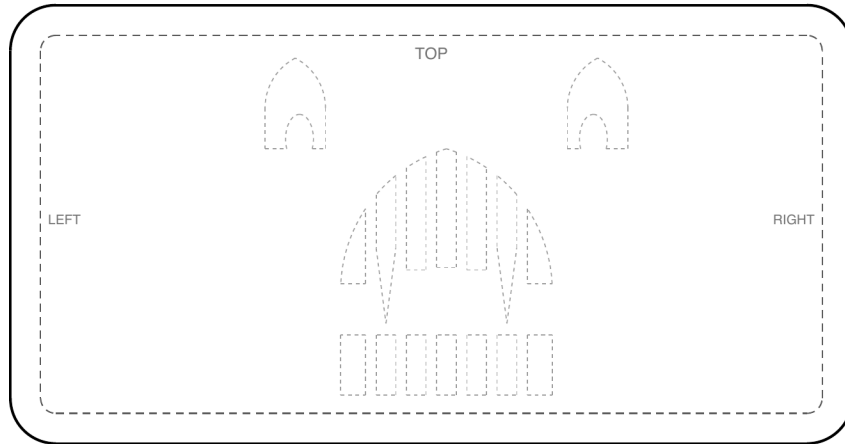

first floor — cut 111.4 x 58.0 mm · NOT symmetric (4.0 mm)


behind the face — mouth and both eyes

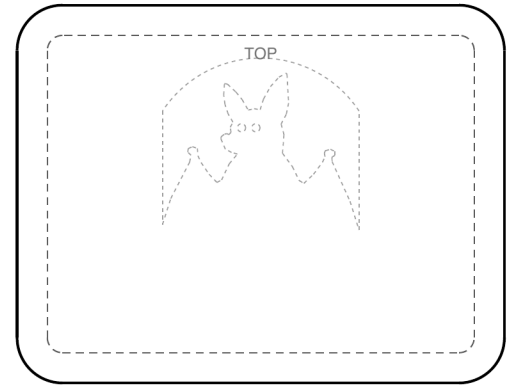

second floor — cut 64.5 x 50.0 mm

behind the bat window

mini_castle (scale 0.5x)

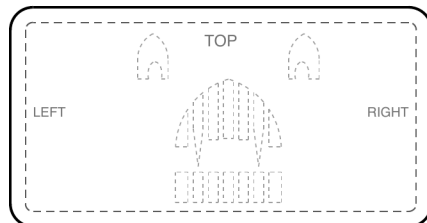

first floor — cut 55.7 x 29.0 mm · NOT symmetric (4.0 mm)

behind the face — mouth and both eyes



second floor — cut 32.2 x 25.0 mm

behind the bat window



This bar is 50 mm. If it measures anything else, the page was scaled and every template above is the wrong size.