Seasonal prediction of end-of-dry season watershed behavior in a highly interconnected alluvial watershed, northern California

Claire Kouba¹ and Thomas Harter¹

¹Department of Land, Air and Water Resources, University of California, Davis, One Shields Avenue, Davis, CA, United States

Correspondence: Claire Kouba (cmkouba@ucdavis.edu)

Abstract. In undammed watersheds in Mediterranean climates, the timing and abruptness of the transition from the dry season to the wet season have major implications for aquatic ecosystems. Of particular concern in many coastal areas is whether this transition can provide sufficient flows at the right time to allow passage for spawning anadromous fish, which is determined by dry season baseflow rates and the timing of the onset of the rainy season. In (semi-) ephemeral watershed systems, these functional flows also dictate the timing of full reconnection of the stream system. In this study, we propose methods to predict, approximately five months in advance, two key hydrologic metrics in the undammed rural Scott River watershed (HUC8 18010208) in northern California. Both metrics are intended to quantify the transition from the dry to the wet season, to characterize the severity of a dry year and support seasonal adaptive management. The first metric is the minimum 30-day dry season baseflow volume, V_{min} , which occurs at the end of the dry season (September-October) in this Mediterranean climate. The second metric is the cumulative precipitation, starting Sept. 1st, necessary to bring the watershed to a "full" or "spilling" condition (i.e. initiate the onset of wet season storm- or baseflows) after the end of the dry season, referred to here as P_{spill} . As potential predictors of these two values, we assess maximum snowpack, cumulative precipitation, the timing of the snowpack and precipitation, spring groundwater levels, spring river flows, reference ET, and a subset of these metrics from the previous water year. We find that, though many of these predictors are correlated with the two metrics of interest, of the predictors considered here, the best prediction for both metrics is a linear combination of the maximum snowpack water content and total October-April precipitation. These two linear models could reproduce historic values of V_{min} and P_{spill} with an average model error (RMSE) of 1.4 Mm³ / 30 days (19.4 cfs) and 20.7 mm (0.8 inches), respectively. Although these predictive indices could be used by governance entities to support local water management, careful consideration of baseline conditions used as a basis for prediction is necessary.

20 . The authors retain copyright for this publication.

1 Introduction

In regions that experience periodic drought, such as the western United States, indices summarizing hydroclimate or surface water supply conditions are often critical decision-support tools for water managers (e.g., Garen, 1993). An index can be forward-looking, such as those that forecast near-term seasonal water supplies (e.g., Null and Viers, 2013; Verley, 2020), or backward-looking, such as ones that evaluate drought severity (e.g., Palmer, 1965; Guttman, 1998; McKee et al., 1993; Wilhite and Glantz, 1985; Wilhite et al., 2000). In many western states, forward-looking seasonal indices are used extensively by water agencies to inform adaptive management decisions (e.g. in Colorado, Idaho and California) (2023; 2023; Null and Viers, 2013). In California the principal examples are the Sacramento Valley Index (SVI) and San Joaquin Index (SJI), which are seasonal forecasts used to determine water allocations through the State Water Project (Null and Viers, 2013; 2022). The state has more recently published a retroactive categorical water year type (WYT) dataset for sub-county level regions throughout California, based on a weighted combination of the cumulative precipitation of the two preceding water years (effectively, a partial one-year-holdover provision), and assigning categorical types using percentiles within a 30-year ranking window (DWR 2021).

These summary indices provide broad characterizations of a water year type. More detailed characteristics, including the hydrologic effects of water year type, climate change, human water use, and other factors, can be identified using the functional flows approach (e.g., Poff et al., 1997; Bunn and Arthington, 2002; Poff et al., 2010; Wheeler et al., 2018). The flows are "functional" because they serve an ecological purpose, such as wet season flood flows, needed to disperse cottonwood seeds (Mahoney and Rood, 1998) and fall pulse flows, needed to provide passage for spawning fall-run anadromous fish (Moyle, 2002). A California-specific functional flows framework has been developed to assess the degree of hydrologic alteration between current and unimpaired conditions (Yarnell et al., 2020; Patterson et al., 2020).

In this study, to test the utility of locally-tailored predictive methods for hydrologic indices, we focus on a single basin, the Scott River watershed in northern California (which in the USGS National Hydrography Dataset is denoted with the 8-digit Hydrologic Unit Code [HUC8] 18010208). We review the hydrologic indices and methods currently used in decision-making, such as agricultural cropping choices or regulatory water use restrictions, and propose two additional decision-support metrics, both designed as quantitative forecasts. We additionally explore the significance of each metric in the context of functional flows.

The first metric is V_{min} , the minimum 30-day dry season baseflow volume in a given water year, which typically occurs in September or October. The second is a prediction of the cumulative rainfall needed to wet up the watershed after the dry season such that subsequent rainfall results in clear runoff, or storm surge, events. This cumulative precipitation depth is referred to as P_{spill} . Both of these metrics have significance for environmental flows and could support near-term (seasonal) adaptive management, similar to the SVI and SJI in California's Central Valley. Specifically, the magnitude of the minimum baseflow rate sets the spatial extent of the aquatic ecosystem during the dry season and influences rearing conditions for oversummering juvenile salmonids (Gorman, 2016). P_{spill} , meanwhile, is intuitively related to the timing of flows necessary for fall-run salmon passage: under equivalent fall rainfall, a greater amount of rain needed to generate stormflow would be

associated with a prolonged dry season. This type of prolonged dry season has delayed salmon access to spawning habitat in recent years (CDFW 2015). After defining and developing seasonal predictions for V_{min} and P_{spill} , we then evaluate trends over time and consider the effects that climate change and changing water use patterns may have on the metrics considered in this study, and the decisions they support.

2 Methods

In this study we used linear regression modeling to predict watershed behavior at the end of the dry season (the response) using data available the previous spring (the predictors). The Scott River watershed (Figure 1) has a snow-influenced Mediterranean climate, giving the river's annual hydrograph a characteristic high-flow season during the rainy winters, a gradual flow recession in the spring-summer as the snowpack melts, and a low-flow dry season after the snowpack is depleted (e.g., Figure 2). Water supplies for agricultural and domestic use (estimated at 23 and 1.3 thousand acre-feet, respectively) (DWR 2004) are relatively reliable in the Scott River system (although some reports of dry wells occur in dry years) (Siskiyou County 2021), and a key management challenge is persistent low environmental flows during the dry season baseflow period. In dry years, the lowest annual flowrates can overlap with the spawning periods for fall-run anadromous fish, potentially restricting fish passage and imperiling the long-term viability of the Scott River fishery (Siskiyou County 2021). Post-1970s minimum dry season baseflows have been lower than pre-1977, and very low minima (< 10 cfs or 0.7 Mm³ / 30 days) have been more frequent in the past two decades (see Results, Section 3.2.1 below), making the management of these flows more urgent.

This study focuses on the transition between the dry season and the wet season, which at times can straddle the conventional water year boundary of October 1st, and cumulative precipitation is used both as a predictor and as a response variable (P_{spill}). When it is a predictor, a traditional October 1st start date is used and it is summed as the cumulative precipitation of October-April, to facilitate an end-of-April prediction of fall conditions. When it is the response variable, to capture uncommon September precipitation, cumulative precipitation is counted starting on September 1st of the preceding water year. This September 1st start date is also used in some graphs of climate and flow data (e.g. in Section 3.2 below), to establish and visualize baseline dry season conditions. Additionally, all flows in this study are observed or simulated at the U.S. Geological Survey (USGS) Fort Jones streamflow gauge (station 11519500), a key monitoring location downstream of nearly all water use and cultivated land in the HUC8 watershed (Figure 1), with an observation record covering water years 1942-2021.

80 2.1 Scott River watershed precipitation-runoff behavior

To establish the context and meaning of the two proposed predictive indices V_{min} and P_{spill} , a brief description of the behavior of the watershed is necessary. In an undammed catchment, the runoff response to one (or a series of) precipitation event(s) is dependent on multiple factors, including antecedent soil moisture conditions, the intensity and magnitude of the precipitation, and the volume of water in aquifer storage (Tarboton, 2003). At a hillslope scale, in areas where soil directly overlays (relatively) impermeable bedrock and aquifer storage is not appreciably present, a threshold runoff response to individual storm events has been observed: after a certain quantity of rainfall, subsurface flow increases dramatically (Tromp-Van Meerveld and

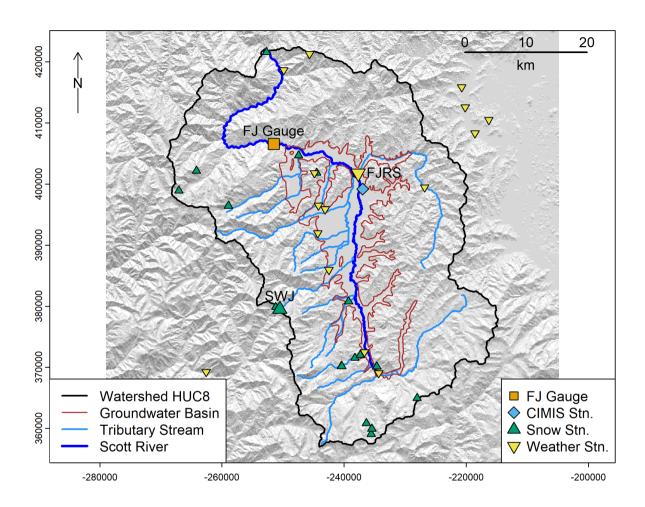


Figure 1. Scott River HUC8 watershed and groundwater basin boundaries, stream network, and key monitoring locations: the Fort Jones stream gauge (USGS ID 11519500), weather stations, snow observation locations, and a CIMIS station (used to estimate reference evapotranspiration). Selected locations are highlighted with an enlarged symbol and an abbreviated label.

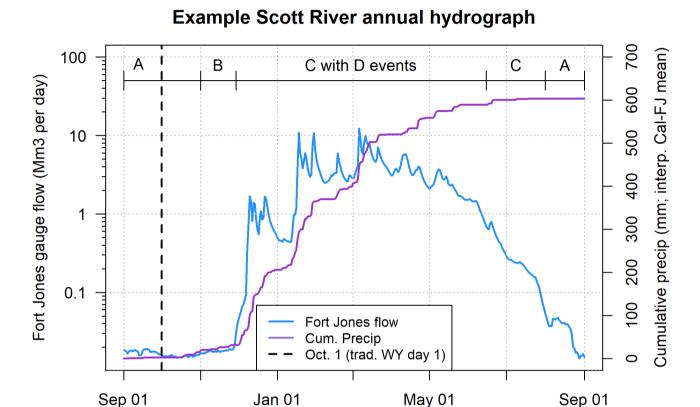


Figure 2. Illustration of four categories of Scott River watershed behavior. The hydrograph in the highlighted periods demonstrates the following watershed behavior: A, dry season baseflow – watershed draining from a medium-to-low storage level; B, moderate flow increase – muted flow surge response to new precipitation; C, winter baseflow and early spring recession – watershed draining from a high storage level; and D, winter stormflow – rapid flow surge response to new precipitation (storm spikes).

Date in modified water year 2016 (starting Sep. 1)

McDonnell, 2006). The proposed mechanism is the filling and connecting of various distributed storage volumes, such as soil pores and microtopographic relief in the bedrock surface (Tromp-Van Meerveld and McDonnell, 2006). Recently this concept has been extended to the watershed or basin scale: relative to the beginning of a storm event, a much higher flow response is possible only when a critical number of storage volumes throughout a basin fill to a threshold level and become connected (McDonnell et al., 2021).

In this study we expand this concept of a basin-scale, threshold-based runoff response to the temporal scale of a season, rather than a single storm event. In this framework the condition of the Scott River watershed, as observed at a regional scale using the Fort Jones stream gauge, can be classified in four main categories. These categories are distinguished by current precipitation conditions and the volumetric proportion of the hydrologically connected reservoirs that are full of water (Table 1).

The term "hydrologically connected reservoirs" is defined here functionally as storage that is sufficiently connected to the stream system as to influence stream reactions to storm inflows. In this study area only soil water and groundwater meet this definition. More generally, water in the Scott River watershed is stored in five primary reservoirs (Harter and Hines, 2008):

- snowpack

100

115

- fractures in impermeable bedrock
- soil moisture/subflow
- the alluvial groundwater aquifer
- streams and surface water bodies

Accumulating snowpack is present only in the mountainous areas of the upper watershed, while the alluvial aquifer is present only within the bounds of the groundwater basin underlying the flat valley floor; water stored in fractured rock emerges as springs in the upper watershed (Mack, 1958) (Figure 1). In conditions with sufficiently high soil water content or groundwater elevations, soil moisture/subflow and groundwater become hydrologically connected to the surface water system. Conversely, water in the snowpack and fractured rock reservoirs is not hydrologically connected to major surface water bodies until it melts or descends lower into the watershed, effectively passing through the aquifer or soil to reach the stream. For convenience the soil moisture/subflow and aquifer reservoirs will be referred to as "connected" storage.

2.1.1 Rainfall-runoff response, functional flows and Q_{spill}

At the end of the dry season, the watershed is in a "draining from low storage" condition, which is reflected in a slowly declining or flat hydrograph, with a flowrate that has decreased for several months (Figure 2, first period A). As the dry season ends, the watershed begins receiving rain, and enters a condition of "filling from a low storage level". In this catchment, much of the earliest water entering the system is routed as recharge through the soil or the streambed to occupy space in the aquifer. Because groundwater moves more slowly through the watershed than surface water, the hydrograph at the Fort Jones gauge demonstrates a muted or delayed response to early rain events (Figure 2, period B).

At the onset of a new wet season, under average conditions, the flowrate of filling is greater than the flowrate of draining, and so the "filling from a low storage level" condition at the beginning of a rainy season is transient, lasting only until the

Table 1. Schematic of watershed behavior and functional flow components occurring during the transition from the dry season to the wet season in a Mediterranean climate; the categories are illustrated in an example annual hydrograph in Figure 1. Water storage level refers to the relative water content of the soil and aquifer within the watershed.

Water storage level	New precip. occurring?	Flow behavior description	Relevant functional flows
Low	No	(A) Watershed draining from a medium-to-low storage level	Late spring recession and dry season baseflow
Low	Yes	(B) Watershed filling from a low storage level, with muted response to new precipitation	Fall pulse flow or small/slow post-dry- season flow increase
High	No	(C) Watershed draining from a high storage level	Winter baseflow and early spring recession
High	Yes	(D) Watershed spilling from a high storage level, with rapid response to new precipitation	Winter stormflow

filling process occupies enough aquifer and soil storage volume to produce a "full" condition. After the water storage in the basin reaches "full", if no more rain occurs, the watershed returns to its default "draining" condition, though from a higher storage baseline than during the dry season, and with a higher draining flowrate (Figure 2, first period C). If there is additional precipitation, the resulting surge in flow response is much more rapid, reflecting a "spilling" condition (Figure 2, intermittent events D).

The precipitation and winter temperatures during the wet season produce an accumulation of snowpack, though in some years this can be reduced by warm periods and rain-on-snow events. Melting snowpack contributes subsurface flow and tributary streamflow to the lower watershed, producing a spring flow recession typically lasting from the last major precipitation event into the summer (Figure 2, second period C and second period A).

Many of the phenomena described in the above paragraphs have been characterized as various types of functional flow (Table 1). Winter stormflow is the obvious functional flow metric corresponding to a "spilling" watershed. The spring recession can last for three to six months and its steepness is moderated by snowmelt. Because it bridges the high-storage and low-storage states, the early and late spring recession appear in two different flow behavior categories (Table 1). Conversely, the flows classified under "watershed filling from a low storage level" are somewhat ambiguous and dependent on year-to-year conditions, since a discrete fall pulse flow does not occur in every water year, and no distinct metric has been proposed for a more gradual post-dry-season flow increase.

Given the regular behavior observed during the dry season-to-wet season transition in the Fort Jones hydrograph, and the physical structure of this highly inter-connected basin, we expected to find a flowrate threshold at the Fort Jones gauge approximately defining the lower limit of the "full" or "spilling" basin condition (referred to here as Q_{spill} ; see Results, section 3.1).

140 2.1.2 Stream-aguifer interaction

145

150

165

In the groundwater basin portion of the watershed, the alluvial aquifer is the largest storage reservoir (Mack, 1958). Groundwater-surface water interactions drive Scott River flow behavior towards the end of the dry season, before the next rainy season begins, when snowpack is depleted and streamflow in many areas is sustained by groundwater discharge alone (Foglia et al., 2018). Discharge to streams from the alluvial aquifer occurs along the thalweg of the Scott River. In this highly-interconnected system, groundwater discharge in one reach of the river is typically approximately balanced out by infiltration through the streambed to the aquifer, much of it occurring on the upper alluvial fans of the tributary streams (see discussion below).

We used the Scott Valley Integrated Hydrologic Model (SVIHM) (Tolley et al., 2019; Foglia et al., 2013a, b) to obtain the estimated volume of water exchanged monthly, in water years 1991-2018, between the surface stream network and the underlying aquifer. All positive fluxes and all negative fluxes (corresponding to gaining and losing stream reaches) were summed independently and then added to create a net value for each month in the simulation period (Figure 3, panel A). These net monthly groundwater-to-stream flux values were then compared to simulated monthly flow volumes in the Scott River, measured at the Fort Jones gauge (Figure 3, panel B).


2.2 Observed response variables $(V_{min} \text{ and } P_{spill})$

The Scott River is an undammed watershed, in which estimates of annual precipitation are an order of magnitude greater than the estimated combined volume of water stored in surface water bodies or aquifers and water pumped or diverted for agriculture (Tolley et al., 2019). In this study we tested whether fundamental hydrologic characteristics, specifically dry-season draining behavior and rainfall-runoff response to early wet season cumulative precipitation, can be predicted using observable hydroclimate data. The first step is quantification of the two response variables.

2.2.1 Dry season baseflow quantities (V_{min}) and timing

Multiple numerical summaries of dry season baseflows were evaluated for suitability as the response variables in this prediction exercise. Monthly flow volumes were preferred over a minimum daily flow value to reduce the influence of individual events that might affect flow on one or a small number of days, such as groundwater pumping or surface water diversions.

Historically, the rainy season in California tends to begin in October, and so by convention each water year begins on October 1st of the previous calendar year, and ends on September 30th. Matching this convention, in most years, the minimum-flow month for the Scott River is September; however, uncommon September storms can elevate flow volumes, and in some years with a late rainy season onset, the October flow volume may be lower. To capture these dynamics, for each calendar year,

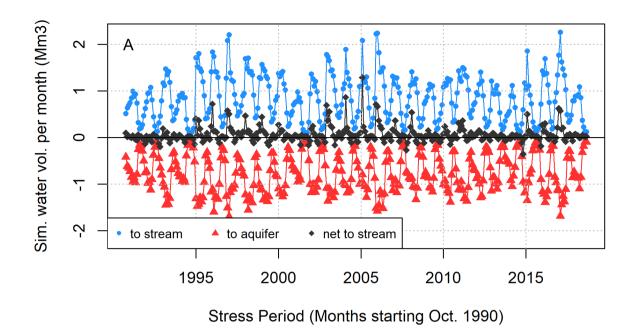

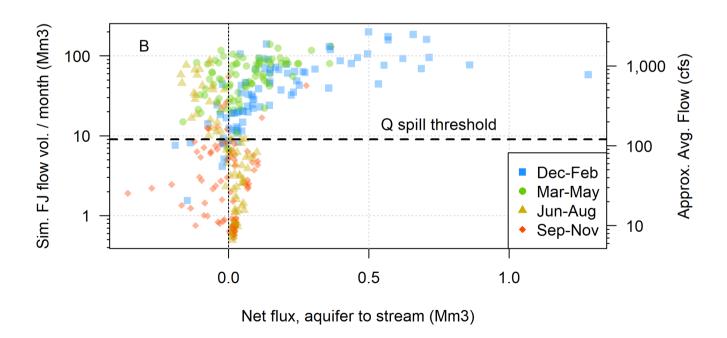


Figure 3. Both stream leakage and aquifer discharge increase in the rainy season, while net flux to the stream remains relatively close to 0 (panel A). Strong seasonal trends are evident in net flux to the stream (panel B; described further in text).

we calculated a rolling 30-day sum of daily flow volumes in the period July-December to identify the 30-day period with the minimum flow, referred to as V_{min} (see Section 3.2). For consistency, each annual V_{min} value was assigned to the water year ending in September of that calendar year, even if the minimum flow window included days in October of the following water year.

2.2.2 Cumulative precipitation P_{spill}

170

175

180

190

195

 P_{spill} was calculated for each water year as the cumulative rainfall at the end of a dry season, starting September 1st, recorded on the first day that the Fort Jones gauge measured flow greater than Q_{spill} (see Results, Section 3.2). As stated above, conceptually, it is the amount of rainfall needed to "fill" the watershed such that it responds rapidly to new precipitation.


A dry season can have negative effects on an aquatic ecosystem if it produces extraordinarily low flows or if it lasts for an extraordinarily long time (e.g., delayed salmon habitat access documented in CDFW 2015). The quantity P_{spill} is correlated with both a lower minimum flow volume and a later river reconnection (Figure 4). If predicted in advance, a forecasted value of P_{spill} would be an indicator of the risk of a severe dry season.

In addition to the volumetric quantity P_{spill} , there could also be demand for seasonal predictions of the *timing* of onset of the coming rainy season. However, predicting the timing of the onset of the rainy season or of Q_{spill} would likely rely on uncertain long-term weather forecasts and is beyond the scope of this paper. In other words, due to randomness in rainfall timing, the exact dry season baseflow duration associated with a higher P_{spill} is highly variable and, hence, unpredictable.


2.3 Potential predictors and selected formulations

To evaluate candidate predictors of dry season baseflows, Pearson's correlation coefficient, R, was calculated between observed response variables V_{min} and P_{spill} , and the following categories of observed predictor data (see Results, Section 3.3):

- 1. Spring (March-May) water level observations in each of 54 individual wells (Figure A1).
- 2. Annual maximum snowpack water content at each individual snow monitoring station at 20 stations aggregated by the California Data Exchange Center (CDEC; Figure 1).
- 3. Cumulative precipitation, October-April, at each weather station within the watershed, and five outside the watershed (total of 17 NOAA stations). In these records, missing values (i.e., days with no recorded observation) are assumed to have 0 precipitation. Water years with more than 5 missing days are excluded from the predictor dataset (Figure 1).
- 4. Cumulative precipitation, October-April, of a composite precipitation record with no missing values, representing the mean of the Callahan and Fort Jones NOAA weather stations (located at the southern and northern ends of the valley, respectively), and referred to as "cal_fj_interp". To generate the composite record, missing values in the Callahan and Fort Jones station records were interpolated based on observations at neighboring stations (see method in Foglia et al., 2013a).
- 5. The flow volumes observed at the Fort Jones gauge (USGS ID 11519500) during the preceding March and April (Figure 1).

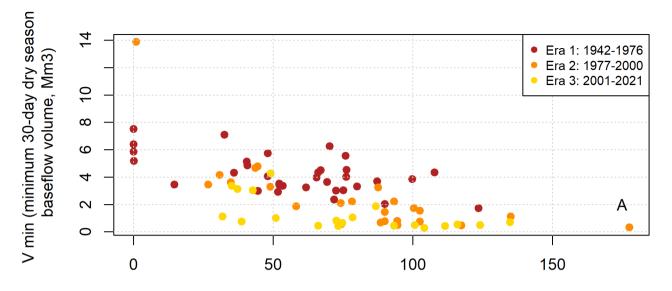

P spill (cumulative precip. [mm] on first day after Sept. 1st when FJ flow > 120 cfs)

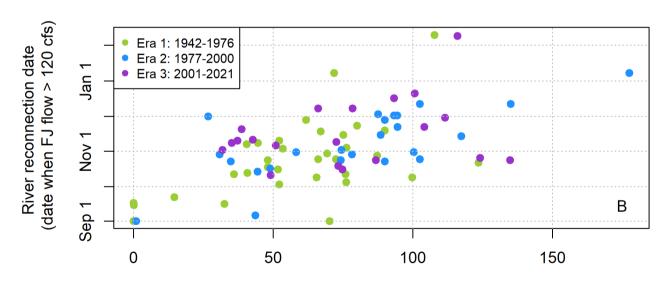

P spill (cumulative precip. [mm] on first day after Sept. 1st when FJ flow > 120 cfs)

Figure 4. The quantity P spill (i.e., the amount of rainfall needed to 'fill' the watershed such that it 'spills', or responds rapidly to new precipitation) is correlated with both a lower minimum dry season baseflow volume (top panel) and a later date of river reconnection (lower panel).

- Cumulative reference evapotranspiration (ET₀), October-April, using observations from Station No. 225 in the California
 Information Management Information System (CIMIS) network (2015-2021), or Spatial CIMIS estimates of ET₀ at the location of Station 225 (2002-2015) (Figure 1).
 - 7. The timing (in Julian days) of the date of maximum snowpack measurement.
 - 8. The timing (in Julian days) of the date of the volumetric center of the rainy season, calculated as the day the cumulative precipitation crossed 50% of the total.
- 9. The 1-year-lagged metrics of maximum snowpack, October-April cumulative precipitation, and April water levels (e.g., the October-April cumulative precipitation measured a full 17-23 months prior to a September minimum flow).

Individual measuring locations, such as wells or weather stations, were evaluated for sample size (i.e., years of data) and degree of relatedness with the two response variables. Relatedness of the monitoring locations with the highest R values in each category of monitoring observation are included in analysis results (see Results, Section 3.3).

210 2.3.1 Prediction formulae for V_{min} and P_{spill}

225

230

With a sample size of 80 years of dry season baseflow volumes, a one- or two-predictor model is best to avoid overfitting (James et al., 2013). Nonetheless, to thoroughly assess predictive potential of this dataset, three-predictor models were also considered.

Commonly, model diagnostics such as Akaike's Information Criterion (AIC) are used to evaluate the best of a set of competing statistical models (Burnham and Anderson, 2004). However, AIC and other information criteria methods can only be used when comparing models based on the same dateset (Burnham and Anderson, 2004). In the dataset for this study, variable record lengths and missing data points produced a situation in which the sample size is different for most of the models under consideration (Tables ?? through A6). Consequently cross-validation was used in this study as the primary model selection technique.

To predict V_{min} , a set of six one-predictor models were generated using the observation location from each category with the highest R, and model fit was evaluated using Leave One Out Cross Validation (LOOCV) (James et al., 2013) (see Results, section 3.3 and ??). For a dataset with n observations, the LOOCV error of a predictive model is obtained by recalculating the model coefficients n times, each time leaving out one observation, and comparing the resulting prediction to the single left-out observation. The root mean square of these n errors is the LOOCV error used to evaluate model performance in Results.

The single predictors with the lowest LOOCV error (excluding evapotranspiration of a reference crop, $[ET_{ref}]$, due to insufficient observation record length) were used to produce a set of four two-predictor models (see Results, Section 3.4 and Table A2) for V_{min} , including two that incorporate data from a full calendar year prior, to test the validity of the DWR Water Year Type index method in this local setting. A similar approach was used to assess two-predictor models for P_{spill} , though no predictors from a prior year were included, and several additional two-predictor combinations were evaluated. In both cases, the best-performing model took the following form:

$$Predicted_i = Int. + m_A * obs_{A.i} + m_B * obs_{B.i}$$
 (1)

Where:

- $Predicted_i$ is the predicted value (either V_{min} or P_{spill}) in calendar year i (i.e., at the end of water year i).
- $-obs_{A,i}$, $obs_{B,i}$ are the observed predictor values in October-April in water year i (millimeters).
- Int., m_A , m_B are the coefficients of the selected linear model.

3 Results

235

240

3.1 Scott River precipitation-runoff behavior

Visual inspection of 80 years of Fort Jones hydrograph behavior during the transition from the dry season to the rainy season (Figure 5, panel A) indicated that there are two distinct domains of flow: one in which flow is relatively flat (dry season baseflow), and one in which the flowrate is an order of magnitude higher, and it is highly responsive to rain events. The intermediate hydrologic state, "filling from low storage", is visible in some fall-winter hydrographs (e.g., Figure 2), but tends to last a relatively short time before the filling rate overwhelms the draining rate and produces a responsive "spilling" condition.

The approximate boundary between these domains, denoted as Q_{spill} , is 120 cfs (294 thousand m³/day or approximately 9 Mm³ per month). This value was determined by testing a range of potential Q_{spill} values to evaluate rainfall-runoff responses preceding and following the threshold (Figure A2).

3.2 Observed response variables

3.2.1 Dry season baseflow quantity and timing, and Scott River eras

Minimum 30-day dry season baseflow volumes, denoted here as V_{min} , have ranged from 0.3 to 7.5 Mm³ / 30 days, with one outlier value of 13.9 Mm³ / 30 days in 1984, when an early September storm followed a wet year in 1983 (Figure 6).

Three periods of water use and climate forces have been proposed for the Scott River (e.g., by Pyschik, 2022): Eras 1, 2, and 3, ranging from 1942-1976, 1977-2000, and 2001-2021, respectively. These eras are separated by the low minimum flow in the year 1977, which is coincident with to the widespread installation of groundwater pumps, and by the onset of a two-decade abnormally dry period in 2000. **Possibly move this to Intro**

Matching other long-term declining flow trends in this watershed, the flows in August and September are relatively steady in Era 1, and they become more variable with significantly lower lows in Eras 2 and 3 (minimum of 2.1 Mm³ / 30 days [28.6 average cfs] in 1942-1976 and 0.3 Mm³ / 30 days [4.4 average cfs] in 1977-2021; Figure 6, panel A).

The timing of the midpoint of the 30-day minimum-flow period falls most commonly in September, though it has fluctuated over the last eight decades (Figure 6, panel B).

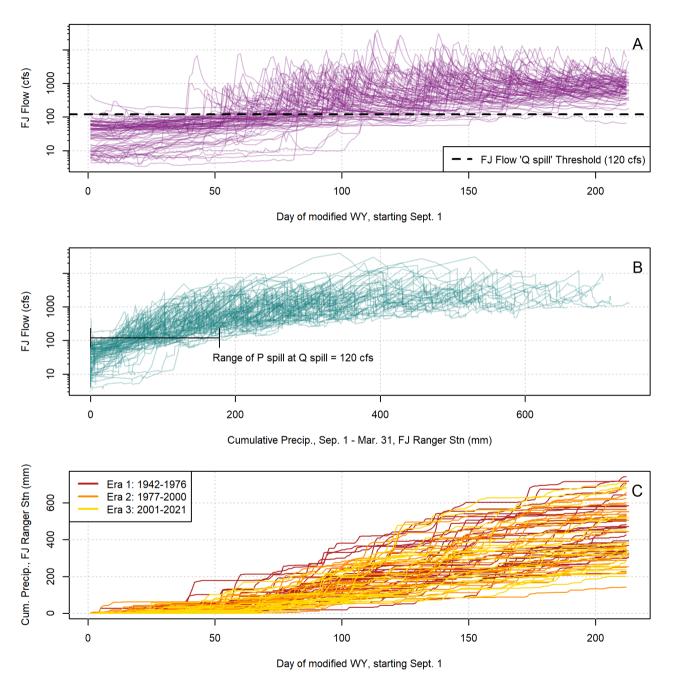


Figure 5. In all three panels, 80 years of data series from September 1 to March 31 are overplotted to illustrate dynamics during the transition from the dry to the wet season: observed Fort Jones hydrographs in Panel A; cumulative rainfall and Fort Jones flow values on fall and winter days in Panel B; and cumulative rainfall over time in Panel C.

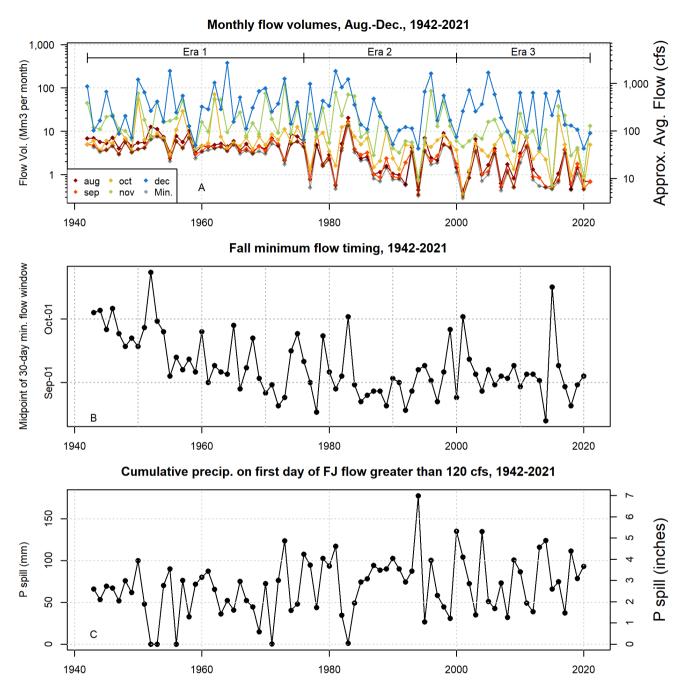


Figure 6. FJ Gauge flow volume, by year, aggregated to monthly time windows in the late summer, fall, and early winter. Eras are noted that correspond to various management and climate forces (e.g., the widespread installation of groundwater wells in the late 1970s, and the onset of a two-decade abnormally dry period in 2000).

3.2.2 Cumulative fall precipitation and watershed response

In some water years prior to the 1980s, the Fort Jones flowrate exceeded Q_{spill} on September 1st (Figure 5, panels A and B), indicating that even under persistent dry season draining conditions, under the climate and water use conditions of wet years in the mid-20th century, the Scott River remained responsive to new precipitation year-round. As a result, the range of P_{spill} , the cumulative precipitation necessary to reach Q_{spill} , is wide (0 to 178 mm, or 0 to 7 inches) (Figure 6, panel C). Mean P_{spill} values were 57, 79, and 76 mm in Eras 1, 2 and 3, respectively.

265 3.3 Predictor comparison for V_{min} and P_{spill}

270

280

285

The observations of spring flows, snowpack, valley floor precipitation, and groundwater elevation are positively correlated both within each category and to each other overall, which is unsurprising: wet years are associated with higher values in all of these categories. Groundwater wells with highest predictive power tend to have long records (e.g., n of 10 or greater years) and to be close to the Scott River (Figure A1); these results incorporate two wells proximate to the river, with record lengths of 43 and 57 years.

Both response variables are correlated with four categories of observations: spring flowrates, maximum snow water content, cumulative precipitation recorded at weather stations on or near the valley floor (October-April), and March-May water levels in some wells. Observations in these categories are positively correlated with V_{min} and negatively correlated with P_{spill} . The correlation coefficient, R, of these response-predictor relationships range from 0.5 to 0.73 for V_{min} and from -0.38 to -0.66 for P_{spill} (Figure 7).

In contrast to these four categories, October-April cumulative ET_0 is negatively correlated with V_{min} and positively correlated with P_{spill} (R of -0.68 and 0.48 for V_{min} and P_{spill} , respectively). October-April cumulative ET_0 is also negatively correlated with snow, precipitation, and groundwater level indicators. This could be because ET can remove a significant volume of water from the watershed, or because years with more rainy or stormy days accumulate less total insolation and atmospheric water demand. Additionally, the relatively high absolute values of R for between ET_0 and the two response variables may be due to a small sample size, as all available ET_0 observations or estimates were collected in 2002 or later (i.e., in ETA).

Some meteorological timing was evaluated in addition to quantities. Both response variables are somewhat correlated with snow timing (i.e., the Julian day of the maximum measured snowpack in a given year; R of 0.33 to 0.52 and -0.22 to -0.38 for V_{min} and P_{spill} , respectively), but no significant correlation is evident between the response variables and precipitation timing (Figure 7).

Finally, a subset of observations from the previous water year were included in the correlation matrix to test for multi-year influence on the response variables. These previous-year metrics had very little predictive power (correlated with V_{min} with an R of 0.29 to 0.33, and with P_{spill} with an R of -0.01 to -0.1).

3.4 Predicted values of V_{min}

290 Diagnostics for the linear regression models assessed in this analysis are included in the Appendix (Figures A3 through A5).

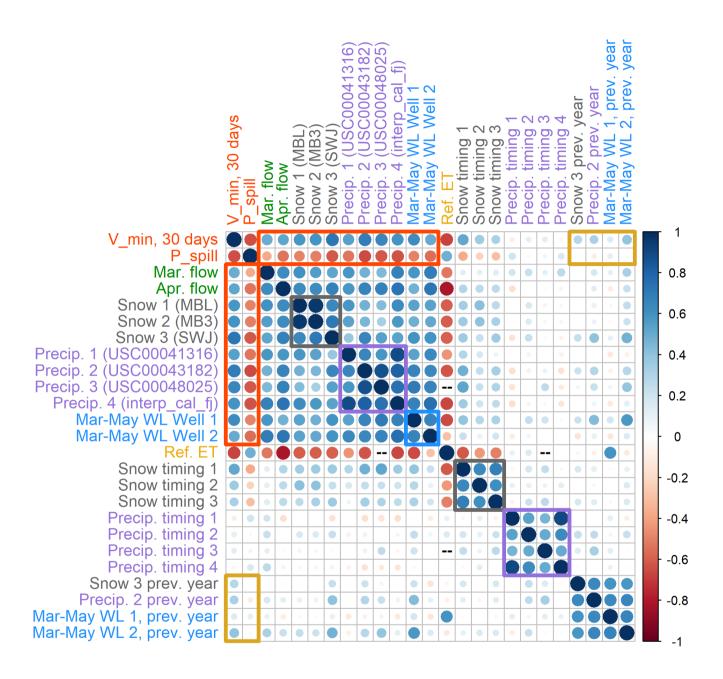


Figure 7. Correlation coefficient matrix of two response variables, minimum 30-day dry season baseflow volumes (V min) and cumulative precipitation necessary to produce 120 cfs in the Scott River (P spill), with various possible predictor metrics. Gray, purple, and blue squares highlight the inter-category correlation coefficients of snowpack metrics, Oct-April cumulative precipitation, and March-May groundwater elevation measurements. Red rectangles highlight the predictors with the greatest absolute correlation coefficient values with V min and P spill, respectively. Yellow rectangles highlight correlations with previous-year hydroclimate quantities.

3.4.1 Predictor assessment and prediction formula

In each of six high-R categories, the monitoring location in each category with the highest R value with observed V_{min} values was selected for further analysis (Figure A3). Out of this set of six, the maximum snowpack and October-April cumulative precipitation produce the lowest model errors (LOOCV errors of 2.74 and 2.72 Mm^3 , respectively; Figure A3, top two panels; ??). In combinations of two predictors, a linear combination of maximum snowpack and cumulative precipitation improved on the best single-predictor model, with an LOOCV error of 2.29 Mm^3 (Figure A4, upper left panel; Table A2).

Among the two-predictor models evaluated was a combination of maximum snowpack water content and the timing of the maximum measurement (Figure A4, top right panel). This produced a slightly larger error (2.78 Mm³) than the single-predictor model with maximum snowpack water content alone (2.74 Mm³; Figure A3, middle left panel), indicating that the timing of maximum snow accumulation is either relatively unimportant in generating dry season baseflows or that the actual timing of snowpack maximum is not captured in temporally sparse snow course measurements.

Additionally, two models featuring a partial one-year holdover were evaluated, to test the validity of this component of the methodology of DWR's Water Year Type index. In both cases, the addition of the climate data from the previous year produced a very small change in model error (Figure A4, two lower panels), indicating that in the Scott Valley context, the previous year's climate may have a minor influence on dry season flows relative to the immediately preceding rainy season.

Based on these results, the model selected as the V_{min} prediction formulation was a linear combination of snowpack maximum from the Swampy John (SWJ) snow station (with data collected by CDEC) and cumulative October-April precipitation from the Fort Jones Ranger Station (FJRS) weather station (with data collected by NOAA) as follows:

$$V_{min, i} = -1.33 + 0.0053 * FJRS_{Oct-Apr, i} + 0.0027 * SWJ_{max, i}$$
(2)

310 Where:

300

305

315

320

- $V_{min,\ i}$ is the predicted value of minimum 30-day dry season baseflows in calendar year i (i.e., at the end of water year i) (million m³ or Mm³)
- $SWJ_{max, i}$ is the maximum snow water content recorded at the Swampy John snow course (CDEC station ID SWJ or 285) in water year i (millimeters)
- $FJRS_{Oct-Apr, i}$ is the cumulative precipitation, recorded October-April of water year i, measured at the Fort Jones Ranger Station (NOAA station ID USC00043182) (millimeters)

3.4.2 Predicted and observed V_{min} over time

The V_{min} formulation proposed above predicts minimum 30-day dry season baseflows with a model error of 2.3 Mm³ per 30 days (31.3 cfs), and a root mean squared error of 1.4 Mm³ (19.4 cfs). These errors indicate substantial uncertainty in any single year's prediction: they correspond to 78% and 49% and Y%, respectively, of the mean V_{min} value, 2.9 Mm³ (40 cfs).

Matching the historical trends of decreasing snowpack, the observed and predicted V_{min} values show a downward trend over time (Figure A5, top panel). An outlier in the year 1984 reflects extremely high minimum dry season baseflows, relative to the predicted values and the overall distribution. In that year, a relatively high-baseflow season was followed by an early September storm. The model residual (predicted minus observed flow volumes) for this year is also an outlier, indicating that the model has a sufficient sample size to not be overwhelmed by this extreme value produced by an extremely uncommon sequence of events (Figure A5, middle panel).

The predictive V_{min} model is based on observations from the full record, but three additional models were generated based on only the observations from each period: Eras 1, 2, and 3, respectively. Residuals based on Era 1 data are similar to those of the full record, with a slight but systematic overprediction in Era 3; Era 2 residuals tend to overpredict in Era 1 more than the full record; and Era 3 residuals offer better performance in Era 3 than the full record, but produce significant systematic underpredictions pre-2000 (Figure A5, middle panel).

3.5 Predicted values of P_{spill}

325

330

Diagnostics for the linear regression models assessed in this analysis are included in the Appendix (Figures A6 through A8).

3.5.1 Predictor assessment and prediction formula

The results of the predictor assessment for the P_{spill} prediction formula were similar to those for V_{min} , in that the two best single predictors were October-April cumulative precipitation and maximum snowpack (Figure A6, top two panels), with LOOCV model errors of 695 and 496 mm, respectively. (ET_{ref} was once again excluded from consideration based on a short record length.) Again similar to V_{min} , the best two-predictor model was the combination of the two best single predictors, with an LOOCV error of 461 mm (Figure A7, upper left panel).

Several combinations of correlated observation categories produced comparable model results, such as spring water levels with maximum snow, maximum snow timing, and cumulative precipitation (Figure A7, upper right and two middle panels). However, not all combinations of co-correlated data produced reasonable predictors; a model with a linear combination of maximum snowpack timing and March flow volumes performed relatively poorly (LOOCV error of 1,005 mm; Figure A7, lower right panels).

Based on these results, the model selected as the P_{spill} formulation for a given water year was a linear combination of the same observation records as V_{min} : snowpack maximum from the SWJ snow station (with data collected by CDEC) and cumulative October-April precipitation from the Fort Jones Ranger Station weather station (station ID USC00043182, with data collected by NOAA).

$$P_{spill, i} = 128 - 0.095 * FJRS_{Oct-Apr, i} - 0.028 * SWJ_{max, i}$$
 (3)

350 Where:

- $P_{spill, i}$ is the predicted value of cumulative rainfall at the end of the dry season, starting Sep. 1, on the first day that the Fort Jones gauge records flow greater than or equal to 120 cfs in calendar year i (i.e., at the end of water year i) (millimeters)
- $SWJ_{max, i}$ is the maximum snow water content recorded at the Swampy John snow course (CDEC station ID SWJ or 285) in water year i (millimeters)
- FJRS_{Oct-Apr, i} is the cumulative precipitation, recorded October-April of water year i, measured at the Fort Jones Ranger Station (NOAA station ID USC00043182) (millimeters)

3.5.2 Predicted and observed P_{spill} over time

355

365

370

375

The P_{spill} estimate formulation proposed above predicts P_{spill} values with a model LOOCV error of 461 mm (18.1 inches), and a root mean squared error of 25.4 mm (1 inches).

Matching the historical trends of decreasing snowpack, the observed and predicted P_{spill} values show an increasing trend over time (Figure A8, top panel). A high outlier in calendar year 1994 (in early water year 1995) was caused by a dry water year 1994 followed by a series of small storms in November and December, none of which produced 120 cfs of flow, followed by a much larger storm on January 8th-9th of 1995 in which the river flow jumped to 600 and then 7,500 cfs in two days.

The predictive P_{spill} model is based on observations from the full record, but three additional models were generated based on only the observations from each period: Eras 1, 2, and 3, respectively. Residuals based on Era 1 tend to underpredict Eras 2 and 3 more than the full-record model; Era 2 residuals tend to overpredict in Eras 1 and 3 more than the full record; and Era 3 residuals have a slightly higher tendency to underpredict than the full record, but overall are fairly similar to the full-record residuals (Figure A5, lower panel).

The linear coefficients for the two prediction equations and their standard errors are summarized in Table 2.

Table 2. Summary of linear model coefficients for V min and P spill.

	b	m_SWJ	m_FJRS
V min prediction	-0.00	0.00000	0.0000
V min std. error	0.00	0.00000	0.0000
P spill prediction	128.10	-0.09466	-0.0283
P spill std. error	7.85	0.02281	0.0103

3.6 Comparison with California DWR Water Year Type (WYT) category

The DWR water year type categories map fairly well onto the two proposed hydrologic indices V_{min} and P_{spill} (Figure 8, panels A and B), which is to be expected, as both DWR WYT and the two proposed indices are based in part on cumulative precipitation data. However, there is less of an ability to identify a long-term trend in the DWR WYT index time series than in the time series of observed or predicted V_{min} or P_{spill} values. Likely causes include the information lost when binning water

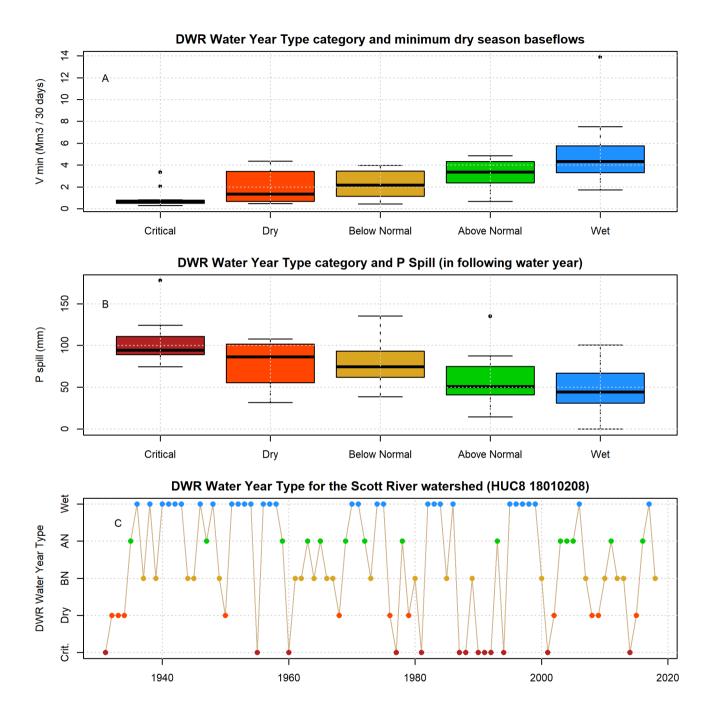


Figure 8. DWR Water Year Type indices over time and compared to the two metrics of hydrologic conditions developed in this study: minimum 30-day dry season baseflow volume (V min) and the amount of precipitation necessary to produce 120 cfs flow in the Scott River (P spill).

years into five categories, and the 30-year ranking window that would prevent a direct comparison of post-2000 WYTs with pre-1950s WYTs (Figure 8, panel C).

4 Discussion

380

385

390

395

4.1 Scott River watershed behavior

The degree to which these forward-looking seasonal predictions are accurate depends on fundamental hydrologic relationships between climate inputs and flow outputs, with some complications introduced by water evaporating or transpiring through native or cultivated vegetation. The condition of a "full" watershed can be operationally defined as a highly responsive to new precipitation. The condition is transient, and proximity to a full condition relies on the balance of slow draining and rapid filling flowrates in any given rainy season. However, in this Mediterranean climate, the general shape of the relationship between cumulative precipitation-runoff behavior is preserved in dry and wet water years (Figure 5, panel B).

Although a Q_{spill} of 120 cfs was identified by an analysis of rainfall-runoff responses and a visual inspection of fall hydrograph behavior (Figures ?? and 5), it also matches information from local stakeholders. Many tributary streams on the valley floor run dry during the summer and fall, and some tributary streams respond more quickly to fall precipitation than others. Generally, the timing of all tributaries reaching flowing status corresponds with the Fort Jones gauge reaching 100 cfs (Sommarstrom, 2020).

Simulated estimates of stream-aquifer exchange corroborates these precipitation-flow relationships. Dry season baseflow (V_{min}) and the onset of wet season flow (framed in terms of P_{spill}) are both influenced by net groundwater discharge from the aquifer. One interpretation of the high frequency of near-0 net monthly stream-aquifer flux values (Figure 3, panel B) is that the high degree of connectivity between the streams and the aquifer in the Scott River system produces balancing counter-forces in response to hydrologic stresses on the system, such as large recharge events. This balancing tendency can be temporarily overwhelmed by large precipitation pulses, but high-flow conditions quickly reduce the volume of water in the surface water system, returning the Scott River to a baseline of nearly-balanced stream-to-aquifer and aquifer-to-stream fluxes. This dynamic also reflects the small size of the available aquifer storage, relative to the amount of precipitation received by the watershed in a given water year (DWR 2004).

The resulting water storage limitations mean that multi-year planning, such as the long-term GSP projects, may be impossible in the Scott River watershed without making assumptions about how much it will rain (i.e., the future climate predictions in Siskiyou County 2021). If those assumptions are not fulfilled by future climate, year-by-year adaptive management may be necessary to achieve management outcomes.

4.2 V_{min} and P_{spill} prediction utility

Though various methods exist to qualitatively predict, in the spring, the severity of the coming low-flow season in the Scott River watershed, a quantitative short-term forecasting index could support more rigorous thresholds for adaptive management.

To this end we developed two linear equations for predicting minimum dry season baseflows about five months in advance, effectively taking an inventory in each April of relevant hydrologic inputs. It could be used to support decisions made in the late spring timeframe regarding the growing season, such as potential regulatory actions and some farmer cropping decisions.

There are several methods in current use. Observations at existing monitoring locations, such as weather stations and long-term snow course records, have been used as ad-hoc hydrologic indices. Historical adaptive management decisions in the Scott River watershed, such as planning to purchase surface water rights leases, have relied on individual monitoring observations, such as percent of snowpack relative to average conditions, or the Fort Jones flow in the spring (e.g., SRWT 2018). Additionally, DWR has effectively extended the methodology of the SVI and SJI metrics to all of California by publishing a categorical water year type (WYT) index for all its major watersheds (to the HUC8 level; DWR -California Department of Water Resources (DWR) (2021)). This metric quantifies meteoric drought and relies only on precipitation data, so as to be comparable across the state. Matching SVI and SJI methodology, it can be calculated at multiple points in each spring, with a final determination in May, but in the case of Scott Valley it has been used to classify WYTs only retroactively through 2018. As previously mentioned it is a relatively complex metric with provisions including a partial one-year holdover (i.e., dry conditions in the previous year will make a dry-type categorization more likely the following year), and non-stationary index thresholds, with a 30-year ranking window.

The quantitative prediction methods proposed in this study map well onto the existing DWR WYT index, but preserve more detailed information. The primary advantages of the proposed method over these and other previous methods of gauging near-term hydrologic conditions is that it is tailored to local hydroclimate data and is interpretable as a numeric prediction of fall conditions. This could be used to inform regulatory actions in an attempt to increase fall environmental flows, or for surface water diverters to plan for low-flow conditions.

Though it also serves as an indication of the severity of a water year, the additional specific utility of the second predicted metric, P_{spill} , may be less than for that of minimum dry season baseflows. Management decisions such as the last possible date to keep a temporary stream gauge installed in a river, without risk of it being washed out, could be informed by a P_{spill} prediction when combined with weather forecasts in the fall.

4.3 Management implications of best-performing predictors

410

415

420

425

430

435

440

As described in Results, the linear models that best predicted observed values of V_{min} and P_{spill} were both based on the same two observation locations (the SWJ snow course and the FJRS weather station; Figure 1), both with lengthy observation records. One interpretation of these results is that the climate inputs produce a predictable fall watershed response, and that human management decisions have a negligible influence on fall river flow. However, model simulations suggest that the timing and magnitude of fall flow increases can be influenced by human water use (e.g., scenarios in Siskiyou County 2021).

Multiple possible explanations could reconcile these two pieces of seemingly contradictory evidence. First, random variability in human water use could be a contributing factor to the error of the predictive models of fall-season hydrologic behavior. Alternatively, human water uses could be so consistent in response to wet or dry season conditions that these water uses could be implicitly incorporated into the predictive models. If adaptive management actions (potentially including events as diverse

as regulatory curtailments or individual cropping choices) are carefully recorded in the future, they could be compared to residuals of the climate-based predictive models to evaluate whether any signal of a response to human interventions can be observed.

Potentially, these seasonal predictions could be extended to additional watersheds (albeit ones with abundant available hydroclimate data). However, the feasibility of this geographic generalization is beyond the scope of this study and should be investigated in future work.

4.4 Influences of climate change on predictive indices

Both predictions (using the full record of hydrologic data) assume some degree of hydroclimate stationarity, in that it uses historical snowpack- and precipitation-runoff relationships to predict modern runoff. In one sense, a longer-term record can be an asset, in that it provides context for the severity of the dry periods of the past two decades. In another sense it is a liability for prediction accuracy: for example, the predicted V_{min} values based on the full record appear to systematically overpredict V_{min} in the most recent era (2001-2021; Figure A4, top left panel, and Figure A5, middle panel). This suggests that factors not captured in these climate data, such as warmer air temperatures, changing upland vegetation and evapotranspiration dynamics, and possibly unknown changes in water use, may be altering the relationship between the spring water supply and dry season baseflow rates.

5 Conclusions

450

455

460

This study proposed two locally-tailored hydrologic decision-support metrics for the Scott River watershed in northern California. Both use snowpack and cumulative precipitation data from October-April to predict the quantity of interest: the first is the minimum 30-day flow volume in a given water year, referred to as V_{min} , which typically occurs in September or October. The second index is the cumulative rainfall needed to "fill" the watershed after the end of the dry season to a "spilling" condition that responds quickly to precipitation events, referred to as P_{spill} . Both indices can be calculated at the end of April to support near-term (seasonal) adaptive management regarding the growing season or the fall, similar to the SVI and SJI in California's Central Valley. However, climate change may reduce the predictive accuracy of indices based on long-term data records, and updates based on smaller numbers of more recent water years should be considered periodically.

The management choices facing local managers in this basin are difficult to quantify and summarize, as is the case in basins throughout California and arid regions globally. Locally-derived summary metrics, tailored to regional hydrologic dynamics, have provided and will continue to provide tools for supporting those choices and communicating them to diverse stakeholders and the general public.

6 Appendix

470 A.1 Groundwater Well Data

Groundwater elevation measurements collected in the spring were evaluated as a potential predictor of river flow behavior the following fall. The length of the records and number of spring-season measurements were variable, limiting the number of wells that could be used as predictor sites. Two wells were selected for the final predictor evaluation.

Correlation coefficients between April groundwater elevations and subsequent September flow volume

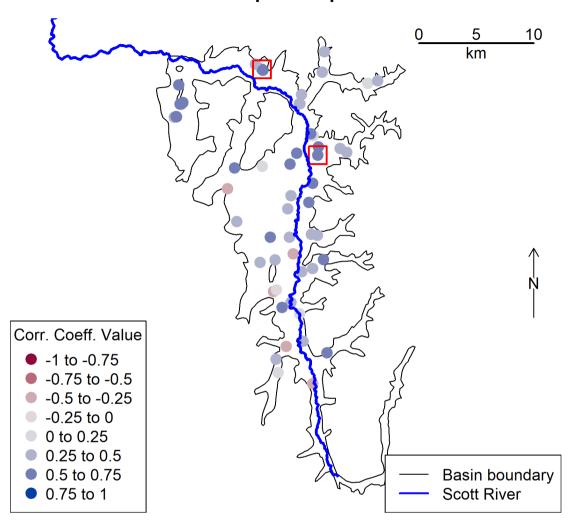


Figure A1. Boundary of the groundwater basin (corresponding approximately to the extent of the flat valley floor in the Scott River watershed) and selected well locations. Colors correspond to the correlation coefficients between April groundwater elevations and September flow volume. The wells included in the predictor comparison are highlighted with a red outer square. 54 wells had enough spring-season water level measurements to be included in this correlation exercise, though some wells are so close together that their symbols overplot on this map.


A.2 Selection of the Q_{spill} threshold value

480

The Q_{spill} value of 120 cfs (294 thousand m³/day or approximately 9 Mm³ per month) was determined by testing a range of potential Q_{spill} values (10 to 500 cfs [24 to 1223 thousand m³/day]) as a dividing threshold between dry- and wet-season flow behavior, and calculating the difference in rainfall-runoff response on either side of the dry season-wet season divide (Figure A2, Panel A). The objective of this analysis was to maximize the difference between these two dQ/dP values: to identify the threshold that reflected a maximally different rainfall-runoff response before and after the threshold was reached.

The difference between the wet and dry season rainfall-runoff responses is approximately the same (113 cfs [275 m³/day] of increased flow per mm of precipitation) for spill thresholds from 105-135 cfs (256-330 10³ m³/day) (Figure A2, Panel A). This indicates that in a large number of water years, flows in the range of 105-135 cfs (257 to 330 thousand m³/day) range are preceded by a dry season flow-response regime and followed by a distinct, flashier flow regime regime. Though higher wet-dry flow response differences were calculated at higher threshold values (i.e., up to 500 cfs [1,223 10³ m³/day]), these progressively higher wet-season flow responses likely reflect the falling limb of individual large storms that over-fill the watershed rather than separating filling from spilling behavior.

Additionally, in visual inspection of 78 years of Fort Jones hydrographs, the 120 cfs (294 10³ m³/day) Q_{spill} threshold generated a plausible breakpoint between dry and wet season river behavior in all water years (e.g., water year 2018 [Figure A2, Panel B]). Furthermore, this value corroborates local observations that an approximate value of 100 cfs represents "fully connected" river conditions (see Discussion section).

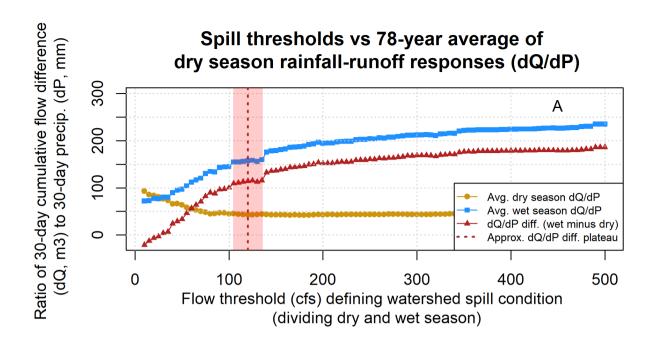

Fort Jones Gauge Flow and Cum. Precip., 2015-2016

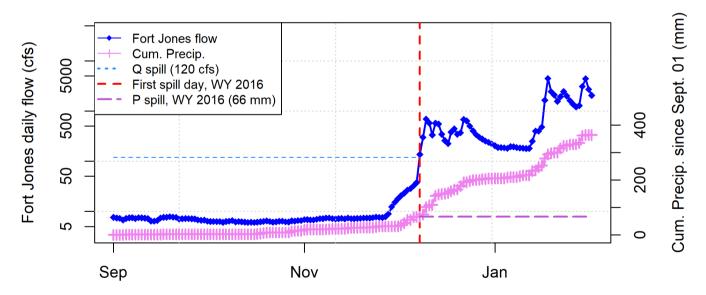


Figure A2. This analysis (Panel A) aimed to identify the flow threshold that approximately defines the boundary between filling (i.e. dry season) and spilling (i.e. wet season) flow behavior at the Fort Jones gauge. For each threshold value, for each water year, a rainfall-runoff response was calculated before and after the flow threshold. The rainfall-runoff response consisted of the 30-day cumulative flow difference (dQ) per 30-day cumulative rainfall difference (dP). 120 cfs was selected as the threshold value dividing the dry and wet seasons (e.g., Panel B).

A.3 Model selection criteria

Diagnostics used to select the predictive models for V_{min} and P_{spill} are shown below and discussed in Results.

A.3.1 V_{min}

Table A1. Linear model diagnostics for one-predictor models of minimum fall flows (V min).

Predictor ID Predictor Descrip.		n	Log Likelihood	AIC	LOOCV	R squared
SWJ_max_wc_mm	Snow maximum		-131	269	2.7	0.53
USC00043182_oct_apr_mm	OctApr. Precip.	75	-142	290	2.7	0.49
SWJ_jday_of_max	Snow maximum timing	70	-154	314	5.1	0.11
springWL_415635N1228315W001	March-May WLs	50	-100	206	3.6	0.39
et0_oct_apr	ET Ref.	17	-21	48	0.9	0.46
mar_flow	March flow vol.	78	-162	330	4.1	0.25

Table A2. Linear model diagnostics for two-predictor models of V min. See table of one-predictor models for description of predictor IDs. Reference ET was not included in two- and three-predictor models due to an insufficient sample size.

Predictor 1	Predictor 2	n	Log Likelihood	AIC	LOOCV	R squared
SWJ_max_wc_mm	USC00043182_oct_apr_mm	67	-119	246	2.3	0.62
SWJ_max_wc_mm	SWJ_jday_of_max	70	-131	270	2.8	0.53
SWJ_max_wc_mm	springWL_415635N1228315W001	50	-91	191	2.7	0.57
SWJ_max_wc_mm	mar_flow	70	-128	264	2.6	0.57
USC00043182_oct_apr_mm	SWJ_jday_of_max	67	-127	263	2.9	0.52
USC00043182_oct_apr_mm	springWL_415635N1228315W001	47	-91	190	3.3	0.48
USC00043182_oct_apr_mm	mar_flow	75	-139	286	2.8	0.52
SWJ_jday_of_max	springWL_415635N1228315W001	50	-97	203	3.3	0.45
SWJ_jday_of_max	mar_flow	70	-141	291	3.8	0.37
springWL_415635N1228315W001	mar_flow	50	-94	197	3.1	0.51

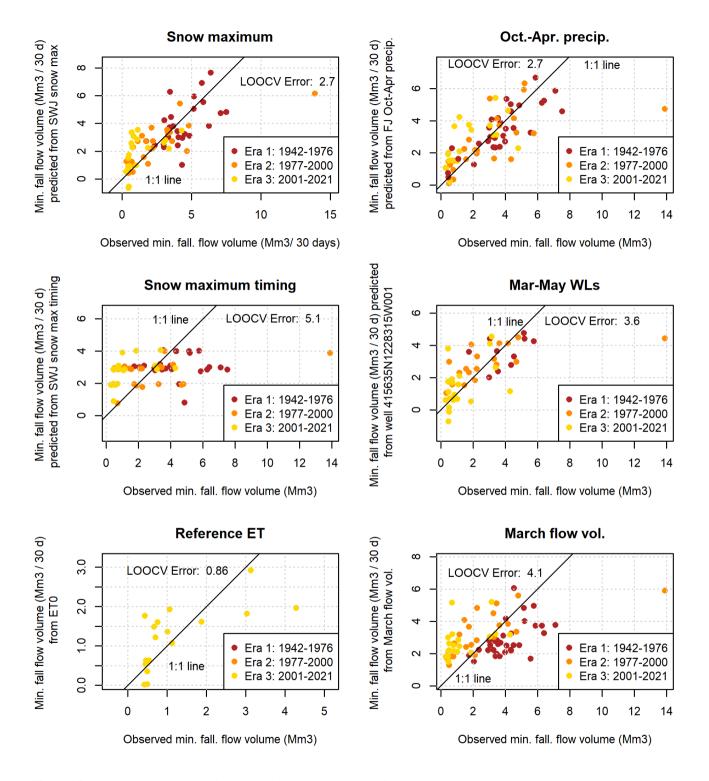


Figure A3. Single-predictor models of minimum 30-day dry season baseflows in the Scott River.

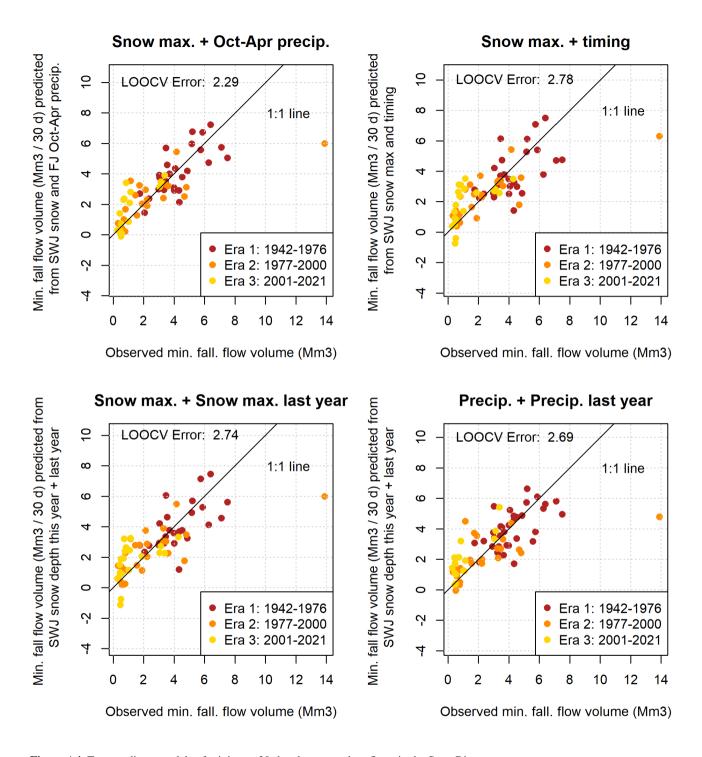
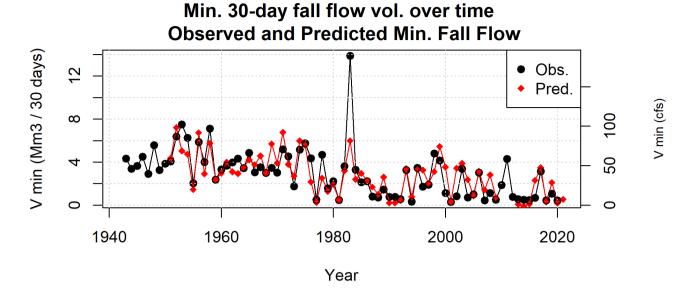


Figure A4. Two-predictor models of minimum 30-day dry season baseflows in the Scott River.



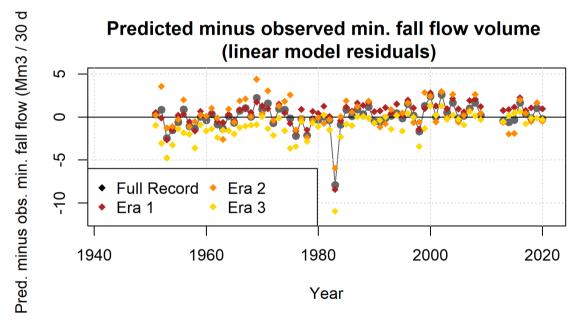


Figure A5. Observed and predicted minimum 30-day dry season baseflows both trend downward between the three eras of the period of record (top panel). The predicted-minus-observed difference (residual) over time also reflects this trend, underpredicting minimum flows pre-1977 and overpredicting them post-2000 (middle panel). The predictive model is based on observations from the full record, but three additional models were generated based on only the observations from Eras 1, 2, and 3. Residuals based on Era 1 data are similar to those of the full record; Era 2 residuals tend to overpredict more than the full record; and Era 3 residuals show better performance post-2000 than the full record, but significant underprediction pre-2000.

Table A3. Linear model diagnostics for three-predictor models of minimum fall flows (V min). See table of one-predictor models for description of predictor IDs. Reference ET was not included in two- and three-predictor models due to an insufficient sample size.

Predictor 1	Predictor 2	Predictor 3	n	Log Like.	AIC	LOOCV	R squared
SWJ_max_wc_mm	USC00043182_oct_apr_mm	SWJ_jday_of_max	67	-119	247	2.3	0.63
SWJ_max_wc_mm	USC00043182_oct_apr_mm	springWL_415635N1228315W001	47	-86	181	2.8	0.59
SWJ_max_wc_mm	USC00043182_oct_apr_mm	mar_flow	67	-117	244	2.3	0.64
SWJ_max_wc_mm	SWJ_jday_of_max	springWL_415635N1228315W001	50	-91	192	2.7	0.58
SWJ_max_wc_mm	SWJ_jday_of_max	mar_flow	70	-127	265	2.7	0.58
SWJ_max_wc_mm	springWL_415635N1228315W001	mar_flow	50	-89	187	2.6	0.61
USC00043182_oct_apr_mm	SWJ_jday_of_max	springWL_415635N1228315W001	47	-90	190	3.3	0.51
USC00043182_oct_apr_mm	SWJ_jday_of_max	mar_flow	67	-123	256	2.8	0.58
USC00043182_oct_apr_mm	springWL_415635N1228315W001	mar_flow	47	-87	184	3.0	0.56
SWJ_jday_of_max	springWL_415635N1228315W001	mar_flow	50	-91	191	2.9	0.58

A.3.2 P_{spill}

500

Table A4. Linear model diagnostics for one-predictor models of P spill.

Predictor ID Predictor Descrip.		n	Log Likelihood	AIC	LOOCV	R squared
SWJ_max_wc_mm	Snow maximum		-333	673	850	0.38
USC00043182_oct_apr_mm	OctApr. Precip.	75	-351	708	718	0.43
SWJ_jday_of_max	Snow maximum timing	70	-347	699	1243	0.09
springWL_415635N1228315W001	March-May WLs	50	-245	495	1123	0.24
et0_oct_apr	ET Ref.	17	-81	167	932	0.23
mar_flow	March flow vol.	78	-380	767	1061	0.14

495 A.4 Diagnostic plots for selected models

Standard diagnostic plots for the selected predictive models for V_{min} and P_{spill} . For V_{min} , these diagnostic plots highlight outlier record 42, which corresponds to the year 1983, when an early September storm followed a wet year. For P_{spill} , three lesser outliers are highlighted, corresponding to water years 1994, 2000 and 2004, in which the three highest values of P_{spill} were observed. These outliers represent the basin in extreme hydrologic conditions, so are retained in the dataset even though they exert disproportionate leverage over the predictive models.

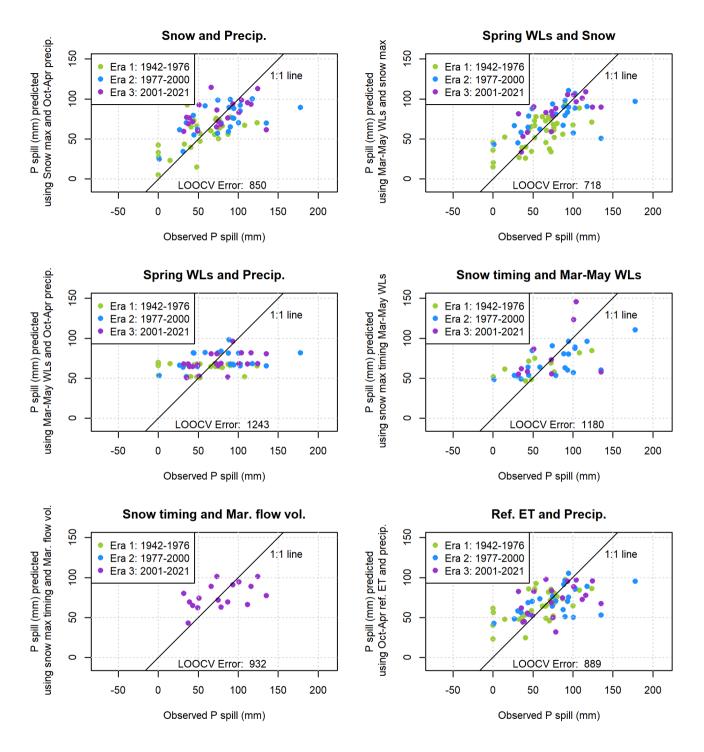


Figure A6. Single-predictor models of P spill, the cumulative precipitation after the dry season needed to generate 120 cfs of flow in the Scott River.

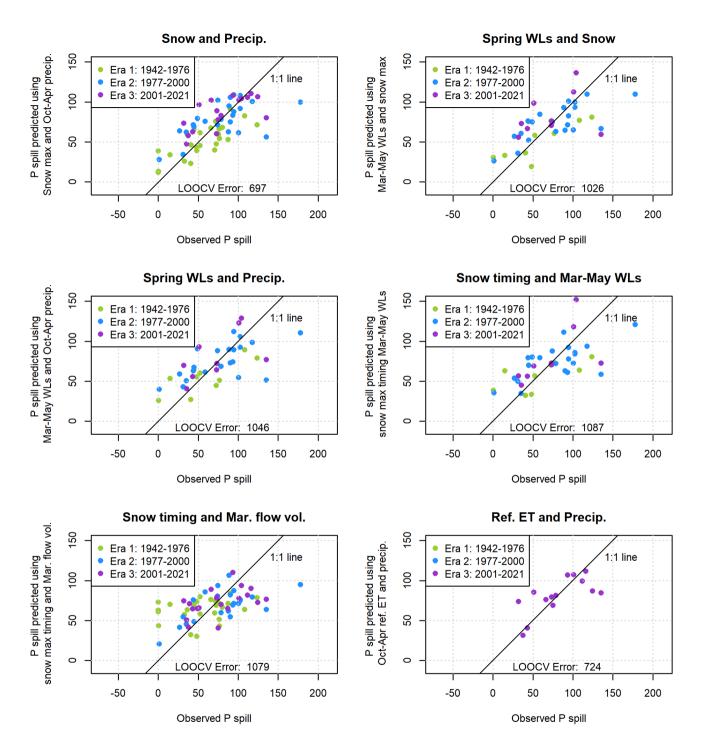
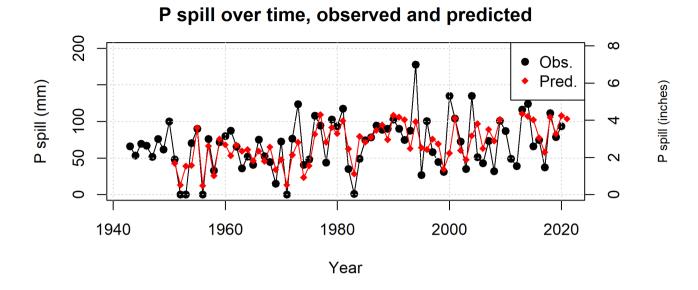


Figure A7. Two-predictor models of P spill, the cumulative precipitation after the dry season needed to generate 120 cfs of flow in the Scott River.



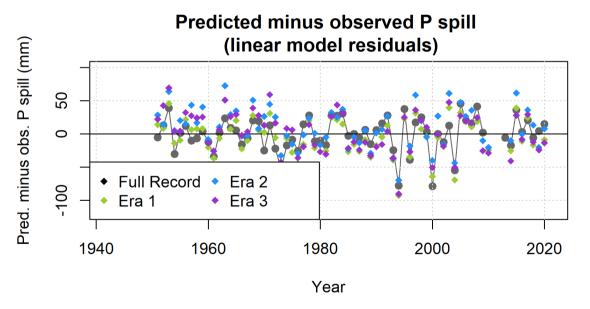


Figure A8. Observed and predicted values of P spill (panel A) indicate a worse model fit for the P spill prediction than for minimum 30-day dry season baseflows. Serious overprediction in Era 1 is followed by more mixed over- and under-prediction in Eras 2 and 3 (bottom panel). The overall P spill model is based on observations from the full record, but three additional models were generated based on only the observations from Eras 1, 2, and 3. Residuals based on Era 1 data are generally lower than those from Eras 2 or 3 or from the full record.

Table A5. Linear model diagnostics for two-predictor models of P spill. See table of one-predictor models for description of predictor IDs. Reference ET was not included in two- and three-predictor models due to an insufficient sample size.

Predictor 1	Predictor 2	n	Log Likelihood	AIC	LOOCV	R squared
SWJ_max_wc_mm	USC00043182_oct_apr_mm	67	-312	631	697	0.51
SWJ_max_wc_mm	SWJ_jday_of_max	70	-333	674	870	0.39
SWJ_max_wc_mm	springWL_415635N1228315W001	50	-240	487	951	0.38
SWJ_max_wc_mm	mar_flow	70	-333	674	853	0.39
USC00043182_oct_apr_mm	SWJ_jday_of_max	67	-315	637	760	0.47
USC00043182_oct_apr_mm	springWL_415635N1228315W001	47	-224	457	920	0.43
USC00043182_oct_apr_mm	mar_flow	75	-351	709	728	0.44
SWJ_jday_of_max	springWL_415635N1228315W001	50	-243	493	1068	0.30
SWJ_jday_of_max	mar_flow	70	-341	690	1079	0.23
springWL_415635N1228315W001	mar_flow	50	-242	493	1067	0.31

Table A6. Linear model diagnostics for three-predictor models of P spill. See table of one-predictor models for description of predictor IDs. Reference ET was not included in two- and three-predictor models due to an insufficient sample size.

Predictor 1	Predictor 2	Predictor 3	n	Log Like.	AIC	LOOCV	R squared
SWJ_max_wc_mm	USC00043182_oct_apr_mm	SWJ_jday_of_max	67	-311	633	712	0.52
SWJ_max_wc_mm	USC00043182_oct_apr_mm	springWL_415635N1228315W001	47	-222	455	874	0.47
SWJ_max_wc_mm	USC00043182_oct_apr_mm	mar_flow	67	-312	633	714	0.51
SWJ_max_wc_mm	SWJ_jday_of_max	springWL_415635N1228315W001	50	-239	488	973	0.39
SWJ_max_wc_mm	SWJ_jday_of_max	mar_flow	70	-332	675	872	0.40
SWJ_max_wc_mm	springWL_415635N1228315W001	mar_flow	50	-239	488	955	0.40
USC00043182_oct_apr_mm	SWJ_jday_of_max	springWL_415635N1228315W001	47	-224	457	936	0.44
USC00043182_oct_apr_mm	SWJ_jday_of_max	mar_flow	67	-314	638	768	0.48
USC00043182_oct_apr_mm	springWL_415635N1228315W001	mar_flow	47	-223	457	923	0.45
SWJ_jday_of_max	springWL_415635N1228315W001	mar_flow	50	-240	490	1008	0.37

[.] Analyses and figures in this manuscript were drafted in RMarkdown. The RMarkdown scripts are available on the corresponding author's GitHub page. All data used in this manuscript are publicly available on local, state or federal data portals.

[.] The authors declare no competing interests.

[.] This manuscript emerged from dissertation work funded by Siskiyou County SGMA planning grants, with funding from California water 505 bonds.

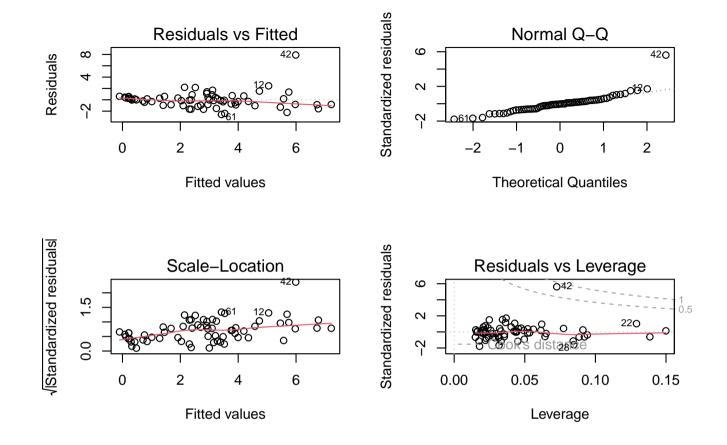


Figure A9. Diagnostic plots for the selected predictive models of V min.

References

- Bunn, S. E. and Arthington, A. H.: Basic principles and ecological consequences of altered flow regimes for aquatic biodiversity, Environmental Management, 30, 492–507, https://doi.org/10.1007/s00267-002-2737-0, 2002.
- Burnham, K. P. and Anderson, D. R.: Multimodel inference: A Practical Information-Theoretic Approach, 2004.
- California Department of Fish and Wildlife (CDFW): Cooperative Report of the Scott River Coho Salmon Rescue and Relocation Effort: 2014 Drought Emergency, Tech. Rep. August, California Department of Fish and Wildlife (CDFW), https://www.fs.usda.gov/Internet/FSE{ }DOCUMENTS/stelprd3850544.pdf, 2015.
 - California Department of Water Resources (DWR): Bulletin 118: Scott River Valley Groundwater Basin, Tech. rep., https://water.ca.gov/LegacyFiles/pubs/groundwater/bulletin{_}}118/basindescriptions/1-5.pdf, 2004.
- California Department of Water Resources (DWR): Sustainable Groundwater Management Act Water Year Type Dataset Development Report, Tech. Rep. January, Department of Water Resources Sustainable Groundwater Management Office, 2021.

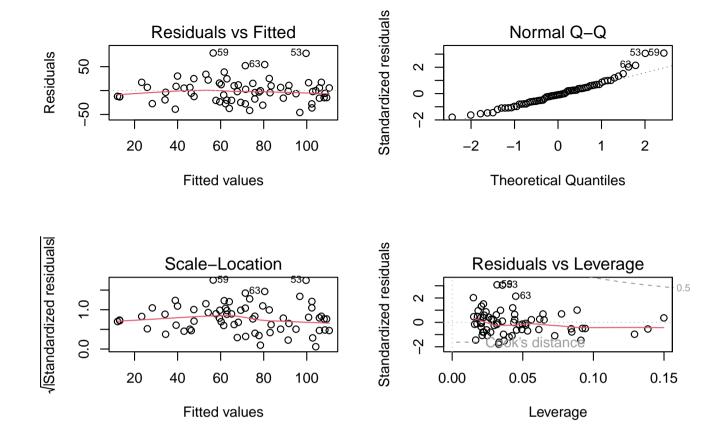


Figure A10. Diagnostic plots for the selected predictive models of P spill.

525

California Department of Water Resources (DWR): Notice to State Water Project Contractors: 2022 State Water Project Table A Allocation Decrease from 15 to 5 Percent, https://water.ca.gov/-/media/DWR-Website/Web-Pages/Programs/State-Water-Project/Management/SWP-Water-Contractors/Files/22-03-2022-SWP-Allocation-Decrease-5-Percent-031822.pdf, 2022.

Colorado Division of Water Resources: Drought & Surface Water Supply Index, https://dwr.colorado.gov/services/water-administration/drought-and-swsi, 2023.

Foglia, L., McNally, A., Hall, C., Ledesma, L., Hines, R., and Harter, T.: Scott Valley Integrated Hydrologic Model: Data Collection, Analysis, and Water Budget, Tech. Rep. April, University of California, Davis, http://groundwater.ucdavis.edu/files/165395.pdf, 2013a.

Foglia, L., McNally, A., and Harter, T.: Coupling a spatiotemporally distributed soil water budget with stream-depletion functions to inform stakeholder-driven management of groundwater-dependent ecosystems, Water Resources Research, 49, 7292–7310, https://doi.org/10.1002/wrcr.20555, 2013b.

Foglia, L., Neumann, J., Tolley, D. G., Orloff, S. B., Snyder, R. L., and Harter, T.: Modeling guides groundwater management in a basin with river–aquifer interactions, California Agriculture, 72, 84–95, 2018.

- Garen, D. C.: REVISED SURFACE-WATER SUPPLY INDEX FOR WESTERN UNITED STATES, Journal of Water Resources Planning and Management, 119, 437–454, https://water.ca.gov/-/media/DWR-Website/Web-Pages/Programs/State-Water-Project/Management/SWP-Water-Contractors/Files/22-03-2022-SWP-Allocation-Decrease-5-Percent-031822.pdf, 1993.
 - Gorman, M. P.: Juvenile survival and adult return as a functional of freshwater rearing life history for coho salmon in the Klamath River basin, Master's thesis, Humboldt State University, https://digitalcommons.humboldt.edu/cgi/viewcontent.cgi?article=1005{&}context=etd, 2016.
- Guttman, N. B.: COMPARING THE PALMER DROUGHT INDEX AND THE STANDARDIZED PRECIPITATION INDEX ' ties of the PDSI and its variations have been the referenced studies show that the intended, Journal Of The American Water Resources Association, 34, 113–121, https://doi.org/10.1111/j.1752-1688.1998.tb05964.x, 1998.
 - Harter, T. and Hines, R.: Scott Valley Community Groundwater Study Plan, Tech. rep., Groundwater Cooperative Extension Program University of California, Davis, Davis, CA, http://groundwater.ucdavis.edu/files/136426.pdf, 2008.
- James, G., Witten, D., Hastie, T., and Tibshirani, R.: An Introduction to Statistical Learning, Springer Science+Business Media, New York, 7th edn., https://doi.org/10.1007/978-1-4614-7138-7, 2013.
 - Mack, S.: Geology and Ground-Water Features of Scott Valley Siskiyou County, California., Tech. rep., Geological Survey Water-Supply Paper 1462, https://pubs.usgs.gov/wsp/1462/report.pdf, 1958.
- Mahoney, J. M. and Rood, S. B.: Streamflow requirements for cottonwood seedling recruitment-An integrative model, Wetlands, 18, 634–645, https://doi.org/10.1007/BF03161678, 1998.
 - McDonnell, J. J., Spence, C., Karran, D. J., van Meerveld, H. J., and Harman, C. J.: Fill-and-Spill: A Process Description of Runoff Generation at the Scale of the Beholder, Water Resources Research, 57, 1–13, https://doi.org/10.1029/2020WR027514, 2021.
 - McKee, T. B., Doesken, N. J., and Kleist, J.: The relationship of drought frequency and duration to time scales, in: Proceedings of the Eighth Conference on Applied Climatology, January, p. 5, Anaheim, California, 1993.
- 550 Moyle, P.: Coho Salmon, Oncorhynchus kisutch (Walbaum), in: Inland Fishes of California, pp. 245–251, 2002.
 - Natural Resources Conservation Service (NRCS): Idaho Water Supply Outlook Report, Tech. rep., USDA, Boise, ID, https://www.wcc.nrcs.usda.gov/ftpref/support/states/ID/wy2023/wsor/borid623.pdf, 2023.
 - Null, S. E. and Viers, J. H.: In bad waters: Water year classification in nonstationary climates, Water Resources Research, 49, 1137–1148, https://doi.org/10.1002/wrcr.20097, 2013.
- 555 Palmer, W. C.: Meteolorogical Drought, Research Paper No. 45, Tech. rep., US Weather Bureau, Washington, D.C., 1965.
 - Patterson, N. K., Lane, B. A., Yarnell, S. M., Qiu, Y., Sandoval-Solis, S., and Pasternack, G. B.: A hydrologic feature detection algorithm to quantify seasonal components of flow regimes, Journal of Hydrology, 585, 2020.
 - Poff, N. L., Allan, J. D., Bain, M. B., Karr, J. R., Prestegaard, K. L., Richter, B. D., Sparks, R. E., and Stromberg, J. C.: A paradigm for river conservation and restoration, BioScience, 47, 769–784, https://doi.org/10.2307/1313099, 1997.
- Poff, N. L., Richter, B. D., Arthington, A. H., Bunn, S. E., Naiman, R. J., Kendy, E., Acreman, M., Apse, C., Bledsoe, B. P., Freeman, M. C., Henriksen, J., Jacobson, R. B., Kennen, J. G., Merritt, D. M., O'Keeffe, J. H., Olden, J. D., Rogers, K., Tharme, R. E., and Warner, A.: The ecological limits of hydrologic alteration (ELOHA): A new framework for developing regional environmental flow standards, Freshwater Biology, 55, 147–170, https://doi.org/10.1111/j.1365-2427.2009.02204.x, 2010.
- Pyschik, J.: Assessing Climate Impacts Against Groundwater Pumping Impacts on Stream Flow with Statistical Analysis, Master's, Albert Ludwigs University Freiburg, 2022.
 - Scott River Water Trust (SRWT): 2017 Monitoring Report, Tech. Rep. June, https://www.scottwatertrust.org/blank, 2018.

- Siskiyou County Flood Control and Water Conservation District: Scott Valley Groundwater Sustainability Plan, Tech. rep., Siskiyou County Flood Control and Water Conservation District, https://www.co.siskiyou.ca.us/naturalresources/page/scott-valley-gsp-chapters, 2021.
- Sommarstrom, S.: Email communication regarding connectivity of Scott River tailings reach, Nov. 18, 2020, 2020.
- 570 Tarboton, D. G.: Rainfall-Runoff Processes., http://www.engineering.usu.edu/dtarb/rrp.html, 2003.

580

- Tolley, D. G., Foglia, L., and Harter, T.: Sensitivity Analysis and Calibration of an Integrated Hydrologic Model in an Irrigated Agricultural Basin with a Groundwater-Dependent Ecosystem, Water Resources Research, 55, https://doi.org/10.1029/2018WR024209, 2019.
- Tromp-Van Meerveld, H. J. and McDonnell, J. J.: Threshold relations in subsurface stormflow: 2. The fill and spill hypothesis, Water Resources Research, 42, 1–11, https://doi.org/10.1029/2004WR003800, 2006.
- Verley, F.: Lessons from Twenty Years of Local Volumetric Groundwater Management: The Case of the Beauce Aquifer, Central France, in: Sustainable Groundwater Management: A Comparative Analysis of French and Australian Policies and Implications to Other Countries, edited by Rinaudo, J.-D., Holley, C., Barnett, S., and Montginoul, M., pp. 93–108, Springer Nature Switzerland AG, Cham, Switzerland, https://doi.org/10.1142/s2382624x22800017, 2020.
 - Wheeler, K., Wenger, S. J., and Freeman, M. C.: States and rates: Complementary approaches to developing flow-ecology relationships, Freshwater Biology, 63, 906–916, https://doi.org/10.1111/fwb.13001, 2018.
 - Wilhite, D. A. and Glantz, M. H.: Understanding: The drought phenomenon: The role of definitions, Water International, 10, 111–120, https://doi.org/10.1080/02508068508686328, 1985.
 - Wilhite, D. A., Hayes, M. J., and Svoboda, M.: Drought Monitoring and Assessment: Status and Trends in the United States, Drought Mitigation Center Faculty Publications, 76, http://digitalcommons.unl.edu/droughtfacpub/76, 2000.
- Yarnell, S. M., Stein, E. D., Webb, J. A., Grantham, T., Lusardi, R. A., Zimmerman, J., Peek, R. A., Lane, B. A., Howard, J., and Sandoval-Solis, S.: A functional flows approach to selecting ecologically relevant flow metrics for environmental flow applications, River Research and Applications, 36, 318–324, https://doi.org/10.1002/rra.3575, 2020.