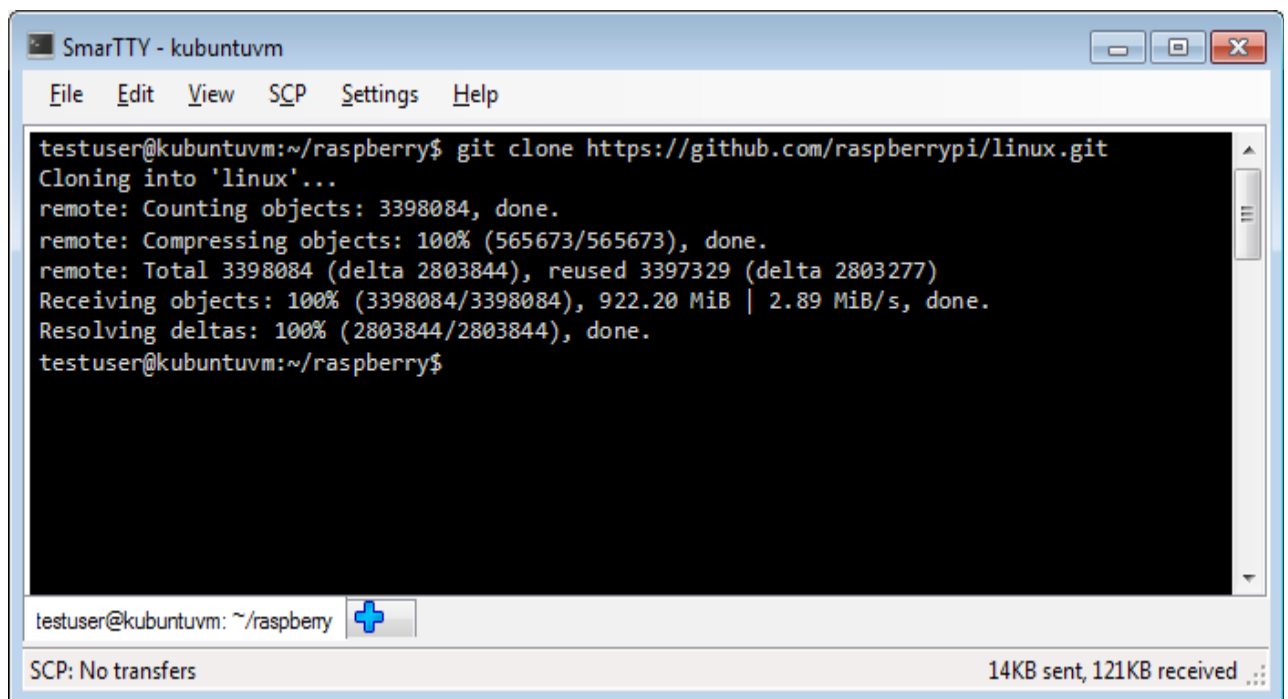# Building and Deploying Raspberry PI Kernel

This tutorial shows how to build a Raspberry PI kernel and install it on the device. As building the kernel on Raspberry PI itself could take several days due to a relatively slow CPU, we will be using an additional Linux machine to build it.

1. Raspberry PI kernel is stored in a Git repository and requires installing a Git client to fetch the files. Install the client on your build machine. E.g. on Debian-based systems it can be done by running the following command:
   sudo apt-get install git

2. Create a directory to store Raspberry-related files (e.g. **/home/<username>/raspberry**) and run the following command in that directory:
   git clone https://github.com/raspberrypi/linux.git
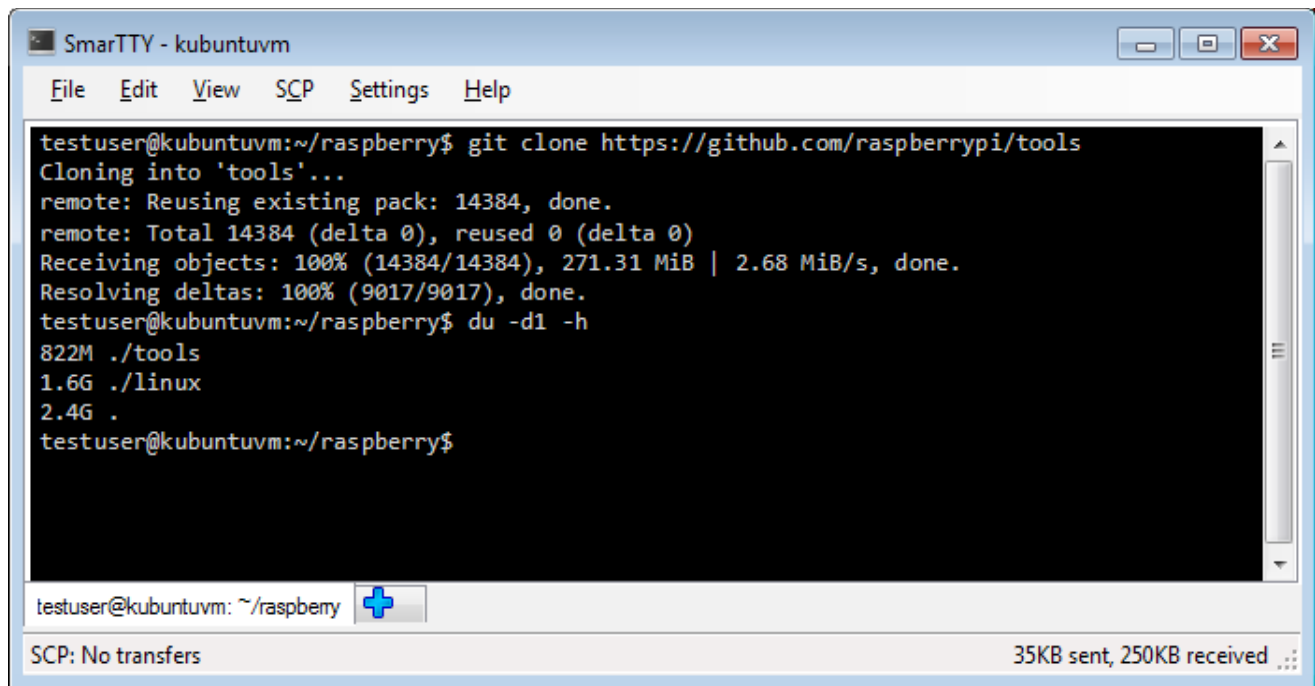   The Raspberry PI kernel source will be downloaded to the 'linux' subdirectory (1.5-2 GB):

3. Download Raspberry PI cross-compilers by running the following command on your build machine:
   git clone https://github.com/raspberrypi/tools
   The tools will be unpacked into the 'tools' subdirectory and will occupy ~1GB of space:

4. The Raspberry PI tools directory contains several toolchain versions:

    - tools/arm-bcm2708/arm-bcm2708hardfp-linux-gnueabi
    - tools/arm-bcm2708/arm-bcm2708-linux-gnueabi
    - tools/arm-bcm2708/gcc-linaro-arm-linux-gnueabihf-raspbian

The last one is the toolchain containing the linaro patches, so we will use it for cross-compilation. Set the CCPREFIX environment variable to the prefix of the third toolchain and test it by invoking GCC using the prefix, e.g.:

export CCPREFIX=/home/testuser/raspberry/tools/arm-bcm2708/gcc-linaro-arm-linux-gnueabihf-raspbian/bin/arm-linux-gnueabihf- ${CCPREFIX}gcc -v

5. Before we can build the kernel we need to configure it. A very good starting point would be the configuration file from your existing Raspberry PI that can be obtained by reading and unpacking the **/proc/config.gz** file on Raspberry PI. Go to the 'linux' subdirectory with the downloaded kernel sources and run the following commands there (assuming '**raspberrypi**' is the host name of your Raspberry PI):

   scp pi@raspberrypi:/proc/config.gz .

   gunzip -c config.gz > .config

   If the config.gz file is missing, run the following command to load the module that provides it:

   sudo modprobe configs

6. Run the following command in the Linux kernel source directory to bootstrap the new kernel configuration from the **.config** file obtained from Raspberry PI. Note that if you used an old SD card image, you will get a lot of questions on recently added features not mentioned in

the old config file:

ARCH=arm CROSS_COMPILE=${CCPREFIX} make oldconfig

```
testuser@kubuntuvm:~/raspberry/linux$ ARCH=arm CROSS_COMPILE=${CCPREFIX} make oldconfig
scripts/kconfig/conf --oldconfig Kconfig
*
* Restart config...
*
*
* ALSA for SoC audio support
*
ALSA for SoC audio support (SND_SOC) [M/n/?] m
  SoC Audio for the Atmel System-on-Chip (SND_ATMEL_SOC) [N/m/?] n
  SoC Audio support for the Broadcom BCM2708 I2S module (SND_BCM2708_SOC_I2S) [M/n/?] m
    Support for HifiBerry DAC (SND_BCM2708_SOC_HIFIBERRY_DAC) [M/n/?] m
    Support for HifiBerry Digi (SND_BCM2708_SOC_HIFIBERRY_DIGI) [N/m/?] (NEW)
    Support for RPi-DAC (SND_BCM2708_SOC_RPI_DAC) [M/n/?] m
  Synopsys I2S Device Driver (SND_DESIGNWARE_I2S) [N/m/?] n
  Build all ASoC CODEC drivers (SND_SOC_ALL_CODECS) [N/m/?] n
  ASoC Simple sound card support (SND_SIMPLE_CARD) [N/m/?] n
#
# configuration written to .config
#
testuser@kubuntuvm:~/raspberry/linux$ _
```
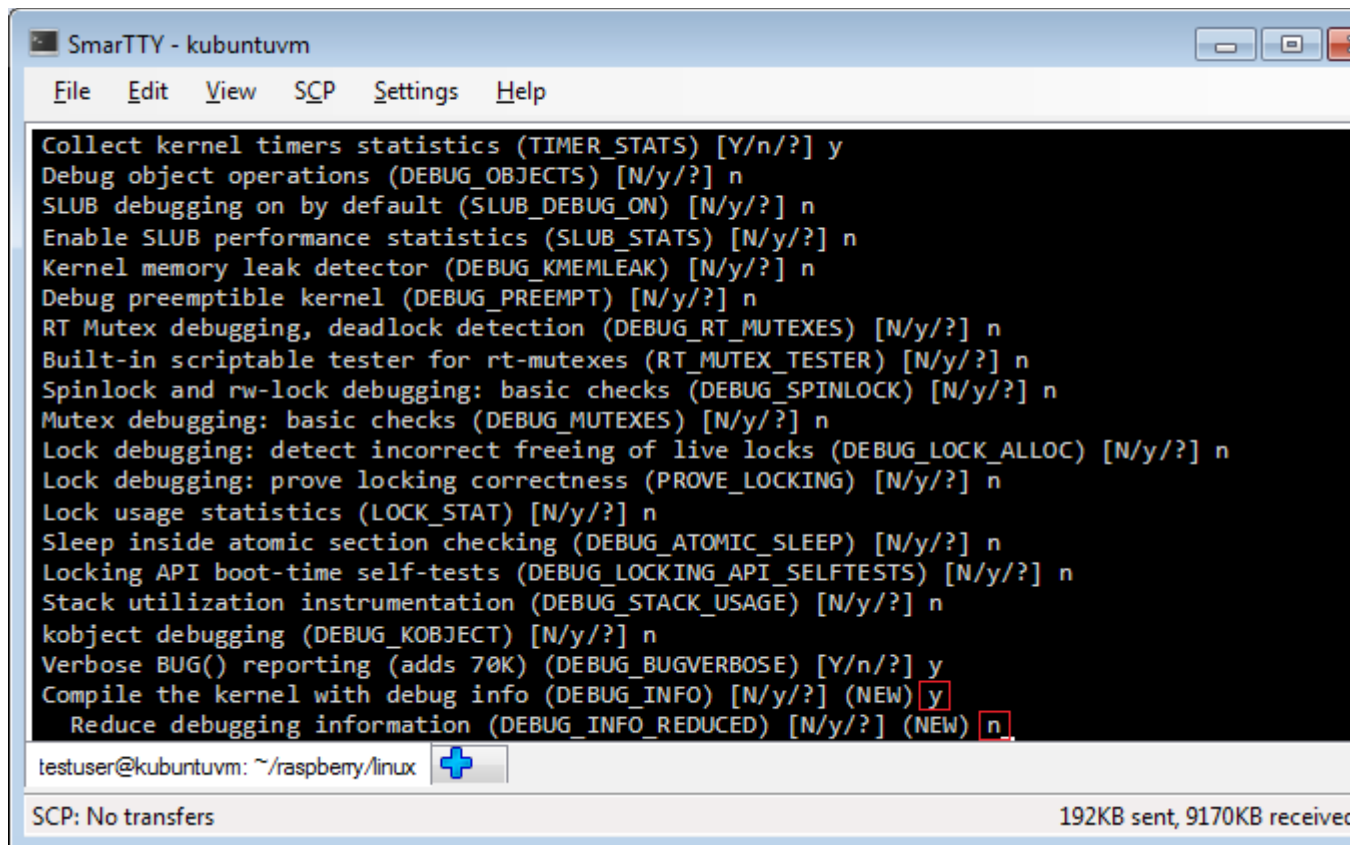
Do not forget to specify ARCH. Otherwise the kernel will be configured using x86 configuration options and will be missing ARM ones leading to a build failure.

7. Now reset all previous options related to debug symbols and enable them explicitly:

8. grep -v DEBUG_INFO < .config > newconfig

mv newconfig .config ARCH=arm

CROSS_COMPILE=${CCPREFIX} make oldconfig

```
SmarTTY - kubuntuvm

File   Edit   View   SCP   Settings   Help

Collect kernel timers statistics (TIMER_STATS) [Y/n/?] y
Debug object operations (DEBUG_OBJECTS) [N/y/?] n
SLUB debugging on by default (SLUB_DEBUG_ON) [N/y/?] n
Enable SLUB performance statistics (SLUB_STATS) [N/y/?] n
Kernel memory leak detector (DEBUG_KMEMLEAK) [N/y/?] n
Debug preemptible kernel (DEBUG_PREEMPT) [N/y/?] n
RT Mutex debugging, deadlock detection (DEBUG_RT_MUTEXES) [N/y/?] n
Built-in scriptable tester for rt-mutexes (RT_MUTEX_TESTER) [N/y/?] n
Spinlock and rw-lock debugging: basic checks (DEBUG_SPINLOCK) [N/y/?] n
Mutex debugging: basic checks (DEBUG_MUTEXES) [N/y/?] n
Lock debugging: detect incorrect freeing of live locks (DEBUG_LOCK_ALLOC) [N/y/?] n
Lock debugging: prove locking correctness (PROVE_LOCKING) [N/y/?] n
Lock usage statistics (LOCK_STAT) [N/y/?] n
Sleep inside atomic section checking (DEBUG_ATOMIC_SLEEP) [N/y/?] n
Locking API boot-time self-tests (DEBUG_LOCKING_API_SELFTESTS) [N/y/?] n
Stack utilization instrumentation (DEBUG_STACK_USAGE) [N/y/?] n
kobject debugging (DEBUG_KOBJECT) [N/y/?] n
Verbose BUG() reporting (adds 70K) (DEBUG_BUGVERBOSE) [Y/n/?] y
Compile the kernel with debug info (DEBUG_INFO) [N/y/?] (NEW) y
  Reduce debugging information (DEBUG_INFO_REDUCED) [N/y/?] (NEW) n

testuser@kubuntuvm: ~/raspberry/linux   +

SCP: No transfers                                    192KB sent, 9170KB received
```

Enable the 'DEBUG_INFO' option and don't enable the DEBUG_INFO_REDUCED option.

9. Now it's time to build the kernel. Run the following command:

    ARCH=arm CROSS_COMPILE=${CCPREFIX} make
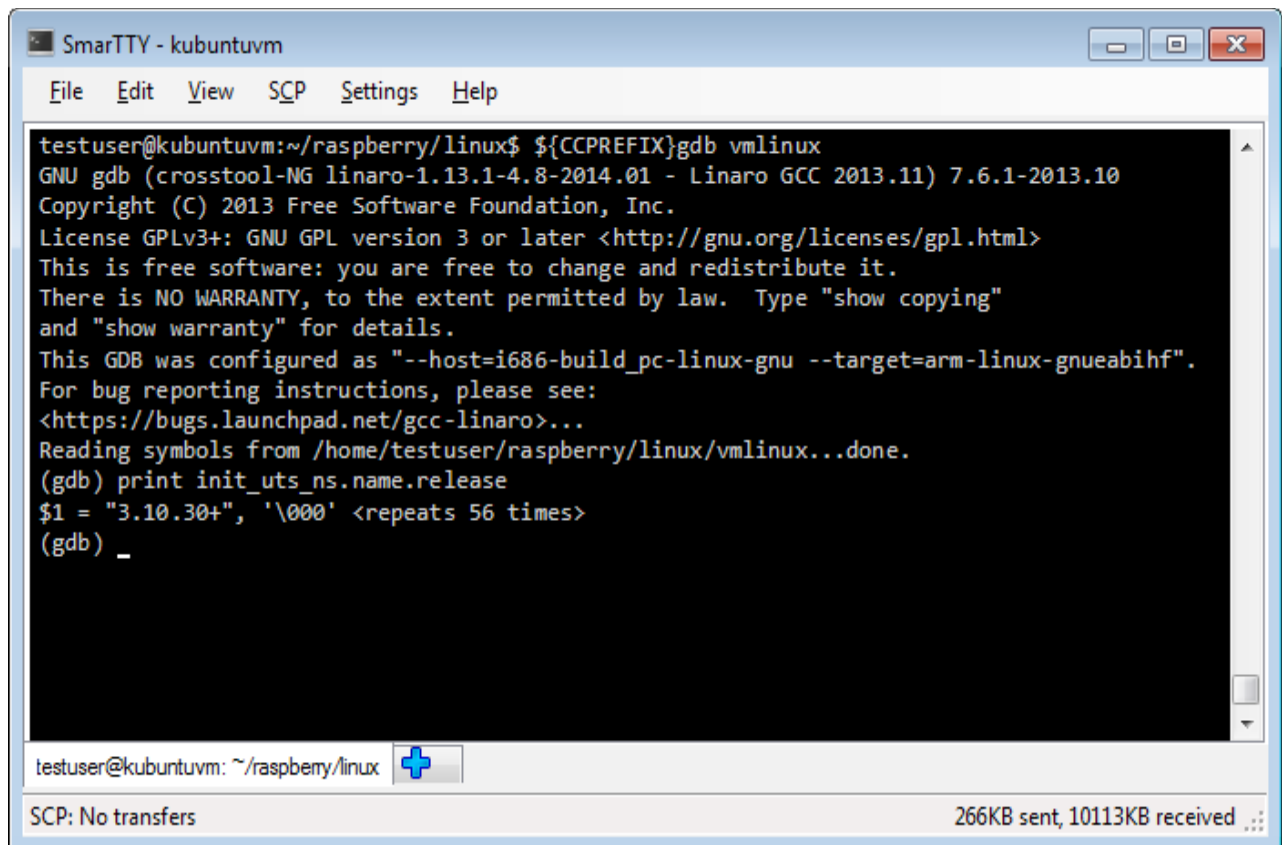
    Building the kernel can take several hours and can be sped up by adding a '-j<amount of cores>' on a multi-core machine to parallelize the build.

10. Once the kernel build is complete we need to verify that it contains the symbols. Open the kernel image using the gdb from the cross-toolchain and look at the value of **init_uts_ns.name.release**:

    ${CCPREFIX}gdb vmlinux

    print init_uts_ns.name.release

```
SmarTTY - kubuntuvm

File   Edit   View   SCP   Settings   Help

testuser@kubuntuvm:~/raspberry/linux$ ${CCPREFIX}gdb vmlinux
GNU gdb (crosstool-NG linaro-1.13.1-4.8-2014.01 - Linaro GCC 2013.11) 7.6.1-2013.10
Copyright (C) 2013 Free Software Foundation, Inc.
License GPLv3+: GNU GPL version 3 or later <http://gnu.org/licenses/gpl.html>
This is free software: you are free to change and redistribute it.
There is NO WARRANTY, to the extent permitted by law.  Type "show copying"
and "show warranty" for details.
This GDB was configured as "--host=i686-build_pc-linux-gnu --target=arm-linux-gnueabihf".
For bug reporting instructions, please see:
<https://bugs.launchpad.net/gcc-linaro>...
Reading symbols from /home/testuser/raspberry/linux/vmlinux...done.
(gdb) print init_uts_ns.name.release
$1 = "3.10.30+", '\000' <repeats 56 times>
(gdb) _

testuser@kubuntuvm: ~/raspberry/linux   +

SCP: No transfers                           266KB sent, 10113KB received
```
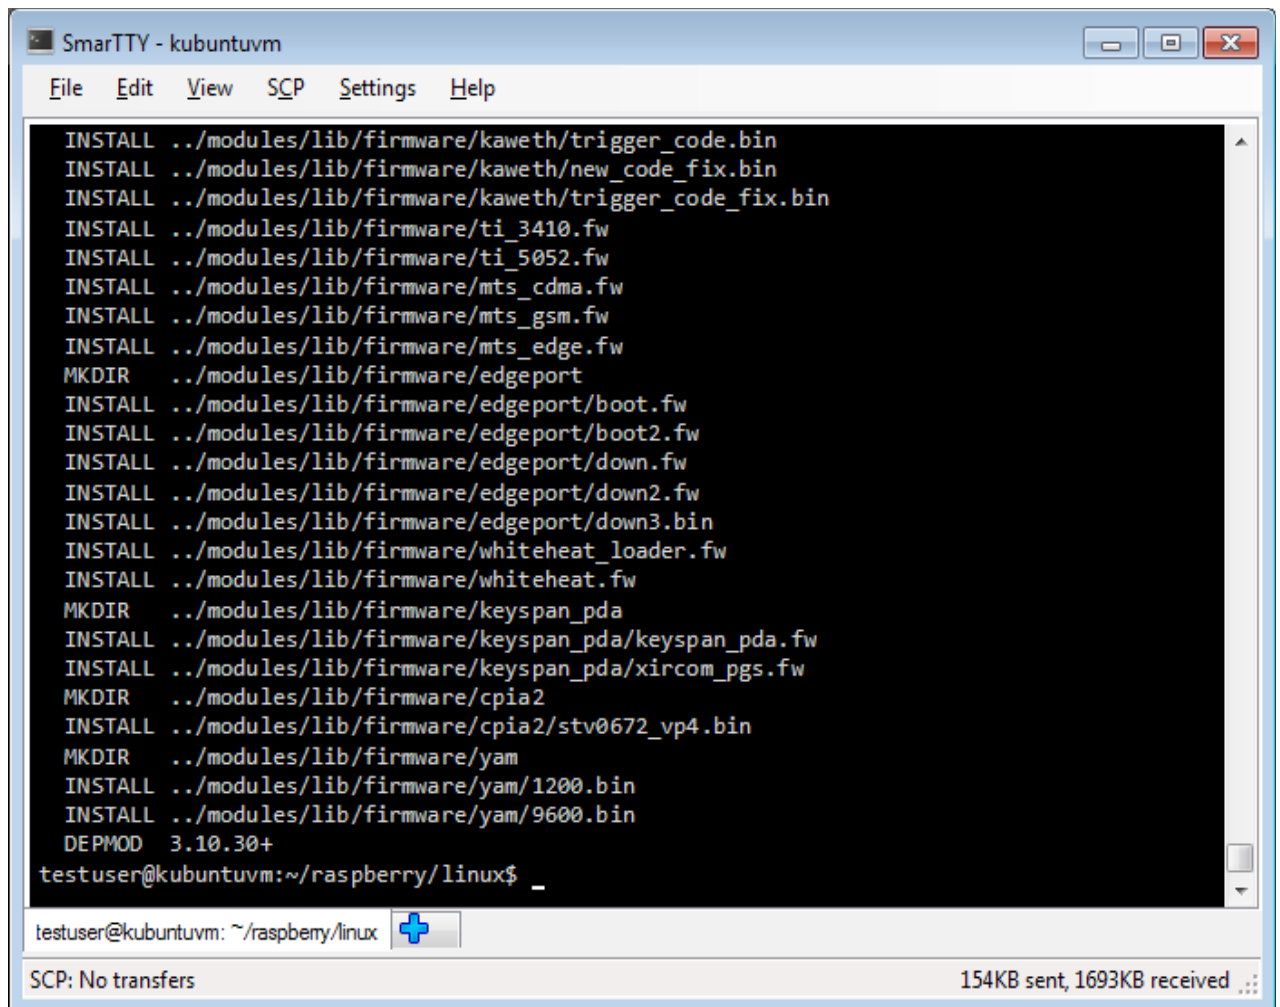
If GDB can display the kernel release string, the kernel has been built with sufficient symbols for kernel debugging.

11. Now that we have verified that the kernel contains the symbols, we will need to generate a directory containing kernel modules that Raspberry PI can load when needed. Run the following command to copy the modules to the '../modules' directory:
ARCH=arm CROSS_COMPILE=${CCPREFIX} INSTALL_MOD_PATH=../modules make modules_install

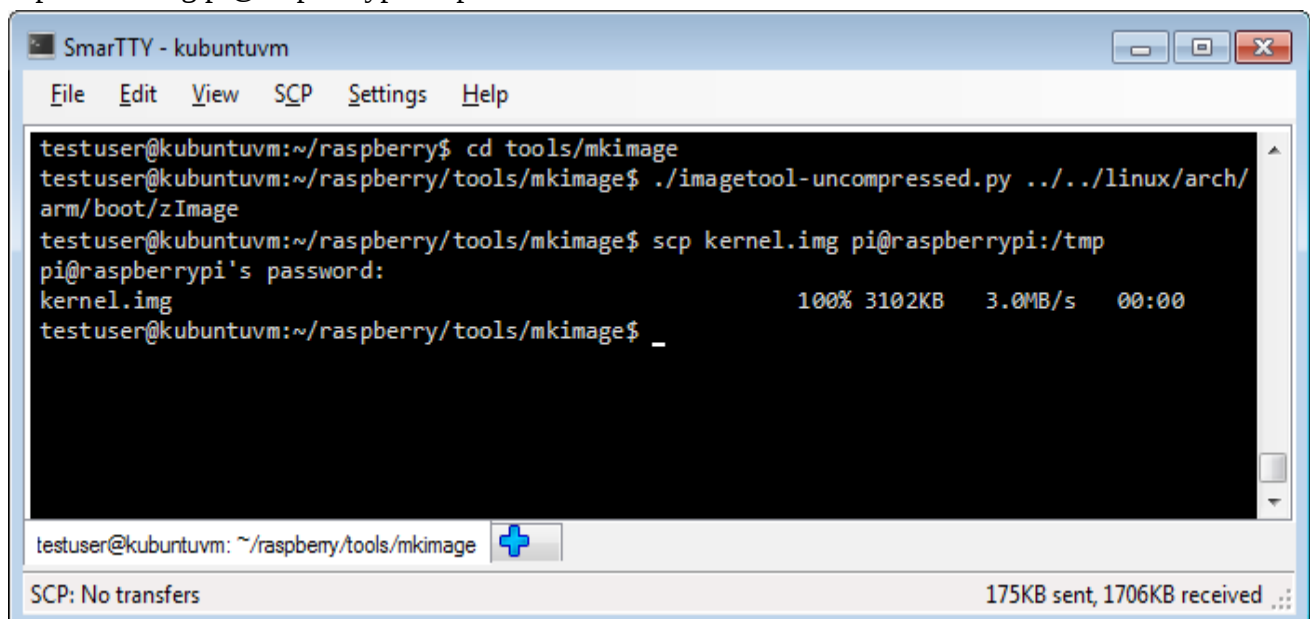12. Now we need to upload the new kernel and the new modules to Raspberry PI. First we will create an uncompressed kernel image and upload it to the temporary directory on Raspberry PI. Run the following commands on your build machine:

    cd <raspberry pi downloads>/tools/mkimage

    ./imagetool-uncompressed.py ../../linux/arch/arm/boot/zImage

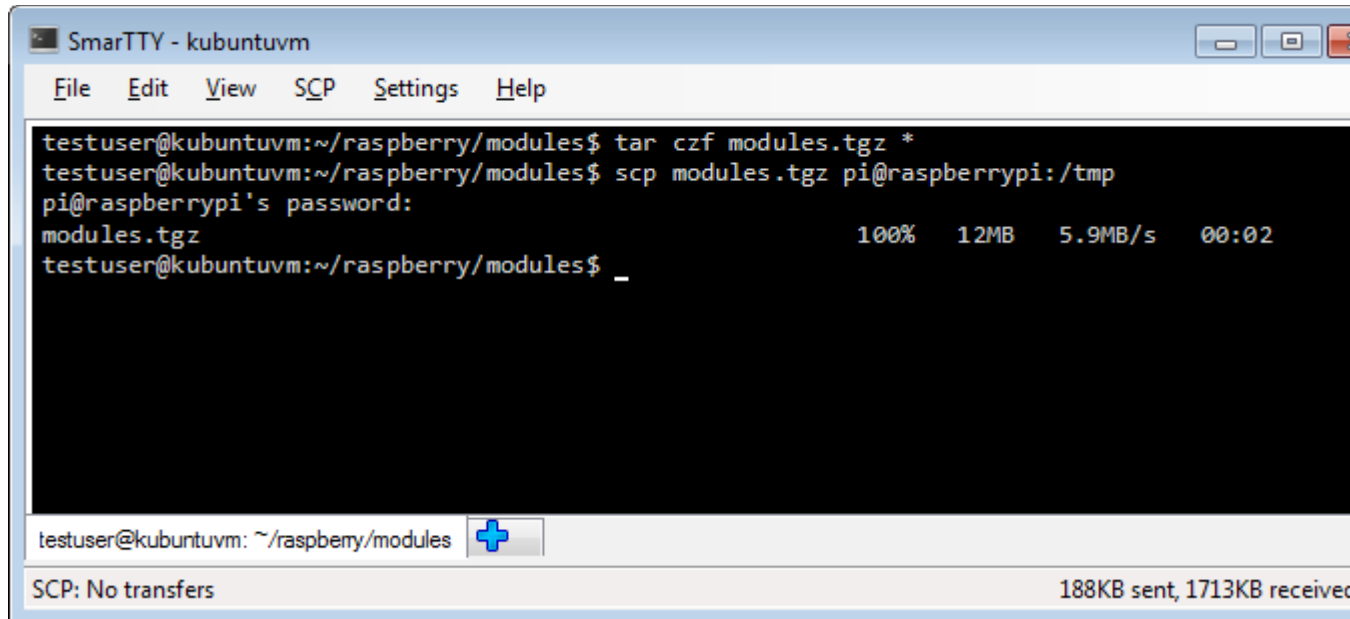   scp kernel.img pi@raspberrypi:/tmp

13. Then go to the 'modules' subdirectory we created before, make a tar archive containing the modules and upload it to Raspberry PI:

    cd <raspberry pi downloads>/tools/modules

    tar czf modules.tgz *

    scp modules.tgz pi@raspberrypi:/tmp

14. Finally we need to install the kernel and the modules. Connect to your Raspberry PI over SSH and run the following commands:

    cd /

    sudo mv /tmp/kernel.img /boot/

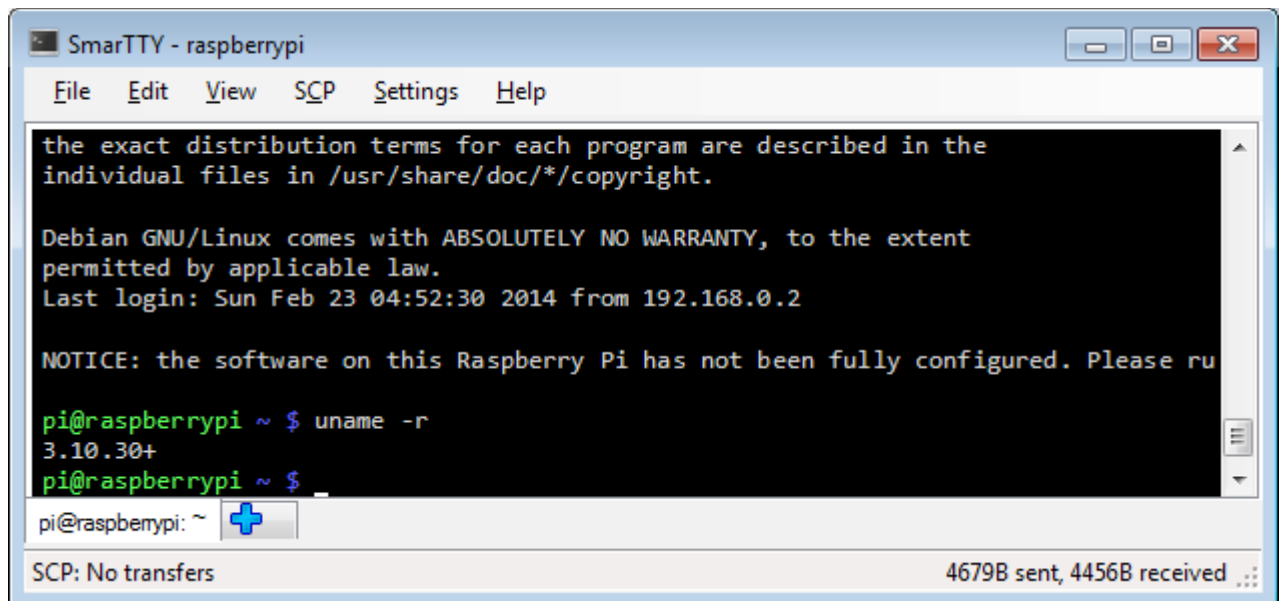   sudo tar xzf /tmp/modules.tgz

    rm /tmp/modules.tgz

    If you now list the contents of /lib/modules you will see that it now also contains the modules for the new kernel.

15. Restart your Raspberry PI to boot the new kernel:

    sudo shutdown -r now

16. Once Raspberry PI boots, connect to it over SSH and run the 'uname -r' command to see the

new kernel release:
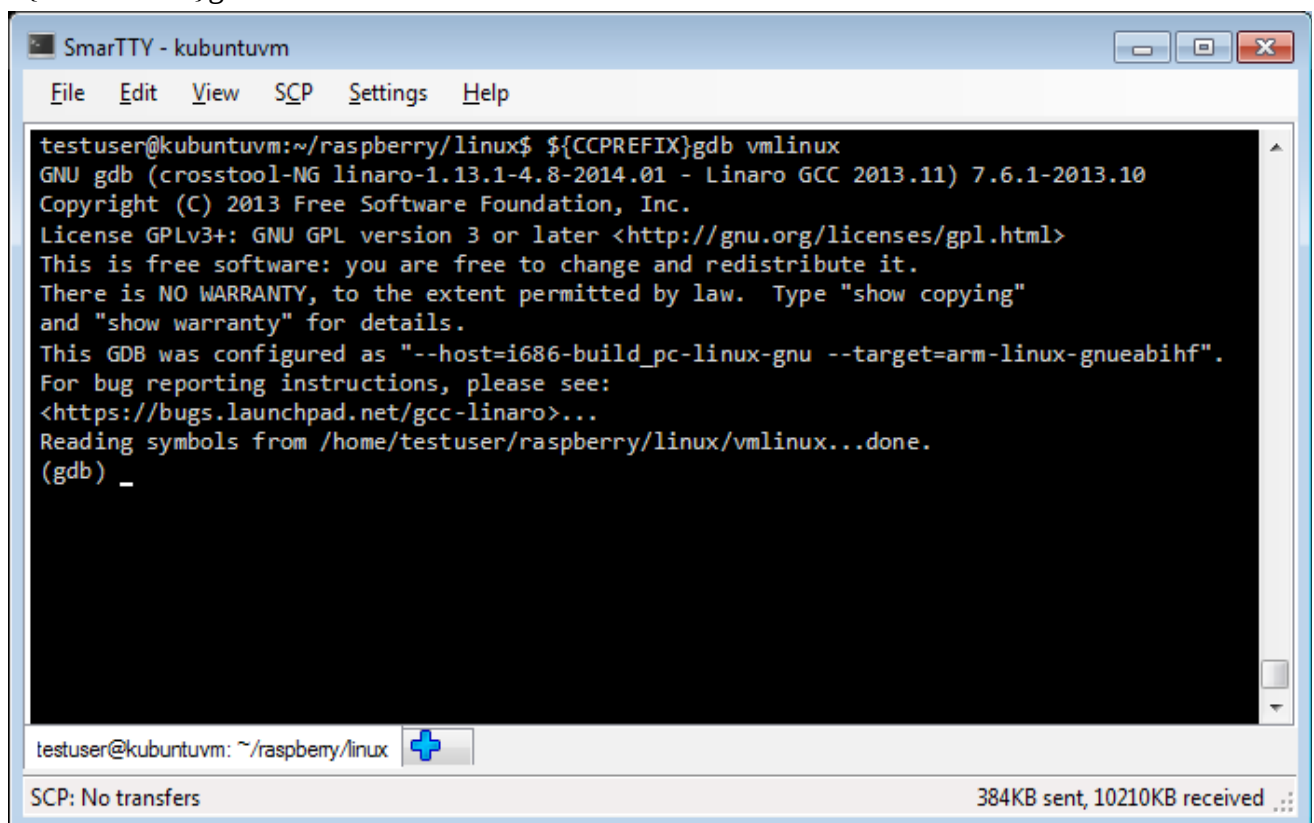
The release string should match the one we queried before when testing the kernel symbols.

17. Now you should be able to debug your kernel. Follow our Raspberry PI JTAG setup tutorial if you have not done that already. Once the JTAG connection is established, begin debugging by running the following command on your build machine:
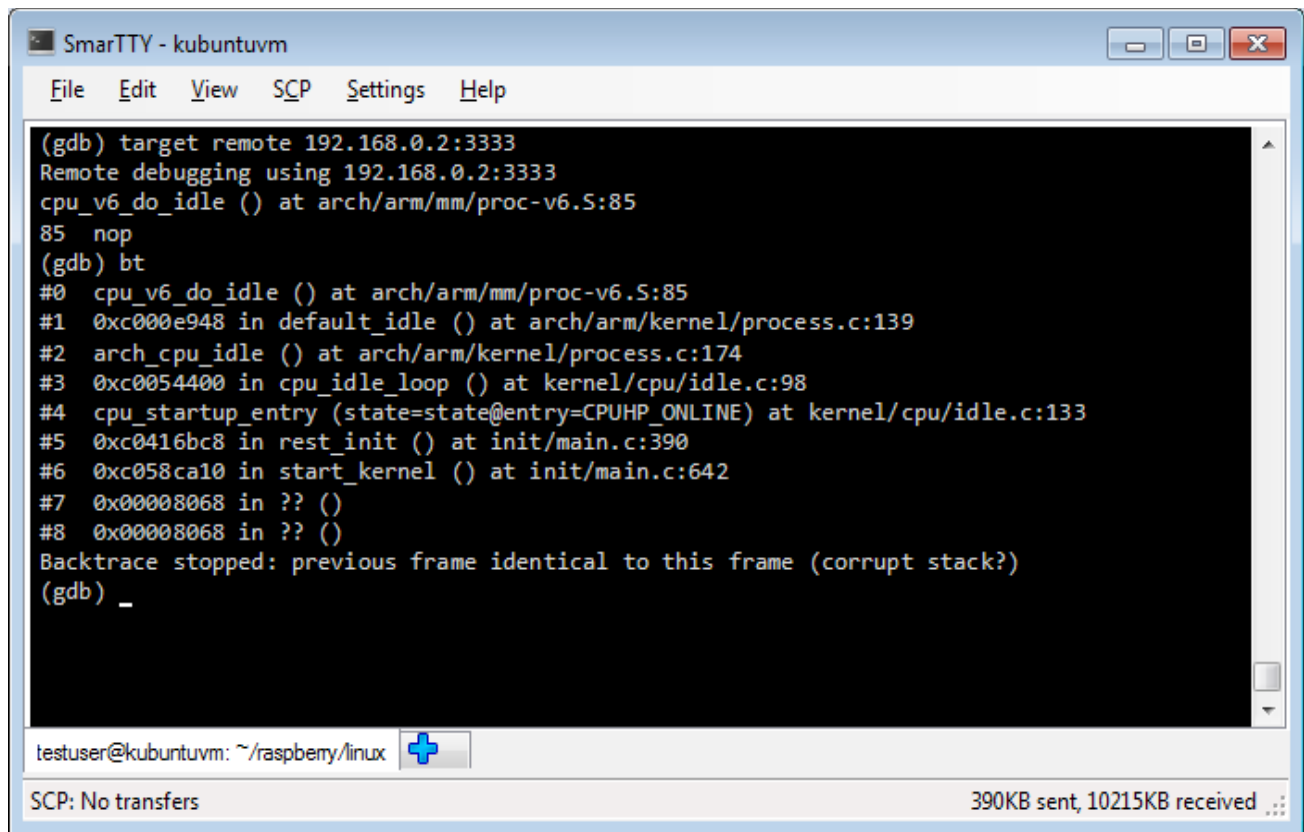 ${CCPREFIX}gdb vmlinux

18. Connect to OpenOCD by running the "target remote <OpenOCD host>:3333" command and display the stack trace using the bt command:

```
SmarTTY - kubuntuvm

File   Edit   View   SCP   Settings   Help

(gdb) target remote 192.168.0.2:3333
Remote debugging using 192.168.0.2:3333
cpu_v6_do_idle () at arch/arm/mm/proc-v6.S:85
85   nop
(gdb) bt
#0   cpu_v6_do_idle () at arch/arm/mm/proc-v6.S:85
#1   0xc000e948 in default_idle () at arch/arm/kernel/process.c:139
#2   arch_cpu_idle () at arch/arm/kernel/process.c:174
#3   0xc0054400 in cpu_idle_loop () at kernel/cpu/idle.c:98
#4   cpu_startup_entry (state=state@entry=CPUHP_ONLINE) at kernel/cpu/idle.c:133
#5   0xc0416bc8 in rest_init () at init/main.c:390
#6   0xc058ca10 in start_kernel () at init/main.c:642
#7   0x00008068 in ?? ()
#8   0x00008068 in ?? ()
Backtrace stopped: previous frame identical to this frame (corrupt stack?)
(gdb) _

testuser@kubuntuvm: ~/raspberry/linux

SCP: No transfers                                          390KB sent, 10215KB received
```
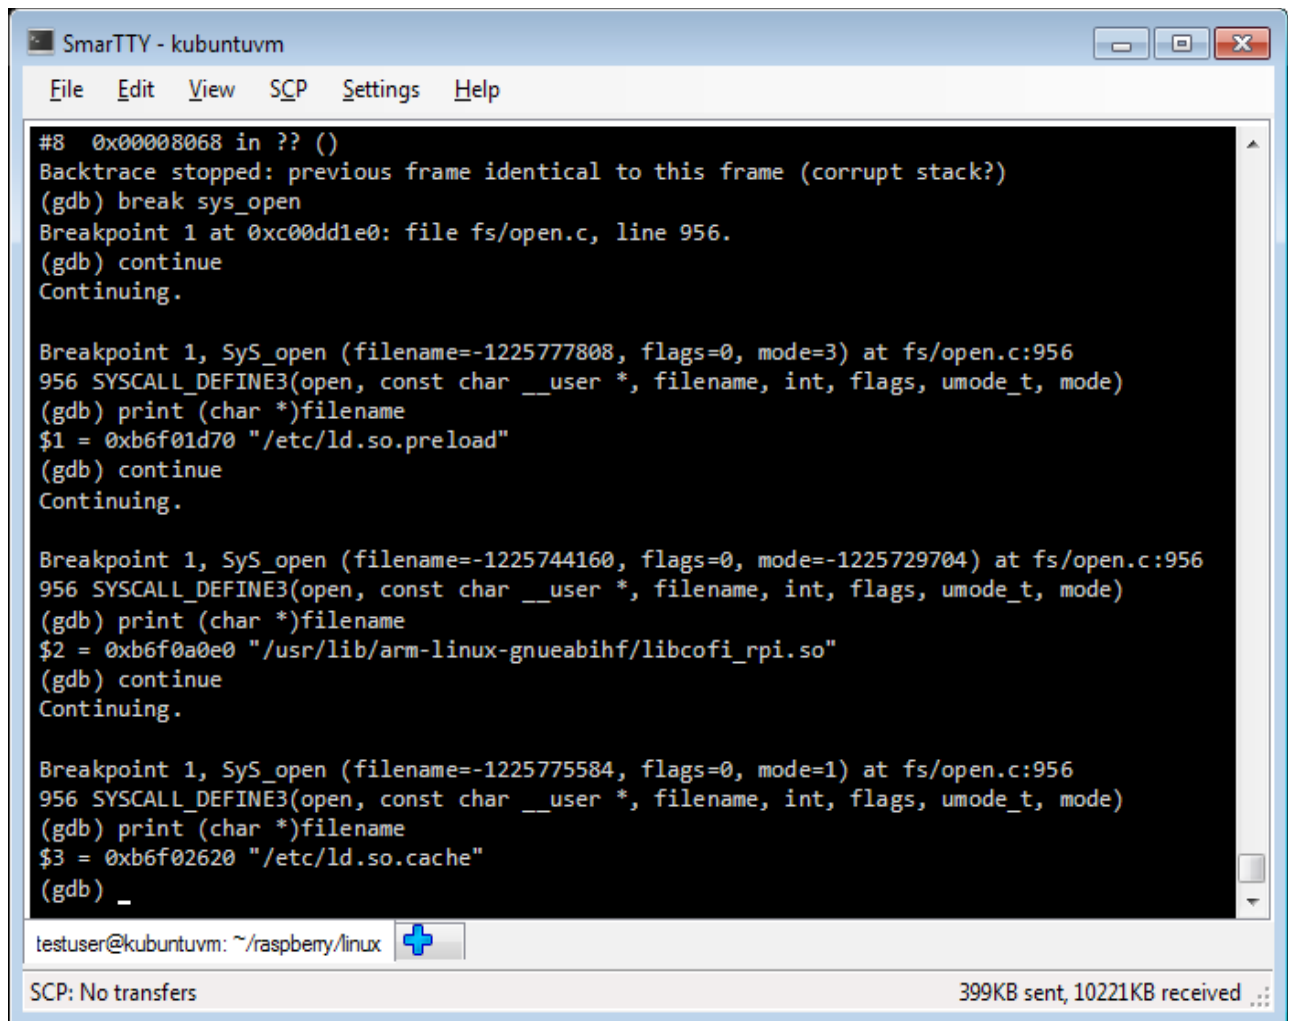
19.Now we'll test breakpoint support by setting a breakpoint at the **sys_open()** function:
break sys_open continue

20.Now go to the Raspberry PI SSH window and run 'ls /tmp' command. The **sys_open** breakpoint will be triggered. Run "print (char *)filename" to see the name of the file being opened:

```
SmarTTY - kubuntuvm

File   Edit   View   SCP   Settings   Help

#8  0x00008068 in ?? ()
Backtrace stopped: previous frame identical to this frame (corrupt stack?)
(gdb) break sys_open
Breakpoint 1 at 0xc00dd1e0: file fs/open.c, line 956.
(gdb) continue
Continuing.

Breakpoint 1, SyS_open (filename=-1225777808, flags=0, mode=3) at fs/open.c:956
956 SYSCALL_DEFINE3(open, const char __user *, filename, int, flags, umode_t, mode)
(gdb) print (char *)filename
$1 = 0xb6f01d70 "/etc/ld.so.preload"
(gdb) continue
Continuing.

Breakpoint 1, SyS_open (filename=-1225744160, flags=0, mode=-1225729704) at fs/open.c:956
956 SYSCALL_DEFINE3(open, const char __user *, filename, int, flags, umode_t, mode)
(gdb) print (char *)filename
$2 = 0xb6f0a0e0 "/usr/lib/arm-linux-gnueabihf/libcofi_rpi.so"
(gdb) continue
Continuing.

Breakpoint 1, SyS_open (filename=-1225775584, flags=0, mode=1) at fs/open.c:956
956 SYSCALL_DEFINE3(open, const char __user *, filename, int, flags, umode_t, mode)
(gdb) print (char *)filename
$3 = 0xb6f02620 "/etc/ld.so.cache"
(gdb) _

testuser@kubuntuvm: ~/raspberry/linux   ✚

SCP: No transfers                              399KB sent, 10221KB received
```

You will see that the Linux kernel is opening handles to libraries used by the 'ls' command.

Now that the basic debugging works you can setup a VisualKernel project to create and debug a basic kernel module