TRANSPERFECT

SAN JUAN BOWL

Logo construction sheet — detailed edition

Geometry, clear space, scaling math, colour codes, variants and misuse

About this document

This sheet defines the exact construction of the San Juan Bowl badge so any vendor, printer or partner can reproduce it without guesswork. Every distance is expressed in x-units, where 1x equals the height of the yellow TRANSPERFECT banner. Because all values are ratios, the rules hold at any reproduction size.

The unit: 1x

1x = banner height. Measured from the supplied master artwork (viewBox 0 0 1254 1254): the banner is 171.7 artwork units tall, so 1x = 171.7 units = 13.7% of the artboard height.

Contents

2. Construction grid — 12x12 grid, dimension lines, full geometry table
3. Clear space & scaling — exclusion zone, minimum footprint, size table
4. Colour codes — HEX, RGB, HSL, CMYK working builds, text-on-colour rules
5. Variants & backgrounds — colour and dark variants, the only four grounds
6. Misuse — eight rendered examples of what never to do
7. Large-format & signage — stadium, field and banner reproduction at 1 m to 20 m




Master badge — colour variant

Confidential — for approved vendors and partners

Construction grid & measurements

All distances in x-units (1x = banner height). Measured from the supplied master artwork.

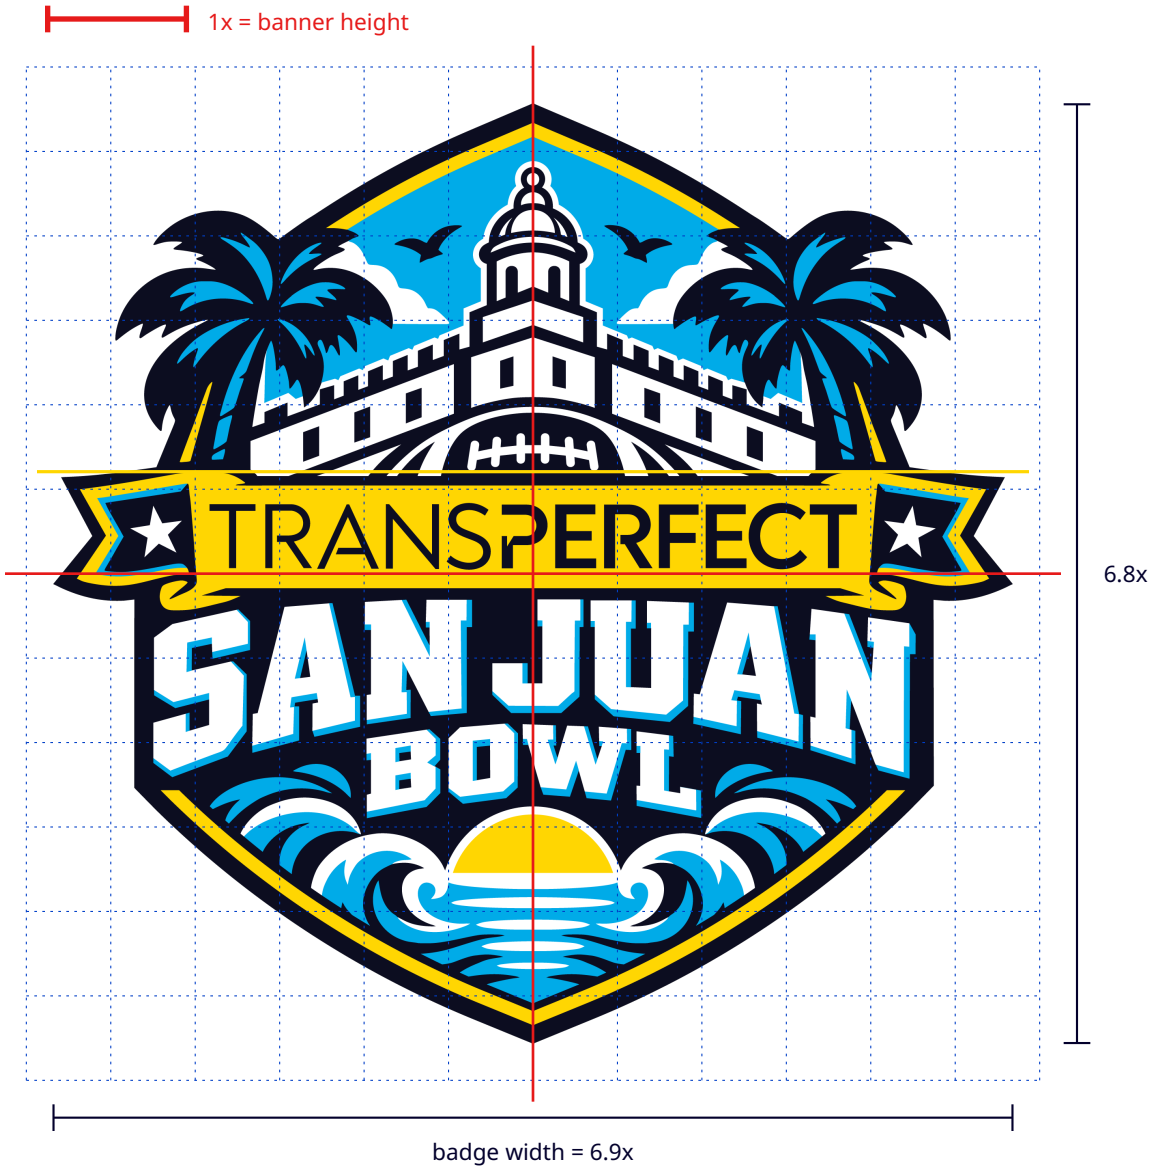

Measurements (x-units)

Badge width	6.9x
Badge height	6.8x
Banner width	6.6x
Banner height	1.0x (the unit)
Clear space	1x every side
Minimum footprint	8.9x x 8.8x
Artboard padding	2.7% sides / 3.7% top-bottom
Banner position	top edge 39.9% from artboard top
Badge centre	exactly on artboard centre (x=627/1254)
Badge aspect ratio	1.022 : 1 (w : h)

Geometry notes

The badge is centred horizontally on its square artboard to within 0.004% — always align on centre, never optically. The banner spans 90% of the artboard width. The badge is very slightly wider than tall (1.022:1); never force it into a perfect square or circle container.

Clear space & scaling

The exclusion zone keeps the badge legible at every size.



Nothing enters the dashed zone: no type, logos, rules, page edges or folds.

Size-to-x conversion table

x = badge width / 6.91. Clear space per side = x.

Badge width	x (clear space)	Typical use
25 mm	3.6 mm	print minimum — stationery
50 mm	7.2 mm	brochures, flyers
75 mm	10.9 mm	posters, signage panels
100 mm	14.5 mm	banners, large print
96 px	14 px	screen minimum — web
512 px	74 px	presentation title slides
60 mm	8.7 mm	embroidery / patch minimum

Minimum sizes

Print: 25 mm wide. Screen: 96 px wide. Embroidery/patch: 60 mm wide. Below these, fine detail (waves, sun rays, banner lettering) fills in.

Scaling rule

Scale the artwork proportionally only. All distances scale linearly with the badge — never re-measure, never eyeball. At the 25 mm print minimum, x = 3.6 mm and clear space is 3.6 mm per side.

Confidential — for approved vendors and partners

Colour codes

Exact web values from the artwork. CMYK builds are unproofed working values — request a vendor proof.

Bowl Navy

Primary ground, text

HEX #0D0E21
RGB 13 - 14 - 33
HSL 237 - 43% - 9%
CMYK C61 M58 Y0 K87

Text on this colour:
White or Gold

Caribbean Sky

Water, rays, accents

HEX #00AAE7
RGB 0 - 170 - 231
HSL 196 - 100% - 45%
CMYK C100 M26 Y0 K9

Text on this colour:
White or Navy

Banner Gold

Banner, sun, stars

HEX #FFD600
RGB 255 - 214 - 0
HSL 50 - 100% - 50%
CMYK C0 M16 Y100 K0

Text on this colour:
Navy only

White

Type, highlights, reverse

HEX #FFFFFF
RGB 255 - 255 - 255
HSL 0 - 0% - 100%
CMYK C0 M0 Y0 K0

Text on this colour:
Navy or Ink

Before you print

CMYK values above are standard conversions for quoting and layout only — they are not proofed. Ask the print vendor for a contract proof before any press run. Pantone references must be matched by the vendor against a physical swatch book; never substitute from memory. Body text in any San Juan Bowl document prints as 100K black, never 4-colour black. RGB is the house colour space; convert to CMYK only at the vendor's request.

Variants & approved backgrounds

Two variants, four grounds — nothing else.



Colour variant

For white, light and sky grounds. The default — use it unless the ground is dark.



Dark-ground variant

For Bowl Navy and ink grounds. Artwork is re-balanced for dark — never just invert the colour variant.

Choosing the variant

Light ground -> colour variant. Dark ground -> dark variant. If the ground is a photograph or pattern, the badge does not go on it at all.

The only four approved grounds



White
colour variant



Light grey #F2F2F2
colour variant



Caribbean Sky
colour variant, badge art only



Bowl Navy / Ink
dark variant

Misuse — never do these

Each example below is rendered from the real artwork. All eight are banned.



Do not stretch or squash
scale proportionally only



Do not recolour
no tints, filters or hue shifts



Do not crop
the full badge always shows



Do not rotate
banner stays horizontal



Do not place on busy grounds
no photos, patterns or gradients



Do not use low contrast
colour badge never on sky/dark



Do not add effects
no shadows, glows, bevels or outlines



Do not retype the banner
lettering is artwork, never live type

Confidential — for approved vendors and partners

Large-format & signage

Stadium, field and banner reproduction — the same construction math, scaled up.

The badge runs from a 25 mm printed card to a 20 m midfield painting. There is no separate large version of the artwork — the vector master scales to any size, and every rule below is the construction grid expressed in metres.

Scale table (x = badge width / 6.91 = clear space per side)

Badge width	x (clear space)	Typical use
1 m (3.3 ft)	14.5 cm	Concourse signage, press backdrops
2 m (6.6 ft)	28.9 cm	Stage surrounds, entrance features
5 m (16.4 ft)	72.4 cm	Stadium fascia, large banners
10 m (32.8 ft)	1.45 m	Building wraps, stand coverings
20 m (65.6 ft)	2.89 m	Field application, midfield mark

Production handoff

- Reproduce from the vector master (SVG/PDF) only — never upscale a PNG. The vector file scales to any size with no quality loss.
- Hand the vendor the vector master plus this construction sheet. The vendor converts it in their own RIP, cutter or stencil workflow — nobody redraws anything.
- Colour at scale is matched physically: spot colours matched to a Pantone swatch book, or the CMYK working builds printed with a contract proof. Never let a vendor match colour from a screen.
- At stadium viewing distances the fine detail (waves, sun rays, banner lettering) reads as texture — that is expected. The badge is designed to be recognised as a whole from 50 m and beyond.
- For field paint or turf application, the vendor prepares stencils from the vector master. Painted detail narrower than about 5 cm is merged at stencil stage — a production simplification, not a redesign.
- On panelled or mesh installations, seams and panel breaks fall at the artboard edge — never through the badge.
- Clear space scales with the badge: at 10 m wide, keep 1.45 m clear on every side.