

V950ME21-LF

Rev B2

14118 Stowe Drive, Suite B Poway, CA 92064

TEL: (858) 621-2700 | FAX: (858) 486-1927

URL: www.zcomm.com

EMAIL: applications@zcomm.com

Voltage-Controlled Oscillator Surface Mount Module


Applications

- Fixed Wireless
- · Microwave Radios

•

Application Notes

- AN-101: Mounting and Grounding
- AN-102: Output Loading
- AN-107: Manual Soldering

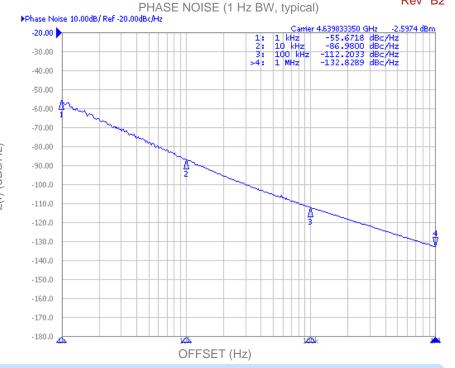


Performance Specifications	Min	Тур	Max	Units
Oscillation Frequency Range	4580		4700	MHz
Phase Noise @ 10 kHz offset (1 Hz BW)		-87		dBc/Hz
Harmonic Suppression (2nd)		-17	-14	dBc
Tuning Voltage	0.5		5	Vdc
Tuning Sensitivity (avg.)		89		MHz/V
Power Output	2	5.5	9	dBm
Load Impedance		50		Ω
Input Capacitance			50	pF
Pushing			7	MHz/V
Pulling (14 dB Return Loss, Any Phase)			15	MHz
Operating Temperature Range	-40		85	°C
Package Style		MINI-14S-L		

Power Supply Requirements	Min	Тур	Max	Units
Supply Voltage (Vcc, nom.)		5		Vdc
Supply Current (Icc)		33	38	mA

Additional Notes

Rev B2


Tuning Curve, typ.

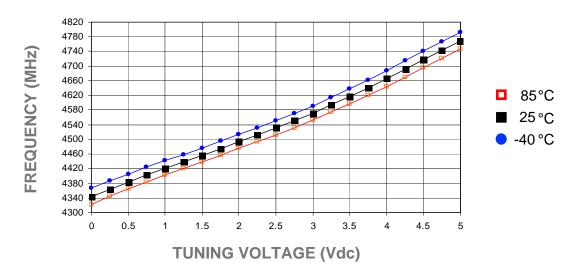

Power Curve, typ.


■ 25 °C

Footprint

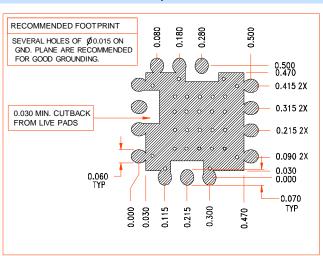

Physical Dimensions

-40 °C

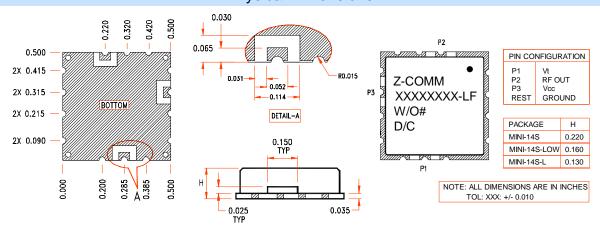

LFSuffix = RoHS Compliant. All specifications are subject to change without notice.

85°C