


System Architecture Diagram

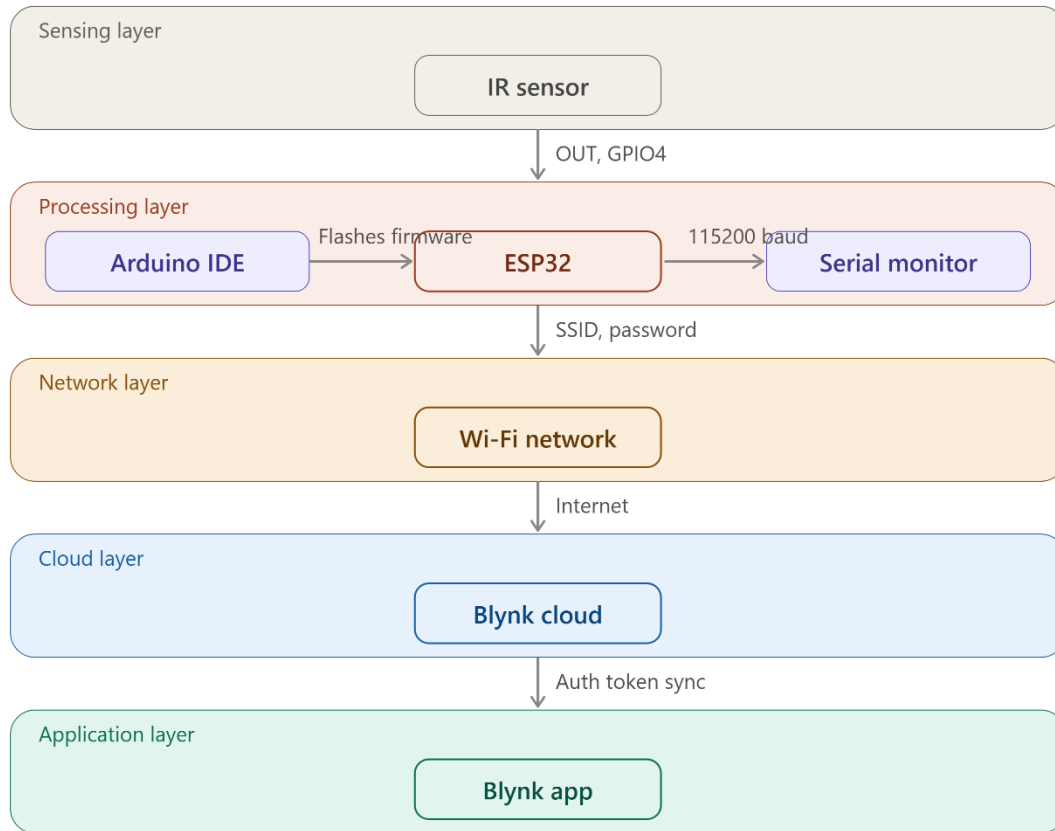

Object detected by IR sensor → status read by ESP32 → pushed via Wi-Fi to Blynk cloud → displayed on the Blynk app dashboard

That's the layered version — five horizontal bands from top to bottom:

- **Sensing layer** — the IR sensor itself
- **Processing layer** — the ESP32, flashed via Arduino IDE on one side and watched through the Serial Monitor on the other
- **Network layer** — the Wi-Fi connection
- **Cloud layer** — the Blynk cloud, synced via your auth token

- **Application layer** — the Blynk app dashboard on your phone

The signal travels straight down through the stack: detection → GPIO read → Wi-Fi → cloud → app display.