
WEATHER PROOF FIRE ALARM

Catalog No : S-100 FA



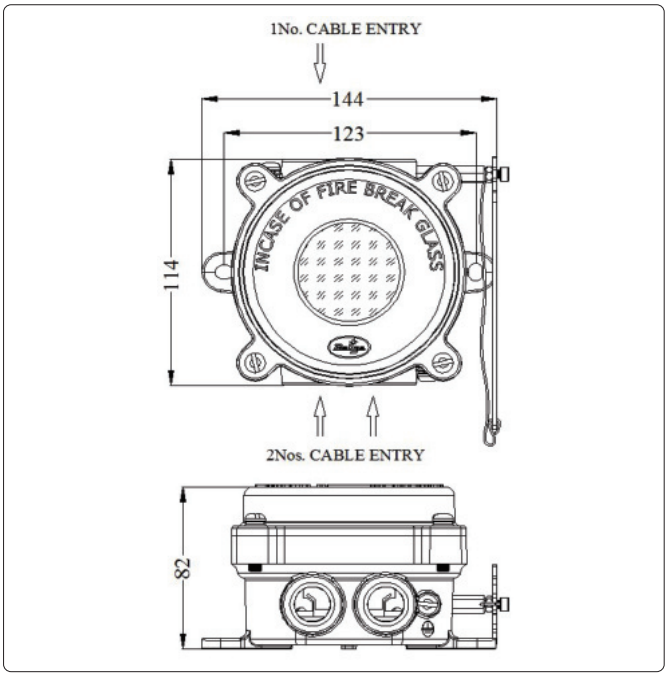

Product Description

Weatherproof fire alarm station with push button actuator with small cap head. The actuator is in contact with the glass cover which when broken activities the alarm.The alarm station is provided with a large gasket for weatherproof protection. These control station have max 2Nos. cables entries and necessary internal & external earthing facilities. Fire alarms are weatherproof and rated for outer use. A SS Hammer is attached for easy breaking of the glass.

Mechanical Data


Material	:	Light metal aluminium alloy
IP Protection	:	IP66 (IEC 60529)
Certificate	:	EDTC(CN)/2023/53228
Finish	:	Epoxy powder coated / Red
Cable entry	:	Max 3Nos. M20x1.5P (or) 3Nos. 0.5 NPT
Weight	:	0.7KG
Body & Cover	:	Bolted type
Hardware	:	Stainless Steel

Electrical Data

Rating : 3.6A, 230 AC | 2.8A 24V DC
Earthing : 2Nos, External (M6) & 1No. Internal (M5)

Special Feature

1. As Cast Mounting Leg with slotted hole provision

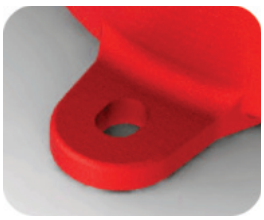

2. As cast earth symbol provision



3. Fast removable stainless steel hammer with simple mechanism.




4. Replacement glass (Spare -if-Required)




Catalog No : S-100 FA

Step 1

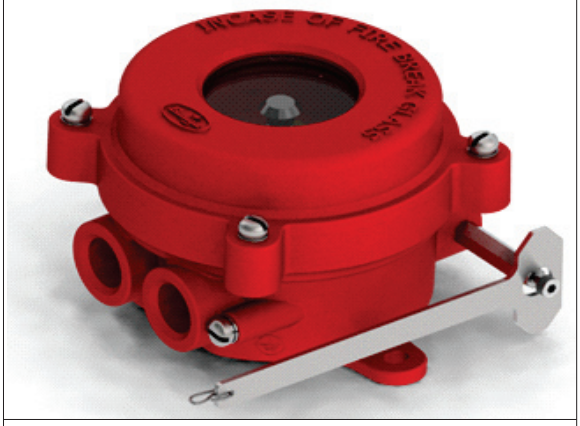

Loosen the 4 Cover screw and remove the cover.

Step 2

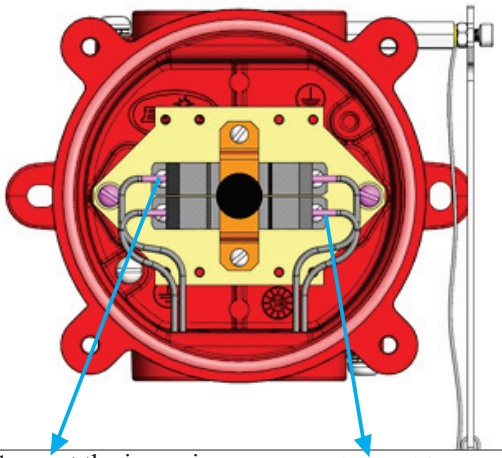

Connect the incoming cable to the connectors.

Outgoing Cables to be connected to PLC/Alarms.



Final assembly

- Fit the cover back as before.
- The ingress protection rating is incumbent upon proper installation of the cable glands & plugs & fully tightening all cover screws.