
ATEX CERTIFIED

EXPLOSION PROOF CABLE GLANDS

CG SERIES

Explosion proof double compression cable glands can be used for both indoor and outdoor application for use in hazardous area.Suitable for use with steel wire armoured, steel tape armoured. Cable sealing rubber, nipple rubber & nipple washer designed in silicone ensures it is suitable for high ambient temperature.



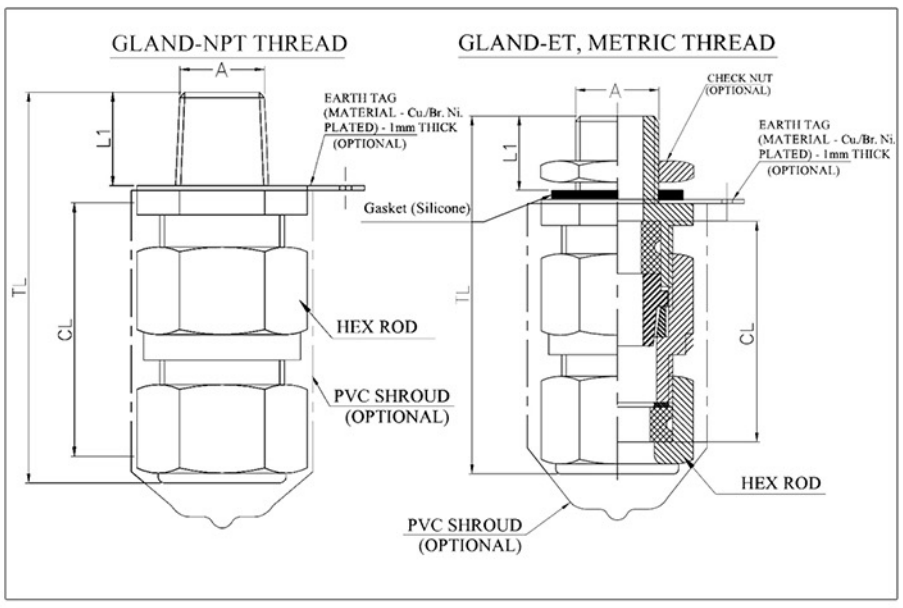

Salient Features

1. IP Rating is obtained through the specially designed silicone rubber components.
2. All rubber in silicone makes it suitable for high ambient temperature -40˚C to +150˚C

Mechanical Data

Material	: Aluminium, Brass, SS304, SS316, SS316L
Finish	: SS304, SS316, SS316L - Polished Brass - Nickle Plated Aluminium - Anodized
Gasket	: Silicone
Range	: Metric M16 - M100 ET 0.5ET - 4.0ET NPT 0.5NPT - 4.0NPT
Accessories (upon request)	: Checknut, Earth Tag, Serrated Washer

Certification

Classification	: Ex II 2 GD Ex d IIC Gb/ Ex e IIC Gb / Ex tb IIIC Db -40˚C ≤ Ta ≤+150˚C IP66
Type of Protection	: Flame proof - Ex d & Increased Safety - Ex e
Area Classification	: Zone 1 & 2, Zone 21 & 22.
Gas /Dust Groups	: Gr IIA/IIB, IIC & Gr IIIA/IIIB, Gr IIIC
Apparatus Standard	: EN/ IEC 60079- 0 EN/ IEC 60079 -1 EN/ IEC 60079 - 31 EN/ IEC 60079 - 7
Test Certificate	: ATEX - ITS13ATEX17914X IECEX -ITS13.0051X CCE- P347182/2 CCE- P347183/2
Approvals	: ATEX, IECEX, CCE

CAT NAME	HEX A/F	HEX A/C	DIM "A" NIPPLE SIZES / THREADING			THREAD LENGTH (L1) (mm)			Min-Max Range				Compression Length (CL) (mm) Approx	Total Length (TL) (mm) Approx
			ET	NPT	METRIC	ET	NPT	METRIC	OD (mm) D1	OD (mm) D2	ID (mm) d1	ID (mm) d2		
CG - 1010	25.4	29.33	0.5	-	-	18	20	18	11-16	-	5-8	-	49	66
			0.75	0.5	M16x1.5P/ M20x1.5P						5-9	-		
CG - 1011	28	32.33	0.75	-	M20x1.5P	19	20	18	16-20	20	9-14	-	49	66
			-	0.5 / 0.75	-						9-15	-		
CG - 1012	36	41.57	1.0	1.0	M25x1.5P	19	24	18	20-25	-	15-20	-	49	70
CG - 1013	45	51.96	1.25	1.25	M32x1.5P	19	24	18	25-28	28-33	20-24	24-27	63	84
CG - 1014	55	63.51	1.50	1.5	M40x1.5P	21	24	18	33-36	36-40	27-30	30-34	63	84
CG - 1015	65	75.06	2.0	2.0	M50x1.5P	22	24	19	40-45	45-50	34-40	40-44	68	90
CG - 1016	85	98.15	2.5	2.5	M63x1.5P	22	37	19	50-56	56-62	44-50	50-56	73	109
CG - 1017	100	115.47	3.0	3.0	M75x1.5P	22	37	19	62-68	68-74	56-62	62-68	73	109
CG - 1018	100	115.47	3.5	3.5	M80x1.5P	22	37	19	74-78	-	68-72	-	73	109
CG - 1019	100	115.47	3.5	3.5	M90x2.0P	22	37	23	78-83	83-88	72-76	76-82	73	109
	120	138.56	4.0	4.0	M100x2.0P	22	37	23	88-92	92-96	82-86	86-90	73	109