
EXPLOSION PROOF BLANKING PLUGS

CAT NO: FWPG SERIES



Description

Explosion proof blanking plugs can be used for both indoor and outdoor application for use in hazardous area. Used in the closure and sealing of unused entries in Ex equipments that are installed in hazardous areas. Its superior design ensures it is suitable for a wide temperature range.

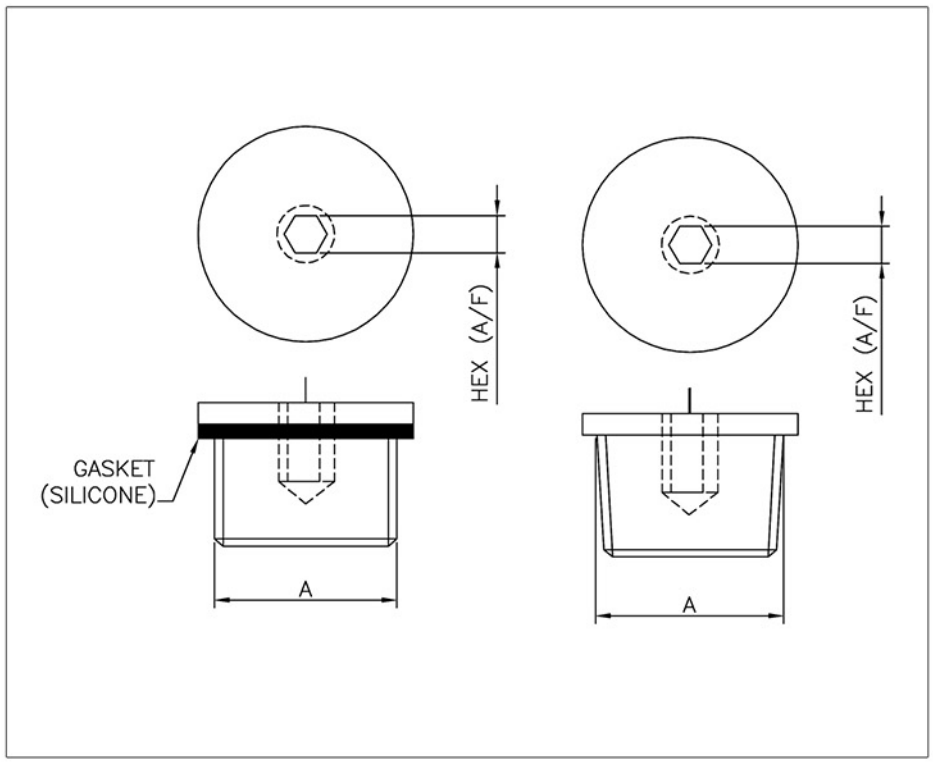

Mechanical Data

Material	: Brass, SS304, SS316, SS316L, Aluminium
Finish	: Brass Nickel Plated, SS304, SS316, SS316L - Polished Aluminium Anodized
IP Protection	: IP 66
Gasket	: Silicone
Range	: Metric M16 - M75 ET 0.5ET - 3.0ET NPT 0.5NPT - 3.0NPT
Accessories (upon request)	: Checknut

Salient Features

1. IP Rating is obtained through the specially designed silicone rubber components.
2. All rubber in silicone makes it suitable for high ambient temperature -40°C to +150°C

Protection / Classification

Classification	: Ex d IIC Gb IP66
Type of Protection	: Flame proof - Ex d
Area Classification	: Zone 1 & 2
Gas Groups	: Gr IIA/IIB, IIC
Apparatus Standard	: IS/ IEC 60079- 0 IS/ IEC 60079 -1 IS/ IEC 60529
Test Certificate	: CIMFR
Approvals	: CIMFR, CCE, BIS

CAT. NO	DIMENSION "A"
FWPG - 551	0.5ET / M16x1.5P
	0.5BSP / 0.5NPT
FWPG - 552	0.75ET / M20x1.5P
	0.75BSP / 0.75NPT
FWPG - 553	1.0ET / M25x1.5P
	1.0BSP / 1.0NPT
FWPG - 554	1.25ET / M32x1.5P
	1.25BSP / 1.25NPT
FWPG - 555	1.5ET / M40x1.5P
	1.5BSP / 1.5NPT
FWPG - 556	2.0ET / M50x1.5P
	2.0BSP / 2.0NPT
FWPG - 557	2.5ET / M63x1.5P
	2.5BSP / 2.5NPT
FWPG - 558	3.0ET/ M75x1.5P
	3.0BSP / 3.0NPT