IECEx CERTIFIED

EXPLOSIONPROOF CUM WEATHERPROOF CONTROL STATION

EXCS-100 SERIES

Explosionproof cum weatherproof control station, EXCS-100 Series are designed for use in Gas & Dust hazardous atmosphere like oil and gas industries, Refineries, chemical industries etc., These control station are suitable for use in location classified as zone 1 & zone 21 and group IIC & IIIC and IP66 rated. Control stations are constructed by AL. Light metal alloy and stainless steel fasteners. Required on-off toggle switches / on-off cam switches / indicating lamp/ momentary push button / Emergency push button / Fire alarm will be fixed on the cover. All necessary electrical connection are safely assembled in Ex db enclosure and with terminals and without terminals variation suitable to connect incoming / outgoing field cables. These control station have max 4Nos. cable entries and necessary internal & external earthing facilities.

Mechanical Data

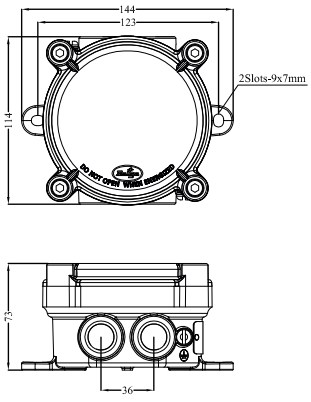
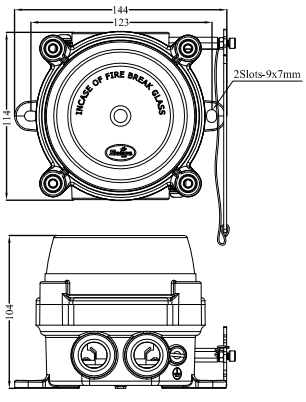
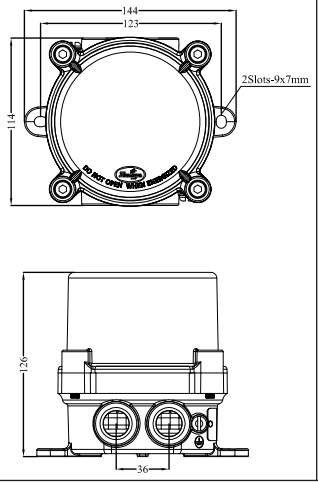
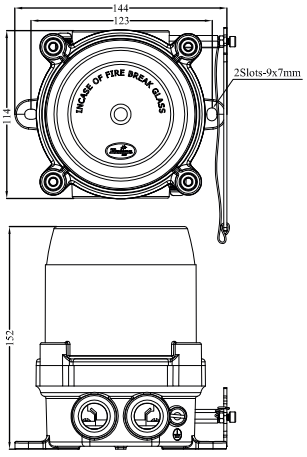
Material	: Light Metal alloy (AL)
IP Protection	: IP66
Finish	: Epoxy powder coated / High built epoxy paint
Cable entry	: Max 4Nos. M20x1.5P Max 4Nos. 0.5 NPT
Weight	: Refer Table
Body & Cover joint	: Spigot type
Hardware	: SS304/SS316

Electrical Data

Terminal	: 10Nos.terminal (For Raised Cover)
Earthing	: 2Nos.External (M6) & 1No.Internal (M5)
Push Button assy	: 24V AC to 415V AC & 24V DC to 250V DC
Switches assy	: Max 16A, 240V AC / 24V DC Selector switch assembly
Indicating Lamp assy	: 24V to 240V AC & 24V to 110V DC

Certification

Certification	:	Ex db IIC T6 Gb Ex tb IIIC T85°C Db -20°C≤Ta≤+60°C
Conformity Standard	:	IEC 60079-0 IEC 60079-1 IEC 60079-31 IEC 60529
IECEx Certificate	:	IECEx KLCS 24.0010X

Push button/ Indicating Lamp/ Switches enclosure dimension detail without terminal	Fire alarm enclosure dimension detail without terminal	Push Button / Indicating Lamp / Switches enclosure dimension detail- with terminal	Fire alarm enclosure dimension detail with terminal
			

VARIATIONS EXCS-100 SERIES

EXCS-100-F (without terminal)



External dim
144x114x73
Weight
0.9 Kgs (Approx)
Mtg Dim
2Slots - 9x7mm (Suitable for M6 bolts)

EXCS-100-R (with terminal)



External dim
144x114x126
Weight
1.2 Kgs (Approx)
Mtg Dim
2Slots - 9x7mm (Suitable for M6 bolts)

EXCS-100-F (without terminal)



External dim
144x114x73
Weight
0.9 Kgs (Approx)
Mtg Dim
2Slots - 9x7mm (Suitable for M6 bolts)

EXCS-100-R (with terminal)



External dim
144x114x126
Weight
1.2 Kgs (Approx)
Mtg Dim
2Slots - 9x7mm (Suitable for M6 bolts)

EXCS-100-F-3 (without terminal)



External dim
144x114x73
Weight
1.0 Kgs (Approx)
Mtg Dim
2Slots - 9x7mm (Suitable for M6 bolts)

EXCS-100-R-3 (with terminal)



External dim
144x114x126
Weight
1.2 Kgs (Approx)
Mtg Dim
2Slots - 9x7mm (Suitable for M6 bolts)

EXCS-100-F (without terminal)



External dim
144x114x73
Weight
1.0 Kgs (Approx)
Mtg Dim
2Slots - 9x7mm (Suitable for M6 bolts)

EXCS-100-R (with terminal)



External dim
144x114x126
Weight
1.2 Kgs (Approx)
Mtg Dim
2Slots - 9x7mm (Suitable for M6 bolts)

EXCS-100-F (without terminal)



External dim
144x114x73
Weight
0.8 Kgs (Approx)
Mtg Dim
2Slots - 9x7mm (Suitable for M6 bolts)

EXCS-100-R (with terminal)



External dim
144x114x126
Weight
1.0 Kgs (Approx)
Mtg Dim
2Slots - 9x7mm (Suitable for M6 bolts)

EXCS-100-F (without terminal)



External dim
144x114x104
Weight
1.2 Kgs (Approx)
Mtg Dim
2Slots - 9x7mm (Suitable for M6 bolts)

EXCS-100-R (with terminal)



External dim
144x114x152
Weight
1.4 Kgs (Approx)
Mtg Dim
2Slots - 9x7mm (Suitable for M6 bolts)

***Note :** Combination of joining enclosure : Refer Baliga