PRODUCT TYPE:


FLAMEPROOF Exd LOUD SPEAKER

PRODUCT CAT NO : FLSR-25



PRODUCT DESCRIPTION

Explosion Proof Loudspeaker. In the main chamber loudspeaker connection is sealed completely and the loudspeaker will operate on the amplifier signals and it is duly wired up to the terminal chamber through sealed nipple the horn unit is placed on the main chamber cover and the output signals are taken through sealed coil. The covers with silicon 'O' ring gasket for weatherproof protection. The output is galvanically isolated

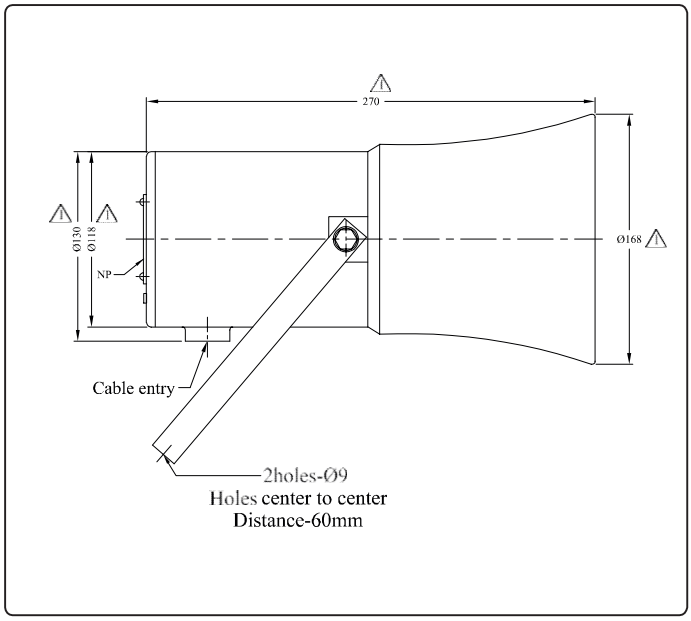

TECHNICAL DATA

PROTECTION / CLASSIFICATION

Type or protection	: Flameproof –Ex db
Gas/ Dust Groups	: IIC/IIIC
Suitable for	: Zone1, 2, 21 & 22.
Temperature Class	: T6/T85°C @ -20°C≤Ta≤+40°C
	T5/T100°C @ -20°C≤Ta≤+50°C
	T4/ T135°C @-20°C≤Ta≤+60°C
Conformity Standard	: IS/IEC 60079-0
	IS/IEC 60079-1
	IS/IEC 60079-31
	IS/IEC 60529
Certificate CIMFR	: CMF 22 INEx 0182
PESO	: P538462/4
BIS	: CM/L 0364341

ELECTRICAL DATA

Operating Voltage	: Amplifier signal Voltage
Selectable Power	: 10W, 15W, 20W, 25W
Sound Output	: 106db Max @1M
Terminal	: 6 way connectors
Earthing	: External 2 x M6
	Internal 1 x M5

MECHANICAL DATA

Material	: Light Metal Alloy (Al)
Ingress Protection	: IP66
Weight	: 2.5kg
Finish	: Bright Red
	(Standard Epoxy powder coated)
Cable Entry	: M20 X 1.5 / M25 X 1.5P
Gasket	: Silicone
Hardware	: SS304
Canopy	: Optional

***Note :** Product should not be energized more than 30min