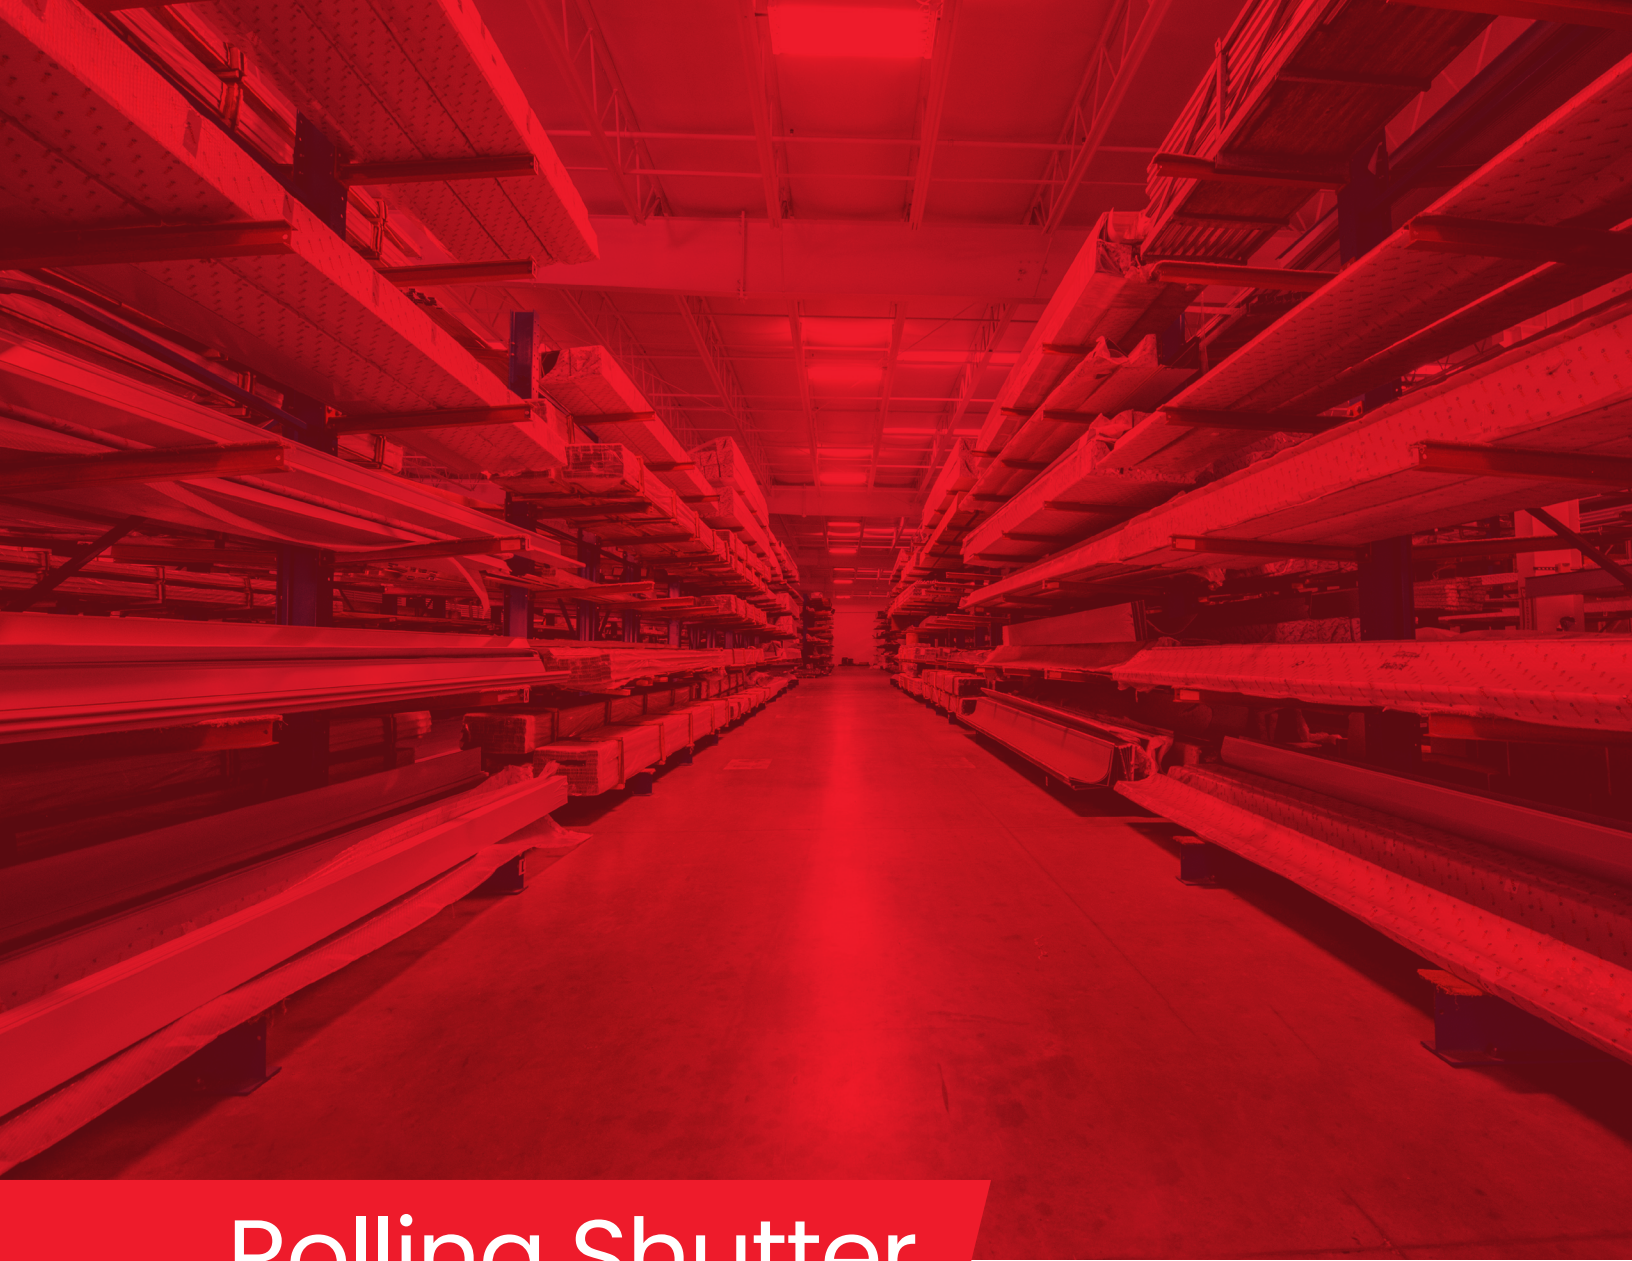




Rolling Shutter

Technical Catalog



TABLE OF CONTENTS

Aluminum Extrusions	5
Housing, End Caps, and Safety Plates	10
Accessories	17
Motor Parts & Accessories	43
Rolling Shutter Breakdowns	57
Pre-Cut Measurements & Information	61
How to adjust cuts for your measurements	65
Motor Specs	69

Disclaimer

The dimensions and thickness of aluminum profiles shown in this manual are theoretical and may vary according to the tolerance provided by American Construction Standards. Cutting lists shown in this manual do not take into account these possible variations. We, therefore, recommend carefully checking aluminum profile dimensions, as well as, the cutting accuracy of all machinery.

The system described in this manual has been designed and tested as a whole. The use of the Croci brand is permitted only when original Croci components are used (sections, accessories, and gaskets) and only when the technical specifications given in this manual are complied with. In the event that any component of the system is not an original Croci component, the use of the Croci brand is not authorized.

The product shall be used in accordance with the specifications, regulations, and laws in force in the country where the product itself is used. Croci waives all responsibility resulting from non-compliance with the above-listed instructions.

Any details provided in this manual representing frames back to the structure are merely shown as an indication to assist designers and manufacturers.






Aluminum Extrusions



Available In:







Systems

Code/Reference	Dimensions	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
AR/17 		Aluminum profile 9x44 mm with foam insulation Weight lb./ft: 0.077 Weight lb./sq ft: 0.54					●		50 slats 19 ft
AR/32 		Aluminum profile 14x55 mm with foam insulation Weight lb./ft: 0.303 Weight lb./sq ft: 1.62						●	30 slats 19 ft
TE7X56U 		End slat for 44mm slats interior/exterior roll Without lock slat	●	●			●		5 slats 19 ft
TE14X56U 		End slat for 55mm slats interior/exterior roll Without lock slat			●	●		●	5 slats 19 ft
TS12X55U 		End slat for 55mm slats interior/exterior roll Without lock slat			●	●		●	5 slats 19 ft

Available In:









Systems

Code/Reference	Dimensions	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
ES/44 		Extruded aluminum profile 9x44 mm Weight lb./ft: 0.205 Weight lb./sq ft: 1.41	●						8 slats 19 ft
ES/44 SUP 		Extruded aluminum profile 9x44 mm Weight lb./ft: 0.205 Weight lb./sq ft: 1.41		●					8 slats 19 ft
ES/55 		Extruded aluminum profile 14x55 mm Weight lb./ft: 0.303 Weight lb./sq ft: 1.62			●				8 slats 19 ft
ES/55 SUP 		Extruded aluminum profile 14x55 mm Weight lb./ft: 0.353 Weight lb./sq ft: 1.9				●			8 slats 24 ft
ES/55 LEX 		Extruded aluminum profile 14x55 mm. Requires use of LEX strip, sold separately Weight lb./ft: 0.368 Weight lb./sq ft: 2				●			8 slats 24 ft

Available In:






Systems

Code/Reference	Dimensions	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
GE62X21 		Track for 44mm slats	●				●		1 piece 19 ft
GE62X21SUP 		Track for 44mm end retention slats		●					1 piece 19 ft
GE80X28 		Track for 55mm slats, for side frames 45 degree up to and including 8" and 90 degree up to 10"			●		●		1 piece 19 ft
GE458028 		Track for 55mm slats, for side frames 45 degree 10" and 12"			●		●		1 piece 19 ft
GE4580SUP 		Track for 55mm for end retention slats for 10" and 12" boxes				●			1 piece 19 ft 24ft

Available In:



Systems

Code/Reference	Dimensions	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
GE4580SNAP-24 		Track, snap for 55mm end retention slats. snap cover (SNAPCVR-24) is included with the track.				●			1 piece 19 ft
SNAPCVR-24 		Track snap cover				●			1 piece 24ft



Housing, End Caps, and Safety Plates



Available In:



Systems



Code	Description	Reference	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
5 sided 45 degree hoods									1 set
*CA45/137	5.5" Shutterbox 45 degree		●	●			●		
CA45/165	6.5" Shutterbox 45 degree		●	●			●		
CA45/180	7" Shutterbox 45 degree		●	●	●		●		
CA45/205	8" Shutterbox 45 degree		●	●	●	●	●	●	
CA45/250	10" Shutterbox 45 degree				●	●		●	
CA45/300	12" Shutterbox 45 degree				●	●		●	
5 sided 45 degree hoods with lip									1 set
CA45/250L 24	10" Shutterbox 45 degree With a lip				●	●		●	
CA45/300L 24	12" Shutterbox 45 degree With a lip				●	●		●	

Any items marked (*) are non-stock items. Please contact our customer service for availability

Available In:



Systems

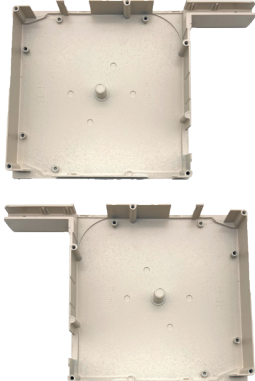
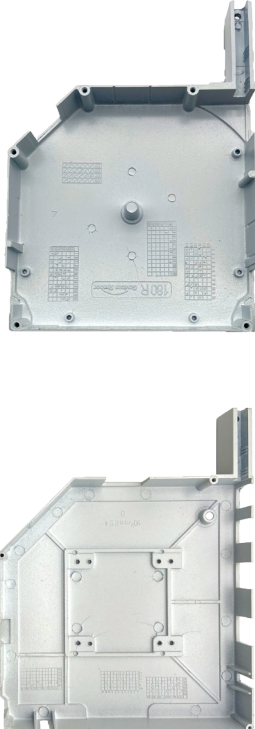
Code	Description	Reference	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
90 Degree Square Hoods									1 set
*CA90/165	6.5" Shutterbox 90 degree		●	●			●		
*CA90/180	7" Shutterbox 90 degree		●	●	●		●		
CA90/205	8" Shutterbox 90 degree		●	●	●	●	●	●	
CA90/250	10" Shutterbox 90 degree				●	●		●	
Round Hoods for Unibox Systems									1 set
*CARD137	5.5" rounded shutterbox		●	●			●		
CARD180	7" rounded shutterbox"		●	●	●		●		
CARD205	8" rounded shutterbox		●	●	●	●	●	●	
CARD250	10" rounded shutterbox				●	●		●	
CARD300	12" rounded shutterbox				●	●		●	

Any items marked (*) are non-stock items. Please contact our customer service for availability

Available In:



Systems




Code	Description	Reference	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
90 Degree Aluminum End Caps									1 pair
*FI165/90	90 degree 6.5" side frames		●	●			●		
FI180/90	90 degree 7" side frames		●	●			●		
FI205/90	90 degree 8" side frames		●	●			●	●	
FI250/90	90 degree 10" side frames		●	●			●	●	
45 Degree Aluminum End Caps									1 pair
*FI125/45	45 degree 5" side frames		●	●			●		
FI165/45	45 degree 6.5" side frames		●	●			●		
FI180/45	45 degree 7" side frames		●	●			●		
FI205/45	45 degree 8" side frames		●	●	●		●	●	
FI205/45 large	45 degree 8" side frames with large pin				●	●		●	
FI250/45	45 degree 10" side frames				●	●		●	
FI250/45 small	45 degree 10" side frames for 8" housing		●	●	●		●	●	
FI300/45	45 degree 12" side frames				●	●		●	

Any items marked (*) are non-stock items. Please contact our customer service for availability


Available In:



Systems

Code	Description	Reference	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
Aluminum Unibox System 45 degree End Caps		 							1 pair
UFI137/45	UNI-Sideframe 45 degrees 5.5"		●	●			●		
UFI165/45	UNI-Sideframe 45 degrees 6.5"		●	●			●		
UFI180/45	UNI-Sideframe 45 degrees 7"		●	●	●		●		
UFI205/45	UNI-Sideframe 45 degrees 8"		●	●	●	●	●	●	
UFI250/45	UNI-Sideframe 45 degrees 10"				●	●		●	
UFI300/45	UNI-Sideframe 45 degrees 12"				●	●		●	
Aluminum Rounded End caps		 							1 pair
UFI137RD	UNI-Sideframe rounded 5.5"		●	●			●		
UFI165RD	UNI-Sideframe rounded 6.5"		●	●			●		
UFI180RD	UNI-Sideframe rounded 7"		●	●	●		●		
UFI205RD	UNI-Sideframe rounded 8"		●	●	●	●	●	●	
UFI250RD	UNI-Sideframe rounded 10"				●	●		●	
UFI300RD	UNI-Sideframe rounded 12"				●	●		●	

Systems

Code	Description	Reference	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
45 Degree Safety Plates									1 piece
FB165/60	6.5" Galvanized steel plate for 60mm reel		●	●			●		
FB180/60	7" Galvanized steel plate for 60mm reel		●	●	●		●		
FB180/70	7" Galvanized steel plate for 70mm reel		●	●	●		●		
FB205/60	8" Galvanized steel plate for 60mm reel		●	●	●	●	●	●	
FB205/70	8" Galvanized steel plate for 70mm reel		●	●	●	●	●	●	
FB250/70	10" Galvanized steel plate for 70mm reel		●	●			●		
FB300/70	12" Galvanized steel plate for 70mm reel		●	●			●		
90 Degree Safety Plates									1 piece
FA180/60	7" Galvanized steel plate for 60mm reel		●	●	●		●		
FA205/70	8" Galvanized steel plate for 70mm reel		●	●	●	●	●	●	
FA250/60	10" Galvanized steel plate for 60mm reel		●	●			●		
FA250/70	10" Galvanized steel plate for 70mm reel		●	●			●		



Systems

Code	Description	Reference	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
Unibox 45 Degree Safety Plates									1 piece
UFB165/60	6.5" Galvanized steel plate for 60mm reel		●	●			●		
UFB180/60	7" Galvanized steel plate for 60mm reel 180mm		●	●	●		●		
UFB205/60	8" Galvanized steel plate for 60mm reel 205mm		●	●	●	●	●	●	
UFB205/70	8" Galvanized steel plate for 70mm reel 205mm		●	●	●	●	●	●	
UFB230/70	9" Galvanized steel plate for 70mm reel				●	●		●	
UFB250/70	10" Galvanized steel plate for 70mm reel 250mm				●	●		●	

Accessories



Systems

Code/Reference	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
5001 	Safety spring for 44mm slats. Screw mount 0.8" x 4.7"	●	●			●		100
5002 	Safety spring for 55mm slats. Screw mount 0.8"x7.3"			●	●		●	100
IMB 0031 	Aluminum safety spring (split end) for 44mm foam filled slats 20.8"x4.7"					●		100
IMB 0032 	Aluminum safety spring (split end) for 55mm foam filled slats 0.8"x7.3"						●	100
SEC60 	Safety locking spring for 2.36" tube Anti-lift device, 2 rings and hanger used in place of bottom locking slat	●	●	●	●	●		1

Systems

Code/Reference	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
SEC70 	Safety locking spring for 2.75" tube Anti-lift device, 2 rings and hanger used in place of bottom locking slat	●	●	●	●	●	●	1

Systems

Code/Reference	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
Lex Strip								
	Clear strips for ES/55 Lex				●			8ft a piece
JHSAR/SUP2								
	Screws for 55mm side plugs Use with TLE55SUP				●			1000
JHSAR/SUP3								
	Screws for 44mm side plus Use with TLE44SUP		●					1000
TLAR/17								
	Side plugs for AR/17 Pressed in and stapled					●		1000
TLAR/32								
	Side plugs for AR/32 Pressed in and stapled						●	1000

Systems



Code/Reference	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
TLES/44 	Side plugs for ES/44 Pressed in place	●						500
TLES/44SUP 	Side plugs for ES/44SUP Screwed in place using JHSAR/SUP3		●					500
TLSUP44 	Side plug for ES/44SUP Used without end retention		●					500
TLES/55 	Side plug for ES/55 Pushed into place			●				500
TLSAR/132PC 	Side plugs for SAR/132 & SAR115 Without tips & with screws							500

Systems







Code/Reference	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
TLSUPEND 	Side plug for ES/55SUP Used without end retention Combines with TLSUP to make TLES/55SUP				●			500
TLSUP 	Side plug for ES/55SUP Used without end retention Combines with TLSUPEND to make TLES/55SUP				●			500
TLES/55SUP 	Complete set of side plugs for ES/55SUP Combination of TLSUP & TLSUPEND				●			500
TLSAR/132C 	Side plugs for SAR/132 & SAR115 with tips With tips and screws							500

Systems								
Code/Reference	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
TLSAR/115C 	Side plugs for ES/55 & SAR/115 With tips, screws, and plastic insert.							500



Systems


Code/Reference	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
2002 	Galvanized steel octagonal reel 2.36" Gauge .036" 19ft length	●	●	●	●	●	●	1 pc. 19ft
2002 ALU 	Aluminum extruded reel 2.36" Gauge .036" 24ft length	●	●	●	●	●	●	1 pc. 24ft
2003 	Galvanized steel octagonal reel 2.75" Gauge .036" 19ft length	●	●	●	●	●	●	1 pc. 19ft
2003 ALU 	Aluminum extruded reel 2.75" (3.15" round outside diameter) Gauge .036" 24ft length	●	●	●	●	●	●	1 pc. 24ft
XX2077 	Galvanized round roll tube 4.01" (97mm inside diameter) Thickness 20/10 24ft length			●	●		●	1 pc. 24ft

Systems





Code/Reference	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
PMCA80S 	Bracket 3x3 square for SIMU T5 Motors	●	●	●	●	●	●	1
2355 	Bracket 4x4 square for SIMU T6 Motors	●	●	●	●	●	●	1
2356 	Aluminum bracket 4x4 with .47" post for side frames FI250/45 & FI300/45	●	●	●	●	●	●	1
2357 	Aluminum bracket 4x4 For ball bearing 2359 and for side frames FI250/45 & FI300/45	●	●	●	●	●	●	1
2358 	Aluminum bracket 4x4 with saddle for balance spring for side frames FI250/45 & FI300/45	●	●	●	●	●	●	1
2370 	Aluminum bracket for 2013/70HD	●	●	●	●	●	●	1

Systems




Code/Reference	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
SBPFE 	Steel free-end support bracket With plate	●	●	●	●	●	●	1
UB42 	Galvanized steel u-bracket screw for 1.65" ball bearing	●	●	●	●	●	●	1
U/SUP01 	Universal plate and clips for sideframes	●	●	●	●	●	●	1
PBS155 	6.1" steel plate for angle bracket Used with SAB	●	●	●	●	●	●	1
SAB 	Small steel angle bracket For PBS155	●	●	●	●	●	●	1


		Systems						
Code/Reference	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
2359	 1.65" ball bearing with metal insert for bracket 2357	●	●	●	●	●	●	1
2359STFLAT	 Steel flat 1.65" ball bearing for bracket 2357 or UB42	●	●	●	●	●	●	1
7105	 Steel flat 1.10" ball bearing. For 2356 bracket or end cap stud.	●	●	●	●	●	●	1
7701	 Aluminum wall bracket with adjustable carriage With ball bearings	●	●	●	●	●	●	1
SBFE	 Steel free-end support bracket	●	●	●	●	●	●	1

Systems


Code/Reference	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
2013/60 	Adjustable heavy-duty PVC internal Cap For 60MM reel	●	●	●	●	●	●	1
2013/60AL 	Adjustable heavy-duty aluminum internal Cap For 60MM reel	●	●	●	●	●	●	1
2013/70 	Adjustable heavy-duty PVC internal cap For 70mm reel	●	●	●	●	●	●	1
2013-70/AL 	Adjustable heavy-duty aluminum internal cap For 70mm reel	●	●	●	●	●	●	1
2013-70D 	Adjustable heavy-duty PVC internal cap For 70mm reel	●	●	●	●	●	●	1
2013/70HD 	Adjustable heavy-duty PVC internal cap For 70mm reel	●	●	●	●	●	●	1

Systems

Code/Reference	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
2331I 	Idler for pull strap For 60mm octagonal reel	●	●	●	●	●	●	1
2331-60S 	Plastic idler for 60mm octagonal reel with square hole	●	●	●	●	●	●	1
2331-60FL 	Idler flush mount for 60mm octagonal reel The 7105 ball bearing goes into the end of this	●	●	●	●	●	●	1
2331-60S-AL 	Adjustable idler in aluminum For 60mm octagonal reel with square hole	●	●	●	●	●	●	1
2331AL70 	Aluminum idler for 70mm octagonal reel Use with gear 4521-70	●	●	●	●	●	●	1

		Systems						
Code/Reference	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
2331D 	Heavy duty adjustable (both ends) end cap for 60mm reel Use on split systems	●	●	●	●	●	●	1
2374S 	Heavy duty adjustable (both ends) end cap for 60mm reel Use on split systems			●	●		●	1
2377S 	Adjustable idler insert for 100mm tube			●	●		●	1
4509 	Idler support, 4"	●	●	●	●	●	●	1
PVC RING 60 	PVC protective ring for 60mm reel			●	●		●	1


Systems

Code/Reference	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
PVC RING 70 	PVC protective ring for 60mm reel	●	●	●	●	●	●	1
SFE60 	Heavy-duty free end for 60mm octagonal reel	●	●	●	●	●	●	1
SFE70 	Heavy-duty free end for 70mm octagonal reel	●	●	●	●	●	●	1

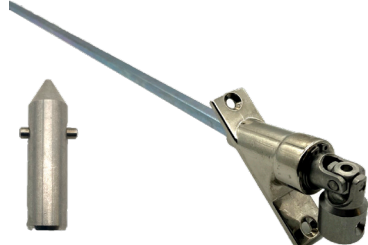
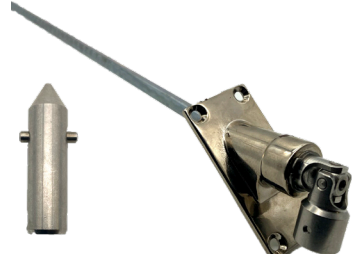
Systems								
Code/Reference	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
2342	 Strap for coiler #2341	●	●	●	●	●	●	Roll of 164ft
2351	 Nylon guide for tape 2"x0.8"	●	●	●	●	●	●	10 pieces
2352	 Nylon guide for tape 3.1"x1.4"	●	●	●	●	●	●	10 pieces
2321I	 PVC tape pulley	●	●	●	●	●	●	10 pieces
2340I	 Tape coiler with strap Available in Bright White	●	●	●	●	●	●	1

Systems


Code/Reference	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
42234 	Crank handle complete with wall attachment 4ft	●	●	●	●	●	●	10 pieces
42296 	Crank handle complete with wall attachment 6ft	●	●	●	●	●	●	10 pieces
422910 	Crank handle complete with wall attachment 10ft	●	●	●	●	●	●	10 pieces
4521-70 	Gear 11:1 ratio w/limit capacity 75bs 10 turns 7mm hex pass through	●	●	●	●	●	●	1
4521 	Gear 8:1 ratio w/limit capacity 50lbs 10 turns 7mm hex pass through	●	●	●	●	●	●	1

		Systems						
Code/Reference	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
7108/70AL 	Aluminum insert for 70mm gear Used with 4521-70 & 2331AL70 or 2331-60S	●	●	●	●	●	●	20 pieces
7108/60AL 	Aluminum insert for 60mm gear Used with 4521 & 2331- 60S or 2331AL70	●	●	●	●	●	●	20 pieces
4205B 	Tulip for removable handle With pin	●	●	●	●	●	●	1 piece
4205BX2 	Large tulip for removable handle With pin	●	●	●	●	●	●	1 piece
4527M2 	Metal universal 45 degree For crank handle 2 holes with 7mm hexagonal clutch	●	●	●	●	●	●	1 piece

Systems

Code/Reference	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
4527M4 	Metal universal 45 degree small bullet For crank handle 4 holes with 7mm hexagonal clutch	●	●	●	●	●	●	1 piece
4528M2 	Metal universal 90 degree small bullet For crank handle 2 holes with 7mm hexagonal clutch	●	●	●	●	●	●	1 piece
4528M2S 	Metal universal 90 degree large bullet For crank handle 2 holes with 8mm hexagonal clutch	●	●	●	●	●	●	1 piece
4528M4 	Metal universal 90 degree small bullet For crank handle 4 holes with 7mm hexagonal clutch	●	●	●	●	●	●	1 piece
4528M4S 	Metal universal 90 degree large bullet For crank handle 4 holes with 8mm hexagonal clutch	●	●	●	●	●	●	1 piece

Systems

Code/Reference	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
Shaft Hex 7mm 	7mm hex rod	●	●	●	●	●	●	1 lf
Shaft Sleeve 	shaft sleeve for 13" 7mm hex shaft	●	●	●	●	●	●	1
40326B 	137 lb. assist spring 60mm reel with simple adjustment, it can be operated on right or left side	●	●	●	●	●	●	1
40326SG 	60mm balance spring 44 lb. torque with simple adjustment, it can be operated on right or left side	●	●	●	●	●	●	1
40326S 	75 lb. assist spring 60mm reel with simple adjustment, it can be operated on right or left side	●	●	●	●	●	●	1




Systems

Code/Reference	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
40327B 	159 lb. assist spring 70mm reel with plate with simple adjustment, it can be operated on right or left side	●	●	●	●	●	●	1
40327S 	123 lb. assist spring 70mm reel with plate with simple adjustment, it can be operated on right or left side	●	●	●	●	●	●	1

Systems								
Code/Reference	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
TC40 25 	PVC conic stopper available in white, bronze, and cream	●	●	●	●	●	●	100
TENYG 	Entry guide for 55mm slats			●	●		●	10 Pairs
TENYP 	Entry guide for 44mm slats	●	●			●		10 Pairs
U/TENYP 	9mm unibox entry guide for 44mm slats	●	●			●		10 Pairs
U/TENY G 	14mm unibox entry guide for 55mm slats			●	●		●	10 Pairs




Systems								
Code/Reference	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
U/TENYG2 	Unibox entry guide for maxi shutter box 10" & 12" housing			●	●		●	10 Pairs
TC41 	Hidden stoppers for bottom slat	●	●	●	●	●	●	1
Spray 10 	Touch-up paint Bright white	●	●	●	●	●	●	1
U/BAY 	Galvanized bayonet for 8" and smaller Required with Unibox systems	●	●	●	●	●	●	1 pair
U/BAY2 	Galvanized bayonet for 10" and 12" UNI frames. Required with Unibox systems	●	●	●	●	●	●	1 pair

Systems

Code/Reference	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
GG35NOR 	Regular PVC gasket for extruded slats, end slats and guide rails	●	●	●	●	●	●	1 roll of 902"
GG600MINI 	Gasket used in place of bottom slat for 44mm slats	●	●				●	1 roll of 500"
GG775MAX 	Gasket used in place of bottom slat for 55mm slats			●	●		●	1 roll of 300"
SP35NOR 	PVC short brush gasket for guide rails, 5cm	●	●	●	●	●	●	1 roll of 902"
SP35MAG 	PVC long brush gasket for guide rails, 8cm	●	●	●	●	●	●	1 roll of 902"
GG12PVC 	PVC gasket for SAR/115							5 pcs 19"

Systems

Code/Reference	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
2644 	PVC plug for guide rails 1/2" Available in Bright White, Grey, Light Beige, Dark Bronze, and Cream	●	●	●	●	●	●	1000
2645 	PVC plug for guide rails 5/8" Available in Bright White, Light Beige, Dark Bronze, and Cream	●	●	●	●	●	●	1000
2646 	PVC plug for guide rails 3/4" Available in Bright White, Light Beige, Dark Bronze, and Cream	●	●	●	●	●	●	1000
CA42A 	Milled aluminum security latch for end slats	●	●	●	●	●	●	1
GR40 	Nylon roller galvanized steel bracket	●	●	●	●	●	●	1

Systems								
Code/Reference	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
PF7109 	70mm to 60mm reduction bushing PVC	●	●	●	●	●	●	1
PT44 	Aluminum bar for key lock & security latch	●	●	●	●	●	●	1 slat of 19ft
KIT 2x3 	Spring loaded storm bar set 2x3 2 pieces	●	●	●	●	●	●	1
KIT 2x4 	Spring loaded storm bar set 2x4 2 pieces	●	●	●	●	●	●	1
KIT TOP HAT 	Plastic top hats for storm bar kits 4 per kit	●	●	●	●	●	●	1

Motor Parts & Accessories



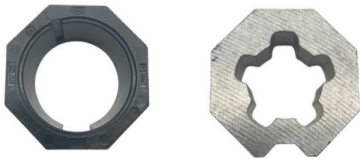
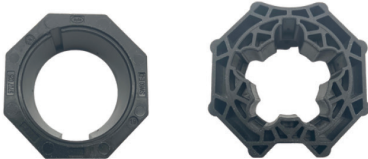
Systems

Code/Reference	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
MEC300 	300 newton-meter motor Torque: 2650 lbs. Rated Voltage: 120v AC Rated Power: 881W Rated Speed: 14 rpm Power Cord: 3ft cord (4 wires) Diameter: 92mm			●	●		●	1
MEC300MO 	300 newton-meter motor with manual override Torque: 2650 lbs. Rated Voltage: 120v AC Rated Power: 881W Rated Speed: 14 rpm Power Cord: 3ft cord (4 wires) Diameter: 92mm	●	●	●	●	●	●	1
MEC550 Straight 	50 Newton-Meter motor Torque: 880.3 lbs. Rated Voltage: 120v AC Rated Power: 234W Rated Speed: 11rpm Diameter: 59mm Power Cord: 3ft cord (4 wires)	●	●	●	●	●	●	1
MEC550MO 	50 Newton-Meter motor with manual override Torque: 880.3 lbs. Rated Voltage: 120v AC Rated Power: 234W Rated Speed: 11rpm Diameter: 59mm Power Cord: 3ft cord (4 wires)	●	●	●	●	●	●	1
MEC550MO RADIO 	50 Newton-Meter radio motor Torque: 880.3 lbs. Rated Voltage: 120v AC Rated Power: 234W Rated Speed: 11rpm Diameter: 59mm Power Cord: 3ft cord (4 wires)	●	●	●	●	●	●	1


Systems

Code/Reference	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
MEC550MO 220V 	50 Newton-Meter 220v motor Torque: 880.3 lbs. Rated Voltage: 220v Rated Power: 234W Rated Speed: 11rpm Diameter: 59mm Power Cord: 3ft cord (4 wires)	●	●	●	●	●	●	1
MEC60100MO 	100 newton-meter motor with manual override Torque: 880.3 lbs. Rated Voltage: 120v AC Rated Power: 234W Rated Speed: 11 rpm Power Cord: 3ft cord (4 wires) Diameter: 59mm	●	●	●	●	●	●	1
MEC60100MO Radio 	100 newton-meter radio motor Torque: 880.3 lbs. Rated Voltage: 120v AC Rated Power: 234W Rated Speed: 11 rpm Power Cord: 3ft cord (4 wires) Diameter: 59mm	●	●	●	●	●	●	1
MEC60100MO 220V 	100 newton-meter 220v motor Torque: 880.3 lbs. Rated Voltage: 220v Rated Power: 234W Rated Speed: 11 rpm Power Cord: 3ft cord (4 wires) Diameter: 59mm	●	●	●	●	●	●	1





Systems

Code/Reference	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
DPLATE10 	Single gang plate for decorative switches 4 per kit White 10	●	●	●	●	●	●	1
DPLATE47 	Single gang plate for decorative switches 4 per kit Ivory 47	●	●	●	●	●	●	1
ADMCA78RD-P 	78mm round crown & drive for Somfy motors	●	●	●	●	●	●	1
ADMCA60SO 	60mm octagonal aluminum drive & crown for Somfy motors	●	●	●	●	●	●	1
ADMCA60SO-P 	60mm octagonal plastic drive & crown for Somfy motors	●	●	●	●	●	●	1

Systems

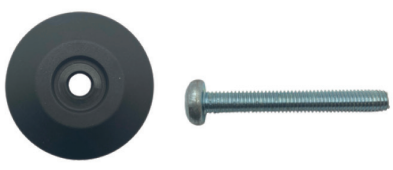

Code/Reference	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
ADMCA70SO-P								
	70mm octagonal plastic crown & drive for Somfy motors	●	●	●	●	●	●	1
ADMCA70SO								
	70mm octagonal aluminum crown & drive for Somfy motors	●	●	●	●	●	●	1
ADMCA10080								
	Somfy Drive & Adapter set 820 SIMU for 97mm ID RD			●	●		●	1
ADMCA10080SM								
	Somfy Drive & Adapter set 820 SIMU for 94mm ID RD			●	●		●	1
PMCA800								
	Base plate for brackets SIMU type 8 2-piece set			●	●		●	1

Systems

Code/Reference	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
PMCA800SO 	Somfy Motor bracket for SIMU new T8 & T8 DMI motors			●	●		●	1
PMCA300SUP 	Somfy Support bracket 300mm	●	●	●	●	●	●	1
PMCAUSO 	Universal Somfy bracket with spring molded nuts To be used with PMRINGSO	●	●	●	●	●	●	1
PMCASO 	4" x 4" Somfy motor bracket with spring ring	●	●	●	●	●	●	1
PMCA775S 	4" x 4" Somfy motor bracket	●	●	●	●	●	●	1

Systems

Code/Reference	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
PMRINGSO 	Stainless steel locking spring ring	●	●	●	●	●	●	1

Systems								
Code/Reference	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
STOP WHEEL LT50 ADAPTER CR 	LT50 Stop Wheel prevents drive from separation	●	●	●	●	●	●	1
STOP WHEEL LT60 ADAPTER CR 	LT60 Stop Wheel prevents drive from separation	●	●	●	●	●	●	1
PMCA775MEC 	4" x 4" Dooya motor bracket	●	●	●	●	●	●	1
MEC TRANS MULTI 	5 Channel Dooya Transmitter Includes wall clip & hardware	●	●	●	●	●	●	1
MEC TRANS SINGLE 	1 Channel Dooya Transmitter Includes wall clip & hardware	●	●	●	●	●	●	1

Systems

Code/Reference	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
MEC TRANS 15-CH 	15 Channel Dooya Transmitter	●	●	●	●	●	●	1
MEC WIFI Bridge 	Dooya WIFI link WIFI to RTS interface	●	●	●	●	●	●	1
MEC Receiver Large 	Large programmable Dooya receiver for 300nm motors Single-channel miniaturized emitter included	●	●	●	●	●	●	1
MEC Receiver Small 	Small programmable Dooya receiver For 50nm & 100nm motors	●	●	●	●	●	●	1
TAHOMA INTERFACE 	Somfy home automation hub	●	●	●	●	●	●	1

Systems

Code/Reference	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
SWITCH DSOW 1800378 	Momentary switch white Paddle/decorative switch	●	●	●	●	●	●	1
SWITCH DSAW 1800374 	Maintain switch white Paddle/decorative switch	●	●	●	●	●	●	1
SWITCH DSOI 1800377 	Momentary switch Ivory Paddle/Decorative switch	●	●	●	●	●	●	1
SWITCH DSAI 1800373 	Maintain switch ivory Decorative paddle, DBL pole	●	●	●	●	●	●	1
SWITCH DROW 2005600 	Momentary rocker switch White	●	●	●	●	●	●	1

Systems

Code/Reference	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
SWITCH DRAW 2005598 	Maintain rocker switch White	●	●	●	●	●	●	1
DECO IVRY ICH 1810898 	DecoFlex wireless wall switch 1 channel ivory Also available in white	●	●	●	●	●	●	1
DECO IVRY 5CH 1810814 	DecoFlex wireless wall switch 5 channel ivory Also available in white	●	●	●	●	●	●	1
KEY SWITCH EXT 2001548 	Momentary external surface key switch	●	●	●	●	●	●	1
KEY SWITCH UNIVERSAL 2004964 	Momentary/Maintenance Key Switch Universal Recess/Surface	●	●	●	●	●	●	1

Systems

Code/Reference	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
Isolation Control 1822135 	Isolation control Used when operating multiple motors on one switch. One required per motor.	●	●	●	●	●	●	1
Synch Control MO 1822159 	Synchronization control Momentary output	●	●	●	●	●	●	1
Key-Pad, Digital 2006029 	RTS wireless digital key-pad	●	●	●	●	●	●	1
Receiver RTS/HZ 1810627 	Programmable receiver for HERZ & RTS-Somfy	●	●	●	●	●	●	1
Receiver Micro 2008191 	Micro HZ receiver	●	●	●	●	●	●	1

Systems

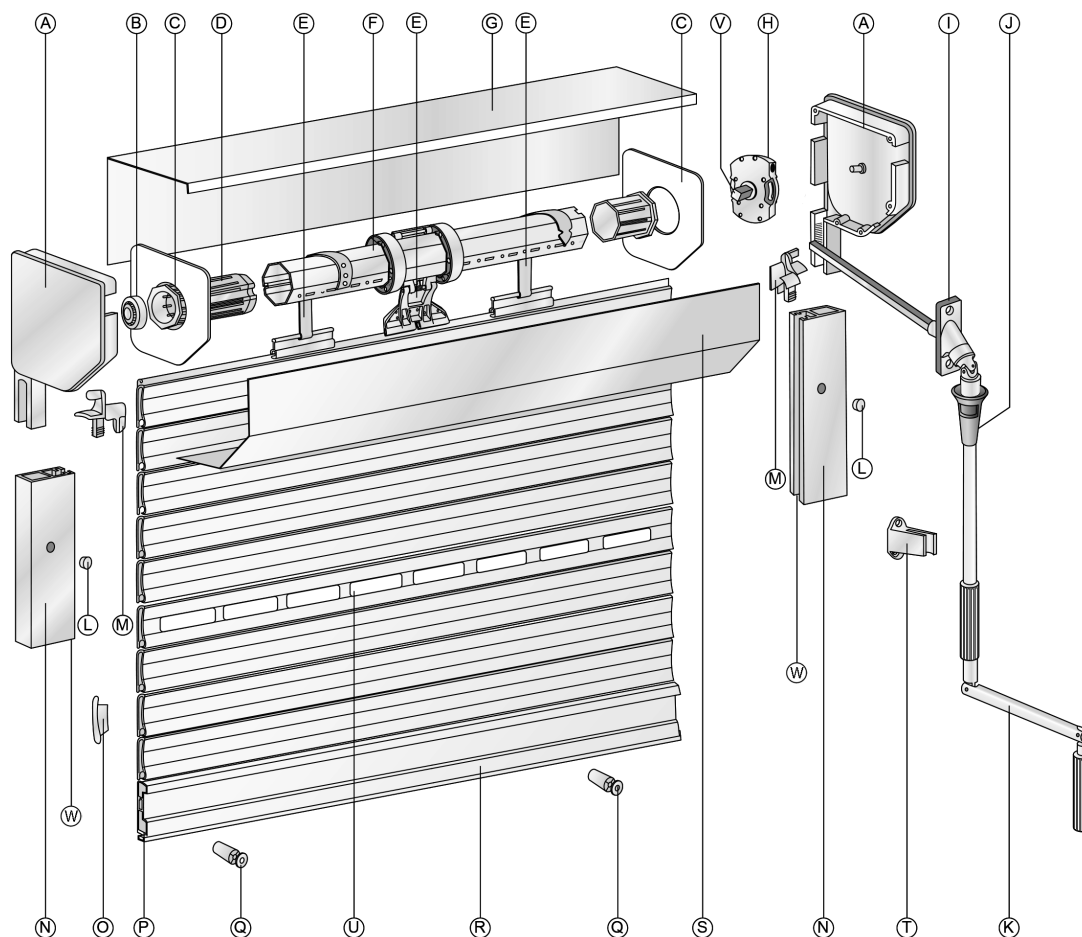
Code/Reference	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
Trans Multi 	White 5-channel Telis RTS transmitter Wall bracket Included	●	●	●	●	●	●	1
Trans Single 	White 1-Channel Telis RTS transmitter Wall bracket included	●	●	●	●	●	●	1
Trans 16CH Pure 1811081 	White 16-Channel transmitter	●	●	●	●	●	●	1
Trans Patio 1ch 1810643 	1-channel patio transmitter TELIS 1 RTS	●	●	●	●	●	●	1
Trans Patio 4ch 1810645 	4-channel patio transmitter TELIS 1 RTS	●	●	●	●	●	●	1

Systems

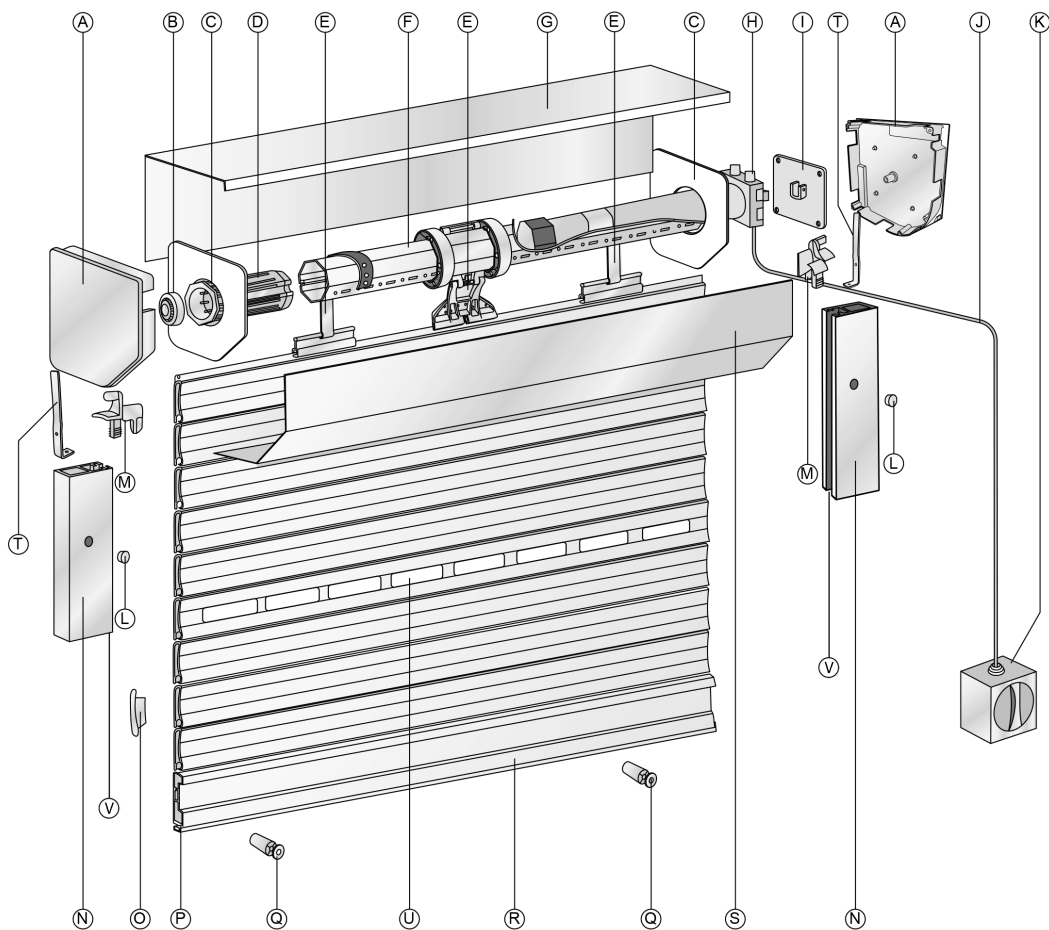
Code/Reference	Description	ES44	ES44 SUP	ES55	ES55 SUP/LEX	AR/17	AR/32	Pkg.
Universal RTS Interface II 1810872 	16-channel universal RTS interface	●	●	●	●	●	●	1
Eolis Wind Off WHT 1816083 	Off white RTS wind sensor for awnings Wire free							1
Eolis Wind White 1816081 	White RTS wind sensor Wire free							1
New Situo 1-CH Trans 1870571 	Situo RTS 1-channel transmitter Wall mount included	●	●	●	●	●	●	1
New Situo 5-ch Trans 1870575 	Situo RTS 5-channel transmitter Wall mount included	●	●	●	●	●	●	1

1. Rolling Shutter Breakdowns

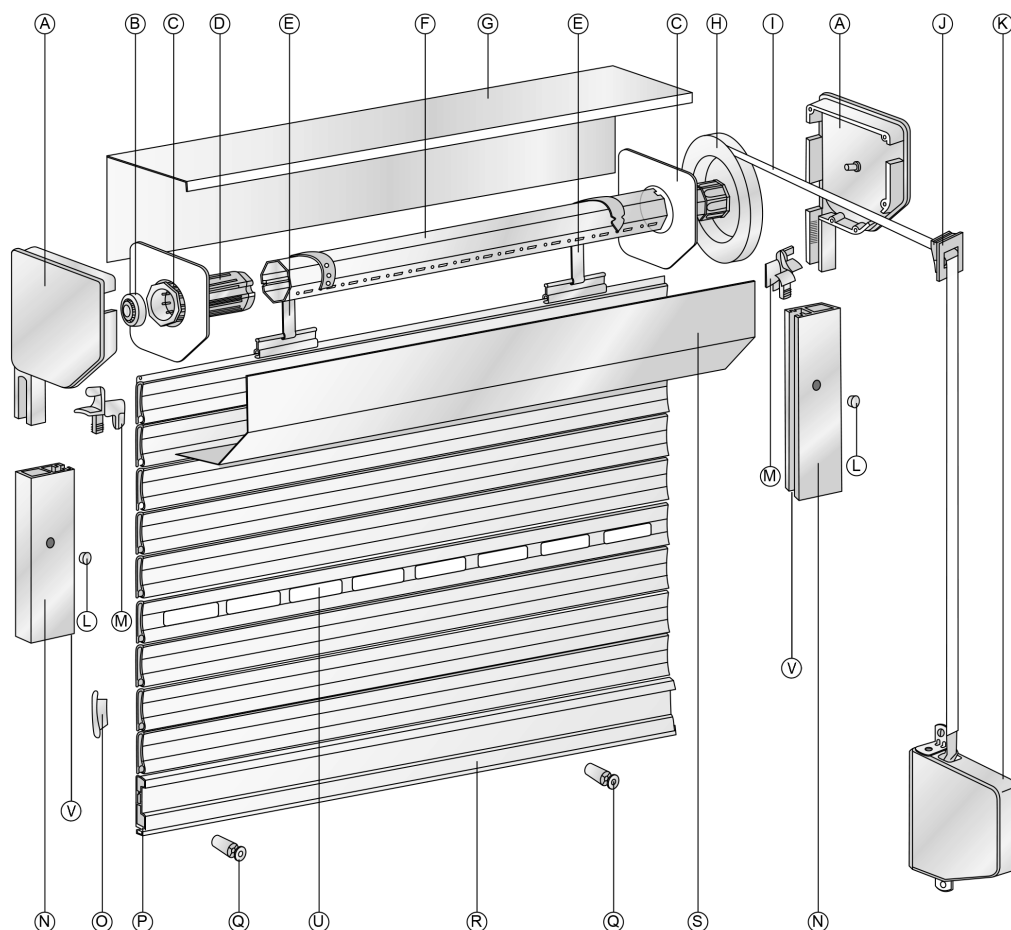




Letter	Description	Quantity	Page #	Comments
A	Aluminum End Cap	1 set	12-13	
B	Ball Bearing	1	26	
C	Safety Plate	2	14-15	
D	Idler	1	28	
E	Safety Spring	1 every 12"	17-18	Choose between slat hangers and safety locking springs
F	Reel	1	23	
G	Shutter Housing	1	10-11	
H	Gear	1	32	Available in 11:1 and 8:1 ratio
I	Metal Universal for crank handle	1	33-34	
J	Tulip	1	33	Available in large & small
K	Crank Handle	1	32	
L	PVC Plug	1 every 6" of height	40	
M	Entry Guide	1 set	37-38	
N	Track	2	7-8	
O	Side Plug	1 per slat	19-22	2 pieces every other slat
P	Gasket	1 pc at width slat	39	
Q	Conic Stopper	2	37	
R	Extruded End Slat	USP calculation	5	
T	Wall Attachment for crank handle	1	32	The wall attachment is included with the crank handle
U	ES/55 Lex	See figure 2.6	6	Only available with ES/55 and ES/55SUP
V	Aluminum insert	1	33	Inserts available for 60mm & 70mm gear
W	Felt weather stripping	Twice the length of the track	39	



Letter	Description	Quantity	Page #	Comments
A	Aluminum End Cap	1 set	12-13	
B	Ball Bearing	1	26	
C	Safety Plate	2	14-15	
D	Idler	1	28	
E	Safety Spring	1 every 12"	17-18	Choose between slat hangers and safety locking springs
F	Reel	1	23	
G	Shutter Housing	1	10-11	
H	Motor	1	43-44	
I	Bracket	1	24-26, 47	
K	Key Switch	1	52	
L	PVC Plug	1 every 6"	40	
M	Entry Guide	1	37-38	
N	Track	2	7-8	
O	Side Plug	1 per slat	19-22	2 pieces every other slat
P	Gasket	1 pc at width slat	39	
Q	Conic Stopper	2	37	
R	Extruded End Slat	USP calculation	5	
T	Galvanized Bayonet	2	38	
U	ES-55 LEX	Se figure 2.6	6	Only available with ES/55 and ES/55SUP
V	Felt weather stripping	Twice the length of the track	39	



Letter	Description	Quantity	Page #	Comments
A	Aluminum End Cap	1 set	12-13	
B	Ball Bearing	1	26	
C	Safety Plate	2	14-15	
D	Idler	1	28	
E	Safety Spring	1 every 12"	17-18	Choose between safety and safety locking springs
F	Reel	1	23	
G	Shutter Housing	1	10-11	
H	Pulley	1	31	
I	Strap	1	31	
J	Nylon Guide	1	31	
K	Strap Box	1	31	
L	PVC Plug	1 every 6"	40	
M	Entry Guide	1 set	37-38	
N	Track	2	7-8	
O	Side Plug	1 per slat	19-22	2 pieces every other slat
P	Gasket	1 pc at width of slat	39	
Q	Conic Stopper	2	37	
R	Extruded End Slat	USP calculation	5	
T	Galvanized Bayonet	2	38	
U	ES-55 LEX	See figure 2.6	6	Only available with ES/55SUP and ES/55
V	Felt weather stripping	Twice the length of the track	39	

2. Pre-Cut Measurements & Information



2.1 How to measure your opening

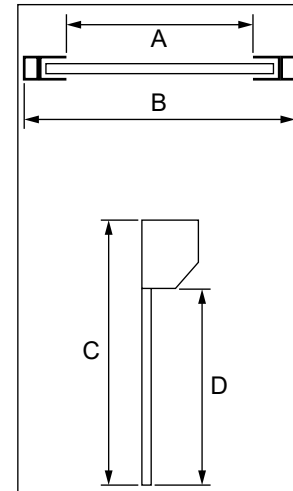
Chose **A** or **B** to measure your width

- **A** is measured from the inside edge of the left track to the inside edge of the right track, (buck/opening)
- **B** is measured from the outside edge of the left track to the outside edge of the right track, it is the overall dimension of the shutter assembly

Chose **C** or **D** to measure your height

- **C** is measured from bottom of track to top of box, it is the overall dimension of shutter assembly
- **D** is measured from bottom of track to bottom of box (Buck/Opening)

Fig. 2.1 Measurement choices



2.2 Maximum slat height

- These are maximum heights without requiring custom housing
- If you have any needs that don't fit with this chart, please contact our customer service team

Fig. 2.2 Maximum slat height without Custom housing

Slat	Maximum Slat Height
ES/44	157"
ES/44SUP	115"
ES/55	170"
ES-55 SUP/LEX	170"
AR/17	159"
AR/32	167"

2.3 Maximum weight per operation type

- Gear – up to 75lbs
 - With Assisted spring – up to 100lbs
- Motor – up to 500lbs (see figure 4.1)

2.3a How to Calculate your total slat weight

- Width" X Height" / 144 X Slat Weight (see figure 2.3)

Fig. 2.3a Slat weight per square foot

Slat	Slat Weight *lbs./sq ft
ES/44	1.41
ES/44SUP	1.6
ES/55	1.8
ES-55SUP/LEX	2.2
AR/17	0.61
AR/32	0.72

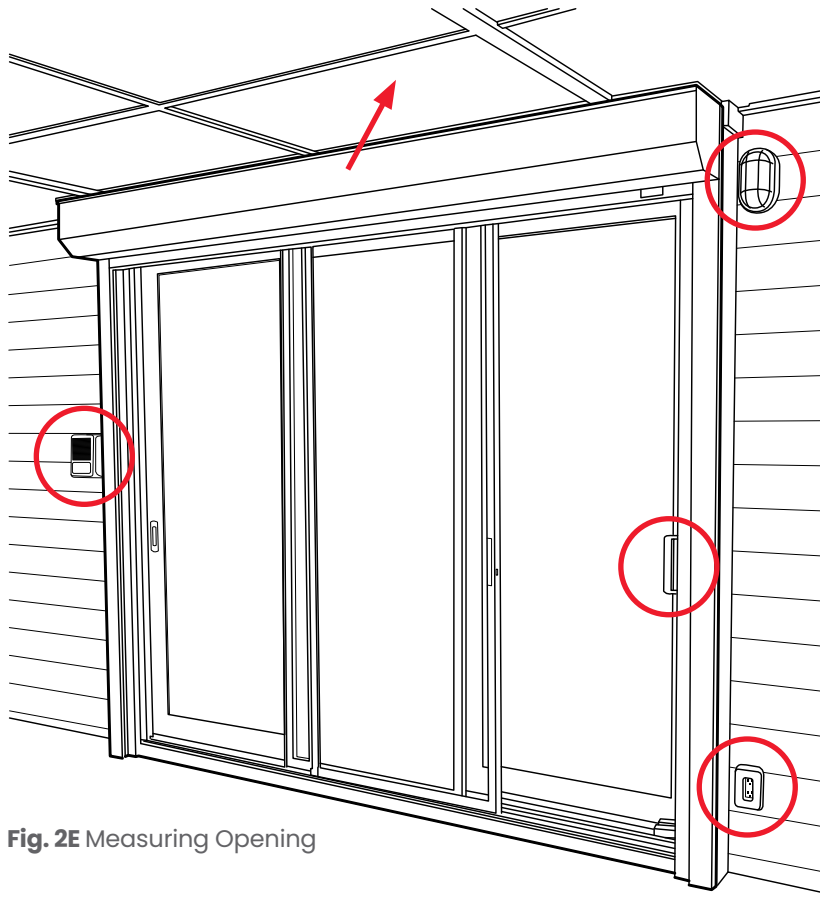


Fig. 2E Measuring Opening

2 E How to measure your opening

Choose measurement type (figure 2.1)

- Have your installer take the measurement of the opening
- Note obstacles around the opening that may impede operation of the shutter
- Gutter, doorknobs, ceiling, floor/threshold

After measurement

- Select which kind of slat type you want (AR series is foam filled profiles and ES is our impact range)
- Once selected ensure your profile measurements are in line with figure 2.2
- If the height exceeds the figures shown on the chart, please contact customer service. Custom housing might be required
- After choosing the slat type calculate the overall weight of the curtain. This is very important to selecting operation type.

2.4 How to determine Housing Size and Slat height

- These are all based on **maximum** track height, using regular Slat Hangers not Anti-Lift Hangers
- ES/55SUP with 10" housing and 100 mm reel is restricted to 96" track height
- ES/55SUP with 12" housing and 100mm reel is restricted to 130" track height

Fig. 2.4 Housing size & slat height

Housing Size	ES/44	ES/44SUP	ES/55	ES/55SUP	AR/17	AR/32
6.5"	52"	42"	38"	x	52"	32"
7"	61"	53"	46"	x	64"	38"
8"	91"	74"	68"	68"	96"	55"
10"	157"	115"	110"	110"	159"	100"
12"	*Not Recommended		170"	170"	x	167"

Fig. 2.5 track to track measurement

2.5 How to determine Overall Measurement using the 'A' measurement

*A= inside Track to inside track

Fig. 2.5 Overall measurement chart

Series	Track	Formula
ES/44	GE62X21	A + 5"
ES/44SUP	GE62X21SUP	A + 5"
AR/17	GE62X21	A + 5"
ES/55	GE80X28	A + 6.25"
	GE45X80	A + 6.25"
ES/55SUP	GE45X80SUP	A + 6.25"
AR/32	GE80X28	A + 6.25"
	GE45X80	A + 6.25"

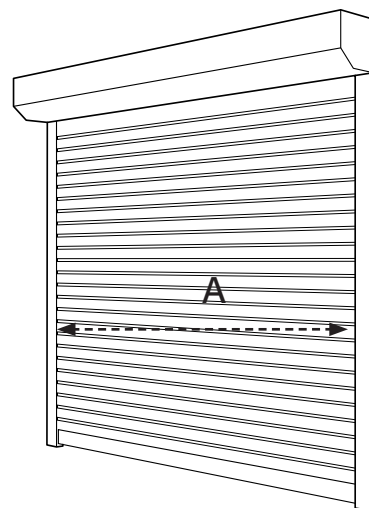
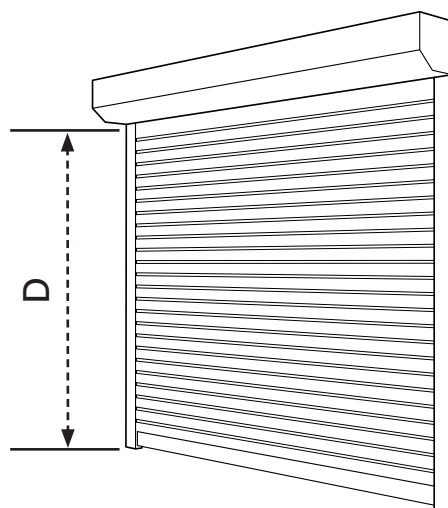


Fig. 2.6 D measurement

2.6 Slat count

- Measurement of bottom of track to top of track (D) divided by slat height
- 44mm slats = 1.73"
ES/44, ES/44SUP, AR/17
- 55mm slats=2.125"
ES/55, ES/55SUP, AR/32

We suggest adding four pieces to attach to the reel if slat hangers are not being used. Subtract one if using bottom track



3. How to adjust cuts for your measurements



3.1 How to determine Housing Cut

- For UFI end caps with 6.5"–8" housing, subtract .125" from the overall measurement ("B" measurement)
- For UFI and FI-45 degree end caps with 10"–12" housing, subtract .25 from the overall measurement ("B")
- For FI-45 degree end caps with 6.5"–8" housing, subtract .375" from the overall measurement

Fig. 3.1 Housing Cut Chart

End-Cap	Calculation
UFI165/45 (6.5")	$B - .375"$
UFI180/45 (7")	$B - .375"$
UFI205/45 (8")	$B - .375"$
UFI250/45 (10")	$B - .25"$
UFI300/45 (12")	$B - .25"$
FI250/45 (10")	$B - .25"$
FI250/45 (10") Small	$B - .375"$
FI300/45 (12")	$B - .25"$
FI165/45 (6.5")	$B - .5"$
FI180/45 (7")	$B - .5"$
FI205/45 (8")	$B - .5"$
FI165/90 (6.5")	$B - .375"$
FI180/90 (7")	$B - .375"$
FI205/90 (8")	$B - .375"$
FI250/90 (10")	$B - .375"$

*B = Outside track to outside track

3.2 How to determine Slat Cut

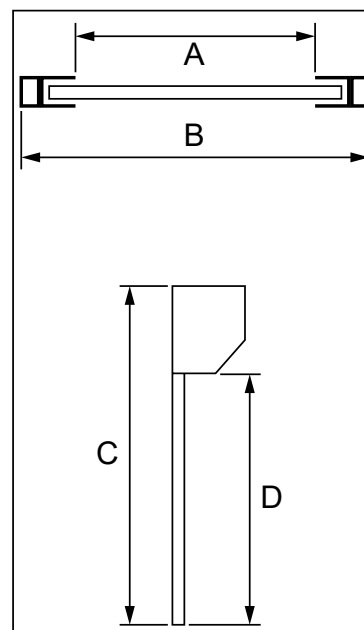
Fig 3.2 Slat Cut Table

*A = inside Track to inside track

*B = Outside track to outside track

Series	Track	A measurement	B measurement
ES/44	GE62X21	$A + 2.0"$	$B - 3.0"$
ES/44SUP	GE62x21SUP	$A + 1.0"$	$B - 4.0"$
AR/17	GE62X21	$A + 2.0"$	$B - 3.0"$
ES/55	GE80X28	$A + 3.0"$	$B - 3.25"$
	GE45X80	$A + 2.5"$	$B - 3.75"$
ES/55SUP	GE45X80SUP	$A + 1.0"$	$B - 5.25"$
AR/32	GE80X28	$A + 3.0"$	$B - 3.25"$
	GE45X80	$A + 2.5"$	$B - 3.75"$

Fig. 3.2 A & B measurements



3.3 How to determine Tack Cut

Fig. 3.3 Track Cut Chart

Series	Track	A measurement	B measurement
ES/44	GE62X21	A = Track Cut	B - Housing Size
ES/44SUP	GE62X21SUP	A + 1"	B - Housing Size + 1"
AR/17	GE62X21	A = Track Cut	B - Housing Size
ES/55	GE80X28	A = Track Cut	B - Housing Size
	GE45X80	A = Track Cut	B - Housing Size
ES/55SUP	GE45X80SUP	A + 1"	B - Housing Size + 1"
AR/32	GE80X28	A = Track Cut	B - Housing Size
	GE45X80	A = Track Cut	B - Housing Size

3.4 Felt Chart

Fig. 3.3 Felt Chart

Series	Track	SP35NOR (Short Brush)	SP35MAG (Long Brush)
ES/44	GE62X21	Track Length x 2	x
ES/44SUP	GE62X21SUP	Track Length x 2	x
AR/17	GE62X21	Track Length x 2	x
ES/55	GE80X28	x	Track Length x 2
	GE45X80	x	Track Length x 2
ES/55SUP	GE45X80SUP	x	Track Length x 2
AR/32	GE80X28	x	Track Length x 2
	GE45X80	Track Length x 2	x

3.5 Maximum weight per operation type

- Gear --up to 75lbs
 - With Assisted spring--up to 100lbs
- Motor --up to 500lbs (see figure 4.1.)

3.6 How to determine Reel Cut for UFI

Fig. 3.4 UFI Reel Cut Chart

*Deduct from the overall measurement

End Cap	Reel	Manual Operation			Motorized Operation			
		Gear operated	Gear/Spring	All Alum.	Straight -75lbs.	Straight +75lbs.	Override -75lbs.	Override +75lbs.
165-205 (6.5"-8")	60mm	-3.75"	-2.875"	-4.5"	-3.75"	-4.5"	-3.75"	-4.5"
	70mm	-3.875"	-2.875"	-4.5"	-3.875"	-4.5"	-3.875"	-4.5"
250-300 (10"-12")	60mm	-4.75"	-3.25"	-4.5"	-4.5"	-4.5"	-4.5"	-4.5"
	70mm	-4.75"	-3.25"	-4.5"	-4.5"	-4.5"	-4.5"	-4.5"

3.7 How to determine Reel Cut for FI-45 degree

Fig. 3.5 FI-45 degree reel cut chart

*Deduct from the overall measurement

End Cap	Reel	Manual Operation			Motorized Operation			
		Gear operated	Gear/Spring	All Alum.	Straight -75lbs.	Straight +75lbs.	Override -75lbs.	Override +75lbs.
165-205 (6.5"-8")	60mm	-3.5"	-2.625"	-4.5"	-3.5"	-4.25"	-3.625"	-4.5"
	70mm	-3.625"	-2.625"	-4.5"	-3.625"	-4.25"	-3.75"	-4.5"
250-300 (10"-12")	60mm	-4.75"	-3.25"	-4.5"	-4.25"	-4.25"	-4.5"	-4.5"
	70mm	-4.75"	-3.25"	-4.5"	-4.25"	-4.25"	-4.5"	-4.5"

3.8 How to determine Reel Cut for FI-90 degree

Fig. 3.6 FI-90 degree reel cut chart

*Deduct from the overall measurement

End Cap	Reel	Manual Operation			Motorized Operation			
		Gear operated	Gear/Spring	All Alum.	Straight -75lbs.	Straight +75lbs.	Override -75lbs.	Override +75lbs.
165-205 (6.5"-8")	60mm	-3.375"	-2.5"	-4.375"	-3.375"	-4.125"	-3.625"	-4.375"
	70mm	-3.5"	-2.5"	-4.375"	-3.5"	-4.125"	-3.75"	-4.375"
250-300 (10"-12")	60mm	-3.375"	-2.875"	-4.375"	-4.125"	-4.125"	-4.375"	-4.375"
	70mm	-2.875"	-2.875"	-4.375"	-4.125"	-4.125"	-4.375"	-4.375"

4. Motor Specs



4.1 Motor Lift Capacity

Fig. 4.1 Motor Lift Capacity Chart

Motor	Reel	Height				
		8 FT	10 FT	12 FT	15 FT	20 FT
somfy. 20NM	60mm	95 lbs.	89lbs.	83 lbs.	75 lbs.	65 lbs.
somfy. 30NM	60mm	120 lbs.	112 lbs.	104 lbs.	94 lbs.	85 lbs.
somfy. 40NM	60mm	150 lbs.	138 lbs.	130 lbs.	118 lbs.	106 lbs.
somfy. 50NM 	60mm	170 lbs.	156 lbs.	146 lbs.	135 lbs.	124 lbs.
somfy. 60NM	70mm	206 lbs.	196 lbs.	186 lbs.	172 lbs.	156 lbs.
somfy. 80NM	70mm	271 lbs.	255 lbs.	241 lbs.	222 lbs.	201 lbs.
somfy. 100NM 	70mm	344 lbs.	321 lbs.	303 lbs.	273 lbs.	253 lbs.
somfy. 200NM/300NM 	100mm	550 lbs.	522 lbs.	495 lbs.	445 lbs.	261 lbs.

Important: The motor lifting capacity chart refers to normal conditions of use. Please see your sales representative or call Croci North America for actual lifting capacity.

Motor Options: with/without Manual override, Radio, 220v

4.2 Minimum Motor Width

- During motor selection along with weight you need to consider if you have enough space in the roll-down to fit the motor.

Fig. 4.2 Minimum motor width chart

Motor	Minimum Width
MAU520	27.5"
MAU30/540	28.75"
MAU530/540 RTS	33.75"
MAUM540	33"
MAUM530RTS	37.5"
Dooya 550 CMO NO Radio	30"
Dooya 6100 CMO No Radio	34.5"
Dooya 550 CMO Radio	35"
Dooya 6100 CMO Radio	36"