

12-24V DC
Input, reverse
polarity
protected, fused


5V Pressure
Xducer Input

1 x Relay output
Form C contacts

Alt RPM Input,
Optically Isolated

Can Bus Interface
SN65VD230DR Based

TFT / Touch
Interface

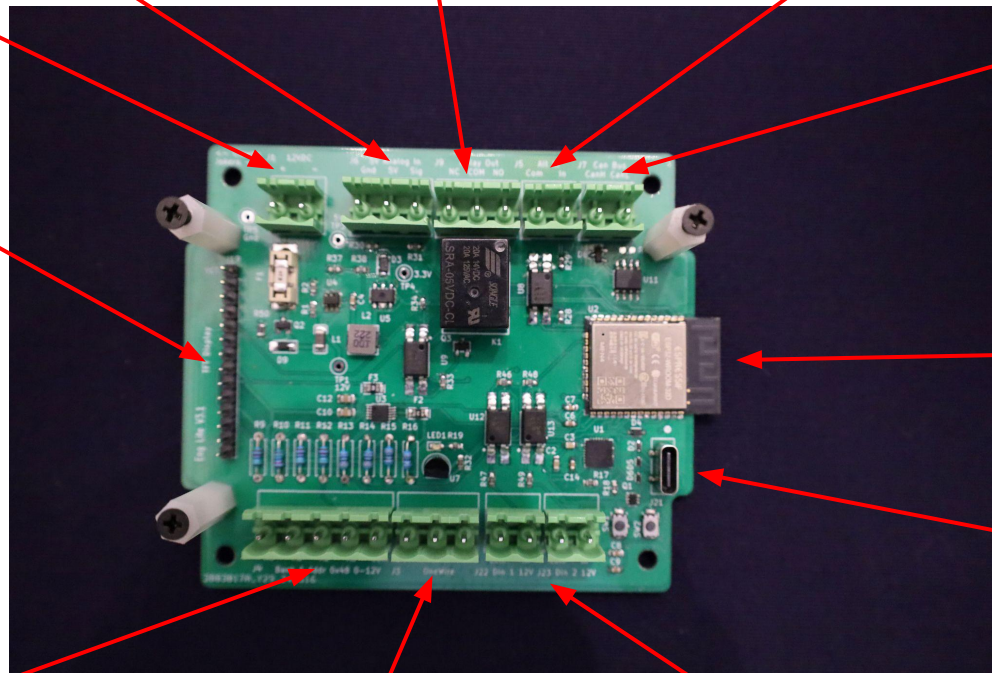

ESP32-WROOM
based, Wifi,
Bluetooth, Flash
etc. RevD, 4M
Flash

USB C Programming
port, CH2102 based Uart
to USB

ADS1115 Analog inputs,
4 x 18V Max

OneWire
Interface

2 x 12V Input,
Optically Isolated