

BERNYL™ UNISURFACER RTS

DF5354RTS

DESCRIPTION

Bernyl™ Unisurfacer RTS is a pre-reduced, Ready To Spray version of our fast drying, post-catalyzed, acid cured primer for interior MDF and interior solid woodwork. It has extremely good coverage and provides good hold-out of the top coat. Using **Bernyl™ Unisurfacer RTS** provides a high solids primer with excellent filling and sanding characteristics. Top coating **Bernyl™ Unisurfacer RTS** with Matador™ provides a superior finishing system. It can be tinted and has low HAPS.

PRODUCT DATA:

Colour:	Wet: White Dry: White	VOC (as packaged, maximum, less water and exempt solvents):	502 g/l or 4.19 lbs/gal
Solids % by Vol.:	40.0 % (Theoretical)	VOC (emitted):	501 g/l or 4.18 lbs/gal
Solids % by Wt.:	59.3 % (Theoretical)	Lbs. VHAPs / Lbs. Solids:	0.08
Weight / Gal.:	10.31 lb/gal	Flash Point (PMCC):	13° C / 55 ° F
Viscosity 23°C / 73°F:	Sig. Zahn 3: 22-26 sec.	Photo Chemically Reactive:	Yes
		Shelf Life:	1 year (at 15-25° C / 59°-77° F)
		Theo. Coverage@1mil dry	642 Sq. Ft./Gal. 100% Efficiency

MIXING / APPLICATION:

Working Temp: >18° C, 65° F substrate, coating and air
Catalysation: 11 % by volume using either 2750 Regular Catalyst; 494 Slow Catalyst; 309 HAPs Free Catalyst
Pot Life: 1 day (23° C / 73° F)
Mixing: Add Catalyst under agitation. Use proper graduated cup for measuring. Be attentive to the correct ratio. Add thinner after catalyst if required.
Sealer: Bernyl™ Transparent Surfacer may be used under Bernyl™ Unisurfacer RTS.
Reducer: Thinner 219 - Regular; Thinner OC 140 - Fast; Thinner 309 - Haps Free, Thinner 419 – Slow, Haps Free
Application: 100-150 (g/m²) Approx. 3.5-5 wet mils; Min 1 mil wet –Max 5 mil wet @ 60%RH
Surface Prep: Substrate should be clean and free of grease and oil. Moisture content of the wood should be between 6%-8%. White wood sanding with 180 grit sandpaper. Sand the first coat (with 220 to 320 paper) in order to eliminate grain raising, if any, and improve adhesion of the subsequent coat. Topcoat within 8 hours of sanding.
Use Directions: For interior use only. Add hardener and reducer then mix thoroughly before application. Stack only when the surface temperature is below 35°C / 95 ° F. Dry time can be directly impacted by many factors, including film thickness. Users are urged to test the system under shop conditions.
App. Equip.: Conventional & HVLP Siphon and Gravity Feed and Pressure Pot Systems and Airless Air Assist Equipment.
Tinting: Can be tinted with Chroma Chem 866 colorants or Opticolor XP's to a maximum of 8% total colourant. Prior to application test a sample piece to assure proper colour match. Do not use Umber pigments.

DRYING TIMES TO SAND / STACK / RECOAT WINDOW:

Method	Drying Temp.	Drying Time (@ 60 % RH and thickness @ 1 mil dry)
Air Drying	20° C / 68° F	1-2 hours dry to sand / 1-2 hr. dry to stack

BERNYL™ UNISURFACER RTS

DF5354RTS

APPLICATION RECOMMENDATIONS:

APPLICATION EQUIPMENT SETTINGS

Method of Application	Wet Film		Dry Film	
	Mils	g/m ²	Mils / Microns	
Conventional – Siphon Fed	3.5 – 5 mils	100-150 g/m ²	1.4 - 2.0 mils	40-60 microns
Conventional – Pressure Pot	3.5 – 5 mils	100-150 g/m ²	1.4 - 2.0 mils	40-60 microns
Airless Air Assist	3.5 – 5 mils	100-150 g/m ²	1.4 - 2.0 mils	40-60 microns
HVLP - Siphon Fed	3.5 – 5 mils	100-150 g/m ²	1.4 - 2.0 mils	40-60 microns
HVLP - Pressure Pot	3.5 – 5 mils	100-150 g/m ²	1.4 - 2.0 mils	40-60 microns

All measurements and application equipment settings are based on application at a temperature of 68°F. Viscosity will vary depending on the temperature of the liquid. The application equipment setting recommendations are guidelines only. The settings are starting point recommendations and adjustments to the equipment settings and equipment may be needed to obtain the desired results. Please refer to your specific equipment manufacturer's recommendations for equipment set-up.

REDUCTION – TIP SIZE – PSI SETTINGS

Conventional Equipment Siphon Feed:

Reduce to 18-21 sec. #4 Ford viscosity cup (20-22 sec Sig. Zahn 2 cup), nozzle size 0.070 inches (1.8 mm) to 0.080 inches (2.0 mm), atomizing air 40 psi (2.8 bar) to 50 psi (3.5 bar).

Conventional Equipment Pressure Pot:

Reduce to 18-21 sec. #4 Ford viscosity cup (20-22 sec Sig. Zahn 2 cup), nozzle size 0.070 inches (1.8 mm) to 0.080 inches (2.0 mm), atomizing air 40 psi (2.8 bar) to 50 psi (3.5 bar), Pot pressure 7 psi (0.48 bar) to 10 psi (0.68 bar)

Airless Air Assist Equipment:

Reduce to 18-25 sec. #4 Ford viscosity cup (20-25 sec Sig. Zahn 2 cup), tip size 0.013 inches (0.33 mm) to 0.016 inches (0.41 mm), fluid pressure 290 psi (20 bar) to 580 psi (40 bar), atomizing air 11 psi (0.8 bar) to 17 psi (1.2 bar).

HVLP Equipment Siphon Feed:

Reduce to 17-21 sec. #4 Ford viscosity cup (19-22 sec Sig. Zahn 2 cup), nozzle size 0.070 inches (1.8 mm) to 0.080 inches (2.0 mm), atomizing air 35 psi (2.4 bar) to 45 psi (3.1 bar).

HVLP Equipment Pressure Pot:

Reduce to 17-21 sec. #4 Ford viscosity cup (19-22 sec Sig. Zahn 2 cup), nozzle size 0.070 inches (1.8 mm) to 0.080 inches (2.0 mm), atomizing air 20 psi (1.37 bar) to 25 psi (1.72 bar). Pot pressure 7 psi (0.48 bar) to 10 psi (0.68 bar)

CONTACTS:


PH: AcromaPro USA and Canada / 1-888-277-1448

www.AcromaPro.com



PRODUCT NOTES

- Maximum recommended dry film thickness for total coating system is 7 dry mils. Heavier film build may cause cracking.
- Temperatures must be above 68°F during application and cure to ensure acceptable coating properties..
- Bernyl™ Unisurfacer RTS must be catalyzed 11% by volume with the recommended catalyst. Do not over catalyze as this may cause cracking over time.

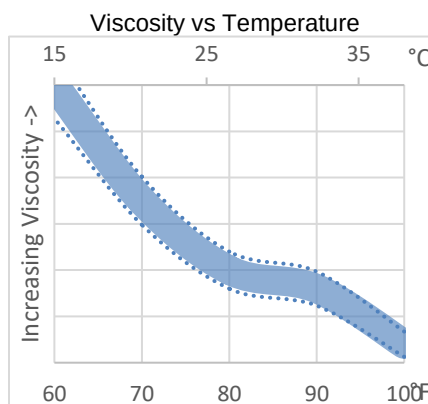

The above chart is for information only and should not be used as product specifications.

TESTING: Due to the wide variety of substrates, surface preparation methods, application methods, and environments, the customer should test the complete system for adhesion, compatibility and performance prior to full scale application.

FOR INDUSTRIAL SHOP APPLICATION: Thoroughly review Material Safety Data Sheet (MSDS) for safety information and cautions prior to using this product. For Regulatory compliance data (i.e. VOC, HAPS, etc.), obtain an Environmental Data Sheet (EDS) prior to using the product. A MSDS and/or EDS is available from your local distributor or representative. Please direct any questions or comments to 1-800-524-5979.

NOTE: Product Data Sheets are periodically updated to reflect new information relating to the product. It is important that the customer obtain the most recent Product Data Sheet for the product being used. The information, rating, and opinions stated here pertain to the material currently offered and represent the results of tests believed to be reliable. However, due to variations in customer handling and methods of application which are not known or under our control, AcromaPro cannot make any warranties as to the end result.