



Industrial Wood Coatings

Kemvar® Surfacer WW White E63WH0045

DV5940000

Catalyst 2750

DV5942000 Catalyst 309

DV5943000 Catalyst 494

DESCRIPTION

SHER-WOOD® KEMVAR® Surfacer WW White, E63WH0045, is a fast drying, post catalyzed, acid cured primer for interior woodwork. It has extremely good coverage and provides good hold-out of the topcoat.


Advantages:

- Good non-yellowing
- Fast Dry
- Low VOC

*VOC compliance limits vary from state to state; please consult local Air Quality rules and regulations.

CHARACTERISTICS

Gloss: 6-12 GU
Volume Solids: 40.1 ± 1%
Weight Solids: 59.4 ± 2%
Viscosity as packaged:
 37 - 43 seconds #4 Din Cup

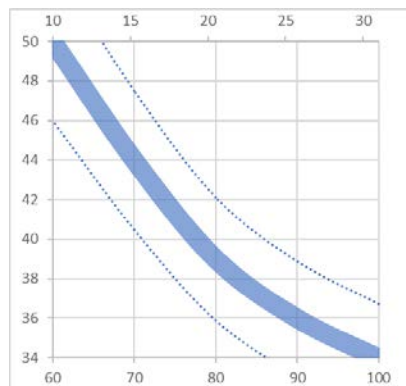

*The above chart is for information only and should not be used as product specifications

Recommended film thickness:

Mils Wet 4.0 – 5.0
 Mils Dry 1.6 – 2.0

Spreading Rate (no application loss)
 643 sq ft/gal @ 1.0 mils DFT

Drying (77°F, 50% RH):

Air Drying: 1 - 2 hours dry to sand.

Force Dry: 15 minutes at 120 °F

CHARACTERISTICS (cont.)

Good air movement and humidity control are necessary for proper drying of water reducible coatings.

Do not exceed the heat distortion temperature of the substrate.

Flash Point: 55°F Pensky-Martens Closed Cup

Mixing Ratio:
 10% catalyst by volume of
 2750, 309 or 494

Pot Life: 8 hours (73°)

Package Life: 1 year, unopened

Air Quality Data:

Non-photochemically reactive
 Volatile Organic Compounds (VOC)
 Theoretical as packaged, maximum, less water and exempt solvents
 3.37 lb/gal, 404 g/L
 Volatile Hazardous Air Pollutants (VHAPS)
 as packaged, maximum:
 No Reportable VHAPS.

An Environmental Data Sheet is available from your local Sherwin-Williams facility or at www.paintdocs.com.

SPECIFICATIONS

Wood (interior only): Must be clean, dry, and finish sanded. Substrate should be free of grease, oil, dirt, fingerprints, and any contamination to ensure optimum adhesion and coating performance properties. Moisture content of wood should be 6 to 8%.

Testing: The information, data, and recommendations set forth in this Product Data Sheet are based upon test results believed to be reliable. However, due to the wide variety of substrates, substrate properties, surface preparation methods, equipment and tools, application methods, and environments, the customer should test the complete system for adhesion, compatibility and performance prior to full scale application.

APPLICATION

Typical Setups

May be applied by:

Conventional Spray
 Air Assisted Airless
 HVLP

Conventional Spray:

Air Pressure.....psi
 Fluid Pressurepsi
 Cap/Tip.....
 Reducer.....
 Recommended Viscosity.....
 Reduction Rate.....as needed up to 20%

Air Assisted Airless:

Air Assist Pressureto 17 psi
 Fluid Pressureto 580 psi
 Cap/Tip..... 0.013 to 0.016 inches
 Reducer..... up to 20%
 Recommended Viscosity...15-25 seconds
 Din #4

HVLP:

Air Pressure at the cap.....psi
 Fluid Pressurepsi
 Cap/Tip.....
 Reducer.....
 Recommended Viscosity.....
 Reduction Rate.....as needed up to x%

Cleanup:

Clean tools/equipment immediately after use with DT5910000 Thinner 219, DT5900000 Thinner OC 140, DT5914000 Thinner 419 HAPS Free or DT5918000 Retarder P HAPS Free. Flush equipment with solvent to prevent rusting. Follow manufacturer's safety recommendations when using any solvent.

ADDITIONAL INFORMATION

Product Limitations :

- Maximum recommended dry film thickness for total coating system is 7 dry mils. Heavier film build may cause cracking.
- Temperatures must be above 68°F during application and cure to ensure acceptable coating properties

ADDITIONAL INFORMATION

(CONT.)

- Adhesion and compatibility testing is recommended when top coating with alkyd paints.
- KEMVAR® Wood Surfacers E63WH45 must be catalyzed 10% by volume with the recommended catalyst. Do not over catalyze as this may cause cracking over time.

CAUTIONS

FOR INDUSTRIAL SHOP APPLICATION ONLY

Thoroughly review product label and Safety Data Sheet (SDS) for safety information and cautions prior to using this product.

To obtain the most current version of the Environmental Data Sheet (EDS), Product Data Sheet (PDS), or Safety Data Sheet (SDS) please visit your local Sherwin-Williams facility or www.paintdocs.com.

Please direct any questions or comments to your local Sherwin-Williams facility.

Note: All purchases of products from Sherwin-Williams are exclusively subject to Sherwin-Williams' terms and conditions of sale which can be found at www.sherwin.com. Please review these terms and conditions prior to the purchase of the products. Sherwin-Williams warrants the product to be free of manufacturing defect in accordance with Sherwin-Williams' quality control procedures. Except for the preceding sentence, due to factors that are outside of Sherwin-Williams' control, including substrate selection, and customer handling, preparation, and application, Sherwin-Williams cannot make any other warranties related to the product or the performance of the product. **SHERWIN-WILLIAMS DISCLAIMS ALL WARRANTIES OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTY OF MERCHANTABILITY, THE IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE.**

Liability for products proven to be defectively manufactured will be limited solely to replacement of the defective product or the refund of the purchase price paid for the defective product, as determined by Sherwin-Williams. Under no circumstances shall Sherwin-Williams be liable for indirect, special, incidental or consequential damages, lost profits or punitive damages arising from any cause whatsoever.

Greensboro
Alex Blahnik
01/16/2020