



# CARE SEAL™ II CLEAR POST-CATALYZED SEALER

FF5321000

## DESCRIPTION:

Care Seal™ II Clear Post-Catalyzed Sealer is a high volume solids, VHAPS free, two component, solvent borne sealer for interior woodwork. This fast drying sealer has excellent sandability, good build and excellent hang on vertical surfaces with very good light stability. It is an excellent sealer for recommended AcromaPro acid cure, clear topcoats.

## PRODUCT DATA:

|                        |                          |                                                             |                                  |
|------------------------|--------------------------|-------------------------------------------------------------|----------------------------------|
| Color:                 | Wet: Clear Dry: Clear    | VOC (as packaged, maximum, less water and exempt solvents): | 5.18 lb/gal or 620 g/l           |
| Solids % by Vol.:      | 28 % (Theoretical)       | VOC (emitted):                                              | 5.18 lb/gal or 620 g/l           |
| Solids % by Wt.:       | 36 % (Theoretical)       | Lbs. VHAPS / Lbs. Solids:                                   | 0 before catalyzed               |
| Weight / Gal.:         | 8.04 lb                  | Flash Point (PMCC):                                         | -4 ° C / 25 ° F                  |
| Viscosity 23°C / 73°F: | DIN #4: 20-24 Sec.       | Photo Chemically Reactive:                                  | No                               |
| Viscosity 23°C / 73°F: | Zahn #2 sig.: 20-26 Sec. | Shelf Life:                                                 | 1 year (at 15-25° C / 59°-77° F) |

## MIXING / APPLICATION:

**Working Temp:** >18° C, 65° F substrate, coating and air  
**Hardener:** 10% by volume using either Catalyst 2750 (standard), Catalyst 494 (slow), or Catalyst 309 (VHAPS free, fast)  
**Pot Life:** 8 hrs. (23° C / 73° F)  
**Mixing:** Mix thoroughly to ensure uniform consistency. Add Catalyst under agitation. Use proper graduated cup for measuring. Be attentive to the correct ratio. Add thinner after catalyst.  
**Reducer:** Thinner 219 (Regular), Thinner OC 140 (Fast), Thinner 309 (Fast, VHAPS free), Thinner 419 (Slow, VHAPS free).  
**Application:** 80 -100 (g/m²) Approx. 3-4 wet mils; Min 3 mils wet – Max 5 mils wet @ 60% RH.  
**Surface Prep:** Substrate should be clean and free of grease and oil. Moisture content of the wood should be between 6%-8%. 150 grit on open grain and 180 grit on closed grain wood. Always sand the sealer-coat within 8 hours prior to top-coating to improve adhesion.  
**Use Directions:** For interior use only. Add hardener and mix thoroughly before application. Stack only when the surface temperature is below 35°C / 95 ° F. Dry time can be directly impacted by many factors, including film thickness. Users are urged to test the system under shop conditions.  
**App. Equip.:** Conventional & HVLP Systems and Airless Air Assist Equipment.  
**Ind. Standards:** This product meets the quality standard Catalyzed Vinyl Transparent for AWI. It also meets KCMA and CKCA standards when used under recommended AcromaPro acid cure clear topcoats.

## DRYING TIMES:

| Method     | Drying Temp.   | Drying Time (@ 60 % RH)              |
|------------|----------------|--------------------------------------|
| Air Drying | 20° C / 68° F  | 30-40 minutes dry to sand and recoat |
| Force Dry  | 70° C / 158° F | 5-10 minutes dry to sand and recoat  |

# CARE SEAL™ II CLEAR POST-CATALYZED SEALER

FF5321000

## APPLICATION RECOMMENDATIONS:

### APPLICATION EQUIPMENT SETTINGS

| Method of Application       | Wet Film<br>Mils / g/m <sup>2</sup> | Dry Film<br>Mils / Microns   |
|-----------------------------|-------------------------------------|------------------------------|
| Conventional – Siphon Fed   | 3-4 mils / 80-100 g/m <sup>2</sup>  | 0.8-1.1 mils / 22-28 microns |
| Conventional – Pressure Pot | 3-4 mils / 80-100 g/m <sup>2</sup>  | 0.8-1.1 mils / 22-28 microns |
| Airless Air Assist          | 3-4 mils / 80-100 g/m <sup>2</sup>  | 0.8-1.1 mils / 22-28 microns |
| HVLP - Siphon Fed           | 3-4 mils / 80-100 g/m <sup>2</sup>  | 0.8-1.1 mils / 22-28 microns |
| HVLP - Pressure Pot         | 3-4 mils / 80-100 g/m <sup>2</sup>  | 0.8-1.1 mils / 22-28 microns |

All measurements and application equipment settings are based on application at a temperature of 68°F. Viscosity will vary depending on the temperature of the liquid. The application equipment setting recommendations are guidelines only. The settings are starting point recommendations and adjustments to the equipment settings and equipment may be needed to obtain the desired results. Please refer to your specific equipment manufacturer's recommendations for equipment set-up.

### REDUCTION – TIP SIZE – PSI SETTINGS

#### Conventional Equipment Siphon Feed:

Reduce to 20-22 sec. #4 DIN viscosity cup (20-22 sec Sig. Zahn 2 cup), nozzle size 0.070 inches (1.8 mm) to 0.080 inches (2.0 mm), atomizing air 30 psi (2.1 bar) to 50 psi (3.5 bar).

#### Conventional Equipment Pressure Pot:

Reduce to 20-22 sec. #4 DIN viscosity cup (20-22 sec Sig. Zahn 2 cup), nozzle size 0.070 inches (1.8 mm) to 0.080 inches (2.0 mm), atomizing air 40 psi (2.8 bar) to 50 psi (3.5 bar), Pot pressure 7 psi (0.48 bar) to 15 psi (1.03 bar)

#### Airless Air Assist Equipment:

Reduce to 20-22 sec. #4 DIN viscosity cup (20-22 sec Sig. Zahn 2 cup), tip size 0.013 inches (0.33 mm) to 0.016 inches (0.41 mm), fluid pressure 290 psi (20 bar) to 580 psi (40 bar), atomizing air 11 psi (0.8 bar) to 17 psi (1.2 bar).

#### HVLP Equipment Siphon Feed:

Reduce to 19-22 sec. #4 DIN viscosity cup (19-22 sec Sig. Zahn 2 cup), nozzle size 0.070 inches (1.8 mm) to 0.080 inches (2.0 mm), atomizing air 35 psi (2.4 bar) to 45 psi (3.1 bar).

#### HVLP Equipment Pressure Pot:

Reduce to 19-22 sec. #4 DIN viscosity cup (19-22 sec Sig. Zahn 2 cup), nozzle size 0.070 inches (1.8 mm) to 0.080 inches (2.0 mm), atomizing air 20 psi (1.37 bar) to 25 psi (1.72 bar). Pot pressure 7 psi (0.48 bar) to 15 psi (1.03 bar)

### CONTACTS:


PH: AcromaPro USA and Canada / 1-888-277-1448

[www.AcromaPro.com](http://www.AcromaPro.com)



### PRODUCT NOTES

- Excellent sealer for use under recommended AcromaPro acid cure clear topcoats. Please consult your AcromaPro representative for system recommendations.
- Over catalyzing may result in blooming, cracking, and poor adhesion.
- Maximum recommended dry film thickness for total coating system is dependent of the topcoats used.
- To avoid material build up in automated line applications, users are urged to clean and flush lines daily.

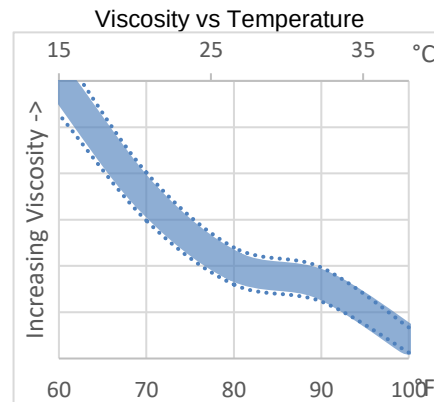

The above chart is for information only and should not be used as product specifications.

**TESTING:** Due to the wide variety of substrates, surface preparation methods, application methods, and environments, the customer should test the complete system for adhesion, compatibility and performance prior to full scale application.

**FOR INDUSTRIAL SHOP APPLICATION:** Thoroughly review Material Safety Data Sheet (MSDS) for safety information and cautions prior to using this product. For Regulatory compliance data (i.e. VOC, HAPS, etc.), obtain an Environmental Data Sheet (EDS) prior to using the product. A MSDS and/or EDS is available from your local distributor or representative. Please direct any questions or comments to 1-800-524-5979.

**NOTE:** Product Data Sheets are periodically updated to reflect new information relating to the product. It is important that the customer obtain the most recent Product Data Sheet for the product being used. The information, rating, and opinions stated here pertain to the material currently offered and represent the results of tests believed to be reliable. However, due to variations in customer handling and methods of application which are not known or under our control, AcromaPro cannot make any warranties as to the end result.