



**SHERWIN
WILLIAMS.**

Industrial Wood Coatings

SHER-WOOD® Blending Clear

Blending Clear.....H66FH11
Catalyst 309.....DV5942000

Catalyst 2750.....DV5940000
Catalyst 494.....DV493000

DESCRIPTION

SHER-WOOD® White, H66FH11 is an acid catalyzed, Blending Clear topcoat formulated for coating cabinetry and other interior woodworking. H66FH11 is designed to be blended with H66WH67 as a topcoat and requires catalyzation prior to using.

Advantages:

- High solids, high hiding formulation
- Good build and fullness
- Ready to use after catalyst added
- HAPS and VOC compliant
- Custom color match

Air Quality Data:

- Photochemically reactive
- Volatile Organic Compounds (VOC) theoretical, maximum, less exempt:
3.9 lb/gal, 467 g/L
- Volatile Hazardous Air Pollutants (VHAPS) as packaged, maximum:
0.63 lb/lb of solids

An Environmental Data Sheet is available from your local Sherwin-Williams facility, or at www.paintdocs.com.

VOC compliance limits vary from state to state; please consult local Air Quality rules and regulations.


CHARACTERISTICS

Gloss @ 60°: 18 - 22 units

Weight Solids: 54 ± 2%

Volume Solids: 44 ± 2%

Viscosity:
25-29 seconds #2 Zahn Cup

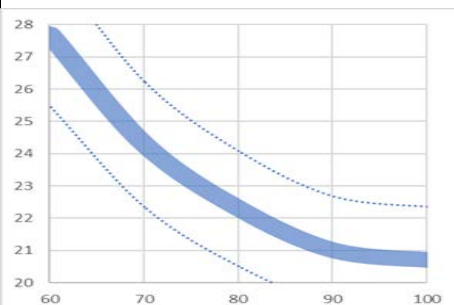

The above chart is for information only and should not be used as product specifications

Recommended film thickness:

Mils Wet 3.0 - 6.0

Mils Dry 1.2 - 2.4

Spreading Rate (no application loss)
694 sq ft/gal @ 1 mils DFT

Drying (77°F, 50% RH):

To Touch: 20 minutes

To Handle: 60 minutes

To Sand: 45 minutes

To Recoat: no critical recoat

To Pack: overnight

Force Dry: Flash off 10-15 minutes
then

30 minutes at 120°F

Do not exceed the heat distortion temperature of the substrate

Flash Point: 75°F Pensky-Martens
Closed Cup

Mixing Ratio: (by volume)

1 gallon H66FH11

15% by volume (19.2 oz/gal) Catalyst

Pot Life: 8 hours

Package Life: 1 year, unopened

SPECIFICATIONS

Wood (interior only): Must be clean, dry, and finish sanded. Substrate should be free of grease, oil, dirt, fingerprints, and any contamination to ensure optimum adhesion and coating performance properties. Moisture content of wood should be 6 to 8%.

Testing: The information, data, and recommendations set forth in this Product Data Sheet are based upon test results believed to be reliable. However, due to the wide variety of substrates, substrate properties, surface preparation methods, equipment and tools, application methods, and environments, the customer should test the complete system for adhesion, compatibility and performance prior to full scale application.

APPLICATION

Typical Setups

THIS PRODUCT MUST BE CATALYZED

Reduction:

Compatible reducers are
DT5910000 Thinner 219
DT5900000 Thinner OC 140
DT5914000 Thinner 419 HAPS Free
DT5918000 Retarder P HAPS Free

Conventional Spray:

Air Pressure.....psi TBD
Fluid Pressure.....psi TBD
Cap/Tip..... TBD
Reducer..... TBD
Recommended Viscosity.....TBD
Reduction Rate.....as needed up to 20%

Airless Spray:

Pressure.....psi TBD
Tip..... TBD
Reducer.....TBD
Recommended Viscosity.....TBD
Reduction Rate.....as needed up to 20%

Air Assisted Airless:

Air Pressure.....psi TBD
Fluid Pressure.....psi TBD
Cap/Tip..... TBD
Reducer.....TBD
Recommended Viscosity.....TBD
Reduction Rate.....as needed up to 20%

Cleanup:

Clean tools/equipment immediately after use with Acetone, R6K9

Follow manufacturer's safety recommendations when using any solvent.

ADDITIONAL INFORMATION

Product Limitations:

- This product must be catalyzed with Catalyst 2750 DV5940000 or Catalyst 309 DV5942000 or Catalyst 494 DV493000 before use at a level of 10% (12.8 ounces per gallon).
- Store at room temperature (under 80°F) after catalyzation. Higher temperatures will reduce the storage life.
- To achieve maximum performance properties a minimum of 2 mils DFT is required.
- Total film thickness of systems must not exceed 4 mils dry film because heavier films may show cracking and checking tendencies.
- For interior use only.
- Sher-Wood Catalysts DV5940000, DV5942000 and DV5943000 are acids. To prevent acid corrosion and pitting, all equipment should be made of stainless steel. Containers should be stainless steel or plastic.
- Do not catalyze with other acid catalysts because of fast reactivity and pot life problems.

CAUTIONS

FOR INDUSTRIAL SHOP APPLICATION ONLY

Thoroughly review product label and Safety Data Sheet (SDS) for safety information and cautions prior to using this product.

To obtain the most current version of the Environmental Data Sheet (EDS), Product Data Sheet (PDS), or Safety Data Sheet (SDS) please visit your local Sherwin-Williams facility or www.paintdocs.com.

Please direct any questions or comments to your local Sherwin-Williams facility.

Note: All purchases of products from Sherwin-Williams are exclusively subject to Sherwin-Williams' terms and conditions of sale which can be found [by following this link \(click here\)](#) Please review these terms and conditions prior to the purchase of the products.

Sherwin-Williams warrants the product to be free of manufacturing defect in accordance with Sherwin-Williams' quality control procedures. Except for the preceding sentence, due to factors that are outside of Sherwin-Williams' control, including substrate selection, and customer handling, preparation, and application, Sherwin-Williams cannot make any other warranties related to the product or the performance of the product. **SHERWIN-WILLIAMS DISCLAIMS ALL WARRANTIES OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTY OF MERCHANTABILITY, THE IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE.**

Liability for products proven to be defectively manufactured will be limited solely to replacement of the defective product or the refund of the purchase price paid for the defective product, as determined by Sherwin-Williams. Under no circumstances shall Sherwin-Williams be liable for indirect, special, incidental or consequential damages, lost profits or punitive damages arising from any cause whatsoever.