



Industrial Wood Coatings

SHER-WOOD® KEMVAR® Plus Surfacer

White..... E63W50

Clear.....E63C56

Catalyst 2750.....DV5940000
Catalyst 309.....DV5942000
Catalyst 494.....DV5943000

DESCRIPTION

SHER-WOOD® KEMVAR® Surfacer is an acid catalyzed surfacer formulated to be used as a primer or sealer under Sher-Wood® KEMVAR® Plus Conversion Varnish or Sher-Wood® Water White Conversion Varnish.

Advantages:

- Meets the Federal HAPS rule for wood finishes as packaged**
- Easy sanding and fast drying
- Excellent holdout and build
- Excellent adhesion to a wide range of bare wood surfaces
- Versatile - may be applied using conventional, airless, air assisted airless or HVLP spray methods
- Very good edge filling on MDF when presealed with vinyl washcoat
- Meets KCMA performance properties when topcoated with Sher-Wood KemVar Plus or Sher-Wood Water White Conversion Varnish
- Available in a broad range of colors

VOC compliance limits vary from state to state; please consult local Air Quality rules and regulations.

Air Quality Data (Theoretical):

- Photochemically reactive
- Volatile Organic Compounds (VOC) as packager, maximum 3.7 lb/gal, 443 g/L
- Catalyzed 4.7% with V66V21 then reduced 35% with R7K310, maximum 4.49 lb/gal 540 g/L
- Volatile Hazardous Air Pollutants (VHAPS)* as packaged, maximum less than 0.8 lbs per pound of solids

*National Standards for Hazardous Air Pollutants (HAPS) Emissions for Wood Furniture Manufacturing Operations CFR40, Part 63, Subpart JJ


An Environmental Data Sheet is available from your local Sherwin-Williams facility, or at www.paintdocs.com.

CHARACTERISTICS

Gloss: Flat

Volume Solids: 49 ± 2%

Package Viscosity:
20-25 seconds #2 Zahn Cup

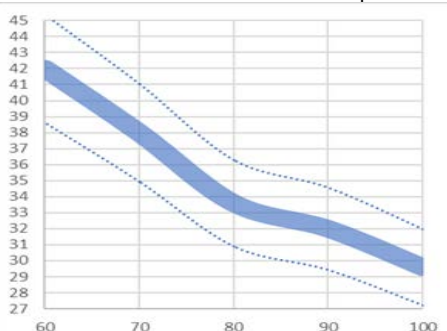

The above chart is for information only and should not be used as product specifications

Recommended film thickness:

Mils Wet 3.0 - 6.0
Mils Dry 1.1 - 2.1

Maximum DFT for Sher-Wood KemVar Plus Surfacer is 4.0 mils. Maximum DFT for Sher-Wood KemVar Plus Surfacer finished with Sher-Wood KemVar Plus White is 7.0 mils

Spreading Rate (no application loss)
catalyzed and reduced
270-515 sq ft/gal @ 1.1-2.1 mils DFT

Drying (1.5 mils, 77°F, 50% RH):

To Touch: 20-30 minutes
To Handle: 20-30 minutes
To Sand: 30-45 minutes
To Recoat: 30 minutes
Force Dry: 15 minutes at 120° F
or 10 minutes at 150° F, to sand

Flash Point: 20°F PMCC
(continued in next column)

CHARACTERISTICS (cont)

Mixing Ratio:

Catalyze
16% (20.5 oz/gal) Catalyst
(by volume)
Reduce 25-50% with
DT5910000, DT5900000,
DT5914000 or DT591800

Pot Life: 24 hours

Package Life: 1 year, unopened

SPECIFICATIONS

Wood (interior only): Must be clean, dry, and finish sanded. Substrate should be free of grease, oil, dirt, fingerprints, and any contamination to ensure optimum adhesion and coating performance properties. Moisture content of wood should be 6 to 8%.

Testing: The information, data, and recommendations set forth in this Product Data Sheet are based upon test results believed to be reliable. However, due to the wide variety of substrates, substrate properties, surface preparation methods, equipment and tools, application methods, and environments, the customer should test the complete system for adhesion, compatibility and performance prior to full scale application.

<u>APPLICATION</u> Typical Setups	<u>SPECIFICATIONS(cont)</u>	<u>CAUTIONS</u>
May be applied using: Conventional Spray Airless Spray Air Assisted Airless HVLP Cleanup: Clean tools/equipment immediately after use with reduction thinner Follow manufacturer's safety recommendations when using any solvent. <u>SPECIFICATIONS</u> Product Limitations: • Sher-Wood KemVar Plus Surfacer must be catalyzed as shown for cure. • Paint temperature and air temperature must be above 70°F during application and cure to ensure acceptable coating properties. • Do not over-catalyze, it may cause cracking, retard drying and shorten working pot life. • Apply directly to bare, finish sanded wood surfaces only. • The catalysts used with this product are acids. To prevent acid corrosion and pitting, all equipment should be made of stainless steel or plastic. (continued in next column)	Product Limitations Continued: • Do not exceed 2.0 mils dry film per coat because heavy films will result in slower drying and sanding times. • Maximum DFT for Sher-Wood KemVar Plus Surfacer is 4.0 mils. Maximum DFT for Sher-Wood KemVar Plus Surfacer finished with Sher-Wood KemVar Plus Conversion Varnish is 7.0 mils. • Do not use in recirculating systems such as flocoaters or curtain coaters because of accelerated cure due to aeration. Recirculating paint lines are acceptable. • Working pot life is 24 hours maximum at 77°F. While catalyzed surfacer remains a low viscosity liquid beyond 24 hours, it should not be used beyond pot life because a chemical reaction is taking place. The resultant film may have inferior cure and cross-linking and a tendency for long-term cracking. At higher temperatures, working pot life is much shorter. • To extend the pot life at the end of the day, add 300-400% of uncatalyzed material. Add catalyst based only on the uncatalyzed portion when ready to use the next day. Refrigeration also extends the working pot life. • Sand within 4 hours of topcoating to ensure optimum intercoat adhesion properties. • Routed MDF must be pre-sealed with Vinyl Sealer reduced 50-100% prior to using KemVar Plus Surfacer. • The Clear Surfacer is a Blending Clear intended for custom color intermixing. It is not recommended to be used as a standalone clear basecoat. • To maintain HAPS compliance only reduce with HAPS compliant reducers. • For interior use only. • Maximum colorant level is 6 ounces per gallon with Phoenix®, OptiColor® XP or GIS colorants. All trademarks are the property of their respective owners.	FOR INDUSTRIAL SHOP APPLICATION ONLY Thoroughly review product label and Safety Data Sheet (SDS) for safety information and cautions prior to using this product. To obtain the most current version of the Environmental Data Sheet (EDS), Product Data Sheet (PDS), or Safety Data Sheet (SDS) please visit your local Sherwin-Williams facility or www.paintdocs.com. Please direct any questions or comments to your local Sherwin-Williams facility. Note: All purchases of products from Sherwin-Williams are exclusively subject to Sherwin-Williams' terms and conditions of sale which can be found by following this link (click here). Please review these terms and conditions prior to the purchase of the products. Sherwin-Williams warrants the product to be free of manufacturing defect in accordance with Sherwin-Williams' quality control procedures. Except for the preceding sentence, due to factors that are outside of Sherwin-Williams' control, including substrate selection, and customer handling, preparation, and application, Sherwin-Williams cannot make any other warranties related to the product or the performance of the product. SHERWIN-WILLIAMS DISCLAIMS ALL WARRANTIES OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTY OF MERCHANTABILITY, THE IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE. Liability for products proven to be defectively manufactured will be limited solely to replacement of the defective product or the refund of the purchase price paid for the defective product, as determined by Sherwin-Williams. Under no circumstances shall Sherwin-Williams be liable for indirect, special, incidental or consequential damages, lost profits or punitive damages arising from any cause whatsoever.